

A

B

C

D

E

ASSEMBLY NOTES:

Assembly shall conform to IPC-A-610 Class 2.

Assembly shall conform with RoHS Directive 2011/65/EU.

Components shall be placed according to the associated CPL and BOM documents.

Lead-free SAC305 solder shall be used.

Reflow profile shall comply with J-STD-20C Lead-Free Reflow Profile.

BGA components shall be 100% checked with x-ray for solder bridges after reflow.

Finished assemblies shall be removed from panel prior to delivery.


Notes:

1

2

3

View from Top side (Scale 2)

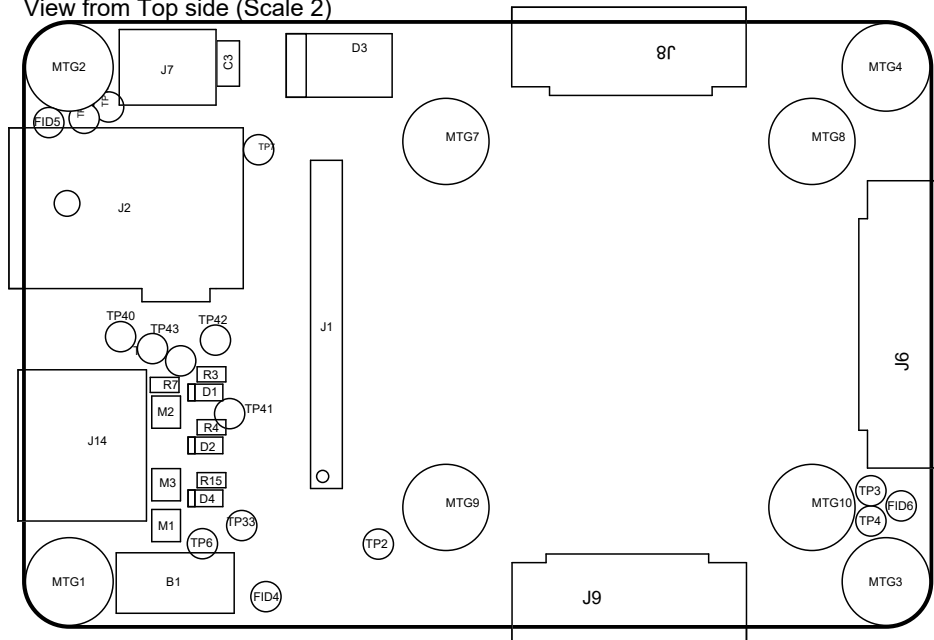Title: **DM1098FFC**

Number: D0000190

Revision: R0M0
E0

Date: 4. 01. 2021

Sheet: 1 of 2

Drawn by: David Malovrh

LUXonjs

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

A



B

C

D

E

~~[Variant: [All Variants]]: View from Bottom side (Scale 2)~~

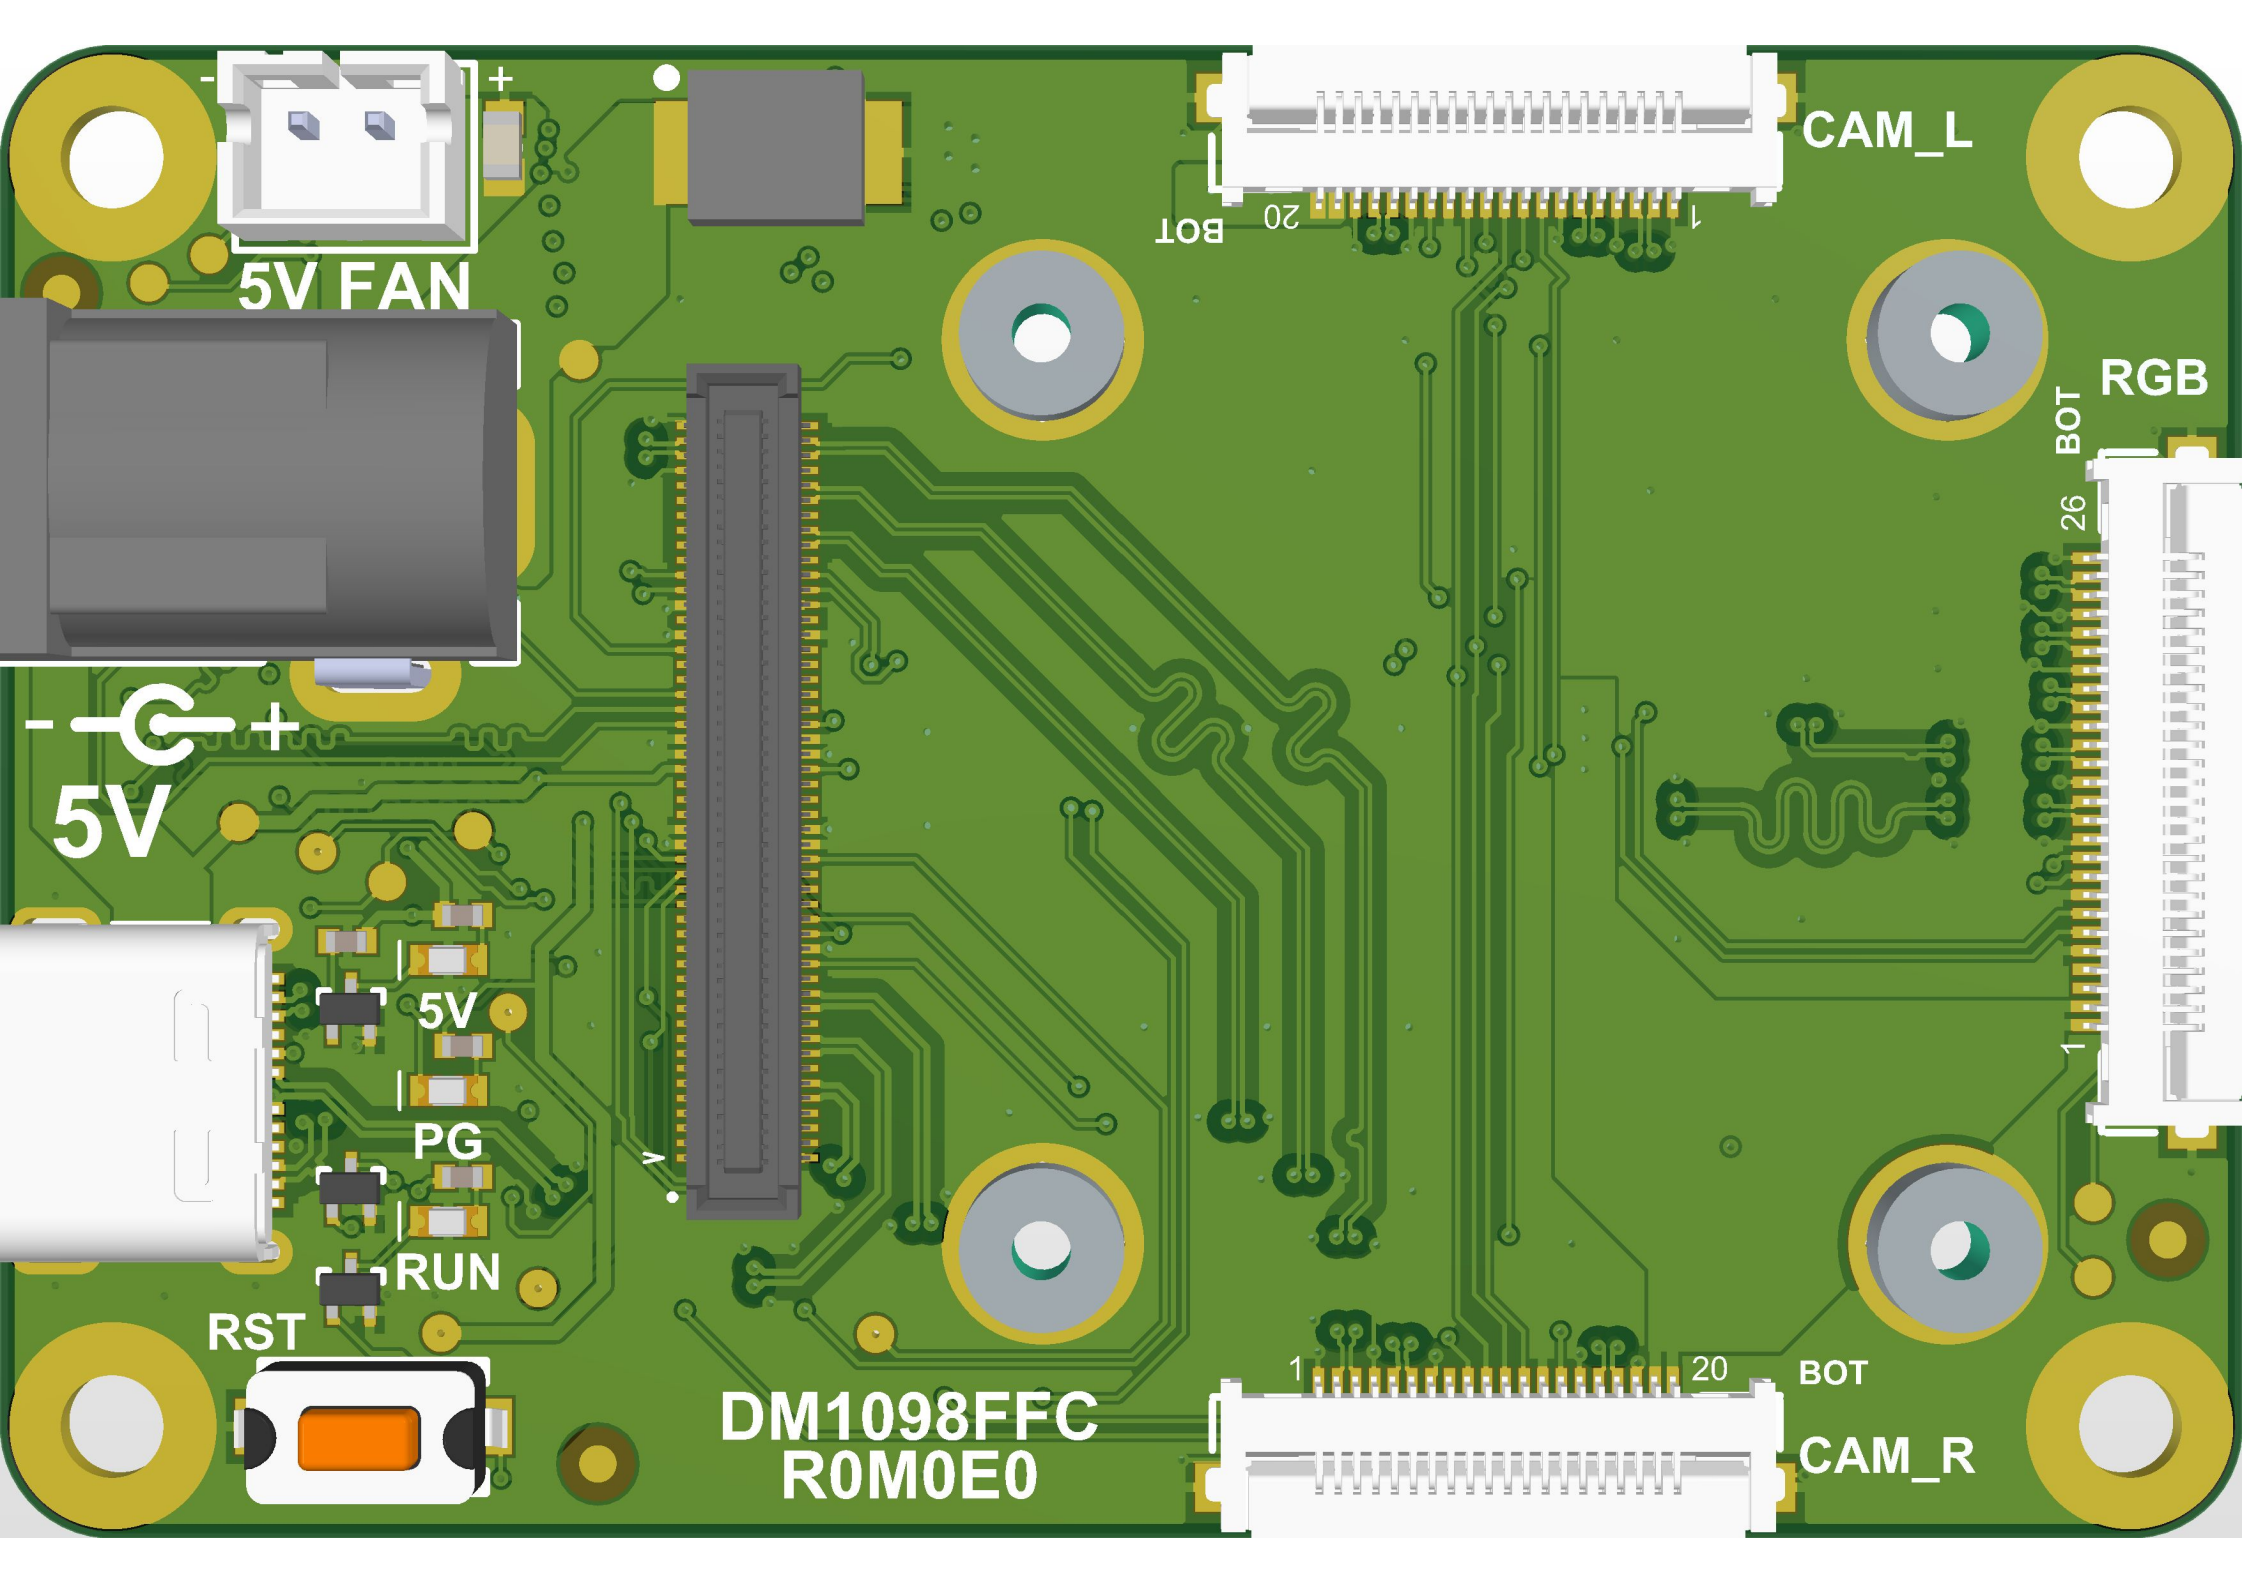


5V FAN




CAM_L

1 20 BOT

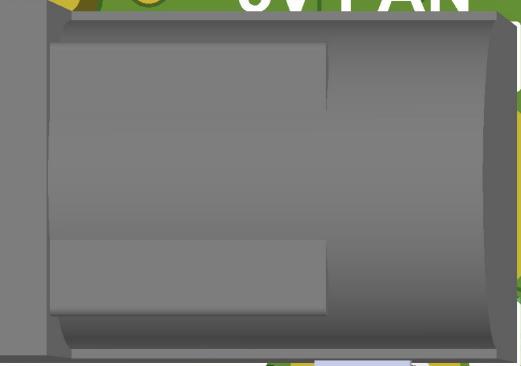

- 5V +

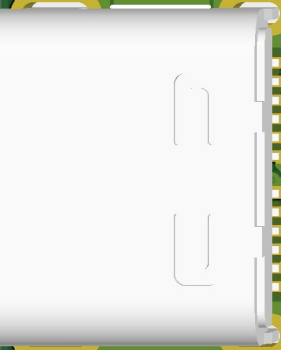


5V


PG

RUN

RST




DM1098FFC
R0M0E0

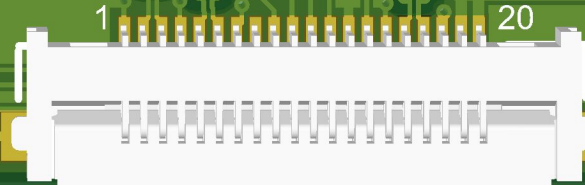


1 20 BOT

CAM_R



RGB

26 BOT

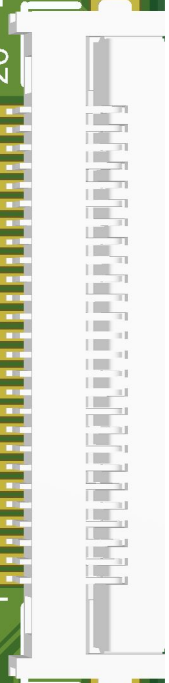

1

LUXonis

DM1098FFC
ROM0E0

SHUTTER
SYNC

FSIN1

FSIN2

AUX

QSPI

uSD