


ASSEMBLY NOTES:

Assembly shall conform to IPC-A-610 Class 2.
Assembly shall conform with RoHS Directive 2011/65/EU.
Components shall be placed according to the associated CPL and BOM documents.
Lead-free SAC305 solder shall be used.
Reflow profile shall comply with J-STD-20C Lead-Free Reflow Profile.
BGA components shall be 100% checked with x-ray for solder bridges after reflow.
Finished assemblies shall be removed from panel prior to delivery.

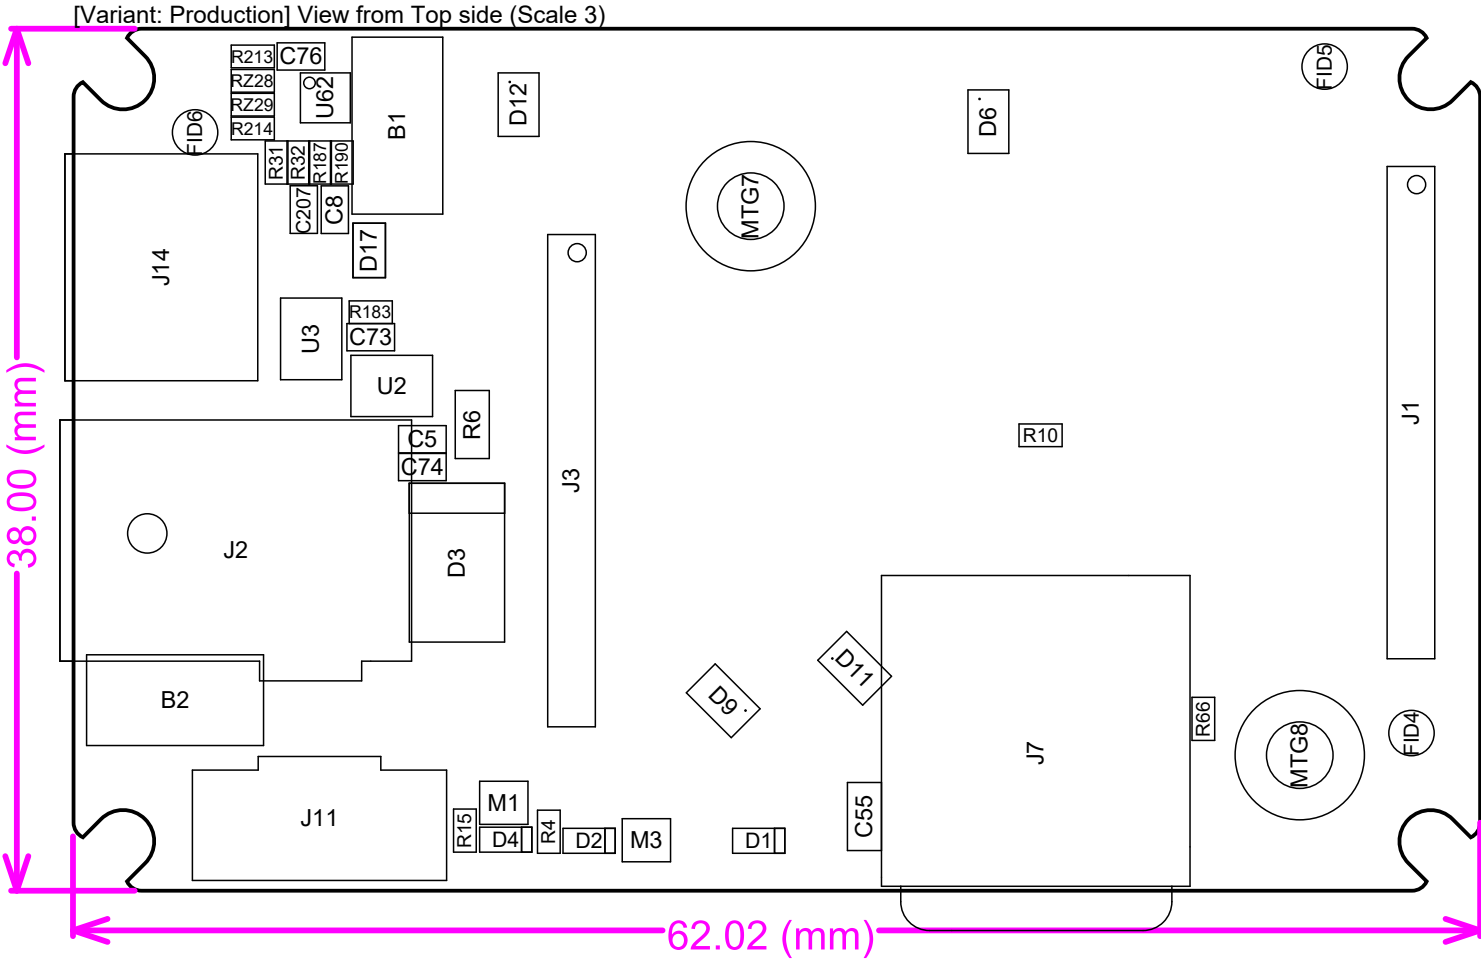


Title: DD2090 4CAM FFC
Number: D0000190 Revision: R0M0E0
Date: 26-Jul-21 Sheet: 1 of 2
Drawn by: Dan Dunga

LUXonjs

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

Title: DD2090 4CAM FFC	
Number: D0000190 Revision: R0M0E0	
Date: 26-Jul-21 Sheet: 2 of 2	PROPRIETARY AND CONFIDENTIAL
Drawn by: Dan Dunga	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

