

## BW1099 - Myriad X SoM Datasheet

### 1 Features

- Intel Movidius Myriad X VPU ma2485-C0
- 16MB QSPI NOR Flash (optional)
- 32Kb I2C EEPROM
- USB3.1, gen1 5gbps
- 1x 4-Lane MIPI CSI-2 D-PHY
- 2x 2-Lane MIPI CSI-2 D-PHY
- QSPI, SDIO, UART, I2C
- Boot Modes Supported: USB, NOR
- On-board power generation

### 2 Applications

- Industrial automation
- Robotics and autonomy
- Security systems
- Remote intelligence

### 3 Description

The Luxonis BW1099 is a system-on-module (SoM) designed for integration into a top-level system with a need for a low-power, 4 TOPS AI vision system. The BW1099 interfaces with the system through a single 10-gbps-rated 100-pin DF40C-100DP-0.4V(51) board-to-board mezzanine connector which carries all signal I/O as well as 5V input. The on-board SMPS system regulates the 5V input and provides all necessary digital and analog power. An auxiliary power port is offered to interface without connection to a baseboard.

Core digital electronics on the BW1099 include the Movidius Myriad X VPU (MA2485-C0), a 16MB QSPI NOR flash, and 32kb EEPROM.

USB 3.1 Gen1, QSPI, UART, I2C, and SDIO are all broken out from the SoM and routed through the mezzanine connector to the system. Additionally, the BW1099 SoM exposes two 2-lane MIPI CSI-2 D-PHY channels and one 4-lane MIPI CSI-2 D-PHY channel, allowing for multiple camera inputs.

Power-on Reset BOOT configuration can be modified with on-board resistor straps, and a 10-pin JTAG connector is also provided on-board to allow for debug without the need for a baseboard.

SoM power consumption is use-case dependent, but typical consumption is under 5W with thermal mitigation.

#### Device Information

PART NUMBER	SIZE (W x L x H) <sup>1</sup>
BW1099	40mm x 30mm x 17.5mm

1) Including components and heatsink

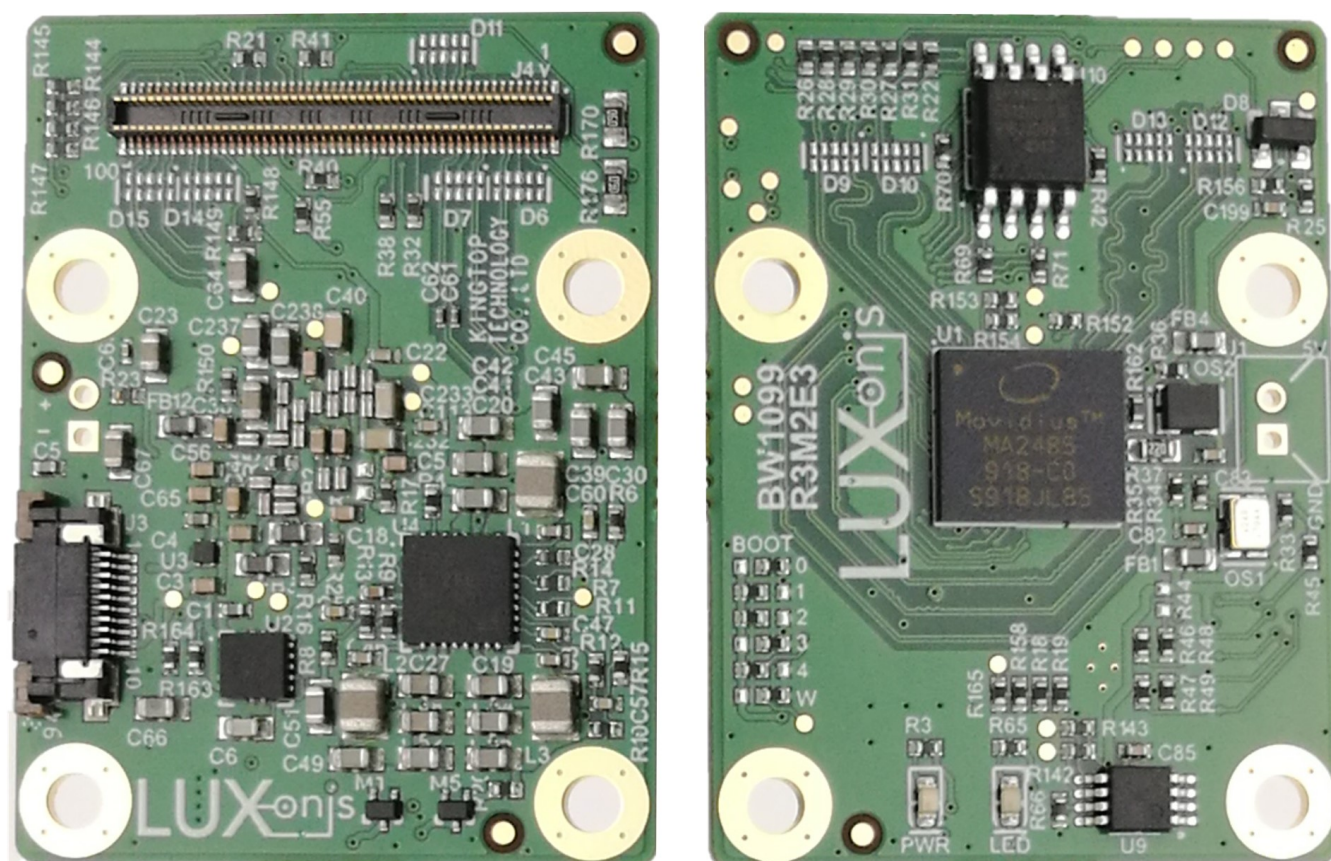


Figure 1 – Bottom and Top of BW1099 PCBA

## Table of Contents

<b>1</b>	<b>FEATURES.....</b>	<b>1</b>
<b>2</b>	<b>APPLICATIONS.....</b>	<b>1</b>
<b>3</b>	<b>DESCRIPTION.....</b>	<b>1</b>
<b>4</b>	<b>BLOCK DIAGRAM.....</b>	<b>4</b>
<b>5</b>	<b>ELECTRICAL CHARACTERISTICS .....</b>	<b>5</b>
5.1	ABSOLUTE MAXIMUM RATINGS <sup>1</sup> .....	5
5.2	RECOMMENDED OPERATING CONDITIONS .....	5
<b>6</b>	<b>SOM CONNECTOR INTERFACE .....</b>	<b>7</b>
6.1	PINOUT.....	7
6.2	I2C .....	8
6.2.1	RGB Camera I2C1 Address Usage .....	8
6.2.2	Stereo Camera I2C2 Address Usage .....	8
6.3	MIPI .....	8
6.4	PGOOD.....	9
6.5	WAKEUP .....	9
6.6	_RST.....	9
6.7	CAMERA REFERENCE CLOCKS .....	9
6.8	CAMERA RESET SIGNALS .....	9
6.9	1.8V SHARED SPI0 (QSPI).....	9
6.10	3.3V GPIO BANK .....	10
6.10.1	3.3V GPIO Bank - SDIO .....	11
6.10.2	3.3V GPIO Bank – QSPI (SPI2) .....	11
6.11	1.8V GPIO .....	11
<b>7</b>	<b>MECHANICAL INFORMATION .....</b>	<b>13</b>
7.1	BW1099 DIMENSIONS .....	13
7.2	RECOMMENDED MOUNTING CONFIGURATION.....	14
7.3	BW1099 MOUNTING HOLES .....	14
7.4	SoM CLEARANCE .....	14
<b>8</b>	<b>THERMAL INFORMATION .....</b>	<b>14</b>
<b>9</b>	<b>REVISION HISTORY .....</b>	<b>15</b>

#### 4 Block Diagram

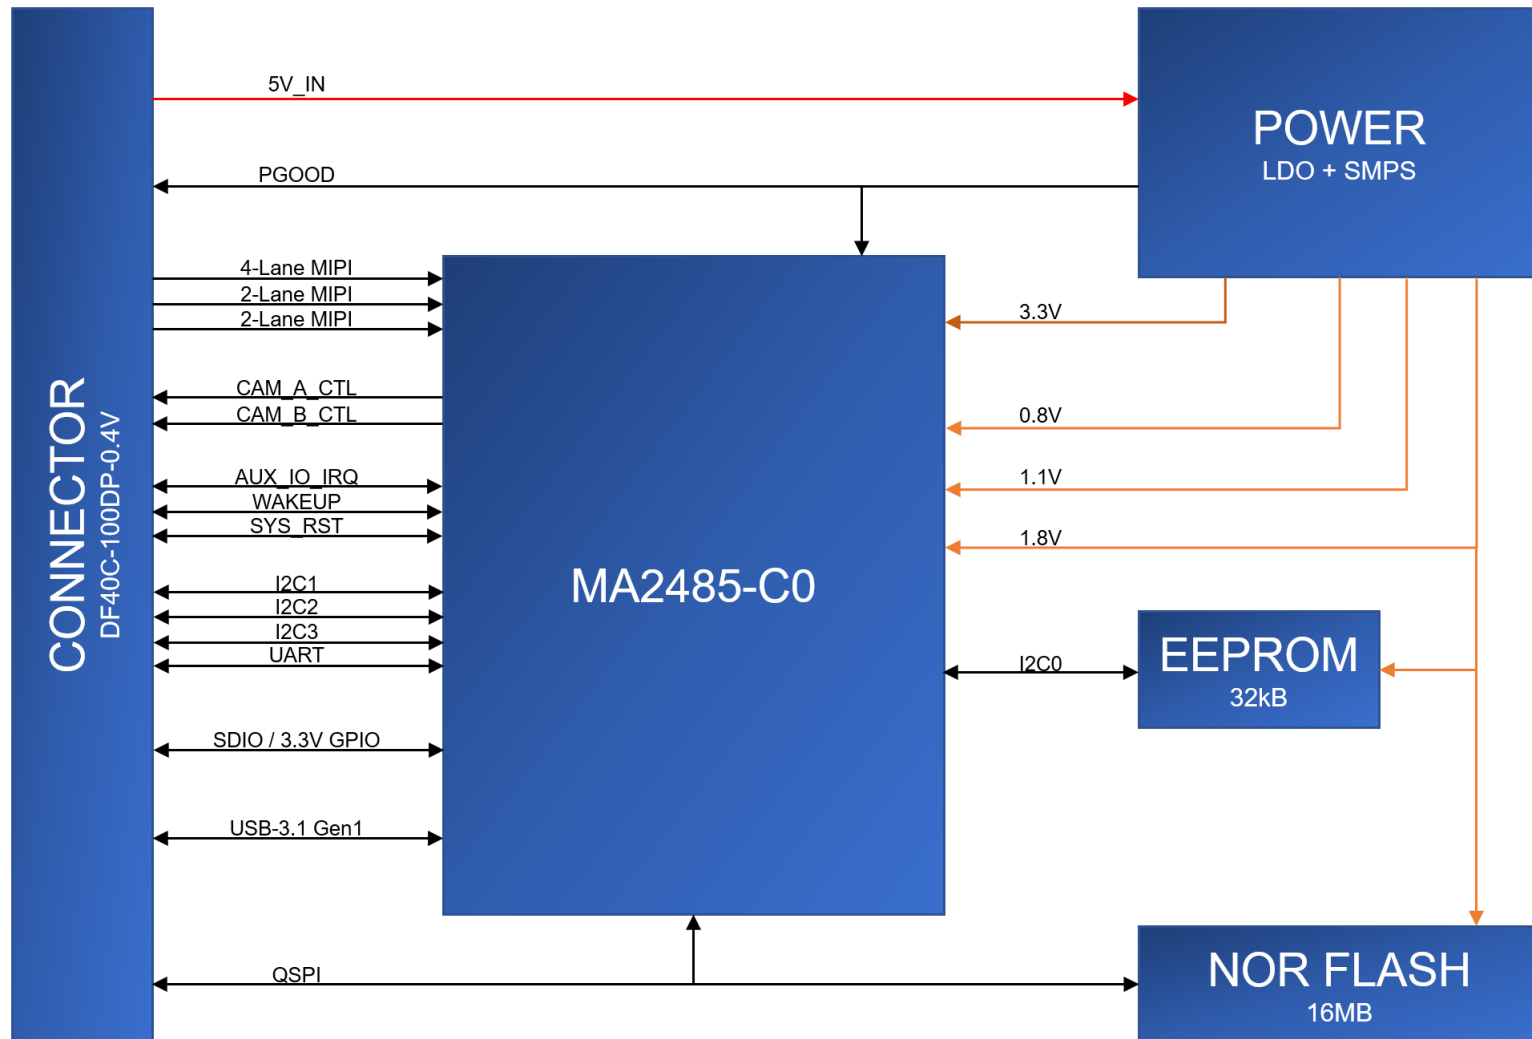


Figure 2 - Schematic Block Diagram

## 5 Electrical Characteristics

### 5.1 Absolute Maximum Ratings<sup>1</sup>

SYMBOL	RATINGS	MIN	MAX	UNIT
$V_{IN}$	External input supply voltage range. <sup>2</sup>	3.6	5.5	V
$V_{I/O\_1V8}$	Input voltage SoM I/O for 1.8V logic	-0.3	2.0	V
$V_{I/O\_3V3}$	Input voltage SoM I/O for 3.3V logic	-0.3	3.6	V
$I_{I/O}$	IO output current drive strength	2	12	mA
$T_J$	Junction temperature.		105	°C
$T_{STG}$	Storage temperature.	-30	150	°C

### 5.2 Recommended Operating Conditions

SYMBOL	RATINGS	MIN	TYP	MAX	UNIT
$V_{IN}$	External input supply voltage range. <sup>2</sup>	4.5	5.0	5.25	V
$V_{I/O\_1V8}$	Input voltage SoM I/O for 1.8V logic	0		1.8	V
$V_{I/O\_3V3}$	Input voltage SoM I/O for 3.3V logic	0		3.3	V
$P_Q$	Quiescent power draw <sup>3</sup>		0.3		W
$P_{IDLE}$	Idle power draw <sup>4</sup>		0.7		W
$P_{INFR}$	Inference power draw <sup>5</sup>		2.48		W
$P_{MAX}$	Absolute maximum power use <sup>6</sup>			5	W
$T_A$	Ambient operating temperature <sup>7</sup>		25	50	°C
$T_J$	Junction temperature. <sup>7</sup>			105	°C

- 1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2) Applies to 5V input pins only
- 3) With SoM in reset
- 4) Myriad X booted to base mode via USB
- 5) Mobilenet-SSDV2 detector, 30fps
- 6) This is with all possible concurrent features enabled via the DepthAI API, and set to max settings with the goal of using as much DC power as possible. It represents the maximum possible DC power consumption possible with the system on module.
- 7) With default Luxonis passive heatsink, running Mobilenet-SSDV2 30fps. Custom or active thermal solutions are recommended in ambient environments >50°C, and/or for highly demanding inference operations >2.5W.



## 6 SoM Connector Interface

### 6.1 Pinout

The following contains the pinout of 100-pin Hirose DF40HC(3.0)-100DS-0.4V receptacle for the BW1099 SoM. The schematic symbol, footprint, and full IO pinout table can be found at the Luxonis Github repository.

1	GND	2	GND
3	CAMA_CLKN	4	UART_RX
5	CAMA_CLKP	6	UART_TX
7	GND		
9	CAMA_D0_N		
11	CAMA_D0_P	8	GND
13	GND	10	USB_RX_P
15	CAMA_D1_N	12	USB_RX_N
17	CAMA_D1_P	14	GND
19	GND	16	USB_D_P
21	CAMA_D2_N	18	USB_D_N
23	CAMA_D2_P	20	GND
25	GND	22	USB_TX_P
27	CAMA_D3_N	24	USB_TX_N
29	CAMA_D3_P	26	GND
31	GND		
		28	CAMA_CLK
33	CAMA_I2C_SDA	30	GND
35	CAMA_I2C_SCL	32	GPIO_37_3V3
		34	CAMA_RST
37	PGOOD	36	GPIO_36_3V3
39	RST	38	GPIO_35_3V3
41	WAKEUP	40	GPIO_34_3V3
		42	COM_AUX_IO2
43	GND	44	GND
45	GND	46	GND
47	5V	48	5V
49	5V	50	5V
51	5V	52	5V
53	5V	54	5V
55	5V/VBUS	56	5V
57	GND	58	GND
59	GPIO_7	60	GPIO_8/SPI0_SS_1
61	GPIO_32_3V3	62	SPI0_SIO0
63	GPIO_33_3V3	64	SPI0_SIO1
65	CAM_B_D_PWM	66	SPI0_SIO2
67	CAM_B_PWDN_N	68	SPI0_SIO3
69	GPIO_53	70	SPI0_SS_0
71	GND	72	GND
73	CAMB_CLK	74	SPI0_SCK
75	GND	76	GND
77	CAMB_I2C_SCL	78	I2C3_SCL
79	CAMB_I2C_SDA	80	I2C3_SDA
81	GND	82	GND
83	CAMB_D1_N	84	CAMC_D1_N
85	CAMB_D1_P	86	CAMC_D1_P
87	GND	88	GND
89	CAMB_D0_N	90	CAMC_D0_N
91	CAMB_D0_P	92	CAMC_D0_P
93	GND	94	GND
95	CAMB_CLKN	96	CAMC_CLKN
97	CAMB_CLKP	98	CAMC_CLKP
99	GND	100	GND

Figure 3 - Schematic Symbol for BW1099 Baseboard Receptacle Connector

## 6.2 I2C

The BW1099 SoM offers two dedicated I2C interfaces, I2C1 (CAMA\_I2C), I2C2 (CAMB\_I2C), both with 2.2Kohm pull-up resistors (SDA & SCL) to the on-SoM 1.8V rail. For custom baseboard designs, each of the two I2C interfaces are available and are not in use for anything else on the SoM. On most Luxonis baseboards, such as the BW1098 family, the I2C1 interface is used for communication with the RGB color camera, the I2C2 interface is used to communicate with the pair of stereo cameras, and the I2C3 is typically unused but accessible through test points or connector pads.

### 6.2.1 RGB Camera I2C1 Address Usage

The IMX378 RGB camera on most Luxonis baseboards uses some specific addresses as seen in Figure 4. Use of the I2C1 interface on other components is possible, but with consideration of the existing usage of the RGB camera.

<i><b>IMX378 MODULE CONNECTOR</b></i>			
MODULE & SENSOR INFORMATION			
MODULE	A12N02A-201	I2C Clock Rate	1000 kHz Max
SENSOR	IMX378-AAQH5-C 12.3 Mega pixel CMOS 1/2.3 inch	I2C Address (8 bits)	0x34 (Sensor)
			0x18 (VCM driver)
			0xA0 (EEPROM driver)
MAX RESOLUTION	4056x3040	Sensor Clock Input	6 - 27 MHz

Figure 4 - Baseboard I2C1 RGB Camera Module Usage

### 6.2.2 Stereo Camera I2C2 Address Usage

The pair of OV9282 sensors comprising the stereo pair some Luxonis baseboards uses specific addresses as seen in Figure 5. Use of the I2C2 interface on other components is possible, but with consideration of the existing usage of the stereo camera.

MODULE & SENSOR INFORMATION			
MODULE	TG161B-201 OR AN01V32-0JG	I2C Clock Rate	400 kHz Max
SENSOR	OV09282-GA4A B&W 1 Mega pixel CMOS 1/4 inch	I2C Address (8 bits)	0xC0(W) 0xC1(R)
MAX RESOLUTION	1280X800	Sensor Clock Input	6 - 64 MHz (24 MHz typ.)

Figure 5 - Baseboard I2C2 Stereo Camera Module Usage

## 6.3 MIPI

Three MIPI CSI-2 DPHYv1.2 interfaces are available as input to the SoM. One is a 4-lane interface, and the other two interfaces are 2-lane each, all allowing a maximum of 2.1Gbps per lane.

For each of the three camera interfaces, the inter-pair delay of that interface is matched to the clock pair within +/-1ps, and all pairs are routed with 100ohm differential impedance.



#### 6.4 PGOOD

PGOOD is a 1.8V open-drain output from the SoM PMIC and is pulled high when the PMIC evaluates power is good. PGOOD has a 10Kohm pull-up resistor to the on-SoM 1.8V rail.

This pin should be left floating if unused or tied to a high-impedance input to sense PGOOD. Do not pull or tie PGOOD to GND.

#### 6.5 WAKEUP

WAKEUP is a 1.8V input to the SoM which is pulled to GND through a 10Kohm resistor. If driven high and sensed during the rising edge of \_RST power-on-reset, the on-chip e-fuse is used for boot selection. At present, this functionality is not used on any Luxonis SoM.

The WAKEUP pin was originally intended for waking the SoM from deep sleep mode, but this functionality is not supported on Luxonis SoMs. However, any GPIO can be used to trigger an interrupt and wake the SoM.

The WAKEUP should be left floating.

#### 6.6 \_RST

\_RST is the active-low Myriad X reset input. \_RST has a 1.8V 10Kohm pull-up resistor on the SoM, and can be driven low from the baseboard to reset the Myriad X.

#### 6.7 Camera Reference Clocks

Two pins are used to provide a 24MHz reference clock to the image sensor ICs on the baseboard. These signals are on the CAMA\_CLK and CAMB\_CLK pins of the SoM interface connector. Each signal has a 121Kohm, pull down on the SoM. It is possible to create additional reference clocks for additional cameras by reconfiguring an GPIO pin.

#### 6.8 Camera Reset Signals

Three pins are used for individually resetting or powering down the RGB and stereo pair cameras. These signals are CAMA\_RST, CAM\_B\_D\_PWM, and CAM\_B\_PWDN\_N, for the RGB, LEFT, and RIGHT cameras respectively. Each of these signals is 1.8V and are active-low. No pull-up or pull-down resistors are on these signals on the SoM.

#### 6.9 1.8V Shared SPI0 (QSPI)

The signals with prefix "SPI0" are part of a QSPI bus which is shared with the optional on-SoM NOR flash. Note the signal configuration details in Table 1 (refer to the [BW1099 IO TABLE](#) for more details). All signals related to SPI0 are delay-matched on the SoM to +/-100ps to the connector interface.

Pin #	Pin name / Primary Function	SoM GPIO	Alt. 1	PU/PD on SoM	Pin Type	Description
60	GPIO_8/SPI0_CS_1	GPIO_8	SPI0_CS_1		1.8V GPIO	GPIO, or can be configured as second CS for SPI0, MX in Controller or Peripheral mode. / +/- 100ps inter-SPI0

70	SPI0_CS_0	GPIO_5		PU: 1kR/1.8V	1.8V GPIO	Hardwired to 1099 on-board NOR S# / +/-100ps inter-SPI0
74	SPI0_SCK	GPIO_4			1.8V GPIO	Hardwired to 1099 on-board NOR C / +/-100ps inter-SPI0
62	SPI0_SIO0	GPIO_0			1.8V GPIO	Hardwired to 1099 on-board NOR DQ0 / +/-100ps inter-SPI0
64	SPI0_SIO1	GPIO_1			1.8V GPIO	Hardwired to 1099 on-board NOR DQ1 / +/-100ps inter-SPI0
66	SPI0_SIO2	GPIO_2		PU: 1kR/1.8V	1.8V GPIO	Hardwired to 1099 on-board NOR W#/DQ2 / +/-100ps inter-SPI0
68	SPI0_SIO3	GPIO_3		PU: 1kR/1.8V	1.8V GPIO	Hardwired to 1099 on-board NOR DQ3/HOLD# / +/-100ps inter-SPI0

Table 1 - SPI0 Pin Configuration

With the NOR flash unpopulated the SPI0 bus can be used by the Myriad X in either controller or peripheral mode. With the Myriad X in controller mode, SPI0\_CS\_0 and SPI0\_CS\_1 can be used as chip selects for any baseboard peripherals, and additional baseboard chip selects can be configured by using GPIOs, if required. With the Myriad X in peripheral mode, either the SPI0\_CS\_0 or SPI0\_CS\_1 can be used by the baseboard controller to select the Myriad X as a peripheral. Unlike for controller mode, in peripheral mode, GPIOs cannot be configured as chip selects for the Myriad X, only SPI0\_CS\_0 and SPI0\_CS\_1 can be used for this purpose.

With the NOR flash populated, the SPI0 bus can still be used by the Myriad X in either controller or peripheral mode, but the NOR flash now occupies the SPI0\_CS\_0 location so some care must be taken to avoid contention. With the NOR flash populated, and the Myriad X is in controller mode, the SPI0\_CS\_0 selects the NOR flash. SPI0\_CS\_1 (or other reconfigured GPIO) can be used as a second chip select for baseboard peripherals. When in peripheral mode SPI0\_CS\_1 should be used as the chip select for the peripheral Myriad X to avoid contention when communicating with NOR flash using SPI0\_CS\_0.

Note that when an external controller is accessing the NOR flash on the SoM, the Myriad X must not be allowed to access at the same time. Asserting \_RST for the Myriad X is an option to prevent this contention.

## 6.10 3.3V GPIO Bank

The SoM offers six GPIO which are 3.3V signaling for easy interface to common peripherals and devices with 3.3V signaling. These GPIO offer several configurations including SDIO, QSPI, UART, PWM, and I2C, along with general purpose IO and are listed in Table 2 (refer to the [BW1099 IO TABLE](#) for more details).

Pin #	Pin name / Primary Function	SoM GPIO	Alt. 1	Alt. 2	Alt. 3	Alt. 4	PU/PD on SoM	Pin Type	Description
40	GPIO_34_3V3	GPIO_34	sd_hst0_dat_0	spi2_dio_2	pwm_0	I2C3_SDA	PU: 40.2kR/1.8V	3.3V GPIO	3.3V GPIO. Note PU/PD resistors that are configured for SDIO, but also compatible with SPI. / +/-100ps inter-SD_HST
61	GPIO_32_3V3	GPIO_32	sd_hst0_clk	spi2_dio_0_mosi			PU: 40.2kR/1.8V	3.3V GPIO	3.3V GPIO. Note PU/PD resistors that are configured for SDIO, but also compatible with SPI. / +/-100ps inter-SD_HST
63	GPIO_33_3V3	GPIO_33	sd_hst0_cmd	spi2_dio_1_miso		I2C3_SCL	PU: 40.2kR/1.8V	3.3V GPIO	3.3V GPIO. Note PU/PD resistors that are configured for SDIO, but also compatible with SPI.

									/ +/-100ps inter-SD_HST
32	GPIO_37_3V3	GPIO_37	sd_hst0_dat_3	spi2_cs_0	pwm_3	UART3_TX	PD: 300kR/GND	3.3V GPIO	3.3V GPIO. Note PU/PD resistors that are configured for SDIO, but also compatible with SPI. / +/-100ps inter-SD_HST
36	GPIO_36_3V3	GPIO_36	sd_hst0_dat_2	spi2_sclk			PU: 40.2kR/1.8V	3.3V GPIO	3.3V GPIO. Note PU/PD resistors that are configured for SDIO, but also compatible with SPI. / +/-100ps inter-SD_HST
38	GPIO_35_3V3	GPIO_35	sd_hst0_dat_1	spi2_dio_3		UART3_RX	PU: 40.2kR/1.8V	3.3V GPIO	3.3V GPIO. Note PU/PD resistors that are configured for SDIO, but also compatible with SPI. / +/-100ps inter-SD_HST

Table 2 - 3.3V GPIO Pin Configuration

### 6.10.1 3.3V GPIO Bank - SDIO

The 3.3V GPIO bank is nominally configured for use with SDIO, as appropriate pull-up and pull-down resistors exist on the SoM. CLK, CMD, and DAT[0:3] are available for use. Optional signals such as card detect can be implemented using the 1.8V GPIO.

### 6.10.2 3.3V GPIO Bank – QSPI (SPI2)

The 3.3V GPIO bank can be configured as a QSPI bus. The weak pull-up and pull-down resistors on the signal lines (for use as SDIO) are over driven when used as a QSPI interface, though maximum data rates are not guaranteed. Like the SPI0 bank, the 3.3V QSPI interface can operate as a controller or peripheral using the SPI2\_CS\_0 signal. Additional chip selects can be sent to baseboard peripherals with other 1.8v GPIO, though the need to level shift from 1.8V to 3.3V may be necessary.

## 6.11 1.8V GPIO

The default IO voltage for all GPIO is 1.8V, with the exceptions of the 3.3V GPIO listed in Table 2. Each SPGPIO can be muxed to alternate functionality as described in Table 3 (refer to the [BW1099 IO TABLE](#) for more details). In addition to muxed functionality, each GPIO is fully user-programmable with support or four output drive strengths (2mA, 4mA, 8mA, 12mA), selectable output slew-rate (slow/fast), open-drain output mode, LVCMOS/LVTTL compatible input modes with selectable hysteresis, programmable pull-up/pull-down input options, power-on-start capability, and no requirements for power sequencing. Additionally, 100MHz frequency can be achieved with less than 15pF external load, or up to 125MHz with less than 10pF external load.

Pin #	Pin name / Primary Function	SoM GPIO	Alt. 1	Alt. 2	PU/PD on SoM	Pin Type	Description
4	GPIO_46	GPIO_46	UART_RX	pwm3		1.8V GPIO	Typically labeled as UART_RX on Luxonis baseboards.
28	CAMA_CLK	GPIO_44			PD: 121kR/GND	1.8V GPIO	24MHz reference clock for Camera A PLL
33	CAMA_I2C_SDA	GPIO_21	pwm5		PU: 2.2kR/1.8V	1.8V GPIO	I2C data for Camera A
34	CAMA_RST	GPIO_31				1.8V GPIO	Camera A reset/power down.
35	CAMA_I2C_SCL	GPIO_20			PU: 2.2kR/1.8V	1.8V GPIO	I2C clock for Camera A

42	COM_AUX_IO2	GPIO_41				1.8V GPIO	Auxiliary GPIO for cameras sync/trigger. Reserved for interrupt FSIN (Frame sync input) for the cameras used.
59	GPIO_7	GPIO_7			PU: 40.2kR/1.8V	1.8V GPIO	Configured for SDIO card detect, or as regular GPIO. Note 1.8V, 40.2k PU. / +/-100ps inter-SD HST
60	GPIO_8/SPI0_CS_1	GPIO_8	SPI0_CS_1			1.8V GPIO	GPIO, or can be configured as second CS for SPI0, MX in Controller or Peripheral mode. / +/-100ps inter-SPI0
62	SPI0_SIO0	GPIO_0				1.8V GPIO	Hardwired to 1099 on-board NOR DQ0 / +/-100ps inter-SPI0
64	SPI0_SIO1	GPIO_1				1.8V GPIO	Hardwired to 1099 on-board NOR DQ1 / +/-100ps inter-SPI0
65	CAM_B_D_PWM	GPIO_57				1.8V GPIO	Camera C reset/power down.
66	SPI0_SIO2	GPIO_2			PU: 1kR/1.8V	1.8V GPIO	Hardwired to 1099 on-board NOR W#/DQ2 / +/-100ps inter-SPI0
67	CAM_B_PWDN_N	GPIO_54				1.8V GPIO	Camera B reset/power down.
68	SPI0_SIO3	GPIO_3			PU: 1kR/1.8V	1.8V GPIO	Hardwired to 1099 on-board NOR DQ3/HOLD# / +/-100ps inter-SPI0
70	SPI0_CS_0	GPIO_5			PU: 1kR/1.8V	1.8V GPIO	Hardwired to 1099 on-board NOR S# / +/-100ps inter-SPI0
73	CAMB_CLK	GPIO_47			PD: 121kR/GND	1.8V GPIO	24MHz reference clock for Camera B PLL
74	SPI0_SCK	GPIO_4				1.8V GPIO	Hardwired to 1099 on-board NOR C / +/-100ps inter-SPI0
77	CAMB_I2C_SCL	GPIO_22			PU: 2.2kR/1.8V	1.8V GPIO	Camera B I2C SDA. Can be used as GPIO.
79	CAMB_I2C_SDA	GPIO_23			PU: 2.2kR/1.8V	1.8V GPIO	Camera B I2C SCL. Can be used as GPIO.
6	GPIO_2	GPIO_45	UART_TX	pwm2		1.8V GPIO	Typically labeled as UART_TX on Luxonis baseboards.
69	GPIO_22	GPIO_53				1.8V GPIO	
78	GPIO_27	GPIO_24	I2C3_SCL		PU: 2.2kR/1.8V	1.8V GPIO	Camera C I2C SCL (if applicable). Can be used as GPIO
80	GPIO_29	GPIO_25	I2C3_SDA		PU: 2.2kR/1.8V	1.8V GPIO	Camera C I2C SDA (if applicable). Can be used as GPIO

Table 3 - 1.8V GPIO Pin Configuration

## 7 Mechanical Information

The following information is the most current data available for the designated device. This data is subject to change without notice and without revision of this document.

### 7.1 BW1099 Dimensions

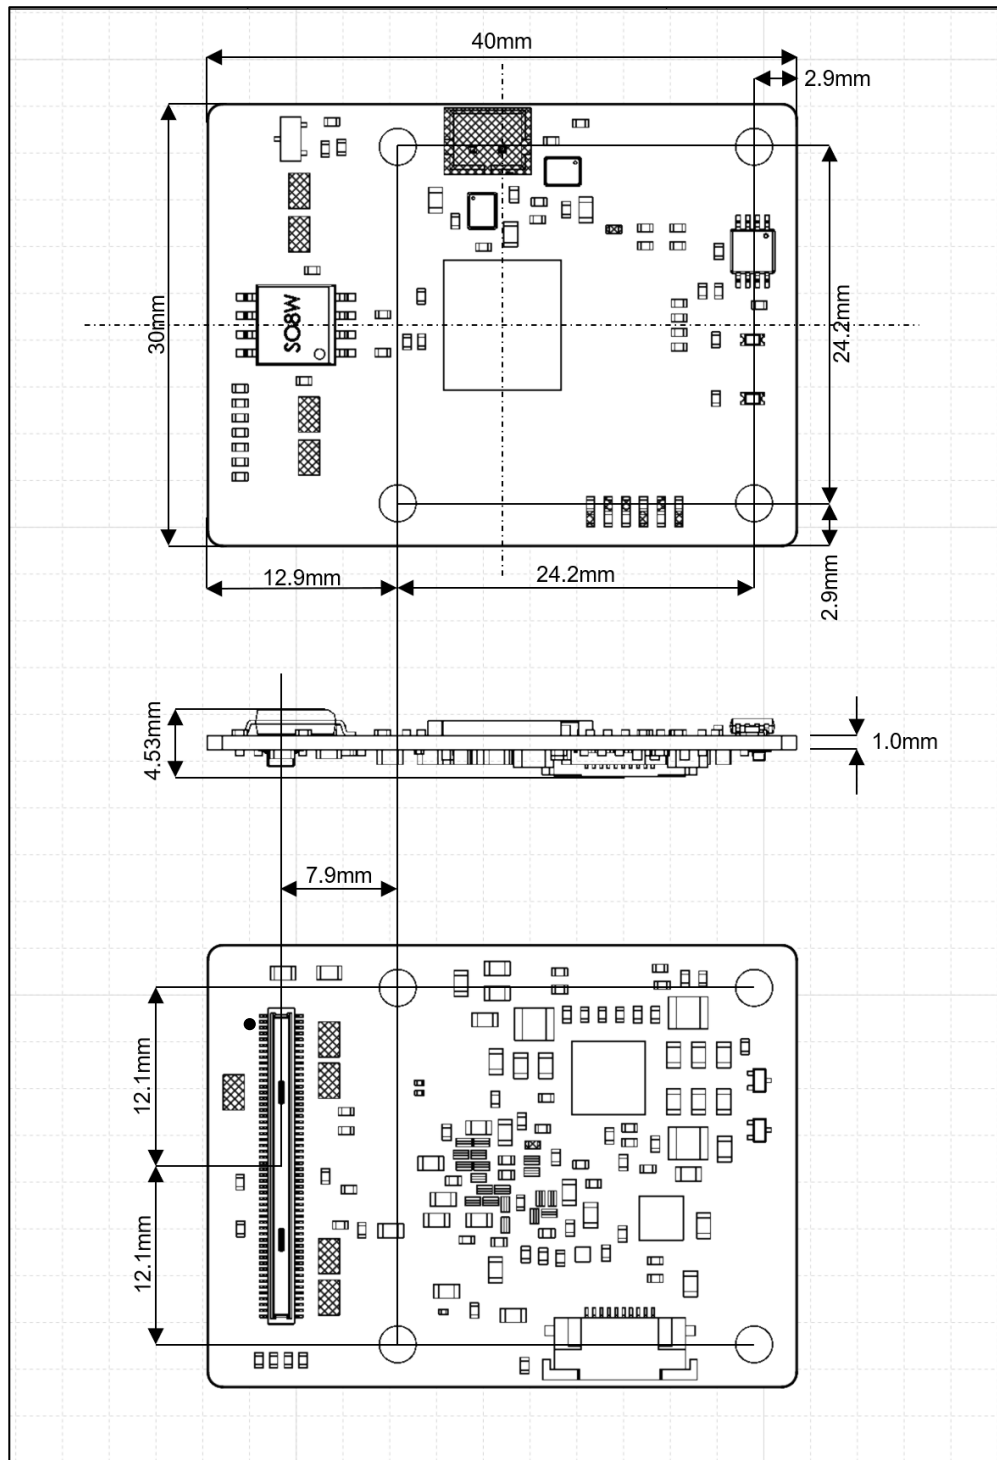


Figure 6 – Top, Side, and Bottom dimensions

## 7.2 Recommended Mounting Configuration

The BW1099 SoM is designed to be used with a 3mm mated-height connector and accompanying 3mm standoffs. The B2B connector plug is on the BW1099 (Hirose DF40C-100DP-0.4V), while the receptacle, which determines mated height, is on the baseboard (Hirose DF40HC(3.0)-100DS-0.4V). Würth Elektronik 9774030243R SMT standoffs are recommended.

## 7.3 BW1099 Mounting Holes

The BW1099 has 4 M2.5 mounting holes for securing the SoM. These mounting holes use a 2.6mm ID, and a 5.5mm OD pad, which is tied to SoM GND. M2-0.40 screws can be used with these pads to secure the SoM to the recommended Würth Elektronik 9774030243R SMT standoffs, or a custom solution using M2-0.40 or M2.5-0.45 screws can be used. Note that when using M2.5-0.45 screws, there is reduced tolerance between the B2B connector clocking and the screws' hole alignment. This must be accounted for to ensure proper connector mating.

## 7.4 SoM Clearance

3mm is the board-to-board standoff height when using the recommended mounting configuration, however, components on the underside of the BW1099 reduce this clearance. For highest design reliability, it is recommended not to place components on the baseboard underneath the SoM, but components with max height <1mm will have clearance.

In previous designs many components have been successfully placed on the baseboard beneath the SoM making careful use of the 3D STEP file of the SoM, which is available upon request.

## 8 Thermal Information

Power consumption can vary considerably depending on the application. A stereo vision application running Mobilenet-SSD V2 at 30fps typically consumes about 2.5W, but more aggressive applications can consume closer to 5W. Most of this power is consumed by the MA2485. While the VFBGA provides an excellent thermal path from the MA2485 to the SoM, the thermal sink is small, and the part temperature can quickly rise toward the 105C max die temperature.

Heatsinking of the MA2485 is required for most applications.

Table 4 details thermal parameters for the MA2485 simulated in a still air environment, an ambient temperature of 25C, 2W power dissipation, and under the test conditions described in JESD51-2A.

Parameter	Value (C/W)	Description
$\theta_{JB}$	5.8	Junction-to-board thermal resistance (EIA/JESD51-8)
$\theta_{JC}$	3.1	Junction-to-case thermal resistance
$\theta_{JA}$	21.4	Junction-to-ambient thermal resistance (EIA/JESD51-2)

Table 4 - MA2485 Thermal Parameters

## **9 Revision History**

- Initial Release – November 2020
- Revision 0.1 – March 2021
  - Corrected I2C3 swapped SDA/SCL on pins 78/80 of 100pin connector.
- Revision 0.2 – June 2021
  - Renamed connector GPIO names with one used on MA2485-CO