

ASSEMBLY NOTES:

Assembly shall conform to IPC-A-610 Class 2.

Assembly shall conform with RoHS Directive 2011/65/EU.

Components shall be placed according to the associated CPL and BOM documents.

Lead-free SAC305 solder shall be used.

Reflow profile shall comply with J-STD-20C Lead-Free Reflow Profile.

BGA components shall be 100% checked with x-ray for solder bridges after reflow.

Finished assemblies shall be removed from panel prior to delivery.


Notes:


1 Note 1

2 Note 2

3 Note 3

View from Top side (Scale 2)

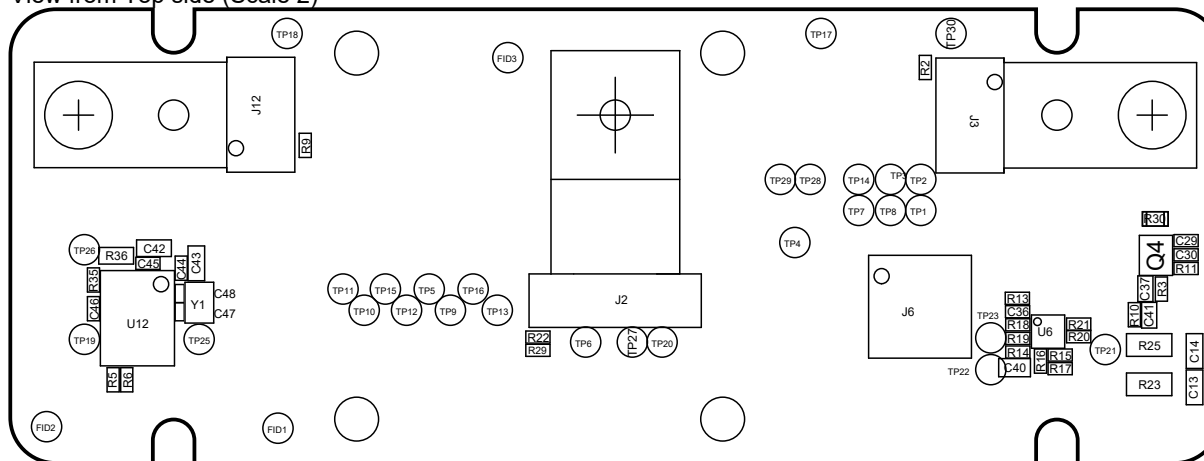

Title: DM1098LUX-D-LITE		
Number: DXXXX	Revision: R0M0 E0	
Date: 23/04/2021	Sheet: 1 of 2	PROPRIETARY AND CONFIDENTIAL
Drawn by: David Malovrh		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

A

B

C

D

E


1

2

3

4

[Variant:]: View from Bottom side (Scale 2)

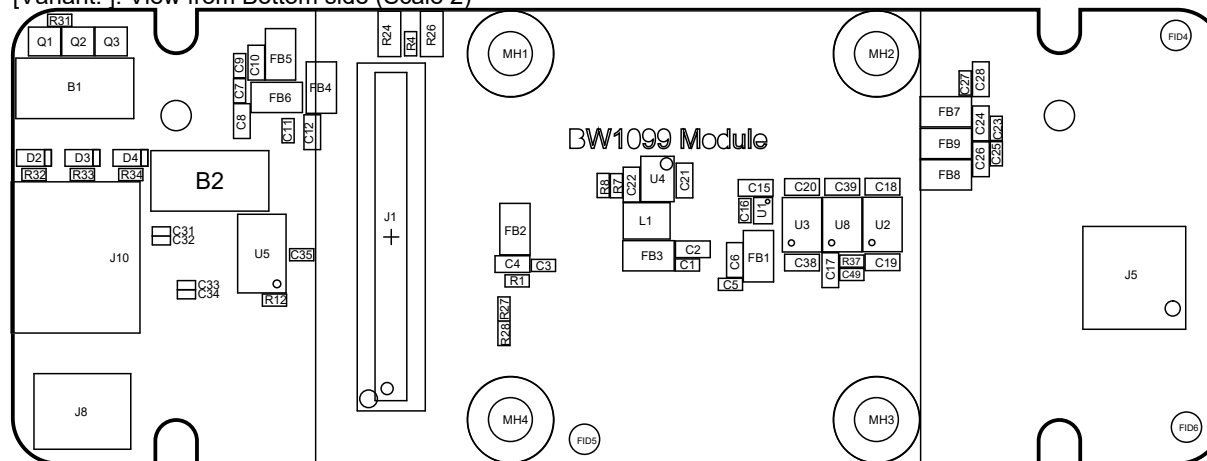

Title: **DM1098LUX-D-LITE**

Number: DXXXX

Revision: R0M0
E0

Date: 23/04/2021

Sheet: 2 of 2

Drawn by: David Malovrh

LUXonjs

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

A

B

C

D

E

