



# Global Trigger firmware Specification for MP7 platform for Upgrade Phase I

Herbert Bergauer, Babak Rahbaran, Johannes Wittmann  
Institute of High Energy Physics (HEPHY)

<http://www.hephy.at>

<http://globaltrigger.hephy.at>

<https://twiki.cern.ch/twiki/bin/viewauth/CMS/GlobalTrigger>

December 14, 2022

---

## Revision History

Doc Rev	Description of Change	Revision Date
8.7	Cleaned up text and layout.	2022/12/13
8.6	Added chapter "Handling of timing errors in synthesis" (7.1.1).	2022/12/01
8.5	Cleaned up (used "textquotesingle").	2022/11/30
8.4	Updated "Configuration of GTHs" (7.4).	2022/11/24
8.3	Inserted chapter "ZDC 5G to 10G conversion scheme" to "Appendices" (7.8). Replaced picture with Table in "Configuration of GTHs" (7.2).	2022/10/14
8.2	Inserted chapter "GTH I/Os" to "Appendices" (7.9).	2022/10/14
8.1	Added table "Firmware versions" (2).	2022/09/27
8.0	Updated "Appendices" (7).	2022/09/26
7.9	Updated text in "LUTs for $1/\Delta R^2$ " (4.4.7), added new chapter "Muon shower bits" (4.4.10).	2022/09/13
7.8	Updated text for Final-OR-mask and veto-mask (5.5.4 and 5.5.5). Updated <code>versions.tex</code> .	2022/09/09
7.7	Updated text for "fractional prescale", reset prescaler with "start" (5.5.3).	2022/08/17
7.6	Updated text for "fractional prescale" values (5.5.3).	2022/07/11
7.5	Inserted "Description of tests" to "Appendices" (7.1).	2022/03/25
7.4	Cleaned up text and tables in section "Framework" (3). Changed links to firmware modules (git branch name set in <code>versions.tex</code> ).	2022/03/23
7.3	Added "Configuration of optical input links" and "Configuration of links to AMC13 (readout)" to "Appendices" (7.5 and 7.6).	2022/02/28
7.2	Inserted "Appendices" (7) and added references.	2022/02/25
7.1	Inserted "Simulation and build of firmware" and "Testing firmware" (2.2.2 and 2.2.3).	2022/02/15
7.0	Bug fixed in labels. Updated labels.	2022/02/14
6.9	Inserted "Implementation in firmware" for top-of-hierarchy of VHDL code (2.2.1). Updated labels.	2022/02/11
6.8	Updated text of section "Implementation in firmware" for Framework (3.1), GTL (4.3) and FDL (5.4).	2022/02/10
6.7	Inserted references and updated text in 2.2.	2022/02/09
6.6	Updated text in "Implementation in firmware" (4.3).	2022/01/10
6.5	Bug fixed in definition of calo eta ranges (4.4.2).	2021/11/30
6.4	Updated data structure for jets with DISP bit (4.2.1).	2021/11/17

Doc Rev	Description of Change	Revision Date
6.3	Inserted "Calculation of look-up-tables (LUTs) for correlation cuts" (4.4.7).	2021/11/10
6.2	Removed "VHDL-Templates for VHDL-Producer".	2021/09/24
6.1	Updated (and renamed) description of "Invariant mass over delta R calculation" (see 4.4.6).	2021/09/14
6.0	New structure of document for firmware versions 1.12.x and higher.	2021/02/10
5.7	Fixed typo in section "Invariant mass calculation for three objects" 4.4.6.	2020/12/03
5.6	Updated text in section "VHDL-Templates for VHDL-Producer".	2020/09/31
5.5	Inserted links to VHDL modules.	2020/09/18
5.4	Updated text in section "Correlation conditions" 4.4.14. Description is for v1.10.0 of Global Trigger Logic.	2020/09/17
5.3	Inserted description of "Invariant mass divided by delta R calculation" (see 4.4.6).	2020/09/10
5.2	Fixed typo (unconstrained pt).	2020/09/09
5.1	Inserted text for new muon structure in sections 4.2.2, 4.4.4 and 4.4.14.1. Added subsections in section "VHDL-Templates for VHDL-Producer"	2020/08/04
5.0	Additional text in section for calo calo overlap remover condition module.	2020/05/25
4.9	Inserted text in section Calorimeter Overlap Remover conditions and Calo Calo Overlap Remover Correlation conditions.	2020/04/16
4.8	Updated text in sections Calorimeter conditions, Muon conditions and Correlation conditions for changes which have been done for GTL VHDL version 1.8.0 (module names without version number, "five eta cuts").	2019/08/13
4.7	Inserted "Asymmetry" and "Centrality" of "Energy sums" (GTL VHDL version 1.6.0). Therefore updated sections 4.1, 4.2.1, 4.4.9 added section "Centrality condition" 4.4.13 and updated Table 5	2018/08/13
4.6	Updated text in section "Global Trigger Logic" (4) according to firmware version v1.5.0 of gtl_module.vhd.	2018/02/21
4.5	Updated text in section "Framework" (3) according to firmware version v1.2.3 of frame.vhd.	2018/01/19
4.4	New "icons" $ET_{miss}^{HF}$ and $HT_{miss}^{HF}$ in Table 5 and Section 4. Updated glossary.	2016/11/11

Doc Rev	Description of Change	Revision Date
4.3	Updated table " $\mu$ FDL register map" (27) and section "Register map" (5.5.7.1). Moved "List of Tables" and "List of Figures" to the end of document. Inserted link to "Scales for inputs to $\mu$ GT" (4.3). Moved section "Software reset" to section "Framework" as subsection (3.2.6). Removed empty sections "IPBus", "Firmware Configuration" and "Bibliography".	2016/11/03
4.2	Updated sections "Calo-Layer2 optical interfaces" (4.2.1) and "Energy sum quantities conditions" (4.4.9) for tower-count trigger bits. Inserted section "Towercount condition" (4.4.12).	2016/10/25
4.1	Updated section "Calo-Layer2 optical interfaces" (4.2.1) for new energy sum quantities and minimum bias trigger bits. Updated sections "Firmware" (2), "Framework" (3) and "Final Desicion Logic" (5).	2016/06/09
4.0	Updated Text in section "Muon Muon Correlation condition module".	2016/01/15
3.9	Removed "Double objects requirements condition with spatial correlation", because not used anymore in the future, replaced by Correlation conditions.	2016/01/08
3.8	Minor changes in text and updated Figure 9.	2016/01/08
3.7	Changed colour in Figure 10 and updated text for correlation conditions (see section 4.4.14.	2016/01/07
3.6	Updated Figures 9 and 8 and text in calo calo correlation condition module.	2015/12/21
3.5	Inserted drawing of VHDL structure of cuts for correlation conditions (see Figure 11).	2015/11/18
3.4	Updated muon $\eta$ ranges (Table 13) and inserted correlation conditions. Created scheme for conversion of calorimeter $\eta$ and $\varphi$ to muon scale for calo-muon-correlation conditions.	2015/11/17
3.3	Added Text in sections calo comparator module and muon comparator module.	2015/10/08
3.2	Updated Text in section "Final Desicion Logic" (5).	2015/10/06
3.1	Updated Figure 13 and Tables 27. Remaned section "Calorimeter conditions module - version 2" to "Calorimeter conditions module - version 3", section "Muon conditions module" to "Muon conditions module - version 2" and section "Muon comparators module" to "Muon comparators module - version 2".	2015/10/02
3.0	Updated text and tables of $\eta$ ranges for Calorimeter objects (see 4.4.2).	2015/09/22

Doc Rev	Description of Change	Revision Date
2.9	Renewed Figures in GTL and FDL (see Figure 7, 8 and 9) and FDL(see Figure 13 and 14). Added register bits description of FDL Register map (see section 5.5.7.1).	2015/09/16
2.8	Updated text, tables and listings of section "VHDL-Templates for VHDL-Producer".	2015/09/15
2.7	Corrected calculation of muon $\eta$ step width (see 4.4.4).	2015/09/10
2.6	Edited text in Table 21.	2015/08/28
2.5	Updated definition of $\eta$ ranges for Calorimeter objects and Muon objects.	2015/08/20
2.4	Added section Calo Muon Correlation condition.	2015/08/19
2.3	Added section "Register map" (5.5.7.1) for $\mu$ FDL.	2015/06/26
2.2	Updated figures (7, 8 and 9) for GTL and edited section "Correlation conditions" (see 4.4.14).	2015/05/08
2.1	Added tables for calorimeter isolation-bits and for muon quality- and isolation-bits definition (12, 15 and 18). Edited section glossary and acronyms.	2015/05/07
2.0	Added text for "Energy sum conditions" (4.4.9) and updated chapters for "Calorimeter conditions" for version 2. Inserted isolation bits for electron/ $\gamma$ and tau objects (4.4.2).	2015/05/06
1.9	Minor changes "Demux Lane Data" (see 3.2.2) and "Muon data" (see 4.4.4).	2014/11/06
1.8	Edited Section "Energy sum quantities conditions" (see 4.4.9).	2014/10/08
1.7	Added sections "Configuration of optical connections" (3.2.1), "Demux Lane Data" (3.2.2) and "Lane Mapping Process" (3.2.3) to framework. Removed tables of optical interfaces from gtl and referenced to tables in framework.	2014/10/07
1.6	Minor changes in "Calorimeter conditions" and "Muon conditions" .	2014/07/01
1.5	Updated with minor changes in "Muon conditions".	2014/06/17
1.4	Fixed bug in Figure 10.	2014/04/30
1.3	Updated section "Muon conditions".	2014/04/22
1.2	Removed section "Muon charge module" and added new section "Muon charge correlation module" (see 4.4.6). Edited text in section and subsections "Muon conditions definition".	2014/04/15
1.1	Changed Figure 10 and minor changes in text for anti-clockwise behaviour in $\varphi$ .	2014/04/04
1.0	Added definition for "calorimeter conditions over bx", see section.	2014/03/12
0.9	Changed text of condition description in subsections Calo conditions definition and Muon conditions definition.	2014/02/12

---

Doc Rev	Description of Change	Revision Date
0.8	Updated calorimeter data structure in <a href="#">4.2.1</a> .	2013/12/03
0.7	Updated muon data structure in <a href="#">4.2.2</a>	2013/12/02
0.6	Moved decription of VHDL templates for TME to "VHDL-Templates for VHDL-Producer".	2013/11/18
0.5	Subsection <a href="#">4.2</a> added to section <a href="#">4</a> .	2013/11/11
0.4	GTL and FDL firmware implemented for new data structure (GTL firmware version v1.0.0 [fix part of GTL], FDL firmware version v1.0.0)	2013/11/06
0.3	New framework implementation based on new object types definition. Additionally, the ROP is implemented based on production requirements.	2013/10/13
0.2	First framework implementation + ROP .	2012/07/01
0.1	Document created.	2012/02/22

# Contents

<b>1</b>	<b>Global Trigger System overview</b>	<b>10</b>
<b>2</b>	<b>Firmware overview</b>	<b>10</b>
2.1	Firmware versions . . . . .	11
2.2	Directory structure of Global Trigger firmware . . . . .	11
2.2.1	Implementation in firmware . . . . .	11
2.2.2	Simulation and build of firmware . . . . .	13
2.2.3	Testing firmware . . . . .	13
<b>3</b>	<b>Framework</b>	<b>14</b>
3.1	Implementation in firmware . . . . .	14
3.2	Main parts . . . . .	17
3.2.1	Configuration of optical connections . . . . .	17
3.2.2	Demux Lane Data . . . . .	19
3.2.3	Lane Mapping Process . . . . .	19
3.2.3.1	Implementation . . . . .	19
3.2.4	SPY Memory . . . . .	20
3.2.4.1	Implementation . . . . .	20
3.2.4.1.1	SPY Trigger . . . . .	20
3.2.4.1.2	SPY memory I . . . . .	21
3.2.4.1.3	SPY memory II . . . . .	21
3.2.5	Timer Counter Manager . . . . .	21
3.2.5.1	Counter Overview . . . . .	22
3.2.5.2	Counters for bunch crossing-, orbit- and luminosity segment number . . . . .	22
3.2.5.3	Bunch crossing counter error . . . . .	23
3.2.5.4	Counters for event- and trigger number . . . . .	23
3.2.6	Software Reset . . . . .	23
3.2.7	Registers . . . . .	24
3.2.7.1	Register map . . . . .	24
3.2.7.2	Register details . . . . .	25

<b>4</b>	<b>Global Trigger Logic</b>	<b>31</b>
4.1	$\mu$ GTL Interface . . . . .	31
4.2	Definition of optical interfaces . . . . .	32
4.2.1	Calo-Layer2 optical interface . . . . .	32
4.2.2	Global Muon Trigger optical interface . . . . .	33
4.3	Implementation in firmware . . . . .	35
4.3.1	Top-of-hierarchy module of $\mu$ GTL . . . . .	35
4.4	$\mu$ GTL structure . . . . .	38
4.4.1	Data $\pm 2bx$ . . . . .	38
4.4.2	Definitions of Calorimeter data . . . . .	38
4.4.3	Definitions of Energy sum quantities data . . . . .	42
4.4.4	Definitions of Muon data . . . . .	44
4.4.5	Calculation of object cuts . . . . .	47
4.4.5.1	Object cuts . . . . .	47
4.4.6	Calculation of correlation cuts . . . . .	52
4.4.7	Calculation of look-up-tables (LUTs) for correlation cuts . . . . .	56
4.4.8	Combination conditions . . . . .	61
4.4.8.1	Combination conditions definition . . . . .	61
4.4.9	Energy sum quantities conditions . . . . .	63
4.4.9.1	Energy sum quantities conditions module (including Asymmetry conditions) . . . . .	63
4.4.10	Muon shower bits . . . . .	65
4.4.11	Minimum bias trigger conditions . . . . .	65
4.4.12	Towercount condition . . . . .	65
4.4.13	Centrality condition . . . . .	65
4.4.14	Correlation conditions . . . . .	66
4.4.14.1	Correlation condition module . . . . .	68
4.4.15	External Conditions . . . . .	71
4.4.16	Algorithms logic . . . . .	71



<b>5</b>	<b>Final Desicion Logic</b>	<b>72</b>
5.1	<a href="#">μFDL Interface</a>	72
5.2	<a href="#">MP7 Final-OR hardware solution</a>	73
5.3	<a href="#">Data flow</a>	73
5.4	<a href="#">Implementation in firmware</a>	75
5.5	<a href="#">Main parts</a>	78
5.5.1	<a href="#">Algo-bx-masks</a>	78
5.5.2	<a href="#">Rate-counters</a>	78
5.5.3	<a href="#">Prescalers</a>	79
5.5.3.1	<a href="#">Prescaler logic</a>	79
5.5.4	<a href="#">Finor-masks</a>	80
5.5.5	<a href="#">Veto-masks</a>	80
5.5.6	<a href="#">Finor</a>	80
5.5.7	<a href="#">Registers and memories</a>	81
5.5.7.1	<a href="#">Register map</a>	81
<b>6</b>	<b>Readout process</b>	<b>90</b>
<b>7</b>	<b>Appendices</b>	<b>91</b>
7.1	<a href="#">Description of simulation, synthesis and hardware tests</a>	91
7.1.1	<a href="#">Handling of timing errors in synthesis</a>	91
7.2	<a href="#">Configuration of GTHs</a>	93
7.3	<a href="#">GTH I/Os</a>	93
7.3.1	<a href="#">GTH output connections</a>	96
7.4	<a href="#">Configuration of GTHs</a>	99
7.5	<a href="#">Configuration of optical input links</a>	101
7.6	<a href="#">Configuration of links to AMC13 (readout)</a>	101
7.7	<a href="#">Optical patch panel</a>	102
7.8	<a href="#">ZDC 5G to 10G conversion scheme</a>	107
7.9	<a href="#">GTH I/Os</a>	108
7.9.1	<a href="#">GTH input connections</a>	108
7.9.2	<a href="#">GTH output connections</a>	110
<b>8</b>	<b>Glossary</b>	<b>113</b>

<b>9 Acronyms</b>	<b>115</b>
<b>List of Tables</b>	<b>116</b>
<b>List of Figures</b>	<b>118</b>

# 1 Global Trigger System overview

The Global Trigger System is based on MicroTCA technology and 10 Gbps optical links. A set of 6 MP7 boards (for MP7 documentation see [1], for MP7 firmware see [2]) with FPGAs of the powerful Xilinx Virtex-7 family is available. The Global Trigger firmware is implemented on these FPGAs. Every FPGA contains a part of the VHDL representation of a L1 Menu, the partitioning is done by VHDL Producer tool. The trigger decision of every MP7 board is collected on an AMC502 board to generate the "final OR" signal which triggers the readout of the detector.

## 2 Firmware overview

The figure 1 shows the architecture of  $\mu$ GT payload. It consists of framework and the algorithm logic which consists of the following modules:

1. Global Trigger Logic Data Mapping
2.  $\mu$ GTL
3.  $\mu$ FDL

The output mux (part of framework) collects data for read-out record which are send via MP7 read-out to AMC13.

The IPBus system allows the control of hardware via a ‘virtual bus’, using a standard IP-over-gigabit-Ethernet network connection.

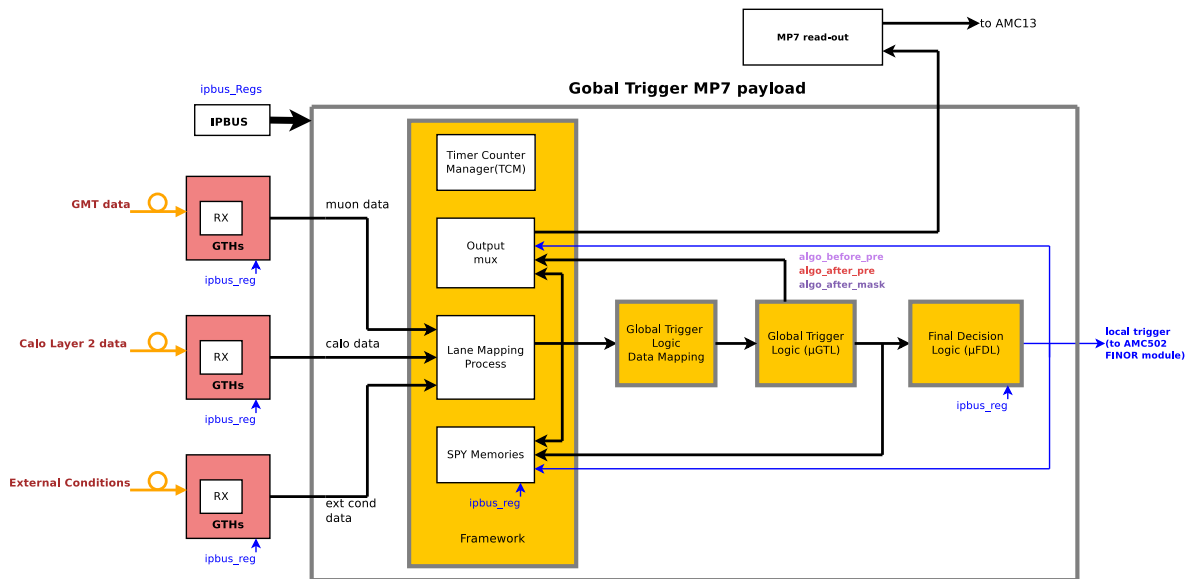


Figure 1:  $\mu$ GT payload

## 2.1 Firmware versions

This firmware description is based on following versions:

Table 2: Firmware versions

Entity	Version
Global Trigger firmware	v1.22.0
Framework	v1.4.0
Global Trigger Logic	v1.18.0
Final Decision Logic	v1.4.1

## 2.2 Directory structure of Global Trigger firmware

In Global Trigger repository all files for building firmware are in directory `'firmware'` with subdirectories for synthesis configuration files (`'cfg'` and `'ucf'`), for VHDL source files (`'hdl'`), for memory files build from IPs (`'ngc'`) and simulation files (`'sim'`).

All definitions for VHDL code are in `'hdl/packages'`, VHDL source files representing Global Trigger firmware are in `'hdl/payload'` with subdirectories (for `'gtl'`, `'fdl'`, `'frame'` and `'ipbus'`).

### 2.2.1 Implementation in firmware

Top-of-hierarchy of VHDL code is `'mp7_payload.vhd'`.

Listing 1 contains the entity-declaration of the top-of-hierarchy file.

Listing 1: Entity declaration of `mp7_payload.vhd`

```
entity mp7_payload is
  port(
    clk: in std_logic; -- ipbus signals
    rst: in std_logic;
    ipb_in: in ipb_wbus;
    ipb_out: out ipb_rbus;
    clk_payload : in  std_logic_vector(2 downto 0);
    rst_payload : in  std_logic_vector(2 downto 0);
    clk_p: in std_logic; -- data clock
    rst_loc: in std_logic_vector(N_REGION - 1 downto 0);
    clken_loc: in std_logic_vector(N_REGION - 1 downto 0);
    ctrs: in ttc_stuff_array;
    lla: in std_logic; -- L1A input
    bc0: out std_logic;
    d: in ldata(4 * N_REGION - 1 downto 0); -- data in
    q: out ldata(4 * N_REGION - 1 downto 0); -- data out
    gpio: out std_logic_vector(29 downto 0); -- IO to mezzanine connector
    gpio_en: out std_logic_vector(29 downto 0) -- IO to mezzanine connector (
      three-state enables)
  );
end mp7_payload;
```

Table 3: Explanation of Listing 1

Item	Explanation
clk	IPBus clock input.
rst	IPBus reset input.
ipb_in	IPBus data input.
ipb_out	IPBus data output.
clk_payload	clock inputs [clk_payload(0)=lhc_clock].
rst_payload	reset inputs.
clk_p	clock 240MHz.
rst_loc	not used.
clken_loc	not used.
ctrs	TTC signals input.
lla	L1A signal input.
bc0	bunch counter reset output.
d	data input (from optical links).
q	data output (to optical links).
gpio	signal outputs to mezzanine board.
gpio_en	enable (signal) outputs to mezzanine board.

All the declarations for arrays ("type"), parameters ("constant") and look-up-tables ("constant") used in modules are available in 'gtl\_pkg.vhd' package-file.

### 2.2.2 Simulation and build of firmware

In document '[README.md](#)' one can find instructions for setting up simulation and build environments. For simulation and building of firmware access rights to GitLab (MP7 firmware) are mandatory.

### 2.2.3 Testing firmware

Testing of firmware in hardware at CMS P5 (see [7.1](#)) is done with script "multiboard\_function\_test" ("tdf run multiboard\_function\_test -h"). Therefore a XML file of the L1Menu and a test vector file must be available at the crate. The firmware of the L1Menu which should be tested must be loaded into the 6 MP7 boards before testing ("tdf run uploadfw\_gt -h"). For checking crate status execute "tdf run crate\_status".

This testing is restricted to persons with access to  $\mu$ GT crates at P5.

## 3 Framework

This description is for version v1.4.0 of Framework.

### Remark:

with frame v1.2.3 "Delay Manager" ('dm.vhd') and "Data Source Multiplexer" ('dsmux.vhd') are removed because these features were never used in production system, only for tests. Simmem data not used anymore, because of removed dsmux. The reason of removing is to get more available resources.

Data from the GTH interfaces are demultiplexed (from 240 MHz clock domain to LHC clock domain, see Demux Lane Data 3.2.2) and mapped to objects structure in Lane Mapping Process (LMP) for  $\mu$ GTL input and SPY I memory.

### 3.1 Implementation in firmware

Listing 2 contains the entity declaration of 'frame.vhd'.

Listing 2: Entity declaration of frame.vhd

```
entity frame is
  generic(
    NR_LANES : positive
  );
  port(
    ipb_clk : in std_logic;
    ipb_rst : in std_logic;
    ipb_in : in ipb_wbus;
    ipb_out : out ipb_rbus;
    ctrs : in ttc_stuff_array; --mp7 ttc ctrs
    clk240 : in std_logic;
    lhc_clk : in std_logic;
    lhc_rst_o : out std_logic;
    bc0 : in std_logic;
    ec0 : in std_logic;
    oc0 : in std_logic;
    start : in std_logic;
    lla : in std_logic;
    bres_d : out std_logic;
    bres_d_FDL : out std_logic;
    start_lumisection : out std_logic;
    lane_data_in : in ldata(NR_LANES-1 downto 0);
    lane_data_out : out ldata(NR_LANES-1 downto 0);
    lhc_data_2_gtl_o : out lhc_data_t;
    prescale_factor_set_index_rop : in std_logic_vector(7 downto 0);
    algo_after_gtLogic_rop : in std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    algo_after_bxomask_rop : in std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    algo_after_prescaler_rop : in std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    local_finor_rop : in std_logic;
    local_veto_rop : in std_logic;
```

```
        finor_rop : in std_logic;  
        local_finor_with_veto_2_spy2 : in std_logic  
    );  
end frame;
```



Table 4: Explanation of Listing 2

Item	Explanation
NR_LANES	number of used optical links.
ipb_clk	IPBus clock (input).
ipb_rst	IPBus reset (input).
ipb_in	IPBus data (input).
ipb_out	IPBus data (output).
ctrs	TTC control signals (input).
clk240	clock (input) 240 MHz.
lhc_clk	clock (input) (LHC clock).
lhc_rst_o	reset (output).
bc0	TTC BGo bunch counter reset (input).
ec0	TTC BGo event counter reset (input).
oc0	TTC BGo orbit counter reset (input).
start	TTC BGo start (input).
l1a	L1 access signal (input).
bcrs_d	delayed bunch counter reset (output).
bcrs_d_FDL	delayed bunch counter reset (output) for $\mu$ FDL.
start_lumisection	begin of lumisection (output).
lane_data_in	data from GTHs (optical links) (input) (240MHz domain).
lane_data_out	data to GTHs (optical links) (output) (240MHz domain).
lhc_data_2_gtl_o	data to $\mu$ GTL (output) (40MHz domain).
prescale_factor_set_in	prescale factor set data (input).
algo_after_gtLogic_rop	algorithms after $\mu$ GTL (input).
algo_after_bxomask_rop	algorithms after BX mask (input).
algo_after_prescaler_rop	algorithms after prescaler (input).
local_finor_rop	local FINOR (input).
local_veto_rop	local VETO (input).
finor_rop	FINOR (input).
local_finor_with_veto_2_spy2	local FINOR with VETO to spy mem (input).

## 3.2 Main parts

The top-of-hierarchy module of framework (`'frame.vhd'`) contains

- demultiplexer of lane data
- lane mapping
- spy memories
- timer counter manager
- register

### 3.2.1 Configuration of optical connections

The configuration of the optical connections from GMT, Calo-Layer2 and External conditions is done as described in Table 5, where frame means 32 bits data in a 240 MHz domain.

Table 5: Configuration of optical connections

link	frame					
	0	1	2	3	4	5
0	reserved	reserved	muon obj. 0 [0..31]	muon obj. 0 [32..63]	muon obj. 1 [0..31]	muon obj. 1 [32..63]
1	reserved	reserved	muon obj. 2 [0..31]	muon obj. 2 [32..63]	muon obj. 3 [0..31]	muon obj. 3 [32..63]
2	reserved	reserved	muon obj. 4 [0..31]	muon obj. 4 [32..63]	muon obj. 5 [0..31]	muon obj. 5 [32..63]
3	reserved	reserved	muon obj. 6 [0..31]	muon obj. 6 [32..63]	muon obj. 7 [0..31]	muon obj. 7 [32..63]
4	electron/ $\gamma$ obj. 0	electron/ $\gamma$ obj. 1	electron/ $\gamma$ obj. 2	electron/ $\gamma$ obj. 3	electron/ $\gamma$ obj. 4	electron/ $\gamma$ obj. 5
5	electron/ $\gamma$ obj. 6	electron/ $\gamma$ obj. 7	electron/ $\gamma$ obj. 8	electron/ $\gamma$ obj. 9	electron/ $\gamma$ obj. 10	electron/ $\gamma$ obj. 11
6	jet obj. 0	jet obj. 1	jet obj. 2	jet obj. 3	jet obj. 4	jet obj. 5
7	jet obj. 6	jet obj. 7	jet obj. 8	jet obj. 9	jet obj. 10	jet obj. 11
8	tau obj. 0	tau obj. 1	tau obj. 2	tau obj. 3	tau obj. 4	tau obj. 5
9	tau obj. 6	tau obj. 7	tau obj. 8	tau obj. 9	tau obj. 10	tau obj. 11
10	ET ETTEM MBT0HFP	HT TOWER- COUNT MBT0HFM	$ET_{\text{miss}}$ ASYMET MBT1HFP	$HT_{\text{miss}}$ ASYMHT MBT1HFM	$ET_{\text{miss}}^{HF}$ ASYM- ETHF CENT[3:0]	$HT_{\text{miss}}^{HF}$ ASYM- HTHF CENT[7:4]
11	free	free	free	free	free	free
12	external- conditions [0..31]	external- conditions [32..63]	reserved	reserved	reserved	reserved
13	external- conditions [64..95]	external- conditions [96..127]	reserved	reserved	reserved	reserved
14	external- conditions [128..159]	external- conditions [160..191]	reserved	reserved	reserved	reserved
15	external- conditions [192..223]	external- conditions [224..255]	reserved	reserved	reserved	reserved

### 3.2.2 Demux Lane Data

Data from GTH interfaces are in the 240 MHz clock domain. The demultiplexing to the LHC clock domain (about 40 MHz) is done in `'demux_lane_data.vhd'`, which is instantiated in `'frame.vhd'` for currently 16 input links.

### 3.2.3 Lane Mapping Process

In the Lane Mapping Process module data from the links are mapped to objects structure defined in `'lhc_data_pkg.vhd'`.

#### 3.2.3.1 Implementation

Currently lane mapping is "fixed" in `'lmp.vhd'` module, see Table 6 (energy sum quantities<sup>1</sup>: including minimum bias trigger bits, towercounts, asymmetry and centrality bits).

Table 6: Current lane mapping

lane	objects
0	muon objects 0..1
1	muon objects 2..3
2	muon objects 4..5
3	muon objects 6..7
4	electron/ $\gamma$ objects 0..5
5	electron/ $\gamma$ objects 6..11
6	jet object 0..5
7	jet object 6..11
8	tau object 0..5
9	tau object 6..11
10	energy sum quantities <sup>1</sup>
11	n/a (currently not used)
12	external-conditions [0..63]
13	external-conditions [64..127]
14	external-conditions [128..191]
15	external-conditions [192..255]

### 3.2.4 SPY Memory

**Remark:**

with frame v1.2.3 simulation memory (SIM Memory) data not useable anymore, because of removed "Data Source Multiplexer". The reason for removing "Data Source Multiplexer" is to get more available resources.

SPY memory III for ROP data is not used anymore.

Figure 2 shows the SPY memory subsystem of Framework. It is used to calibrate the system and to record results of the  $\mu$ GTL and  $\mu$ FDL.

#### 3.2.4.1 Implementation

The memory subsystem consists of four three parts, which will be discussed in more detail in the following sections:

- SPY Trigger
- SPY Memory I
- SPY Memory II

##### 3.2.4.1.1 SPY Trigger

The SPY trigger controls the SPY memories and decides when data is recorded. It can be configured and controlled using software registers 3.1 and 3.2.

Listing 3 contains the entity declaration of the 'spytrig.vhd'.

Listing 3: SPY trigger interface specification

```
entity spytrig is
  port
  (
    lhc_clk      : in  std_logic;
    lhc_rst      : in  std_logic;
    orbit_nr     : in  orbit_nr_t;
    bx_nr        : in  bx_nr_t;
    sw_reg_i     : in  sw_reg_spytrigger_in_t;
    sw_reg_o     : out sw_reg_spytrigger_out_t;
    spy1_o       : out std_logic;
    spy2_o       : out std_logic
  );
end;
```

When the SPY trigger receives a "spy12" command (next or once) over the software register interface, it asserts the *spy1* and *spy2* signals for the appropriate orbit. This means that the *spy* signals go high with the bunch crossing counter reaching the value zero and stay high until it reaches zero again (overflow).

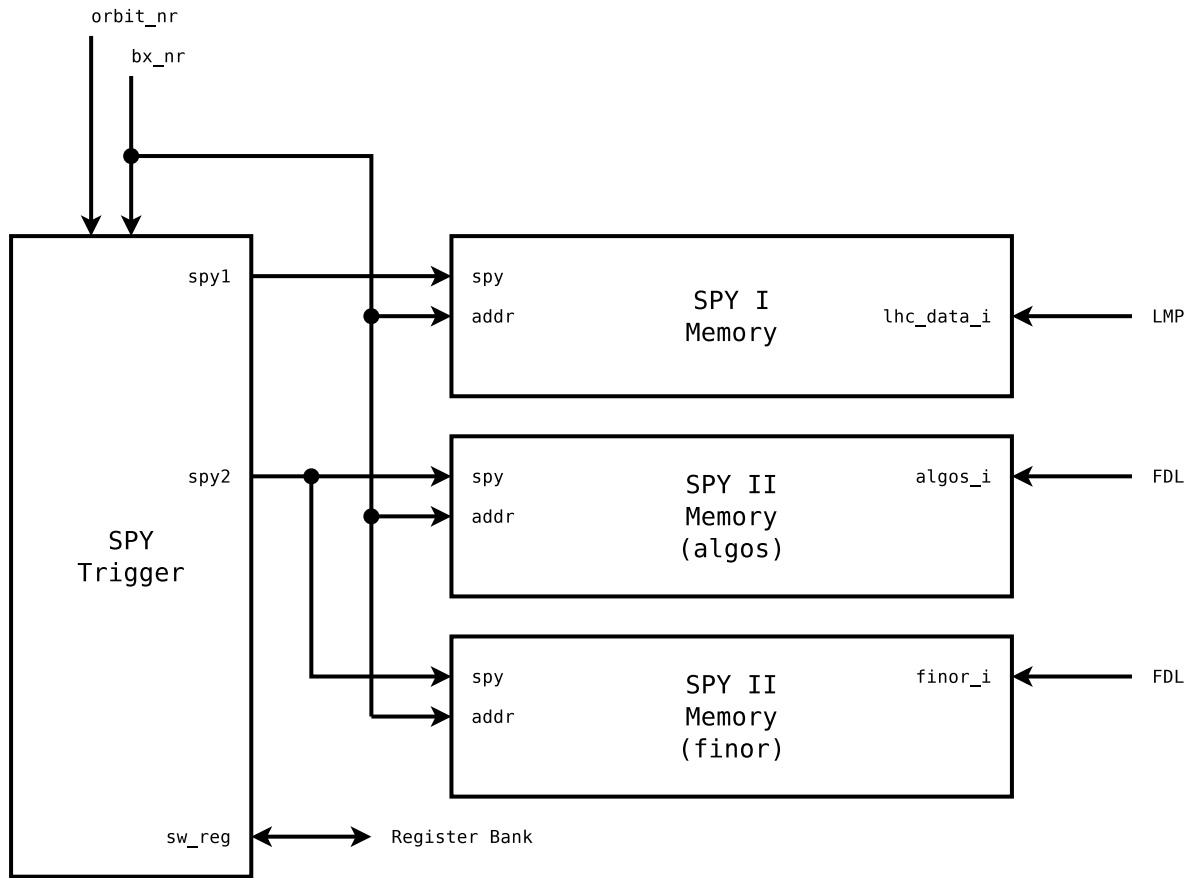


Figure 2: Memory subsystem

#### 3.2.4.1.2 SPY memory I

SPY memory I stores data from LMP (coming from GTHs) to check the alignment of the data, for simulation and test purposes. It is composed of 72 4096x32 bits memories (to cover 3564 bunch crossings with 32 bits datawidth) for all input data. The 4096x32 memory has an input port for 32 bits data at the 40MHz clock domain and an IPBus interface to read the content. Memory address is given by bunch crossing counter (40MHz clock domain).

#### 3.2.4.1.3 SPY memory II

SPY memory II is divided into two subcomponents, to store the "algor" and "finor" outputs of the  $\mu$ FDL, where memory for "algor" has 16 4096x32 bits memories (16x32=512 algos) and "finor" is made of only one (for finor with veto). Both have the same architecture as SPY memory I.

### 3.2.5 Timer Counter Manager

The Timer Counter Manager (TCM) provides different counters, listed in Table 7 and a set of registers.

### 3.2.5.1 Counter Overview

Table 7: Counters of Timer Counter Manager



Counter	range	increase condition	reset condition	Comments
<code>bx_nr</code> (3.3)	0..3563	<code>rising_edge(lhc_clk)</code>	overflow	
<code>event_nr</code> (3.4)	$0..2^{32} - 1$	<code>lla=1</code> and <code>rising_edge(lhc_clk)</code>	BGo: event counter reset	
<code>trigger_nr</code> (3.5)	$0..2^{48} - 1$	<code>lla=1</code> and <code>rising_edge(lhc_clk)</code>	BGo: start run	
<code>orbit_nr</code> (3.6)	$0..2^{48} - 1$	overflow of <code>bx_nr</code>	BGo: orbit counter reset	
<code>luminosity_seg_nr</code> (3.7)	$0..2^{32} - 1$	<code>rising_edge(orbit_nr(18))</code>	BGo: orbit counter reset	

### 3.2.5.2 Counters for bunch crossing-, orbit- and luminosity segment number

The counter for bunch crossing number (`bx_nr`) is zero at startup and increased at every LHC clock cycle as depicted in figure 3. Its maximal value is 3563 (0xdeb), then it automatically overflows and starts at zero again (see figure 4). Exactly when `bx_nr` = 0, delayed BC0 (`bcrs_d`) has to be asserted. Otherwise the counter is out of synchronization. If this happens, the software register `err_det` is set and the counter waits for the next `bcrs_d` to synchronize again. The value of bunch crossing number can be read from "TCM Bunch Crossing Number Register" (3.3).

The counter for orbit number (`orbit_nr`) is 1 at startup and increased at every end of orbit (`bx_nr` = 3563). It is set to 1 with orbit counter reset (TTC signal `oc0`). The value of orbit number can be read from "TCM Orbit Number Register" (3.6).

The counter for luminosity segment number (`luminosity_seg_nr`) is increased, if signal `start` (TTC signal) was applied and counter for orbit number (`orbit_nr`) is greater than a given value for length of luminosity segment period (currently = 262144 [0x40000], see '`gt_mp7_core_pkg.vhd`'). The value of luminosity segment number can be read from "TCM Luminosity Segment Number Register" (3.7).

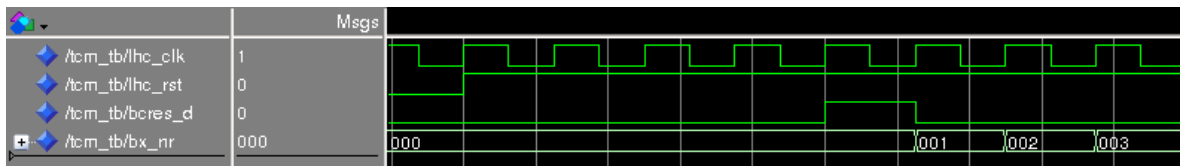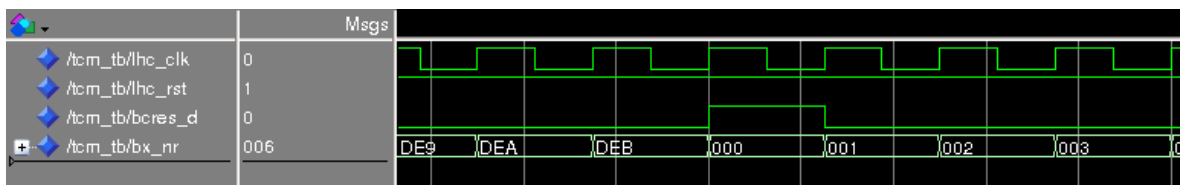Figure 3: start of the bunch crossing number with the first `bcrs_d`

### 3.2.5.3 Bunch crossing counter error

As stated above, *bcrest\_d* has to be asserted exactly when *bx\_nr* = 0, otherwise the bunch crossing counter is out of sync. Then the software register *err\_det* is set as depicted in figure 5. Signal *err\_det* can be reset via software event register *err\_det\_reset\_event* as depicted in figure 6.

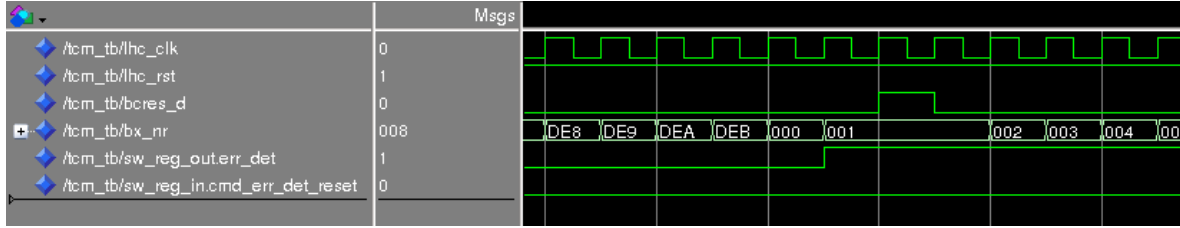


Figure 5: set of the software register *err\_det* when *bc\_res\_d* is not asserted correctly

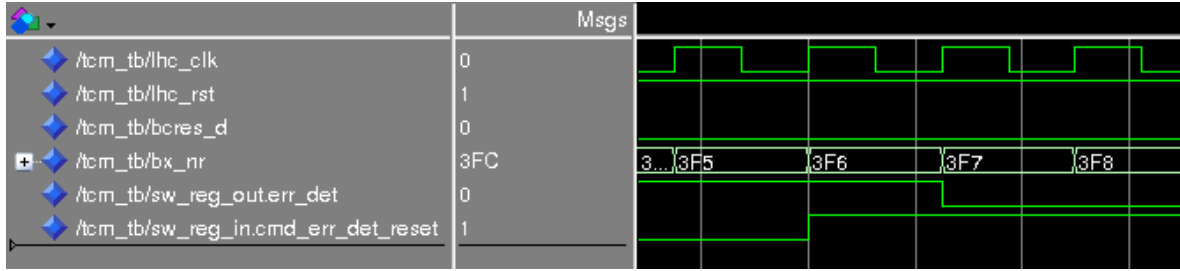


Figure 6: reset of the software register *err\_det* when *err\_det\_reset\_event* toggles

The TCM implements two additional counters (*bx\_nr\_chk* and *bx\_nr\_max*) for debugging purposes. These counters are not visible with any other module but readable via software. Counter *bx\_nr\_chk* has 32 bits that increased with every LHC clock cycle and set to 0 with *bcrest\_d*. Value *bx\_r\_max* holds the highest *bx\_nr\_chk* ever reached (should be 3563, if the link is aligned).

### 3.2.5.4 Counters for event- and trigger number

The counters for event number (*event\_nr*) and trigger number (*trigger\_nr*) are increased with L1A signal. Event number counter is set to 0 with *ec0* signal, trigger number counter with *start* (TTC signals). The values of event number and trigger number can be read from "TCM Event Number Register" (3.4) and "TCM Trigger Number Register" (3.5).

### 3.2.6 Software Reset

The software reset module provides the possibility for a software reset via the software reset register *sw\_reset\_event*, see 3.17.



### 3.2.7 Registers

#### 3.2.7.1 Register map

The register map for Framework has a base address of 0x80000000.

Table 8: Framework register map

Offset	Register name	Access	Description
0x80000000	Timestamp	r	read-only register for timestamp begin of synthesis.
0x80000001	Hostname	r	4 read-only registers for hostname of synthesis platform.
0x80000009	Username	r	4 read-only registers for username of synthesis.
0x80000012	Frame version	r	read-only register for Global Trigger firmware version.
0x80000013	Build version	r	read-only register for build version of Global Trigger firmware.
0x80000800	Reset register	r/w	register for reset pulse and counter reset of counters.
0x80200000	Spy mem finor	r/w	4096 memory addresses for finor and veto.
0x80240000	Spy mem algos (0)	r/w	4096 memory addresses for algos[31:0].
0x80241000	Spy mem algos (1)	r/w	4096 memory addresses for algos[63:32].
...	...	...	...
0x8024F000	Spy mem algos (15)	r/w	4096 memory addresses for algos[511:480].
0x80300000	Spy mem (0)	r/w	4096 memory addresses for input data.
0x80301000	Spy mem (1)	r/w	4096 memory addresses for input data.
...	...	...	...
0x80347000	Spy mem (71)	r/w	4096 memory addresses for input data.
0x80700000	Spytrigger: orbit nr low	r/w	register for lower 32 bits of spy trigger orbit number.
0x80700001	Spytrigger: orbit nr high	r/w	register for higher 32 bits of spy trigger orbit number.
0x80700002	Spytrigger: control	r/w	control register for spy12.
0x80700003	Software reset	r/w	software reset register.
0x80700010	Spytrigger status	r	status register of spytrigger.
0x80700012	TCM status	r	status register of TCM.
0x80700016	TCM status: orbit nr low	r	read-only register for lower 32 bits of orbit number.
0x80700017	TCM status: orbit nr high	r	read-only register for higher 32 bits of orbit number.

Table 8: Framework register map

Offset	Register name	Access	Description
0x80700019	TCM status: bx nr max	r	read-only register for maximum Bx number.
0x8070001C	TCM status: lum seg nr	r	read-only register for luminosity segment number.

### 3.2.7.2 Register details

Register 3.1: SPY TRIGGER ORBIT NUMBER REGISTERS



**orbit\_nr\_low** 32 low bits of the 48 bit orbit number, used for the spy once trigger.

**orbit\_nr\_high** 16 high bits of the 48 bit orbit number, used for the spy once trigger.

Register 3.3: TCM BUNCH CROSSING NUMBER REGISTER




Register 3.2: SPY TRIGGER CONFIGURATION REGISTER


spy12_bsy				reserved												clr_spy12_err					
spy12_rdy																clr_spy3_rdy					
spy12_err																clr_spy12_rdy					
																spy12_next					
																spy12_once					
31	29	27	26													6	5	4	3	1	0
0	0	0	0												0	0	0	0	0	Reset	

- spy12\_once** Triggers the recording of the selected orbit to SPY memories I and II, when written with 1.
- spy12\_next** Triggers the recording of the next whole orbit to SPY memories I and II, when written with 1.
- clr\_spy12\_rdy** Clears the ready flag of the SPY trigger for SPY memories I and II, when written with 1.
- clr\_spy3\_rdy** Clears the ready flag of the SPY trigger for SPY memory III, when written with 1.
- clr\_spy12\_err** Clears the error flag, when written with 1.
- spy12\_bsy** Indicates that the SPY trigger for SPY memories I and II is busy.
- spy12\_rdy** Indicates that one orbit has been recorded in SPY memories I and II and that the SPY trigger is ready for new commands.
- spy12\_err** Indicates an error condition (Set only when the selected orbit number for the spy once trigger lies in the past and can therefore not be recorded).

## Register 3.4: TCM EVENT NUMBER REGISTER

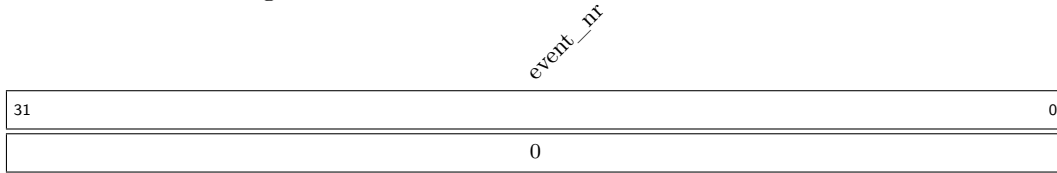


## Register 3.5: TCM TRIGGER NUMBER REGISTERS

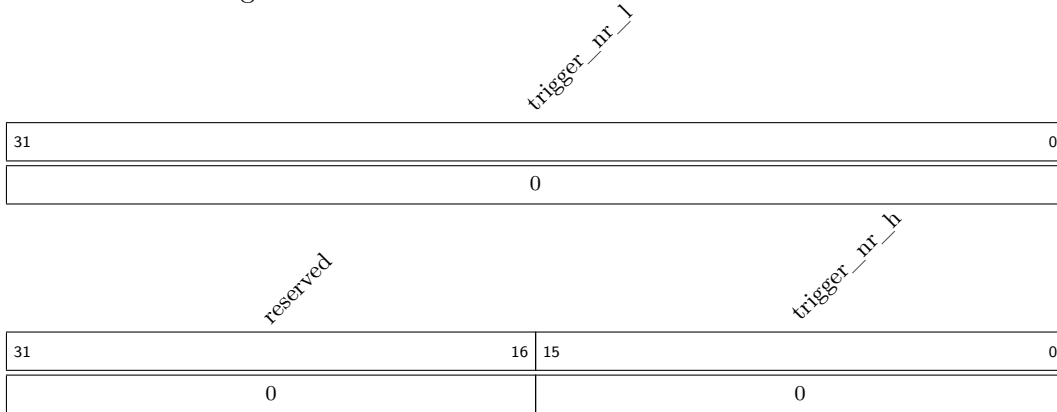

**trigger\_nr\_l**     32 low bits of the 48 bit trigger number.

**trigger\_nr\_h**     16 high bits of the 48 bit trigger number.

## Register 3.6: TCM ORBIT NUMBER REGISTERS

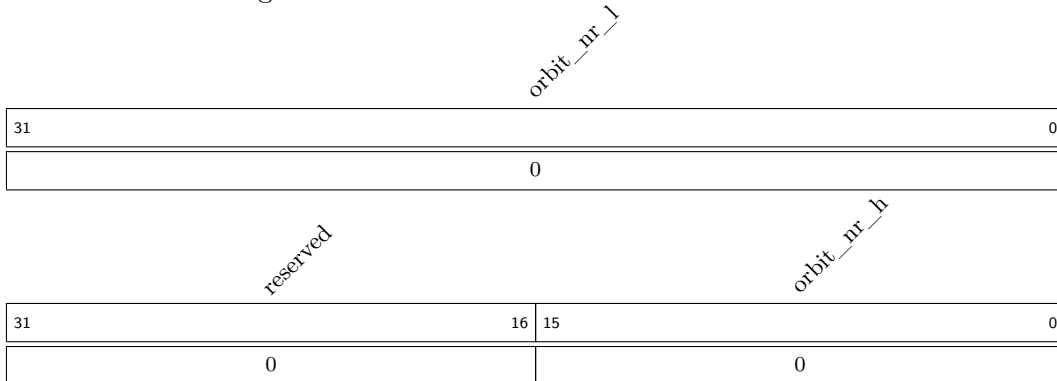

**orbit\_nr\_l**     32 low bits of the 48 bit orbit number.

**orbit\_nr\_h**     16 high bits of the 48 bit orbit number.

Register 3.7: TCM LUMINOSITY SEGMENT NUMBER REGISTER

<i>luminosity_seg_nr</i>	
31	0
0	

Register 3.8: TCM BUNCH CROSSING NUMBER  $\mu$ FDL REGISTER

<i>reserved</i>												<i>bx_nr_d_fdl</i>											
31												0											
0												0											

Register 3.9: TCM BUNCH CROSSING NUMBER CHECK REGISTER

bx_nr_chk																														
31																														0
0																														

Register 3.10: TCM BUNCH CROSSING NUMBER MAX REGISTER

bx_nr_max																														
31																														0
0																														

Register 3.11: TCM CMD\_IGN\_BCRES

reserved		cmd_ign_bcre	
31	1	0	
0		0	Reset

**cmd\_ign\_bcre** bcre is ignored (not checked) when this is set.

Register 3.12: TCM ERR\_DET

reserved		err_det	
31	1	0	
0		0	Reset

**err\_det** set when out of synchronization.

Register 3.13: TCM ERR\_DET\_RESET\_EVENT

reserved		err_det_reset_event	
31	1	0	
0		0	Reset

**err\_det\_reset\_event** resets err\_det.

Register 3.14: TCM BGo SIGNALS

reserved				BGo		
34				4	3	0
0				0		
Reset						

**BGo signals** for simulation of BGo signals.

## Register 3.15: TCM BGo\_EVENT

<i>reserved</i>															<i>BGo_event</i>	
															1	0
0															0	Reset

**BGo\_event** replaces the BGo input signals with the sw-register BGo signals for exactly one clock cycle.

## Register 3.16: TCM LUMINOSITY\_SEG\_PERIOD\_MSK

<i>luminosity_seg_period_msk</i>																
															31	0
0	x	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Reset

**luminosity\_seg\_period\_msk** **luminosity\_seg\_nr** is increased when the **orbit\_nr mod lum\_seg\_period\_mask = 0**.

## Register 3.17: SOFTWARE RESET REGISTER

<i>reserved</i>															<i>sw_reset_event</i>	
															1	0
0															0	Reset

**sw\_reset\_event** generates a reset signal for exactly one clock cycle.

## 4 Global Trigger Logic

This description is for version v1.18.0 of Global Trigger Logic.

The Global Trigger Logic ( $\mu$ GTL) firmware contains conditions and algorithms for trigger decision (see Figure 7).

Definitions are based on document [5].

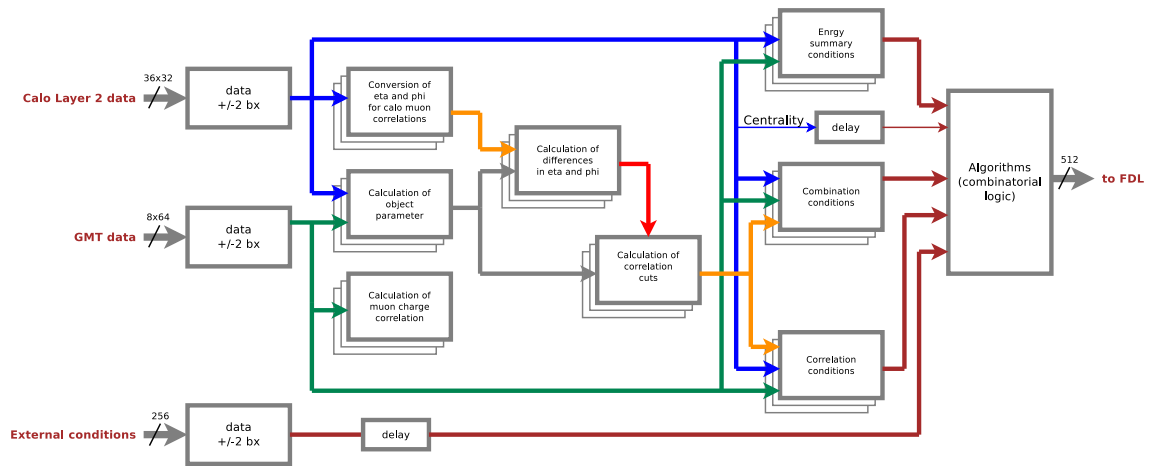


Figure 7:  $\mu$ GTL firmware

### 4.1 $\mu$ GTL Interface

#### Inputs:

- Calo-Layer2 data
  - Electron/ $\gamma$  objects (EG0..EG11)
  - Jet objects (JET0..JET11)
  - Tau objects (TAU0..TAU11)
  - Energy summary information:
    - \* Total Et (ET)
    - \* Total Et from ECAL only (ETTEM)
    - \* Total calibrated Et in jets (HT)
    - \* Missing Et ( $ET_{miss}$ )
    - \* Missing Et including HF ( $ET_{miss}^{HF}$ )
    - \* Missing Ht objects ( $HT_{miss}$ )
    - \* Missing Ht including HF ( $HT_{miss}^{HF}$ )
    - \* "Asymmetry" information (ASYMET, ASYMHT, ASYMETHF, ASYMHTHF)



- Minimum bias HF bits (MBT0HFP, MBT0HFM, MBT1HFP and MBT1HFM; part of energy summary information data structure)
- Towercount bits (TOWERCOUNT, number of firing HCAL towers; part of energy summary information data structure)
- "Centrality" bits (CENT0..CENT7; part of energy summary information data structure)
- Global Muon Trigger data
  - Muon objects (MU0..MU7)
  - Muon shower bits (bit 61 on MU0, MU2, MU4, MU6)
- External conditions

**Outputs:**

- Algorithms

## 4.2 Definition of optical interfaces

**Remark:**

All definitions for scales in the following chapters are from a CMS Detector Note: "Scales for inputs to  $\mu$ GT" (see [5]).

### 4.2.1 Calo-Layer2 optical interface

The data structure of an electron/ $\gamma$  object (bits 27..31 are not defined yet, reserved for quality, ...):

31	27	26	25	24	17	16	9	8	0
<i>qual/spare</i>				<i>iso</i>	$\varphi$		$\eta$		$E_T$

The data structure of a jet object:

Remark: "D" means DISP bit (displaced jet) - "qu" means quality flags - "sp" means spare bits.

31	30	29	28	27	26	19	18	11	10	0
<i>sp</i>	<i>qu</i>	<i>D</i>	$\varphi$				$\eta$		$E_T$	

The data structure of a tau object (bits 27..31 are not defined yet, reserved for quality, ...):

31	27	26	25	24	17	16	9	8	0
<i>qual/spare</i>				<i>iso</i>	$\varphi$		$\eta$		$E_T$

The data structure of "Total Et" (ET) quantity [including "Total Et from ECAL only" (ET-TEM) and "minimum bias HF+ threshold 0" bits]:

31	28	27	24	23	12	11	0
<i>MBT0HFP</i>				<i>E<sub>T</sub> [ETTEM]</i>			
<i>spare</i>				<i>E<sub>T</sub> [ET ]</i>			

The data structure of "Total calibrated Et in jets" (HT) quantity [including "towercount" and "minimum bias HF- threshold 0" bits]:

31	28	27	25	24	12	11	0
<i>MBT0HFM</i>				<i>TOWERCOUNT</i>			
<i>spare</i>				<i>E<sub>T</sub></i>			

The data structure of "Missing Et" ( $ET_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMET and "minimum bias HF+ threshold 1" bits]:

31	28	27	20	19	12	11	0
<i>MBT1HFP</i>				$\varphi$			
<i>ASYMET</i>				<i>E<sub>T</sub></i>			

The data structure of "Missing Ht" ( $HT_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMHT and "minimum bias HF- threshold 1" bits]:

31	28	27	20	19	12	11	0
<i>MBT1HFM</i>				$\varphi$			
<i>ASYMHT</i>				<i>E<sub>T</sub></i>			

The data structure of "Missing Et including HF" ( $ET_{\text{miss}}^{\text{HF}}$ ) quantity [including "Asymmetry" ASYMETHF and "Centrality" bits (3:0)]:

31	28	27	20	19	12	11	0
<i>[CENT3:0]</i>				$\varphi$			
<i>ASYMETHF</i>				<i>E<sub>T</sub></i>			

The data structure of "Missing Ht including HF" ( $HT_{\text{miss}}^{\text{HF}}$ ) quantity [including "Asymmetry" ASYMHTHF and "Centrality" bits (7:4)]:

31	28	27	20	19	12	11	0
<i>CENT[7:4]</i>				$\varphi$			
<i>ASYMHTHF</i>				<i>E<sub>T</sub></i>			

## 4.2.2 Global Muon Trigger optical interface

The data structure of a muon object (64 bits):

Remark: "extrapol." means extrapolated - "qual" means quality bits - "iso" means isolation bits - "ch" means charge bits (bit 34 = charge sign, bit 35 = charge valid) - "m" means muon shower bit (on MU0 [MUS0], MU2 [MUS1], MU4 [MUSOOT0] and MU6 [MUSOOT1]; spare on MU1, MU3, MU5 and MU7) - "imp" = impact parameter.

## Contents

---

63	62	61	60	53	52	43	42	36	35	34	33	32
<i>imp</i>	<i>m</i>	<i>unconst.p<sub>T</sub></i>			<i>φ (out)</i>			<i>index bits</i>			<i>ch</i>	<i>iso</i>
31	23			22	19		18	10		9	0	
<i>η (extrapol.)</i>				<i>qual</i>		<i>p<sub>T</sub></i>			<i>φ (extrapol.)</i>			

## 4.3 Implementation in firmware

The firmware of  $\mu$ GTL consists of two main parts:

- A top-of-hierarchy file '`gtl_module.vhd`', which contains the pipeline for  $\pm 2\text{bx}$  data, the instantiations of calculators for differences in  $\eta$  and  $\varphi$ , the instantiations of conditions, the instantiations of charge correlation logic of muons and the Algorithms logic for 512 Algorithms, as well as a package file ('`gtl_pkg.vhd`') for declarations. Currently 6 AMC (MP7) boards are used to contain Algorithms.

A software tool called Trigger Menu Editor (TME) [3] is available to create a L1Menu with up to 512 Algorithms, which are partitioned by VHDL Producer [4] to the 6 MP7 boards.

The VHDL Producer creates VHDL snippets files (`algo_index.vhd`, `gtl_module_instances.vhd`, `gtl_module_signals.vhd`, `ugt_constants.vhd`) for a certain Trigger Menu.

These snippets are inserted into templates for '`gtl_module_tpl.vhd`', '`algo_mapping_rop_tpl.vhd`' and '`fdl_pkg_tpl.vhd`' during simulation and synthesis (see Figure 8).

- A set of VHDL files exists for all the modules instantiated in top-of-hierarchy and the modules in the hierarchy. These files, called the "fixed part", are not influenced by VHDL Producer.

The latency of  $\mu$ GTL is fixed to 5 bunch-crossings, 2 bunch-crossings for the pipeline of  $\pm 2\text{bx}$  data (for data with  $+2\text{bx}$  and  $+1\text{bx}$ ), 2 bunch-crossings for conditions (fixed), also for the conditions requested in the future, 1 bunch-crossing for the logic of Algorithms (see Figure 9).

### 4.3.1 Top-of-hierarchy module of $\mu$ GTL

The top-of-hierarchy module of  $\mu$ GTL ('`gtl_module_tpl.vhd`') contains

- pipeline for  $\pm 2\text{bx}$  data
- instantiations of charge correlation logic of muons (generated by VHDL Producer)
- instantiations of calculators for differences in  $\eta$  and  $\varphi$  (generated by VHDL Producer)
- instantiations of calculators for  $\Delta\eta$  and  $\Delta\varphi$  cuts (generated by VHDL Producer)
- instantiations of calculators for mass,  $\Delta R$  and two-body pt cuts (generated by VHDL Producer)
- instantiations of conditions (generated by VHDL Producer)
- boolean logic for Algorithms (generated by VHDL Producer)

Listing 4 contains the entity declaration of the top-of-hierarchy file of  $\mu$ GTL.

All the declarations for arrays ('type'), parameters ('constant') and look-up-tables ('constant') used in modules are available in '`gtl_pkg.vhd`' package-file.

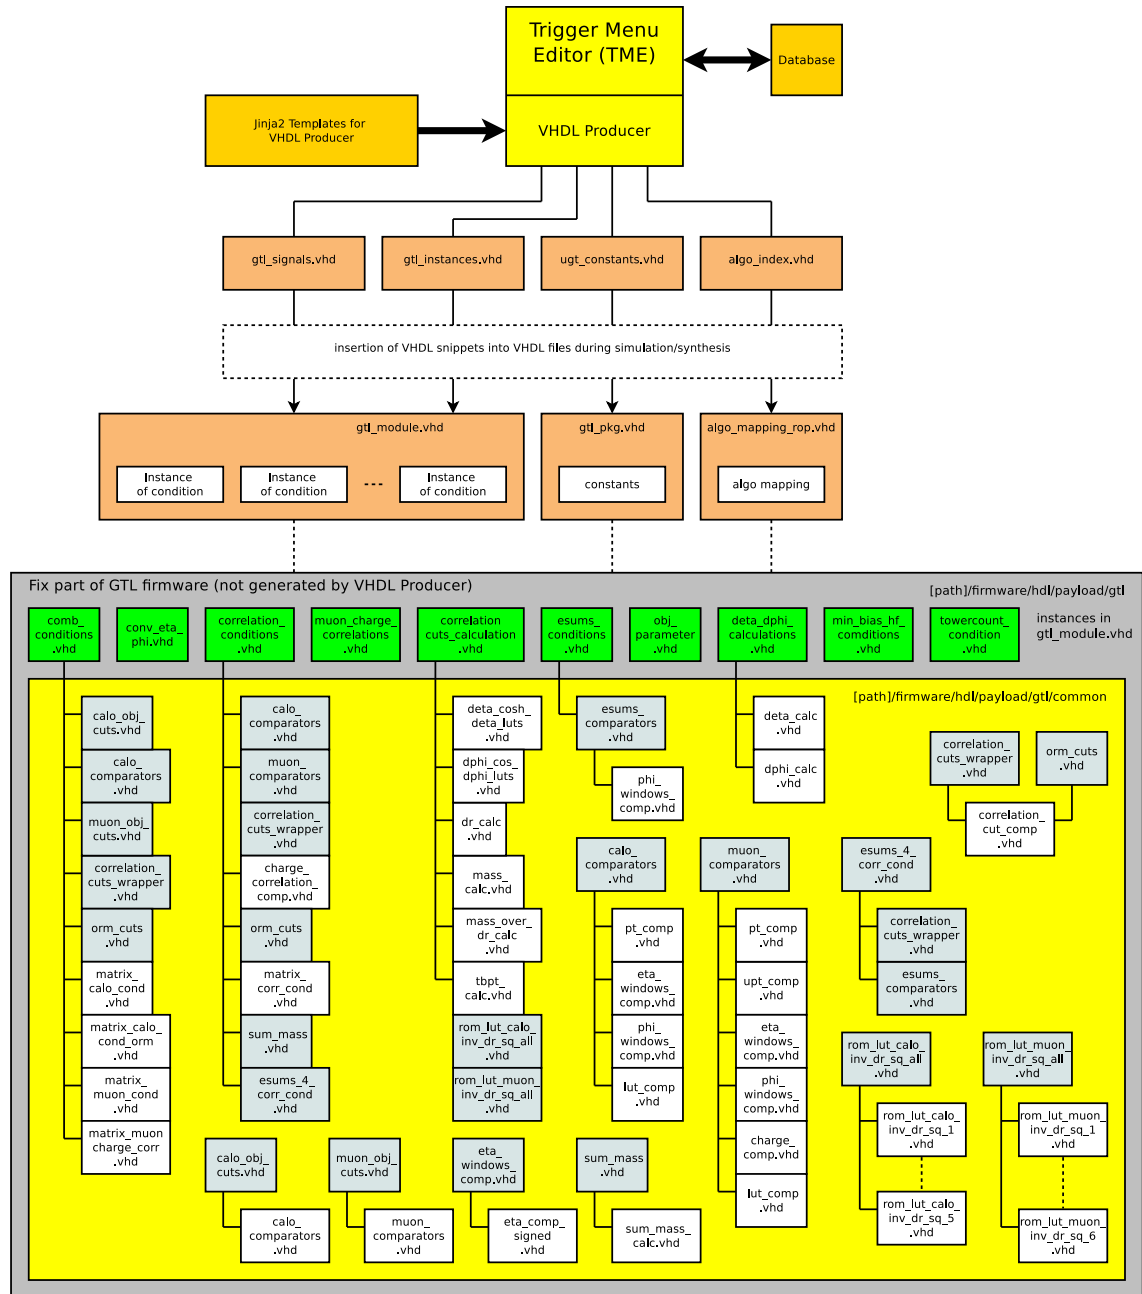


Figure 8: VHDL file generation by VHDL Producer

Table 9: Explanation of Listing 4

Item	Explanation
lhc_clk	clock input (LHC clock).
gtl_data	input data ( $\pm 2bx$ data).
algo_o	algorithms output.

Listing 4: Entity declaration of gtl\_module\_tpl.vhd

```
entity gtl_module is
  port(
    lhc_clk : in std_logic;
    gtl_data : in gtl_data_record;
    algo_o : out std_logic_vector(NR_ALGOS-1 downto 0));
end gtl_module;
```

## 4.4 $\mu$ GTL structure

### 4.4.1 Data $\pm 2$ bx

The  $\mu$ GTL input data flow through a register pipeline of four stages. With those data it is possible to have conditions with objects from different bunch-crossings (within  $\pm 2$  bunch-crossings), electron/ $\gamma$  for Correlation conditions.

See Figure 9 for a scheme of  $\mu$ GTL pipeline structure. The data "data\_p\_1bx" and "data\_p\_-2bx" occur 1 respectively 2 bunch-crossings after data for a certain bunch-crossing, therefore we got 2 bunch-crossings of latency from those data. The data "data\_m\_1bx" and "data\_m\_-2bx" have no influence on latency, because coming before data for a certain bunch-crossing.

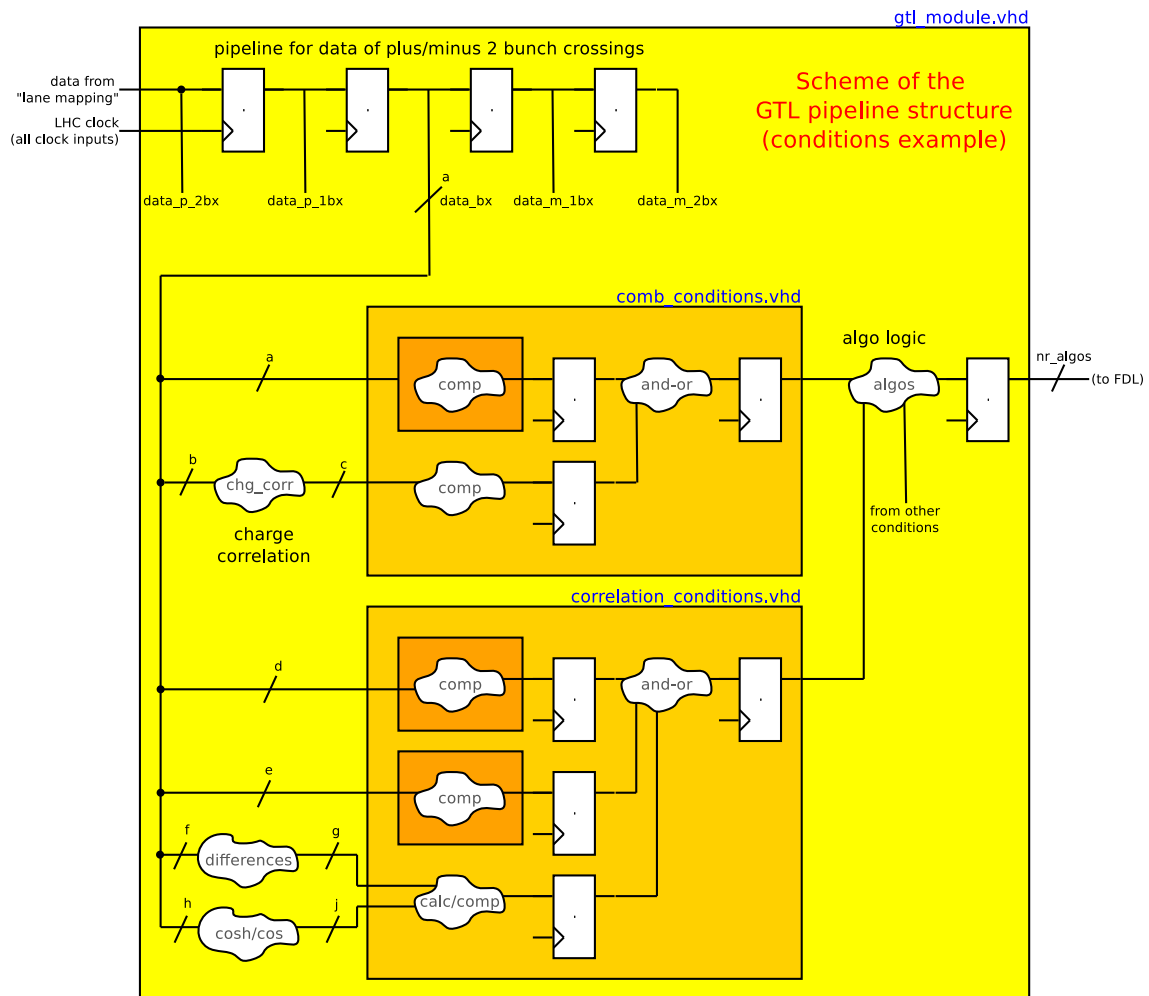


Figure 9: Scheme of  $\mu$ GTL pipeline structure

### 4.4.2 Definitions of Calorimeter data

The calorimeter trigger processing identifies **electron/ $\gamma$** , **jet** and **tau** objects and **energy sum quantities**.

See also [4.2](#).

**Electron/ $\gamma$ :**

Twelve objects are passed to the  $\mu$ GT for each event.

For each selected object, the Calo-Layer2 sends parameters for  $p_T$  and for position and isolation - encoded in 32 bits:

- 9 bits  $p_T$ , range = 0..255 GeV (HW index = 0..0x1FF), step = 0.5, the highest bin will mark an overflow (HW index 0x1FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\simeq 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- 2 bits isolation
- 5 bits spare

**Jet:**

Twelve objects are passed to the  $\mu$ GT for each event.

For each selected object, the Calo-Layer2 sends parameters:  $p_T$ , for position information, a DISP bit and quality information - encoded in 32 bits:

- 11 bits  $p_T$ , range = 0..1023 GeV (HW index = 0..0x7FF), step = 0.5, the highest bin will mark an overflow (HW index 0x7FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\simeq 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- 1 DISP bit (will be used to flag a jet as delayed / displaced based on HCAL timing and depth profiles that are indicative of a "long lived particle" (LLP) decay. If this bit is set to 1, then the jet has been tagged as a LLP jet.)
- 2 bits for "quality flags" - currently not used.
- 2 bits spare

**Tau:**

Twelve objects are passed to the  $\mu$ GT for each event.

For each selected object, the Calo-Layer2 sends parameters for  $p_T$  and for position information and isolation - encoded in 32 bits:

- 9 bits  $p_T$ , range = 0..255 GeV (HW index = 0..0x1FF), step = 0.5, the highest bin will mark an overflow (HW index 0x1FF): meaning has to be defined



- 8 (7+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\cong 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- 2 bits isolation
- 5 bits spare

The representation of the 8 bits (called "hardware index [HW index]") in  $\eta$  is expected as Two's Complement notation as shown below.

Table 10:  $\eta$  scale of calorimeter objects

HW index	$\eta$ range	$\eta$ bin
0x72	$114 \cdot 0.087/2$ to $115 \cdot 0.087/2$	114
...	...	...
0x01	$0.087/2$ to $2 \cdot 0.087/2$	1
0x00	0 to $0.087/2$	0
0xFF	0 to $-0.087/2$	-1
0xFE	$-0.087/2$ to $-2 \cdot 0.087/2$	-2
...	...	...
0x8E	$-114 \cdot 0.087/2$ to $-115 \cdot 0.087/2$	-115

The representation of the 8 bits in  $\varphi$  is expected as shown in Table 11.

Table 11:  $\varphi$  scale of calorimeter objects

HW index	$\varphi$ range	$\varphi$ range [degrees]	$\varphi$ bin
0x00	0 to $2\pi/144$	0 to 2.5	0
0x01	$2\pi/144$ to $2 \cdot 2\pi/144$	2.5 to 5.0	1
...	...	...	...
0x8F	$143 \cdot 2\pi/144$ to $2\pi$	357.5 to 360	143

The representation of the 2 bits for isolation ( $e/\gamma$  and tau) is expected as shown in Table 12.

Table 12: Definition of  $e/\gamma$  and tau isolation bits

bits [26..25]	definition
00	not isolated
01	isolated
10	TBD
11	TBD

### 4.4.3 Definitions of Energy sum quantities data

See 4.2 for data structure.

Energy sum quantities consist of following quantities (for naming convention see 8):

- ET
- HT
- $ET_{\text{miss}}$
- $HT_{\text{miss}}$
- ETTEM
- $ET_{\text{miss}}^{HF}$
- $HT_{\text{miss}}^{HF}$
- ASYMET
- ASYMHT
- ASYMETHF
- ASYMHETF
- CENT[0..7]

Calo-Layer2 sends 6 frames (each 32 bits) with Energy sum quantities containing the following information:

- $E_T$ , 12 bits, range = 0..2047 GeV (HW index = 0..0xFFF), step = 0.5, the highest bin will mark an overflow (HW index 0xFFF): meaning has to be defined
- azimuth angle ( $\varphi$ ) position, 8 bits, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\approx 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- "Towercount", 13 bits, range = 0..8191
- "Minimum bias", 4 bits, range = 0..15
- "Asymmetry", 8 bits, range = 0..255 (used 0..100)
- "Centrality", 8 single bits, used as signals

Frame 0: The data structure of "Total Et" (ET) quantity [including "Total Et from ECAL only" (ETTEM) and "minimum bias HF+ threshold 0" bits].

Frame 1: The data structure of "Total calibrated Et in jets" (HT) quantity [including "towercount" and "minimum bias HF- threshold 0" bits].

Frame 2: The data structure of "Missing Et" ( $ET_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMET and "minimum bias HF+ threshold 1" bits].

Frame 3: The data structure of "Missing Ht" ( $HT_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMHT and "minimum bias HF- threshold 1" bits].

Frame 4: The data structure of "Missing Et including HF" ( $ET_{\text{miss}}^{\text{HF}}$ ) quantity [including "Asymmetry" ASYMETHF and "Centrality" bits (3:0)].

Frame 5: The data structure of "Missing Ht including HF" ( $HT_{\text{miss}}^{\text{HF}}$ ) quantity [including "Asymmetry" ASYMHTHF and "Centrality" bits (7:4)].

#### 4.4.4 Definitions of Muon data

Eight Muon objects are provided by Global Muon Trigger. One Muon object has a 64 bits data structure with parameters for  $p_T$ , for unconstrained  $p_T$ , for impact parameter, for position, charge, quality and isolation information (see also [4.2.2](#)):

- 10 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/576$  ( $\approx 0.625^\circ$ ), 576 bins (HW index = 0..0x23F), HW index starting at  $0^\circ$  (anti-clockwise)
- 9 bits  $p_T$ , range = 0..255 GeV (HW index = 0..0xFF), step = 0.5, the highest bin will mark an overflow (HW index 0xFF): meaning has to be defined
- 4 bits quality, 16 types for quality (meaning not defined yet!)
- 9 (8+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -2.45 to 2.45, step = 0.087/8, linear scale, 451 bins (-225..225, HW index = 0x11F..0x0E1)
- 2 bits isolation, 4 types for isolation (meaning not defined yet!)
- 1 bit charge sign, charge sign = '0' means "positive" charge, charge sign = '1' means "negative" charge
- 1 bit charge valid (= '1' means "valid")
- 7 index bits
- 10 bits azimuth angle ( $\varphi$ ) position, raw data
- 8 bits unconstrained  $p_T$ , range = 0..255 GeV (HW index = 0..0xFF), step = 1.0, the highest bin will mark an overflow (HW index 0xFF)
- 1 hadronic (muon) shower bit
- 2 bits impact parameter

The representation of the 9 bits (called "hardware index [HW index]") in  $\eta$  is expected as Two's Complement notation as shown in [Table 13](#).

The central value of the bin 0 ( $-0.010875/2$  to  $+0.010875/2$ ) = 0.0, the left edge of the bins will range from  $-255 \times 0.010875 - 0.010875/2 = -2.7785625$  to  $+255 \times 0.010875 - 0.010875/2 = 2.7676875$ . The central value of the bins will range between  $\pm 2.773125$ . The physical  $\eta$  range of the muon detectors is about  $\pm 2.45$ , so that not all possible  $\eta$  bins will be used.

The representation of the 10 bits in  $\varphi$  is expected as shown in [Table 14](#).

The representation of the 4 bits for quality is expected as shown in [Table 15](#).

The representation of the 2 bits for isolation is expected as shown in [Table 18](#).

Table 13:  $\eta$  scale of muon objects

HW index	$\eta$ range	$\eta$ bin
0x0E1	$224.5*0.087/8$ to $225.5*0.087/8$	225
0x0E0	$223.5*0.087/8$ to $224.5*0.087/8$	224
...	...	...
0x001	$0.5*0.087/8$ to $1.5*0.087/8$	1
0x000	$0.5*-0.087/8$ to $0.5*0.087/8$	0
0x1FF	$0.5*-0.087/8$ to $1.5*-0.087/8$	-1
0x1FE	$1.5*-0.087/8$ to $-2.5*0.087/8$	-2
...	...	...
0x11F	$-224.5*0.087/8$ to $-225.5*0.087/8$	-225

Table 14:  $\varphi$  scale of muon objects

HW index	$\varphi$ range	$\varphi$ range [degrees]	$\varphi$ bin
0x000	0 to $2\pi/576$	0 to 0.625	0
0x001	$2\pi/576$ to $2*2\pi/576$	0.625 to 1.250	1
...	...	...	...
0x23F	$575*2\pi/576$ to $2\pi$	359.375 to 360	575

Muon shower bits definition is shown in Table 17.

The representation of the 2 bits for impact parameter is expected as shown in Table 18.

Table 15: Definition of muon quality bits

bits [22..19]	definition
0000	quality "level 0"
0001	quality "level 1"
...	...
1110	quality "level 14"
1111	quality "level 15"

Table 16: Definition of muon isolation bits

bits [33..32]	definition
00	not isolated
01	isolated
10	TBD
11	TBD

Table 17: Definition of hadronic (muon) shower bits on bit 61 of muon objects

object	definition
0	MUS0
2	MUS1
4	MUSOOT0
6	MUSOOT1

Table 18: Definition of muon impact parameter bits

bits [63..62]	definition
00	TBD
01	TBD
10	TBD
11	TBD

#### 4.4.5 Calculation of object cuts

List of object cuts:

- $p_T$
- $\eta$
- $\varphi$
- isolation
- DISP (displaced = "long lived particle" jet)
- charge
- quality
- unconstrained  $p_T$
- impact parameter

##### 4.4.5.1 Object cuts

The comparisons for objects cuts are done by:

A comparator between the energy ( $p_T$ ) and a threshold (`pt_threshold`) with 'mode-selection'. Similar for unconstrained  $p_T$ .

The comparison in  $\eta$  is done with five "window"-comparators, so one gets max. five ranges for  $\eta$ . The  $\eta$  value (HW index) has a Two's Complement notation, the comparisons is done signed. Number of windows is given for  $\eta$ .

The comparison in  $\varphi$  is done with two "window"-comparators, so one gets two ranges for  $\varphi$ . The comparisons is done unsigned. Number of windows is given for  $\varphi$ .

There are two cases how the limits of one "window"-comparator could be set (see also Figure 10):

- Upper limit is less than lower limit  $\Rightarrow \varphi$  range between the limits, including the  $\varphi$  bin with value = 0 (HW index).
- Upper limit is greater/equal than lower limit  $\Rightarrow \varphi$  range between the limits, not including the  $\varphi$  bin with value = 0 (HW index).

```
phi_comp_w1 <= '1' when phi_w1_upper_limit < phi_w1_lower_limit and
    (phi <= phi_w1_upper_limit or phi >= phi_w1_lower_limit) else
    '1' when phi_w1_upper_limit >= phi_w1_lower_limit and
    (phi <= phi_w1_upper_limit and phi >= phi_w1_lower_limit)
    else '0';
```

Only one of the required ranges ("windows") must be fulfilled by  $\eta$  and  $\varphi$  values ("or").



The comparisons for isolation, quality and impact parameter are done with LUTs.  
 The comparison for charge is done with requested charge.  
 If DISP bit is set to 1, then the jet has been tagged as a "long lived particle" (LLP) jet. A one bit requirement is given for DISP for comparison.

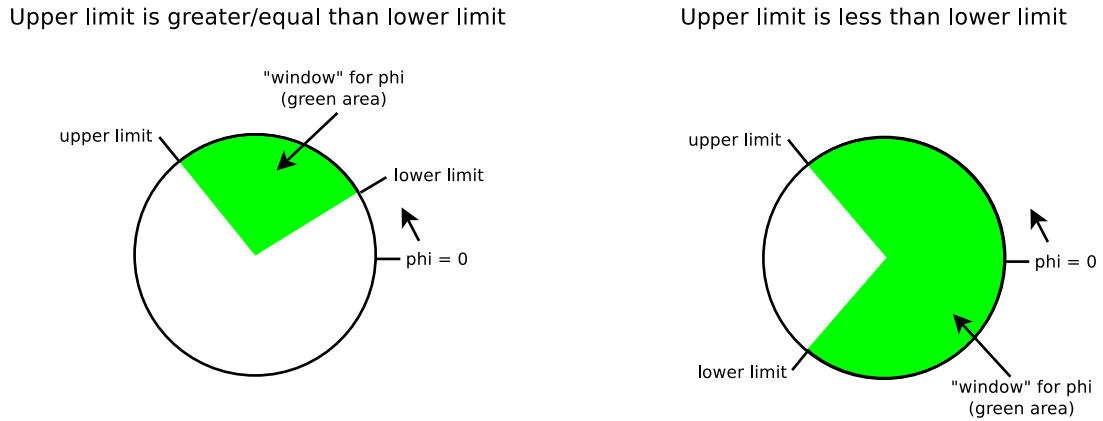


Figure 10: Setting the limits for "window"-comparators for  $\varphi$

The comparison of isolation (for electron/ $\gamma$ , tau and muon) is done with a LUT (Table 19). [To ignore quality comparison, all bits in the LUT have to be '1']

The comparison of impact parameter is done with LUT (Table 20). [To ignore quality comparison, all bits in the LUT have to be '1']

The comparison of quality is done with LUT (Table 21). [To ignore quality comparison, all bits in the LUT have to be '1']

Charge valid and charge sign bits must be equal to the requested charge.

Table 19: LUT contents for isolation comparison

LUT content (4 bits)	isolation (2 bits)	trigger
X"0"	xx	no trigger
X"1"	00	trigger on isolation bits = 00
X"2"	01	trigger on isolation bits = 01
X"3"	00 or 01	trigger on isolation bits = 00 or 01
X"4"	10	trigger on isolation bits = 10
X"5"	00 or 10	trigger on isolation bits = 00 or 10
X"6"	01 or 10	trigger on isolation bits = 01 or 10
X"7"	00 or 01 or 10	trigger on isolation bits = 00 or 01 or 10
X"8"	11	trigger on isolation bits = 11
X"9"	00 or 11	trigger on isolation bits = 00 or 11
X"A"	01 or 11	trigger on isolation bits = 01 or 11
X"B"	00 or 01 or 11	trigger on isolation bits = 00 or 01 or 11
X"C"	10 or 11	trigger on isolation bits = 10 or 11
X"D"	00 or 10 or 11	trigger on isolation bits = 00 or 10 or 11
X"E"	01 or 10 or 11	trigger on isolation bits = 01 or 10 or 11
X"F"	00 or 01 or 10 or 11	trigger on isolation bits = 00 or 01 or 10 or 11 (= "ignore" isolation)

Table 20: LUT contents for impact parameter comparison

LUT content (4 bits)	impact parameter (2 bits)	trigger
X"0"	xx	no trigger
X"1"	00	trigger on impact parameter bits = 00
X"2"	01	trigger on impact parameter bits = 01
X"3"	00 or 01	trigger on impact parameter bits = 00 or 01
X"4"	10	trigger on impact parameter bits = 10
X"5"	00 or 10	trigger on impact parameter bits = 00 or 10
X"6"	01 or 10	trigger on impact parameter bits = 01 or 10
X"7"	00 or 01 or 10	trigger on impact parameter bits = 00 or 01 or 10
X"8"	11	trigger on impact parameter bits = 11
X"9"	00 or 11	trigger on impact parameter bits = 00 or 11
X"A"	01 or 11	trigger on impact parameter bits = 01 or 11
X"B"	00 or 01 or 11	trigger on impact parameter bits = 00 or 01 or 11
X"C"	10 or 11	trigger on impact parameter bits = 10 or 11
X"D"	00 or 10 or 11	trigger on impact parameter bits = 00 or 10 or 11
X"E"	01 or 10 or 11	trigger on impact parameter bits = 01 or 10 or 11
X"F"	00 or 01 or 10 or 11	trigger on impact parameter bits = 00 or 01 or 10 or 11 (= "ignore" impact parameter)

Table 21: LUT contents for quality comparison of muon objects

LUT content (16 bits)	quality bits (4 bits)	trigger
X"0000"	xxxx	no trigger
X"0001"	0000	trigger on quality "level 0"
X"0002"	0001	trigger on quality "level 1"
X"0003"	0001 or 0000	trigger on quality "level 1" or "level 0"
X"0004"	0010	trigger on quality "level 2"
...	...	...
X"8000"	1111	trigger on quality "level 15"
X"C000"	1111 or 1110	trigger on quality "level 15" or "level 14"
...	...	...
X"FFFF"	xx	trigger on all quality "levels" (= "ignore")

#### 4.4.6 Calculation of correlation cuts

The following cuts are used for two objects correlations:

- $\Delta\eta$  (DETA).
- $\Delta\varphi$  (DPHI).
- $\Delta R$  (DR).
- charge correlation (only for muon).
- Cuts for mass (MASS) of following mass types:
  - Invariant mass.
  - Invariant mass with unconstrained pt (for muons only).
  - Invariant mass over  $\Delta R$ .
  - Transverse mass.
- Two-body pt.

There is one mass cut for correlations with three objects:

- Invariant mass for three objects (MASS).

The generation of look-up-tables (LUTs) for calculations of correlation cuts is described in chapter "Calculation of look-up-tables (LUTs) for correlation cuts" (see [4.4.7](#)).

##### Calculation of $\Delta\eta$

The calculation of  $\Delta\eta$  of two objects is done with formula:

$$\Delta\eta = \text{abs}(\eta_1 - \eta_2)$$

where  $\eta_1$  and  $\eta_2$  are represented in signed hardware indices.

##### Calculation of $\Delta\varphi$

The calculation of  $\Delta\varphi$  of two objects is done with formula:

$$\Delta\varphi = \text{abs}(\varphi_1 - \varphi_2) \text{ with } (" \varphi \text{ full bin range} " - \Delta\varphi) \text{ when } (\Delta\varphi > " \varphi \text{ half bin range} ").$$

where  $\varphi_1$  and  $\varphi_2$  are represented in unsigned hardware indices.

##### $\Delta R$ calculation

The calculation of  $\Delta R$  of two objects is done with formula:

$$\Delta R = \sqrt{(\eta_1 - \eta_2)^2 + (\varphi_1 - \varphi_2)^2}.$$

The calculation of  $\Delta R^2$  in VHDL (no square root in VHDL) is done by adding the square of  $\Delta\eta$  and  $\Delta\varphi$  LUT values.

##### Invariant mass calculation

The calculation of *invariant mass of two objects* is done with formula:

$$M = \sqrt{2pt_1pt_2(\cosh(\eta_1 - \eta_2) - \cos(\varphi_1 - \varphi_2))}.$$

The calculation of  $\frac{M^2}{2}$  in VHDL (no square root in VHDL) is done by multiplying LUT values of  $pt_1$ ,  $pt_2$  and the difference of  $\cosh(\Delta\eta)$  and  $\cos(\Delta\varphi)$ .

### Transverse mass calculation

The calculation of *transverse mass of two objects* is done with formula:

$$M = \sqrt{2pt_1pt_2(1 - \cos(\varphi_1 - \varphi_2))}.$$

Calculation similar to "Invariant mass calculation".

### Invariant mass over $\Delta R$ calculation

The formulas for *invariant mass over  $\Delta R$  of two objects* are:

$$M = \sqrt{2pt_1pt_2(\cosh(\eta_1 - \eta_2) - \cos(\varphi_1 - \varphi_2))}.$$

$$\Delta R = \sqrt{(\eta_1 - \eta_2)^2 + (\varphi_1 - \varphi_2)^2}.$$

The calculation of *invariant mass over  $\Delta R$  of two objects* is done with  $\frac{M^2}{2} \times (1/\Delta R^2)$  (no square root in VHDL).

A direct calculation of  $1/\Delta R^2$  is not possible in firmware (VHDL code), therefore the implementation of the calculation is done by LUTs. In the hardware the values of these LUTs are stored in "large" ROMs, which was realized using the Block RAMs (BRAMs) of the Virtex chip.

Due the limited number of available BRAMs there are some restrictions for creating algorithms with *invariant mass over  $\Delta R$* :

- Objects must have the same type (e.g.: "muon muon", "eg eg", ...)
- Objects must be of same bx
- Resolution of  $\Delta\eta$  and  $\Delta\varphi$ :
  - Full resolution for calos (max. deta bins=230, max. dphi bins=72)
  - Half resolution only for muons (max. deta bins=226, max. dphi bins=144)
- If  $1/\Delta R^2=0$  ( $\Delta\eta=0$  and  $\Delta\varphi=0$ ) then correlation cut *invariant mass over  $\Delta R$*  is true
- The values of LUTs are only valid for current definitions and restrictions. Every change might cause a recalculation of the values and a regeneration of IPs (representing LUTs in BRAMs) in Vivado (firmware generation tool)

The values of LUTs in firmware are listed in coe files of ROMs (created by same scripts mentioned above), currently 5 ROMs for "calo calo" and 6 ROMs for "muon muon" (see '[lut\\_caloo\\_inv\\_dr\\_sq\\_rom1.coe](#)', etc. and '[lut\\_muon\\_inv\\_dr\\_sq\\_rom1.coe](#)', etc.). The addresses of the BRAMs are given by  $\Delta\eta$  and  $\Delta\varphi$ . All ROMs for calos have 4096 addresses, for muons 8192 addresses. The data width of ROMs is different depending on the highest LUT value in ROM. Because of these different data widths, the partitioning of several ROMs was done to save BRAM resources. Currently 873 BRAMs (36kb) are available per Virtex chip. Following numbers of BRAMs (36kb) are needed for:

- "calo calo": 660
- "muon muon": 672

Currently one calculation of *invariant mass over  $\Delta R$*  of "calo calo" or "muon muon" is possible in one Virtex chip, but one can have some algorithms containing *invariant mass over  $\Delta R$*  with different thresholds, but with same objects and same bx.

### Invariant mass calculation for three objects

The calculation of *invariant mass calculation for three objects* is done by calculating the invariant mass for all two-object combinations and take the sum of the three invariant masses of the two-object combinations.

### Two-body pt calculation

The calculation of *two-body pt* is done with formula:

$$pt = \sqrt{pt_1^2 + pt_2^2 + 2pt_1pt_2(\cos(\varphi_1)\cos(\varphi_2) + \sin(\varphi_1)\sin(\varphi_2))}$$

The calculation of  $pt^2$  in VHDL (no square root in VHDL) using LUTs for  $pt_1$ ,  $pt_2$ ,  $\cos(\varphi)$  and  $\sin(\varphi)$ .

### Muon charge correlation

For definition of muon charge, see [4.4.4](#).

In the muon charge correlation module ('[muon\\_charge\\_correlations.vhd](#)'), the charge correlations are made for different muon conditions types. The module is instantiated in the top-of-hierarchy module ('[gtl\\_module.vhd](#)') and not inside of a muon conditions module. The charges of objects (number of objects depends on muon condition type) are compared to get "like sign charge" ("LS") or "opposite sign charge" ("OS"), "LS" means that the charges (charge sign) of objects are the same, "OS" means that at least one object has different charge than the others. This information is used in all instatiated muon conditions. There is no charge correlation for single type conditions.

In all cases the "charge valid" bit of the objects must be set.

In TME one can select "LS", "OS" or ignore for charge correlation in muon conditions.

Table 22: Muon charge correlation - Double Muon

x	x	I ignore (charge x = +, -, I)
+	+	LS both positive muons
-	-	LS both negative muons
+	-	OS two muons of opposite sign (a pair)
-	+	OS two muons of opposite sign (a pair)

Table 23: Muon charge correlation - Triple Muon

x x x	I ignore (charge x = +, -, I)
+ + +	LS three muons of positive charge
- - -	LS three muons of negative charge
- + +	OS a pair plus a positive muon
+ - +	OS a pair plus a positive muon
+ + -	OS a pair plus a positive muon
+ - -	OS a pair plus a negative muon
- + -	OS a pair plus a negative muon
- - +	OS a pair plus a negative muon

Table 24: Muon charge correlation - Quad Muon

x x x x	I ignore (charge x = +, -, I)
+ + + +	LS four muons of positive charge
- - - -	LS four muons of negative charge
- + + +	OS a pair plus two positive muons
+ - + +	OS a pair plus two positive muons
+ + - +	OS a pair plus two positive muons
+ + + -	OS a pair plus two positive muons
+ + - -	OS two pairs
+ - + -	OS two pairs
+ - - +	OS two pairs
- - + +	OS two pairs
- + - +	OS two pairs
- + + -	OS two pairs
+ - - -	OS a pair plus two negative muons
- + - -	OS a pair plus two negative muons
- - + -	OS a pair plus two negative muons
- - - +	OS a pair plus two negative muons



#### 4.4.7 Calculation of look-up-tables (LUTs) for correlation cuts

LUTs are defined as a VHDL "constant" in `gt1_luts_pkg.vhd` (VHDL package file). The values of precision and step size are given by "scale\_set" in XML file of a L1 menu.

Overview of precision types for correlation cuts (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

- *EG-EG-Delta* relevant for DeltaEta and DeltaPhi LUTs
- *EG-EG-MassPt* relevant for pt and unconstrained pt LUTs (used in mass and two-body pt calculations)
- *EG-EG-Math* relevant for  $\cos(\text{DeltaPhi})$  and  $\cosh(\text{DeltaEta})$  LUTs (used in mass calculations)
- *EG-EG-InverseDeltaRMath* relevant for  $1/\text{DeltaR}$  LUTs (used in mass over deltaR calculations)
- *EG-EG-TwoBodyPtMath* relevant for  $\cos(\text{Phi})$  and  $\sin(\text{Phi})$  LUTs (used in two-body pt calculations)
- *EG-EG-DeltaOverlapRemoval* is obsolete, used EG-EG-Delta (same scales for  $\eta$  and  $\varphi$ )
- *EG-EG-Mass* currently not used
- *EG-EG-TwoBodyPt* is obsolete, used EG-EG-MassPt

Overview of precision names (example for "MassPt"):

EG-EG-MassPt  
EG-JET-MassPt  
EG-TAU-MassPt  
JET-JET-MassPt  
JET-TAU-MassPt  
EG-ETM-MassPt  
JET-ETM-MassPt  
TAU-ETM-MassPt  
EG-HTM-MassPt  
JET-HTM-MassPt  
TAU-HTM-MassPt  
EG-ETMHF-MassPt  
JET-ETMHF-MassPt  
TAU-ETMHF-MassPt  
EG-MU-MassPt  
JET-MU-MassPt  
TAU-MU-MassPt  
MU-MU-MassPt  
MU-ETM-MassPt  
MU-HTM-MassPt

## MU-ETMHF-MassPt

**LUTs for  $p_T$  and unconstrained  $p_T$  used in mass and two-body pt calculations**

The values of  $p_T$  or unconstrained  $p_T$  LUT are calculated by building the half difference of maximum and minimum value of a bin, adding minimum value, rounding at precision position after decimal point and multiplying with  $10^{\text{precision}}$  to get integer values.

The address input of the LUT for  $p_T$  or unconstrained  $p_T$  is the value of hardware index of  $p_T$  or unconstrained  $p_T$ .

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-MassPt</type>
...
<n_bits>1</n_bits>
</scale>
```

VHDL names of  $p_T$  and unconstrained  $p_T$  LUTs:

EG\_PT\_LUT (used also for tau)

JET\_PT\_LUT

ETM\_PT\_LUT (used also for  $HT_{\text{miss}}$  and  $ET_{\text{miss}}^{HF}$ )

MU\_PT\_LUT

MU\_UPT\_LUT

**LUTs for  $\Delta\eta$** 

The values of the LUT are calculated by multiplying  $\Delta\eta$  in hardware indices with  $\eta$  step size, rounding at precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT is the value of  $\Delta\eta$  in hardware indices.

The precision value in XML file is given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-Delta</type>
...
<n_bits>3</n_bits>
</scale>
```

where  $\langle n\_bits \rangle$  is the precision value and  $\langle type \rangle$  represents a precision name.

The  $\eta$  ( $=\Delta\eta$ ) step size in XML file is given by (an example for electron/ $\gamma$ ):

```
<scale>
<object>EG</object>
<type>ETA</type>
```

```
...
<step>+4.3499999999999997E-02</step>
...
</scale>
```

VHDL names of  $\Delta\eta$  LUTs:

```
CALO_CALO_DIFF_ETA_LUT
CALO_MU_DIFF_ETA_LUT
MU_MU_DIFF_ETA_LUT
```

### **LUTs for $\Delta\varphi$**

The values of the LUT are calculated by multiplying  $\Delta\varphi$  in hardware indices with  $\varphi$  step size, rounding at precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT is the value of  $\Delta\varphi$  in hardware indices.

The precision values of  $\Delta\varphi$  are identical with  $\Delta\eta$ .

The  $\varphi$  ( $=\Delta\varphi$ ) step size in XML file is given by (an example for electron/ $\gamma$ ):

```
<object>EG</object>
<type>PHI</type>
...
<step>+4.3633231299858237E-02</step>
...
</scale>
```

VHDL names of  $\Delta\varphi$  LUTs:

```
CALO_CALO_DIFF_PHI_LUT
CALO_MU_DIFF_PHI_LUT
MU_MU_DIFF_PHI_LUT
```

### **LUTs for $\cosh(\Delta\eta)$ used in mass calculations**

The values in the LUT are calculated by multiplying  $\Delta\eta$  in hardware indices with  $\eta$  step size, calculating cosine hyperbolic, rounding at "Math" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT for  $\cosh(\Delta\eta)$  is the value of  $\Delta\eta$  in hardware indices.

For calo muon correlations one has to use the muon step size.

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-Math</type>
```

...

`<n_bits>3</n_bits>`

`</scale>`

used for  $\cosh(\Delta\eta)$  and  $\cos(\Delta\varphi)$ .

VHDL names of  $\cosh(\Delta\eta)$  LUTs:

CALO\_CALO\_COSH\_DETA\_LUT

CALO\_MUON\_COSH\_DETA\_LUT

MU\_MU\_COSH\_DETA\_LUT

### **LUTs for $\cos(\Delta\varphi)$ used in mass calculations**

The values in the LUT are calculated by multiplying  $\Delta\varphi$  in hardware indices with  $\varphi$  step size, calculating cosine, rounding at "Math" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT for  $\cos(\Delta\varphi)$  is the value of  $\Delta\varphi$  in hardware indices. For calo muon correlations one has to use the muon step size.

VHDL names of  $\cos(\Delta\varphi)$  LUTs:

CALO\_CALO\_COS\_DPFI\_LUT

CALO\_MUON\_COS\_DPFI\_LUT

MU\_MU\_COS\_DPFI\_LUT

### **LUTs for $1/\Delta R^2$ used in mass over deltaR calculations**

The calculation of  $1/\Delta R^2$  is done by multiplying  $\Delta\eta$  in hardware indices with  $\eta$  step size, making the square, doing the same for  $\Delta\varphi$ , adding the squares, inverting the sum, rounding at "InverseDeltaRMath" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values. The address of the two-dimensional LUT for  $1/\Delta R^2$  consists of values of  $\Delta\eta$  and  $\Delta\varphi$  in hardware indices.

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

`<scale>`

`<object>PRECISION</object>`

`<type>EG-EG-InverseDeltaRMath</type>`

...

`<n_bits>5</n_bits>`

`</scale>`

Precision names for "InverseDeltaRMath":

EG-EG-InverseDeltaRMath

JET-JET-InverseDeltaRMath

TAU-TAU-InverseDeltaRMath

MU-MU-InverseDeltaRMath

The LUTs are located in BRAMs.

For calo-calo mass over deltaR 5 ROMs are needed to represent the LUT. The content of the LUT one can see in '[lut\\_calor\\_inv\\_dr\\_sq\\_rom1.coe](#)' (and so on).

For muon-muon mass over deltaR 6 ROMs are needed to represent the LUT. The content of the LUT one can see in '[lut\\_muon\\_inv\\_dr\\_sq\\_rom1.coe](#)' (and so on).

The access to a certain ROM depends on the values of  $\Delta\eta$  and  $\Delta\varphi$  (see '[description\\_rom\\_lut\\_calor\\_inv\\_dr\\_sq.txt](#)' and '[rom\\_lut\\_calor\\_inv\\_dr\\_sq\\_all.vhd](#)', respectively

['description\\_rom\\_lut\\_muon\\_inv\\_dr\\_sq.txt'](#) and ['rom\\_lut\\_muon\\_inv\\_dr\\_sq\\_all.vhd'](#)).

### **LUTs for $\cos(\varphi)$ used in two-body pt calculations**

The values in the LUT are calculated by building the half difference of maximum and minimum value of a  $\varphi$  bin, adding minimum value, calculating cosine, rounding at "TwoBodyPtMath" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-TwoBodyPtMath</type>
...
<n_bits>3</n_bits>
</scale>
```

used for  $\cos(\varphi)$  and  $\sin(\varphi)$ .

VHDL names of  $\cos(\varphi)$  LUTs:

CALO\_COS\_PHI\_LUT

MUON\_COS\_PHI\_LUT

### **LUTs for $\sin(\varphi)$ used in two-body pt cuts**

The values in the LUT are calculated by building the half difference of maximum and minimum value of a  $\varphi$  bin, adding minimum value, calculating sine, rounding at "TwoBodyPtMath" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

VHDL names of  $\sin(\varphi)$  LUTs:

CALO\_SIN\_PHI\_LUT

MUON\_SIN\_PHI\_LUT

#### 4.4.8 Combination conditions

##### 4.4.8.1 Combination conditions definition

A condition consists of input data and a set of requirements, which contain the requirements to be complied. The requirements are called "object cuts".

The requirement list contains:

thresholds for  $p_T$ , ranges for  $\eta$  and  $\varphi$ , LUTs for isolation, LUTs for quality, requested charges, thresholds for unconstrained  $p_T$ , a LUT for impact parameter. The condition is complied, if every comparison between object parameters and requirements is valid for the following object cuts (only for requested cuts):

For Calorimeter input data:

- $p_T$  greater-equal (or equal) threshold
- $\eta$  in range
- $\varphi$  in range
- iso LUT

For Muon input data:

- $p_T$  greater-equal (or equal) threshold
- $\eta$  in range
- $\varphi$  in range
- iso LUT
- requested charge
- quality LUT
- unconstrained  $p_T$  greater-equal (or equal) threshold
- impact parameter LUT

There are different types of conditions implemented, depending of how many objects have to comply the requirements.

- "Quad objects requirements condition": this condition type consists of requirements for 4 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 4 different objects, each of which fulfills at least one of the requirements.
- "Triple objects requirements condition": this condition type consists of requirements for 3 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 3 different objects, each of which fulfills at least one of the requirements.

- "Double objects requirements condition": this condition type consists of requirements for 2 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 2 different objects, each of which fulfills at least one of the requirements.<sup>2</sup>
- "Single object requirement condition": this condition type consists of one requirement for one trigger object of a given object type. To fulfill this condition, there must exist at least one object which fulfills the requirement.

The values of the requirements are given by VHDL Producer for every Trigger Menu.

The input data objects have to be of same type and same bunch-crossing.

With "Double objects requirements condition" a correlation cut of "two-body pt" can be required (calorimeter and muon objects).

Additionally charge correlation cuts with "Double objects requirements condition", "Triple objects requirements condition" and "Quad objects requirements condition" of muon objects can be required.

---

<sup>2</sup>"Double objects requirements condition with spatial correlation" not used anymore, replaced by Correlation conditions

#### 4.4.9 Energy sum quantities conditions

##### 4.4.9.1 Energy sum quantities conditions module (including Asymmetry conditions)

A comparator between  $E_T$  and a threshold (`et_threshold`) and, depending on object type, a comparison in  $\varphi$  with two "window"-comparators is done in this module. The value for  $E_T$  threshold, the 'mode-selection' for the  $E_T$  comparator and the limits for the "window"-comparators are given in the generic interface list of the module. The selection whether a comparison in  $\varphi$  is part of the condition is done with the value of the generic parameter 'obj\_type' ('ETM\_TYPE', 'ETMHF\_TYPE', 'HTM\_TYPE' and 'HTMHF\_TYPE' force a comparison). The comparison in  $\varphi$  is done in the same way as for calorimeter conditions. Additionally the data structure of input data (`data_i` in port interface list) is provided as a record in this list. The output signal of the module is in high state, if all comparisons are true.

Data for Asymmetry trigger are received on 4 frames on bits 27..20 (8 bits). For every type a comparison with an 8-bit threshold (greater-equal [or equal]) is done. Asymmetry data are interpreted as counts.

For the entity declaration of '[esums\\_conditions.vhd](#)', see Listing 5.



Table 25: Explanation of Listing 5

Item	Explanation
et_ge_mode	"mode-selection" for the $E_T$ comparator. Valid strings are "true" and "false" (type is boolean), "true" means comparator works on greater/equal, "false" means equal (for tests only)
obj_type	valid strings are "ETT_TYPE", "HTT_TYPE", "ETM_TYPE", "HTM_TYPE" and "ETMHF_TYPE".
et_threshold	threshold value for comparison in $E_T$ . The size of the std_logic_vector depends on the number of $E_T$ bits.
phi_full_range	boolean to set full range of $\varphi$ .
phi_w1_upper_limits	"upper limit" of "window"-comparator 1 for $\varphi$ .
phi_w1_lower_limits	"lower limit" of "window"-comparator 1 for $\varphi$ .
phi_w2_ignore	boolean to ignore "window"-comparator 2 for $\varphi$ .
phi_w2_upper_limits	"upper limit" of "window"-comparator 2 for $\varphi$ .
phi_w2_lower_limits	"lower limit" of "window"-comparator 2 for $\varphi$ .
clk	clock input (LHC clock).
data_i	input data, structure defined in obj_type.
condition_o	output of condition (routed to Algorithms logic, see 4.4.16).

Listing 5: Entity declaration of esums\_conditions.vhd

```

entity esums_conditions is
  generic
    (
      et_ge_mode : boolean;
      obj_type : natural := ETT_TYPE; -- ett=0, ht=1, etm=2, htm=3
      et_threshold: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0);
      phi_full_range : boolean;
      phi_w1_upper_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
      ;
      phi_w1_lower_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
      ;
      phi_w2_ignore : boolean;
      phi_w2_upper_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
      ;
      phi_w2_lower_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    );
  port(
    clk : in std_logic;
    data_i : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    condition_o : out std_logic
  );
end esums_conditions;

```

#### 4.4.10 Muon shower bits

Muon shower bits MUS0 (MUon Shower, bit 61 on MU0), MUS1 (bit 61 on MU2), MUSOOT0 (MUon Shower Out Of Time, bit 61 on MU4), MUSOOT1 (bit 61 on MU6) (see [4.4.4](#) and [Table 17](#)) can be selected by TME to an algo or combined with other conditions to an algo .

#### 4.4.11 Minimum bias trigger conditions

Data for Minimum bias trigger are received on the 4 MSBs of 4 frames used for Energy sum quantities (see [4.4.9](#)).

- MBT0HFP: "minimum bias HF+ threshold 0" bits
- MBT0HFM: "minimum bias HF- threshold 0" bits
- MBT1HFP: "minimum bias HF+ threshold 1" bits
- MBT1HFM: "minimum bias HF- threshold 1" bits

In minimum bias trigger conditions module there is a comparison with a 4-bit threshold (greater-equal [or equal]).

#### 4.4.12 Towercount condition

Data for Towercount trigger (number of firing HCAL towers) are received on frame HT (see [4.4.9](#)) on bits 24..12 (13 bits) of HT data structure.

In towercount condition module there is a comparison with a 13-bit threshold (greater-equal [or equal]).

#### 4.4.13 Centrality condition

Centrality bits used as a signals for triggers (similar to external signals).

#### 4.4.14 Correlation conditions

The correlation conditions contain a combination of two "Single object requirement conditions" of two object types or one "Double objects requirement condition" of objects of the same type. In addition with object cuts there are correlation cuts for  $\Delta\eta$ ,  $\Delta\varphi$ ,  $\Delta R$ , mass, mass divided by  $\Delta R$  and "two-body pt".

The correlation condition of "Invariant mass for three objects" contains one "Triple objects requirement condition" of objects of the same type with one object cut for mass.

List of correlation cuts in [4.4.6](#).

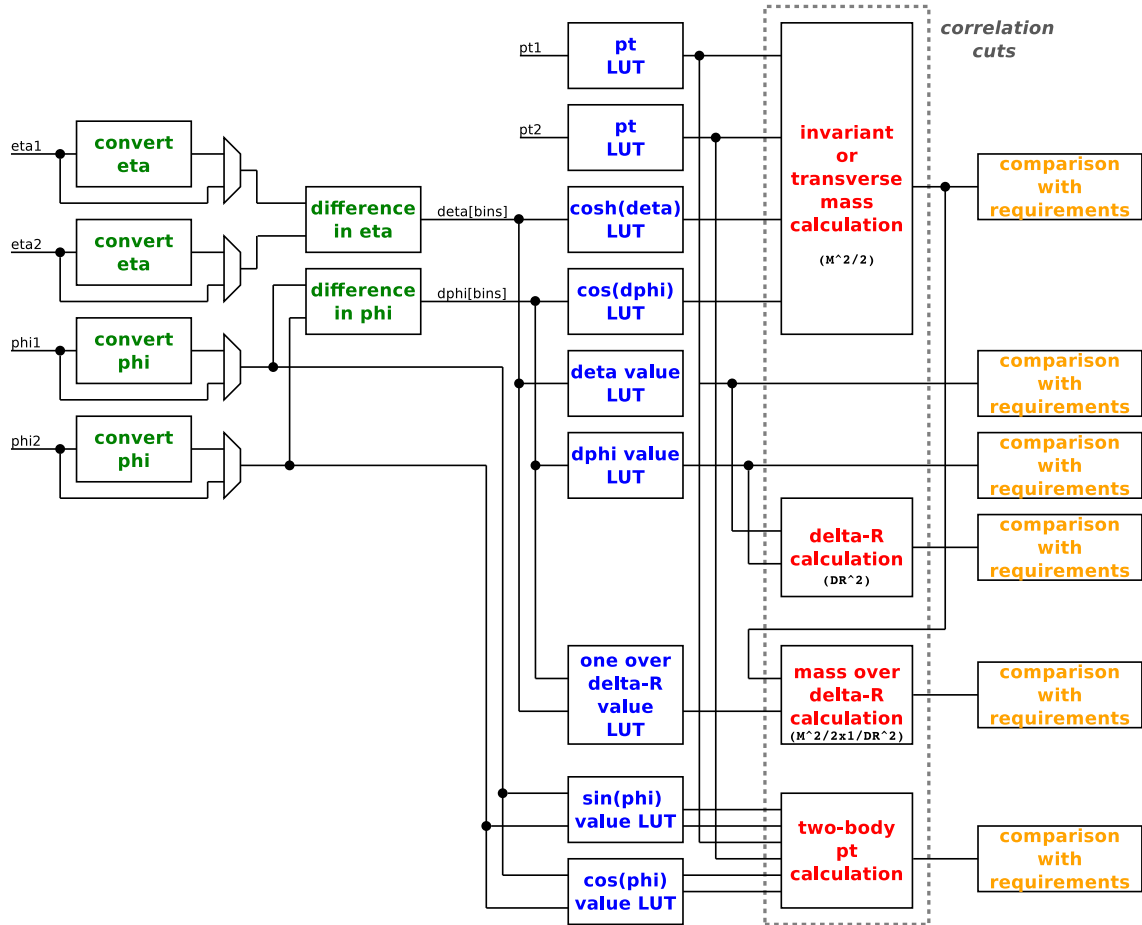


Figure 11: VHDL structure of cuts for correlation conditions

#### Overview of correlation cuts in conditions

The following list gives an overview of possible correlation cuts in conditions:

- Calo conditions:
  - two-body pt (for double condition)
- Calo conditions overlap removal:

- $\Delta\eta$  overlap removal
  - $\Delta\varphi$  overlap removal
  - $\Delta R$  overlap removal
  - two-body pt (for double condition)
- Muon conditions:
  - charge correlation
  - two-body pt (for double condition)
- Calo calo correlation condition with calo overlap removal:
  - $\Delta\eta$  overlap removal
  - $\Delta\varphi$  overlap removal
  - $\Delta R$  overlap removal
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass
  - two-body pt
- Calo calo correlation condition:
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass
  - two-body pt
- Calo calo correlation condition for invariant mass divided by  $\Delta R$ :
  - invariant mass divided by  $\Delta R$
- Calo calo correlation condition mass with three objects:
  - invariant mass with three objects
- Calo muon correlation condition:
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass
  - two-body pt
- Calo esums correlation condition:

- $\Delta\varphi$
  - transverse mass
  - two-body pt
- Muon muon correlation condition:
  - charge correlation
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass or invariant mass unconstraint pt
  - two-body pt
- Muon muon correlation condition for invariant mass divided by  $\Delta R$ :
  - charge correlation
  - invariant mass divided by  $\Delta R$
- Muon muon correlation condition mass with three objects:
  - charge correlation
  - invariant mass with three objects
- Muon esums correlation condition:
  - $\Delta\varphi$
  - transverse mass
  - two-body pt

#### 4.4.14.1 Correlation condition module

As described in section Correlation conditions (4.4.14), correlations of two object types are available. Therefore several correlations (objects 1-objects 2) are possible:

- Correlation condition with calorimeter objects  
electron/ $\gamma$ -electron/ $\gamma$ , electron/ $\gamma$ -jet, electron/ $\gamma$ -tau, jet-jet, jet-tau and tau-tau.
- Correlation condition with calorimeter objects and energy sum quantities ( $ET_{\text{miss}}$ ,  $ET_{\text{miss}}^{HF}$  and  $HT_{\text{miss}}$  only)  
electron/ $\gamma$ -etm, jet-etm, tau-etm, electron/ $\gamma$ -htm, jet-htm, tau-htm, electron/ $\gamma$ -etmhf, jet-etmhf and tau-etmhf.
- Correlation condition with calorimeter objects and muons objects  
electron/ $\gamma$ -muon, jet-muon and tau-muon.
- Correlation condition with muon objects

- Correlation condition with muon objects and energy sum quantities ( $ET_{\text{miss}}$ ,  $ET_{\text{miss}}^{HF}$  and  $HT_{\text{miss}}$  only)  
muon-etm, muon-etmhf and muon-htm.

There are two correlations for mass with three objects:

- Correlation condition for mass with three objects with calorimeter objects (same type, same bunch-crossing)
- Correlation condition for mass with three objects with muon objects

In correlation condition with calorimeter and muons objects we have different scales of calorimeter and muon objects in  $\eta$  and  $\varphi$ , therefore LUTs for conversion of the calorimeter bins to muon bins are used (in '[gt1\\_pkg.vhd](#)': e.g. EG\_ETA\_CONV\_2\_MUON\_ETA\_LUT and EG\_PHI\_CONV\_2\_MUON\_PHI\_LUT).

**Remark:**

The center value of bins are used as reference value for conversion. The content of EG\_ETA\_CONV\_2\_MUON\_ETA\_LUT is calculated with formular:

"converted-calo-eta[bin] = calo-eta[bin]  $\times$  4 + 2",

of EG\_PHI\_CONV\_2\_MUON\_PHI\_LUT with formular:

"converted-calo-phi[bin] = calo-phi[bin]  $\times$  4 + 2".

Definitions of scales (see Tables [10](#), [11](#), [13](#) and [14](#)):

- Calorimeter objects:

$$- \eta \text{ bin width} = \frac{0.087}{2} \text{ (bin 0 from 0.0 to } \frac{0.087}{2} \text{)}$$

$$- \phi \text{ bin width} = \frac{2\pi}{144} \text{ (bin 0 from 0.0 to } \frac{2\pi}{144} \text{)}$$

- Muon objects:

$$- \eta \text{ bin width} = \frac{0.087}{8} \text{ (bin 0 from } 0.5 \times \frac{-0.087}{8} \text{ to } 0.5 \times \frac{+0.087}{8} \text{)}$$

$$- \phi \text{ bin width} = \frac{2\pi}{576} \text{ (bin 0 from 0.0 to } \frac{2\pi}{576} \text{)}$$

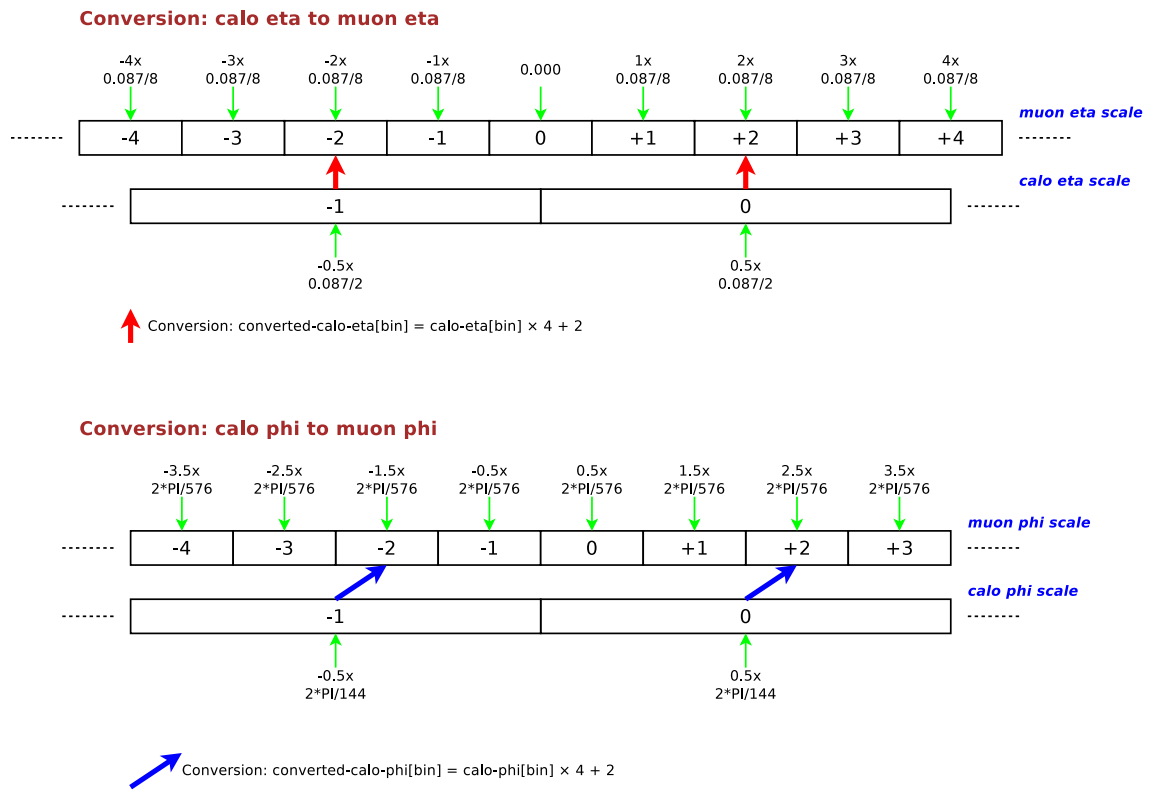


Figure 12: Conversion of calorimeter  $\eta$  and  $\varphi$  to muon scales

#### **4.4.15 External Conditions**

Maximal 256 External Conditions are possible in Global Trigger. They are provided as inputs in the Algorithms logic of  $\mu$ GTL. External Conditions will include the "Technical Trigger" of the legacy system.

#### **4.4.16 Algorithms logic**

The outputs of all the instantiated conditions are combined in the Algorithms logic with boolean algebra given by TME for every single Algorithm. These Algorithms are registered and provided as inputs for Final Decision Logic.



## 5 Final Desicion Logic

This description is for version v1.4.1 of Final Desicion Logic.

The Final Desicion Logic ( $\mu$ FDL) firmware contains algo-bx-masks, suppression of algos caused by calibration trigger, prescalers, veto-masks and rate-counters ("before prescalers", "after prescalers" and "post dead time") for each Algorithm and the local Final-OR- and veto-logic.

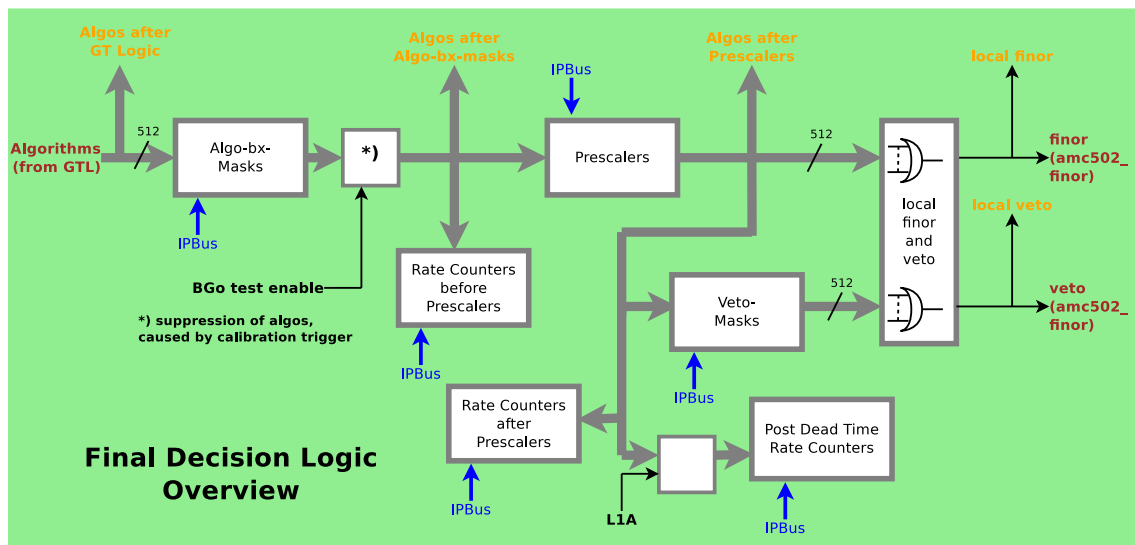


Figure 13:  $\mu$ FDL firmware

### 5.1 $\mu$ FDL Interface

#### Inputs:

- Algorithms from  $\mu$ GTL
- IPBus interface (for registers, counters and memories)
- LHC clock
- Reset signal
- BC0, BGo test-enable, L1A
- Begin of lumi-section

#### Outputs:

- Prescale factor set index to Readout-Process

- Algorithms after GTLogic to Readout-Process
- Algorithms after algo-bx-masks to Readout-Process
- Algorithms after prescalers to Readout-Process
- Algorithms after Final-OR-masks to Readout-Process
- Local Final-OR to Readout-Process
- Local veto to Readout-Process
- Local Final-OR with veto to Readout-Process
- Local Final-OR to mezzanine
- Local veto to mezzanine
- Local Final-OR with veto to mezzanine

## 5.2 MP7 Final-OR hardware solution

The firmware of  $\mu$ FDL in this document is based on a hardware configuration with maximum 6  $\mu$ GT modules.

## 5.3 Data flow

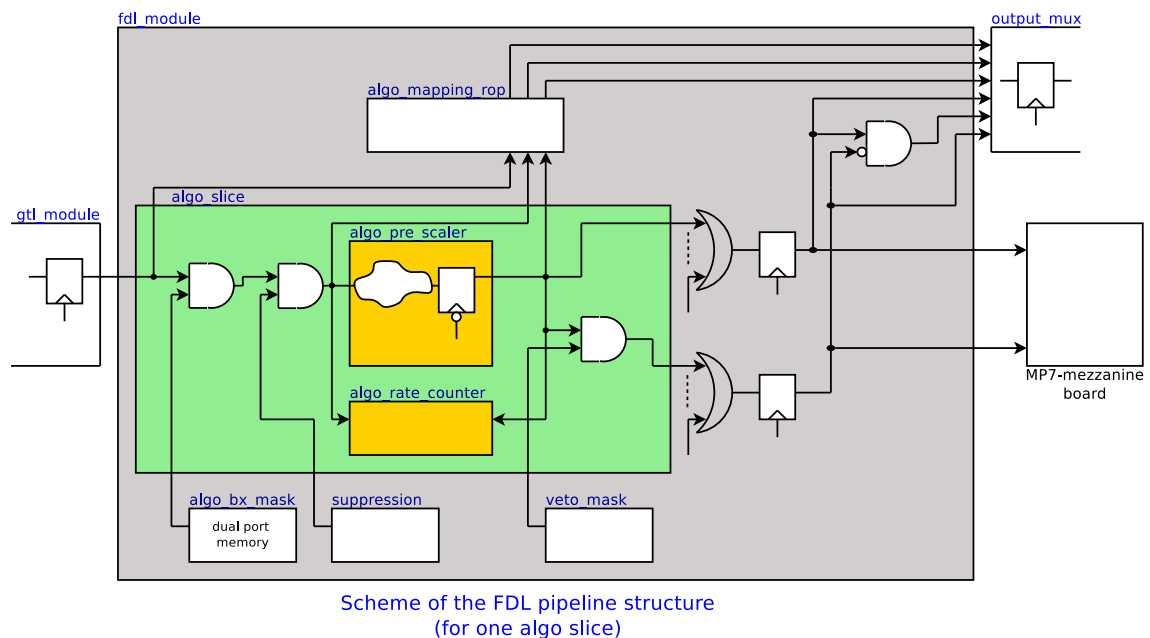


Figure 14:  $\mu$ FDL pipeline

Every Algorithm, in total 512 coming from  $\mu$ GTL, passes a algo-bx-mask, the logic for suppression of algos caused by calibration trigger (5.17) and a prescaler, which reduces the trigger rate by a given factor. The factor has a precision of two digits after comma ("fractional prescale factor"). Prescaled Algorithms signals are combined to a local final-or-signal (Final-OR). For every Algorithm there is a rate-counter before prescaler and after prescaler, which are incremented by LHC clock if the Algorithm is true. In addition there are post-dead-time counters, one for each Algorithm, which are incremented, if the Algorithm and the L1A-signal are true at the same bunch-crossing. Algorithms after GTLogic, after algo-bx-masks, after prescalers, the local Final-OR- and local Veto-signal are provided for read-out-record.

If there are not enough firmware resources in one  $\mu$ GT board, more boards could be used. Therefore the 512 Algorithms are partitioned by TME. TME will set the number of Algorithms as constant in the package module '`gtl_pkg.vhd`'. This means  $\mu$ GTL and  $\mu$ FDL firmware considered as a unit for synthesis. In the case of more  $\mu$ GT boards, the local Final-OR and local veto are routed via a mezzanine board on MP7 (located on "General Purpose I/O connector") to the FINOR-AMC502 module, where the total Final-OR is created and send to TCDS.

A mapping for Algorithms is provided, to give flexibility for setting the index of Algorithms:

- creating a mapping instance (`algo_mapping_rop.vhd`) by VHDL Producer, this component will be instantiated in fix part of FDL, and new calculation will done each time over TME.
- TME delivers just the number of Algorithms, which will be built on each card.
- from FDL point of view, FDL see incremented number of Algorithms indexes, e.g. 0, 1, 2, which is e.g. 69, 200, 300.
- TME should take care of assignment of each Algorithm to a number, that means if in card 1 `algo_59` is defined, nobody allows to produce the same number again.

## 5.4 Implementation in firmware

The entity declaration of 'fdl\_module.vhd' is shown in 5.3.

Listing 6 contains the entity declaration of 'fdl\_module.vhd'.

Listing 6: Entity declaration of fdl\_module.vhd

```
entity fdl_module is
  generic(
    SIM_MODE : boolean := false; -- if SIM_MODE = true, "algo_bx_mask" is
      given by "algo_bx_mask_sim".
    PRESCALE_FACTOR_INIT : ipb_regs_array(0 to MAX_NR_ALGOS-1);
    MASKS_INIT : ipb_regs_array(0 to MAX_NR_ALGOS-1);
    PRESCALE_FACTOR_SET_INDEX_WIDTH : positive := 8;
    PRESCALE_FACTOR_SET_INDEX_REG_INIT : ipb_regs_array(0 to 1) := (others =>
      X"00000000");
    L1A_LATENCY_DELAY_INIT : ipb_regs_array(0 to 1) := (others => X"00000000"
    );
    CNTRL_REG_INIT : ipb_regs_array(0 to 1) := (others => X"00000000");
    -- Input flip-flops for algorithms of fdl_module.vhd - used for tests of
      fdl_module.vhd only
    ALGO_INPUTS_FF: boolean := false
  );
  port(
    ipb_clk          : in std_logic;
    ipb_rst          : in std_logic;
    ipb_in           : in ipb_wbus;
    ipb_out          : out ipb_rbus;

    -- =====
    lhc_clk          : in std_logic;
    lhc_rst          : in std_logic;
    bcre             : in std_logic;
    test_en          : in std_logic;
    l1a              : in std_logic;
    begin_lumi_section : in std_logic;
    algo_i           : in std_logic_vector(NR_ALGOS-1 downto 0);
    bx_nr_out        : out std_logic_vector(11 downto 0);
    prescale_factor_set_index_rop : out std_logic_vector(
      PRESCALE_FACTOR_SET_INDEX_WIDTH-1 downto 0);
    algo_after_gtLogic_rop : out std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    algo_after_bxomask_rop : out std_logic_vector(MAX_NR_ALGOS-1 downto
      0);
    algo_after_prescaler_rop : out std_logic_vector(MAX_NR_ALGOS-1
      downto 0);
    local_finor_rop   : out std_logic;
    local_veto_rop    : out std_logic;
    finor_2_mezz_lemo : out std_logic; -- to LEMO
    finor_preview_2_mezz_lemo : out std_logic; -- to LEMO
    veto_2_mezz_lemo  : out std_logic; -- to LEMO
    finor_w_veto_2_mezz_lemo : out std_logic; -- to tp_mux.vhd
    local_finor_with_veto_o : out std_logic; -- to SPY2_FINOR
    -- HB 2016-03-02: v0.0.21 - algo_bx_mask_sim input for simulation use with
      MAX_NR_ALGOS (because of global index).
    algo_bx_mask_sim : in std_logic_vector(MAX_NR_ALGOS-1 downto 0)
```

```
);  
end fdl_module;
```

Table 26: Explanation of Listing 6

Item	Explanation
SIM_MODE	switch for simulation mode.
PRESCALE_FACTOR_INIT	init value for prescale factor.
MASKS_INIT	init value for BX mask.
PRESCALE_FACTOR_SET_INDEX_WIDTH	width of prescale factor set index.
PRESCALE_FACTOR_SET_INDEX_REG_INIT	init value prescale factor set index register.
L1A_LATENCY_DELAY_INIT	init value of L1A latency delay.
CNTRL_REG_INIT	init value control register.
ALGO_INPUTS_FF	switch for algos input flip-flops.
ipb_clk	IPBus clock input.
ipb_rst	IPBus reset input.
ipb_in	IPBus data input.
ipb_out	IPBus data output.
lhc_clk	clock input (LHC clock).
lhc_rst	reset input.
bcrs	TTC BGo bunch counter reset input.
test_en	TTC BGo test enable input.
lla	L1A input.
begin_lumi_section	begin of lumisection input.
algo_i	algos input.
bx_nr_out	bunch crossing number output.
prescale_factor_set_index	prescale factor set data output.
algo_after_gtLogic_rop	algos after GTL output.
algo_after_bxomask_rop	algos after BX mask output.
algo_after_prescaler_rop	algos after prescaler output.
local_finor_rop	local FINOR output.
local_veto_rop	local VETO output.
finor_2_mezz_lemo	FINOR to MP7 mezzanine board and via LEMO connection to FINOR board.
finor_preview_2_mezz_lemo	FINOR preview to MP7 mezzanine board and via LEMO connection to FINOR preview board.
veto_2_mezz_lemo	VETO to MP7 mezzanine board and via LEMO connection to FINOR board.
finor_w_veto_2_mezz_lemo	FINOR with VETO to MP7 mezzanine board and via LEMO connection to FINOR board.
local_finor_with_veto_o	local FINOR with VETO output.
algo_bx_mask_sim	algo-bx-mask input for simulation.

## 5.5 Main parts

The top-of-hierarchy module (`'fdl_module.vhd'`) contains

- version registers
- a command pulse register
- prescalers for all Algorithms
- registers for prescale factors
- register for prescale factor set index
- rate-counters for all Algorithms, finor, veto, L1A and post-dead-time
- read only registers for rate-counter values
- algo-bx-masks for all Algorithms
- Final-OR-masks for all Algorithms
- veto-masks for all Algorithms
- the Final-OR-logic

### 5.5.1 Algo-bx-masks

Every Algorithm passes a logic where at every bunch-crossing of the orbit the Algorithm is enabled (or not). The algo-bx-masks are implemented as dual-port memories and loaded at the begin of run. The size of the algo-bx-masks memory is number of bunch-crossings per orbit for address length and number of Algorithms for data-depth (3564 [4096] x 512 bits). The address (bx-number) of the memory for masking the Algorithm is delivered by an address-counter for algo-bx-masks memory, which is reseted with a delay-able bcres signal, to get the correct relations between Algorithms and masks from memory.

### 5.5.2 Rate-counters

Every Algorithm has rate-counters with 32 bits, because of the length of one luminosity segment period. There are counters before and after prescalers and post-dead-time counters (5.1, 5.3 and 5.4). The counters before and after prescalers are incremented, if the Algorithm signal is in high state and a positive edge of LHC clock occur. The post-dead-time counters are incremented, if the Algorithm signal, delayed by L1A latency delay (5.12), is in high state, a L1A signal and a positive edge of LHC clock occur. The content of a counter is updated into a register (for reading the counter value) and is set to 0 at the begin of a luminosity segment period. So there is one luminosity segment period time to read the registers with the counter values by software. In addition there are rate-counters for Final-OR-signal, Veto-signal and L1A-signal implemented (5.11, 5.14 and 5.13). All counters count the occurance of the signal in one luminosity segment.

### 5.5.3 Prescalers

Every Algorithm has a prescaler with a prescale factor of 24 bits (5.2). The prescaler reduces the trigger-rate per Algorithm with a factor. So a factor of 2 lets every second trigger request of this Algorithm pass, a factor of 3 every third request and so on. A prescale factor of 1 lets all triggers pass while a factor of 0 inhibits all trigger requests of the corresponding Algorithm. Since 2019 the logic allows also for fractional prescale factor values. Prescale factors are listed in integer or float format in prescale tables. The precision of the fractional prescale factor values in the current implementation is 2 (2 digits after decimal point). Software multiplies the fractional prescale factor with  $10^{\text{precision}}$  (i.e., currently by 100) and loads it into a register. At the beginning of a new “luminosity section” (“lumi section”) the factor is updated if during the preceding lumi section the update was requested by software. For this, in the “command pulses” register (5.10) the value of “request update factor pulse” is first set to 1 and then back to 0. The prescaler then uses the updated factor. A register for the “prescale factor set index” (5.6) contains a value which represents a certain set of prescale factors (commonly referred to as “prescale column” in CMS). The content of this register can be seen in the Readout-record, too. The “prescale factor set index” is loaded into the register by software and updated at the beginning of the next lumi section (5.15 and 5.16).

#### 5.5.3.1 Prescaler logic

With each trigger request of the Algorithm, a counter is incremented by  $10^{\text{precision}}$  as long as the incremented counter is less than the prescale factor. If the incremented counter is greater or equal than the prescale factor, the trigger request of the prescaled Algorithm is forwarded to the Final Decision Logic (for one clock cycle) and the prescale factor is subtracted from the incremented counter during the next clock cycle.

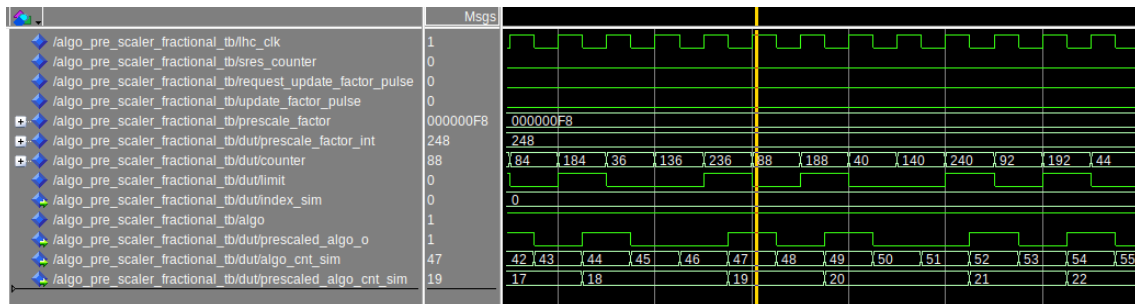


Figure 15: Fractional prescaler

In Figure (15) one can see the simulation of a fractional prescaler. In this example the fractional prescale factor is 2.48 and the signal “prescale factor int” shows this value multiplied by  $10^{\text{precision}}$ , i.e., currently by 100 (so, 248). The signal “algo” is always true, in other words, without prescale this Algorithm would be firing (sending a trigger request) in every bunch crossing. Signal “prescaled algo o” shows when the trigger request of the prescaled Algorithm is allowed to pass. Signals “algo cnt sim” and “prescaled algo cnt sim” show the number of this Algorithm’s trigger requests before and after the prescale logic. At the cursor point a factor  $47/19 \approx 2.4737$  is reached. With “algo cnt sim” reaching higher numbers, on average



the effective prescale factor gets closer and closer to the requested value of 2.48.  
The prescaler is reseted with B-Go "start" signal, at the begin of a run.

#### 5.5.4 Finor-masks

Every Algorithm passes a Final-OR-mask, which enables the Algorithm for Final-OR. The Final-OR-masks are implemented as registers (5.5) and loaded at the begin of a run.  
Configuration of Final-OR-masks is done by a "run settings key" (e.g. UGT\_RS\_KEYS => ugt\_rs\_algo\_finor\_mask\_empty/v4)

#### 5.5.5 Veto-masks

Every Algorithm passes a veto-mask, if at least one Algorithm, which is enabled by veto-mask, becomes high state, then Final-OR is disabled as long as the Algorithm is in high state. The veto-masks are implemented as registers (5.5) and loaded at the begin of a run.  
Configuration of veto-masks is done by a "run settings key" (e.g. UGT\_RS\_KEYS => ugt\_rs\_algo\_finor\_veto\_all\_zero/v2)

#### 5.5.6 Finor

The Final-OR-signal is a disjunction of all Algorithms passed the Final-OR-bx-masks. An Algorithm enabled by veto-mask, disables the Final-OR. This is done on the FINOR-AMC502 module.

### 5.5.7 Registers and memories

All registers and memories are 32 bits wide. (Definition of addresses is shown in Table 27.)

- Dual-port memories for the algo-bx-masks are implemented. For each Algorithm there is a mask bit at every bunch crossing of one orbit. Therefore in total memories of 4096 x 512 bits are implemented. Because of the 32 bit data interface, 16 memories each with a size of 4096 x 32 bits are instantiated.
- Read-only registers for the value of rate-counters (before and after prescalers, post-dead-time counters) are implemented, 512 registers, one for every Algorithm. Rate-counter value has 32 bits.
- Registers for prescale factor of the prescalers are implemented, 512 registers, one for every Algorithm. A prescale factor value has 24 bits.
- Registers for masks (Final-OR- and veto-masks) are implemented, 512 registers.
- One register for prescale factors set index is implemented. This register contains a value, which is unique for a given set of prescale factors. The content of this register is part of Readout-record.
- One register for command pulses is implemented. One bit of this register (bit 0) is used for "setting the request signal for updating prescale factors high", which enables, that the prescale factors and the prescale factor set index are loaded at the begin of a luminosity segment period. (Other bits are not defined yet.)
- One control register is implemented (the content has to be defined).
- 32 register for L1 Trigger Menu name for  $\mu$ GTL is implemented.
- 4 register for L1 Trigger Menu UUID for  $\mu$ GTL is implemented.
- One register for L1 Trigger Menu compiler version is implemented.
- One register for  $\mu$ FDL firmware version is implemented.
- One register for  $\mu$ GTL firmware (fixed code) version is implemented.

#### 5.5.7.1 Register map

The register map for  $\mu$ FDL has a base address of 0x90000000.

**Remark:**

Register "SVN revision number" is used for firmware version of Framework VHDL code (SVN revision number is obsolete).


Table 27:  $\mu$ FDL register map

Offset	Register name	Access	Description
0x90000000	Algo BX masks (0)	r/w	4096 memory addresses of algo-bx-masks for Algorithms 0-31.
0x90001000	Algo BX masks (1)	r/w	4096 memory addresses of algo-bx-masks for Algorithms 32-63.
...	...	...	...
0x9000F000	Algo BX masks (15)	r/w	4096 memory addresses of algo-bx-masks for Algorithms 480-511.
0x90010000	Rate counter before prescaler (5.1)	r	512 read-only registers for rate-counter values before prescalers.
0x90010200	Prescale factors (5.2)	r/w	512 registers for prescale factors.
0x90010400	Rate counter after prescaler (5.3)	r	512 read-only registers for rate-counter values after prescalers.
0x90010600	Rate counter post-dead-time (5.4)	r	512 read-only registers for post-dead-time rate-counter values.
0x90010800	Masks (5.5)	r/w	512 registers for Final-OR-masks and veto-masks. Bit 0 = Final-OR-mask, bit 1 = veto-mask.
0x90091880	Prescale factors set index (5.6)	r/w	Register for prescale factors set index.
0x900918C0	L1tm name	r	32 registers for L1 Trigger Menu name for $\mu$ GTL.
0x900918E0	L1tm uuid	r	4 registers for L1 Trigger Menu UUID for $\mu$ GTL.
0x900918E4	L1tm compiler version (5.7)	r	Register for L1 Trigger Menu compiler version.
0x900918E5	GTL FW version (5.8)	r	Register for firmware version of $\mu$ GTL VHDL code.
0x900918E6	FDL FW version (5.9)	r	Register for firmware version of $\mu$ FDL VHDL code.
0x900918E7	L1tm FW uuid	r	4 registers for L1 Trigger Menu FW UUID for $\mu$ GTL.
0x900918EB	SVN revision number	r	Register for firmware version of framework VHDL code.
0x900918EC	L1tm uuid hash	r	Register for L1 Trigger Menu UUID hash for $\mu$ GTL.

Table 27:  $\mu$ FDL register map


Offset	Register name	Access	Description
0x900918ED	L1tm FW uuid hash	r	Register for L1 Trigger Menu FW UUID hash for $\mu$ GTL.
0x900918EE	Module ID	r	Register for Module ID of L1 Trigger Menu.
0x90091900	Command Pulses (5.10)	r/w	Register for command pulses (request_update_factor_pulse).
0x90091980	Rate counter finor (5.11)	r	One read-only registers for finor rate-counter value.
0x90092200	L1A latency delay (5.12)	r/w	Register for L1A latency delay value (used for post-dead-time counter).
0x90093000	Rate counter L1A (5.13)	r	One read-only registers for L1A rate-counter value.
0x90094000	Rate counter veto (5.14)	r	One read-only registers for veto rate-counter value.
0x90095000	Current prescale set index (5.15)	r	Read-only register for prescale factors set index, which was "updated" with begin of current lumi-section ("prescale_factors_set_index_reg_updated(0)" in VHDL).
0x90095001	Previous prescale set index (5.16)	r	Read-only register for prescale factors set index, which was "updated" with begin of previous lumi-section for monitoring "prescale_factors_set_index_reg_updated(1)" in VHDL).
0x90096000	Calibration trigger gap (5.17)	r/w	Register for begin and end (in Bx) of calibration trigger gap.

## Register 5.1: RATE COUNTER BEFORE PRESCALER

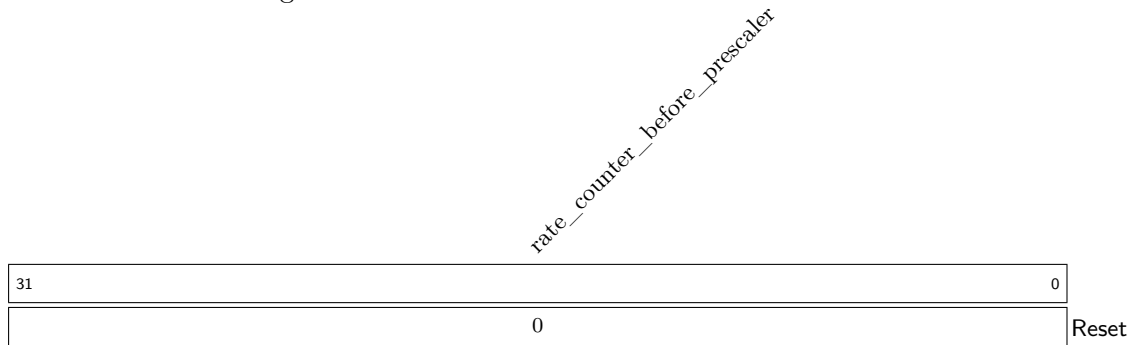


**rate\_counter\_before\_prescaler** Rate counter before prescaler. Counts the occurance of an algo (given by register address) in one luminosity segment.

## Register 5.2: PRESCALE FACTOR

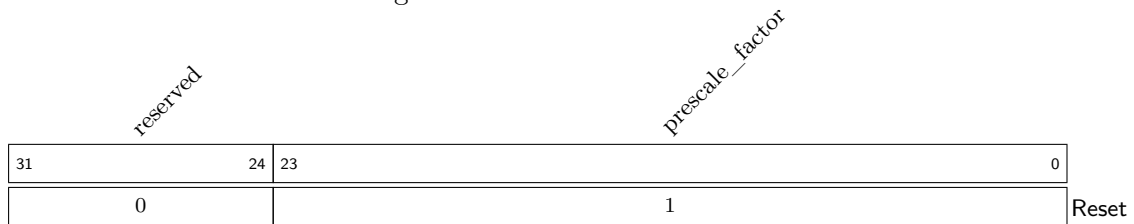

**prescale\_factor** Prescale factor of an algo (given by register address). Prescale factor = 0 means "disable alg". The factor has a precision of two digits after comma, therefore values in register are equal to factor \* 100 (e.g.: factor=1.00 => 100 [0x64]).

## Register 5.3: RATE COUNTER AFTER PRESCALER

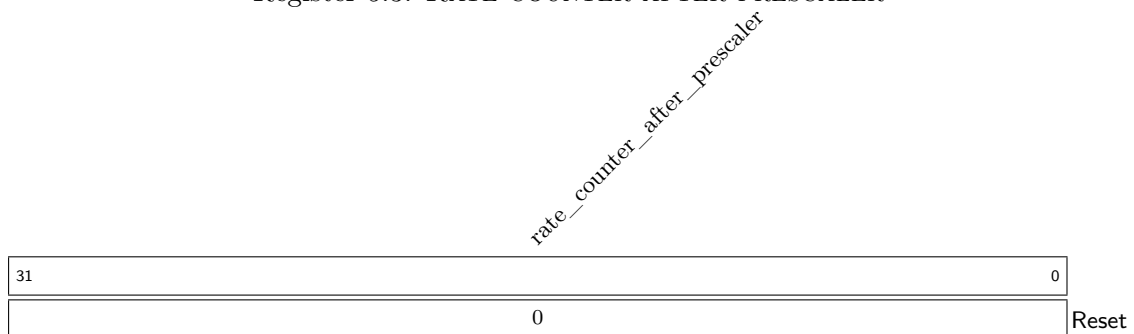

**rate\_counter\_after\_prescaler** Rate counter after prescaler. Counts the occurance of an algo (given by register address) in one luminosity segment.

Register 5.4: RATE COUNTER POST-DEAD-TIME

		<i>rate_counter_postdeadtime</i>	
31			0
0			Reset

**rate\_counter\_postdeadtime** Rate counter post-dead-time. Counts the occurrence of an algo (given by register address) and L1A at the same bx in one luminosity segment.

Register 5.5: MASKS

		<i>reserved</i>		<i>veto_mask</i> <i>fnor_mask</i>	
31			2	1	0
0			0	1	Reset

**veto\_mask** Selection of a veto (by an algo, given by register address) for veto-or.

**fnor\_mask** Selection of an algo (given by register address) for final-or.

Register 5.6: PRESCALE FACTORS SET INDEX

		<i>reserved</i>		<i>prescale_factor_set_index</i>	
31			8	7	0
0			0		Reset

**prescale\_factor\_set\_index** Index for a certain set of prescale factors.

Register 5.7: L1TM COMPILER VERSION

<i>reserved</i>								<i>major</i>								<i>minor</i>								<i>revision</i>								
31	24				23	16				15	8				7	0																
0								0								0								0								Reset

**major** Major version of VHDL producer.

**minor** Minor version of VHDL producer.

**revision** Revision version of VHDL producer.

Register 5.8: GTL FW VERSION

<i>reserved</i>								<i>major</i>								<i>minor</i>								<i>revision</i>								
31	24				23	16				15	8				7	0																
0								0								0								0								Reset

**major** Major version of GTL firmware.

**minor** Minor version of GTL firmware.

**revision** Revision version of GTL firmware.

Register 5.9: FDL FW VERSION


<i>reserved</i>								<i>major</i>								<i>minor</i>								<i>revision</i>								
31	24				23	16				15	8				7	0																
0								0								0								0								Reset

**major** Major version of FDL firmware.

**minor** Minor version of FDL firmware.


**revision** Revision version of FDL firmware.

## Register 5.10: COMMAND PULSES REGISTER

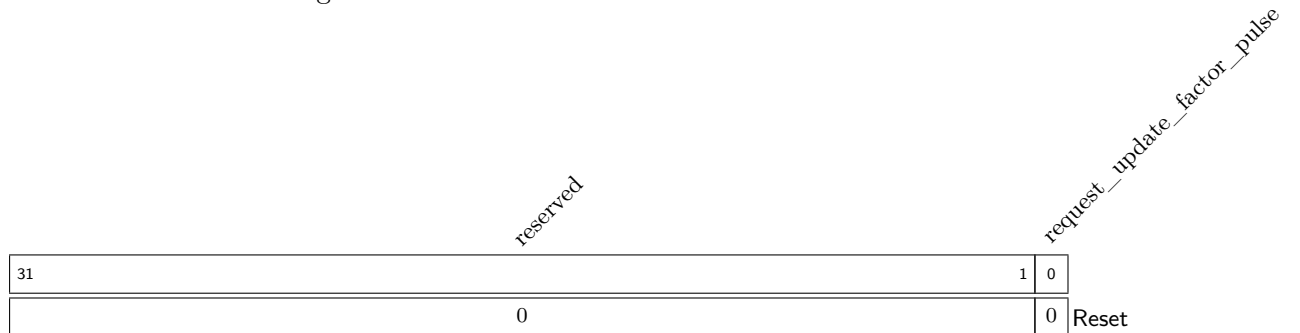


**request\_update\_factor\_pulse** A sequence of applying 1 followed by 0 generates the "request update factors pulse". (Updating is done at the next "begin of luminosity segment".)

## Register 5.11: RATE COUNTER FINOR

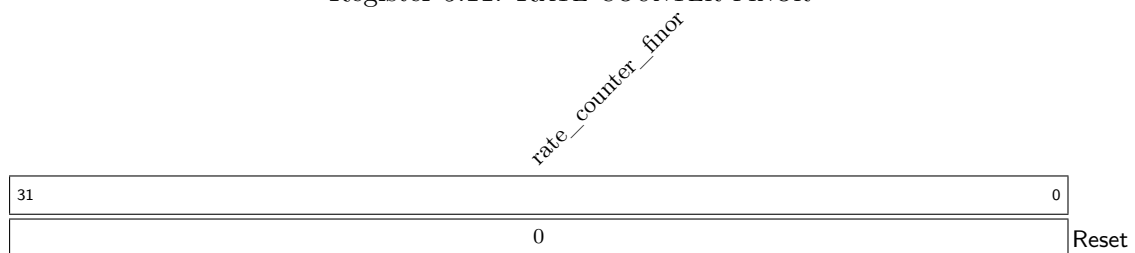

**rate\_counter\_finor** Rate counter finor. Counts the occurance of finor in one luminosity segment.

## Register 5.12: L1A LATENCY DELAY

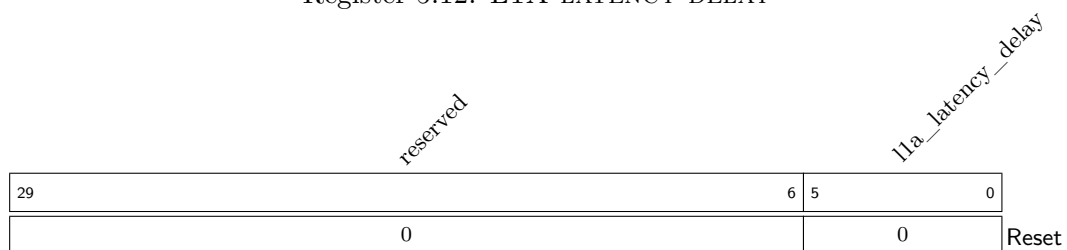

**l1a\_latency\_delay** L1A latency delay value (used for post-dead-time counter).



## Register 5.13: RATE COUNTER L1A

rate_counter_l1a	
31	0
0	
Reset	

**rate\_counter\_l1a** Rate counter L1A. Counts the occurance of L1A in one luminosity segment.

## Register 5.14: RATE COUNTER VETO

rate_counter_veto	
31	0
0	
Reset	


**rate\_counter\_veto** Rate counter veto. Counts the occurance of veto in one luminosity segment.

## Register 5.15: CURRENT PRESCALE SET INDEX

reserved		prescale_factor_set_index_updated	
31	8	7	0
0		0	
		Reset	


**prescale\_factor\_set\_index\_updated** Index for a certain set of prescale factors, which was "updated" with begin of current lumi-section.

Register 5.16: PREVIOUS PRESCALE SET INDEX

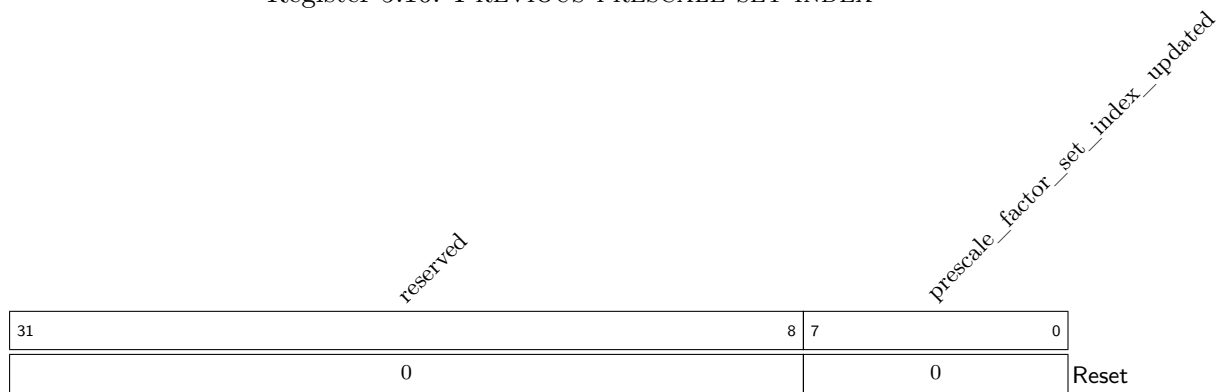

**prescale\_factor\_set\_index\_updated** Index for a certain set of prescale factors, which was "updated" with begin of previous lumi-section.

Register 5.17: CALIBRATION TRIGGER GAP

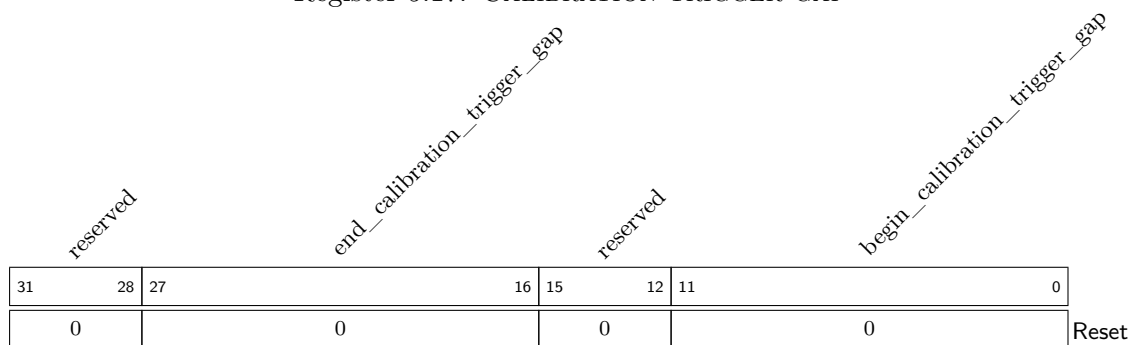

**begin\_calibration\_trigger\_gap** Begin of calibration trigger gap (in Bx).

**end\_calibration\_trigger\_gap** End of calibration trigger gap (in Bx).

## 6 Readout process

Data for readout are collected in '[output\\_mux.vhd](#)' (part of '[frame.vhd](#)').

The readout contains:

- algorithm outputs of  $\mu$ GTL (`algo_after_gtLogic`)
- algorithms after bunch crossing mask (`algo_after_bxmask`)
- algorithms after prescale logic (`algo_after_prescaler`)
- finor and veto bits
- prescale factor index
- bunch counters
- hash values for menu name and firmware UUID

For details see [7.6](#).

The readout process of Global Trigger data is done via GTH transmitter of MP7 to AMC13.

## 7 Appendices

### 7.1 Description of simulation, synthesis and hardware tests

Workflow for simulation and synthesis of firmware is described in [README](#) file.

List of useful TDF routines and commands for hardware tests:

- Check crate status  

```
$ tdf run crate_status
```
- Enable TTC signals on AMC13 for all MP7 modules  

```
$ tdf run ttc_enable
```
- Check lock of BC0 and LHC clock  

```
$ tdf unittest <module> default
```
- Reset module  

```
$ tdf mp7butler reset <module> -clksrc external -clkcfg default-ext
```
- Load firmware to scansd card on all MP7 modules [and load it into FPGAs]  

```
$ tdf run uploadfw_gt <tar file path> [-rebootfpga]
```
- Load firmware from scansd card into FPGAs  

```
$ tdf run loadfw_gt <fw build nr> <nr modules>
```
- Compare hardware results with test vector pattern (for a certain firmware build)  

```
$ tdf run multiboard_function_test -h
```
- Setup links (GTHs)  

```
$ tdf mp7butler rxmgts <module> -e <links>
```
- Align links (GTHs)  

```
$ tdf mp7butler rxalign <module> -e <links> [-to-bx <alignment point>]
```
- Check minipods  

```
$ tdf mp7butler minipods <module>
```
- ... (other routines are available in /nfshome0/ugtdev/software/tdf/etc/routines)

#### 7.1.1 Handling of timing errors in synthesis

Sometimes synthesis finish with timing errors on modules and no bit files are generated for those modules. Most of the time the errors are low or not relevant and can be ignored. In this case generation of a bit file could be done on the platform of synthesis with the following command in an environment where vivado is running (see [README](#)):

- Generate bit file

```
$ vivado -mode batch -source <local path to mp7_ugt_legacy>/  
scripts/vivado_write_bitstream.tcl -tclargs  
<path to synth dir> <module number>
```

## 7.2 Configuration of GTHs

### 7.3 GTH I/Os

The FPGA on MP7 board receives and transmits data via GTH transceivers. In Table ?? configuration of GTHs [6] for Global Trigger is shown<sup>3</sup>.

Table 28 contains the GTH input connections from MP7 MTP front connectors<sup>4</sup>:

Table 28: GTH input connections

Objects	Link	MGT_BANK	GTH ch.	RX	TX
RX1/1	rx3/1	X1Y35	0x00	1	muon
RX1/2	rx3/2	X1Y34	0x02	2	muon
RX1/3	rx3/3	X1Y33	0x04	3	muon
RX1/4	rx3/4	X1Y32	0x06	4	muon
RX1/5	rx3/5	X1Y31	0x08	5	eg
RX1/6	rx3/6	X1Y30	0x0A	6	eg
RX1/7	rx3/7	X1Y29	0x0C	7	jet
RX1/8	rx3/8	X1Y28	0x0E	8	jet
RX1/9	rx3/9	X1Y27	0x10	9	tau
RX1/10	rx3/10	X1Y26	0x12	10	tau
RX1/11	rx3/11	X1Y25	0x14	11	esums
RX1/12	rx3/12	X1Y24	0x16	12	free
RX1/13	rx4/1	X1Y23	0x18	13	external conditions
RX1/14	rx4/2	X1Y22	0x1A	14	external conditions
RX1/15	rx4/3	X1Y21	0x1C	15	external conditions
RX1/16	rx4/4	X1Y20	0x1E	16	external conditions
RX1/17	rx4/5	X1Y19	0x20	17	free
RX1/18	rx4/6	X1Y18	0x22	18	free
RX1/19	rx4/7	X1Y17	0x24	19	free
RX1/20	rx4/8	X1Y16	0x26	20	free
RX1/21	rx4/9	X1Y15	0x28	21	free
RX1/22	rx4/10	X1Y14	0x2A	22	free
RX1/23	rx4/11	X1Y13	0x2C	23	free
RX1/24	rx4/12	X1Y12	0x2E	24	free
RX1/25	rx5/1	X1Y11	0x30	nc	-
RX1/26	rx5/2	X1Y10	0x32	nc	-

---

<sup>3</sup>"ch." means "channel", "RX" means "receiver", "TX" means "transmitter"

<sup>4</sup>"ch." means "channel", "pp conn." means "optical patch panel connector number"

Table 28: GTH input connections

Objects	Link	MGT_BANK	GTH ch.	RX	TX
RX1/27	rx5/3	X1Y09	0x34	nc	-
RX1/28	rx5/4	X1Y08	0x36	nc	-
RX1/29	rx5/5	X1Y07	0x38	nc	-
RX1/30	rx5/6	X1Y06	0x3A	nc	-
RX1/31	rx5/7	X1Y05	0x3C	nc	-
RX1/32	rx5/8	X1Y04	0x3E	nc	-
RX1/33	rx5/9	X1Y03	0x40	nc	-
RX1/34	rx5/10	X1Y02	0x42	nc	-
RX1/35	rx5/11	X1Y01	0x44	nc	-
RX1/36	rx5/12	X1Y00	0x46	nc	-
RX2/1	rx0/1	X0Y35	0x48	nc	-
RX2/2	rx0/2	X0Y34	0x4A	nc	-
RX2/3	rx0/3	X0Y33	0x4C	nc	-
RX2/4	rx0/4	X0Y32	0x4E	nc	-
RX2/5	rx0/5	X0Y31	0x50	nc	-
RX2/6	rx0/6	X0Y30	0x52	nc	-
RX2/7	rx0/7	X0Y29	0x54	nc	-
RX2/8	rx0/8	X0Y28	0x56	nc	-
RX2/9	rx0/9	X0Y27	0x58	nc	-
RX2/10	rx0/10	X0Y26	0x5A	nc	-
RX2/11	rx0/11	X0Y25	0x5C	nc	-
RX2/12	rx0/12	X0Y24	0x5E	nc	-
RX2/13	rx1/1	X0Y23	0x60	nc	-
RX2/14	rx1/2	X0Y22	0x62	nc	-
RX2/15	rx1/3	X0Y21	0x64	nc	-
RX2/16	rx1/4	X0Y20	0x66	nc	-
RX2/17	rx1/5	X0Y19	0x68	nc	-
RX2/18	rx1/6	X0Y18	0x6A	nc	-
RX2/19	rx1/7	X0Y17	0x6C	nc	-
RX2/20	rx1/8	X0Y16	0x6E	nc	-
RX2/21	rx1/9	X0Y15	0x70	nc	-
RX2/22	rx1/10	X0Y14	0x72	nc	-
RX2/23	rx1/11	X0Y13	0x74	nc	-
RX2/24	rx1/12	X0Y12	0x76	nc	-
RX2/25	rx2/1	X0Y11	0x78	nc	-

Table 28: GTH input connections

<b>Objects</b>	<b>Link</b>	<b>MGT_BANK</b>	<b>GTH ch.</b>	<b>RX</b>	<b>TX</b>
RX2/26	rx2/2	X0Y10	0x7A	nc	-
RX2/27	rx2/3	X0Y09	0x7C	nc	-
RX2/28	rx2/4	X0Y08	0x7E	nc	-
RX2/29	rx2/5	X0Y07	0x80	nc	-
RX2/30	rx2/6	X0Y06	0x82	nc	-
RX2/31	rx2/7	X0Y05	0x84	nc	-
RX2/32	rx2/8	X0Y04	0x86	nc	-
RX2/33	rx2/9	X0Y03	0x88	nc	-
RX2/34	rx2/10	X0Y02	0x8A	nc	-
RX2/35	rx2/11	X0Y01	0x8C	nc	-
RX2/36	rx2/12	X0Y00	0x8E	nc	-



### 7.3.1 GTH output connections

Table 29 contains the GTH output connections to MP7 MTP front connectors:

Table 29: GTH output connections

MTP48	minipod	GTH ch.	MP7 ch.	pp conn.	data
TX1/1	tx3/1	X1Y35	0x01	nc	-
TX1/2	tx3/2	X1Y34	0x03	nc	-
TX1/3	tx3/3	X1Y33	0x05	nc	-
TX1/4	tx3/4	X1Y32	0x07	nc	-
TX1/5	tx3/5	X1Y31	0x09	nc	-
TX1/6	tx3/6	X1Y30	0x0b	nc	-
TX1/7	tx3/7	X1Y29	0x0d	nc	-
TX1/8	tx3/8	X1Y28	0x0f	nc	-
TX1/9	tx3/9	X1Y27	0x11	nc	-
TX1/10	tx3/10	X1Y26	0x13	nc	-
TX1/11	tx3/11	X1Y25	0x15	nc	-
TX1/12	tx3/12	X1Y24	0x17	nc	-
TX1/13	tx4/1	X1Y23	0x19	nc	-
TX1/14	tx4/2	X1Y22	0x1b	nc	-
TX1/15	tx4/3	X1Y21	0x1d	nc	-
TX1/16	tx4/4	X1Y20	0x1f	nc	-
TX1/17	tx4/5	X1Y19	0x21	nc	readout (AMC13)
TX1/18	tx4/6	X1Y18	0x23	nc	readout (AMC13)
TX1/19	tx4/7	X1Y17	0x25	nc	readout (AMC13)
TX1/20	tx4/8	X1Y16	0x27	nc	readout (AMC13)
TX1/21	tx4/9	X1Y15	0x29	nc	readout (AMC13)
TX1/22	tx4/10	X1Y14	0x2b	nc	readout (AMC13)
TX1/23	tx4/11	X1Y13	0x2d	nc	readout (AMC13)
TX1/24	tx4/12	X1Y12	0x2f	nc	readout (AMC13)
TX1/25	tx5/1	X1Y11	0x31	nc	readout (AMC13)
TX1/26	tx5/2	X1Y10	0x33	nc	readout (AMC13)
TX1/27	tx5/3	X1Y09	0x35	nc	-
TX1/28	tx5/4	X1Y08	0x37	nc	-
TX1/29	tx5/5	X1Y07	0x39	nc	-
TX1/30	tx5/6	X1Y06	0x3b	nc	-
TX1/31	tx5/7	X1Y05	0x3d	nc	-
TX1/32	tx5/8	X1Y04	0x3f	nc	-

Table 29: GTH output connections

<b>MTP48</b>	<b>minipod</b>	<b>GTH ch.</b>	<b>MP7 ch.</b>	<b>pp conn.</b>	<b>data</b>
TX1/33	tx5/9	X1Y03	0x41	nc	-
TX1/34	tx5/10	X1Y02	0x43	nc	-
TX1/35	tx5/11	X1Y01	0x45	nc	-
TX1/36	tx5/12	X1Y00	0x47	nc	-
TX2/1	tx0/1	X0Y35	0x49	nc	-
TX2/2	tx0/2	X0Y34	0x4b	nc	-
TX2/3	tx0/3	X0Y33	0x4d	nc	-
TX2/4	tx0/4	X0Y32	0x4f	nc	-
TX2/5	tx0/5	X0Y31	0x51	nc	-
TX2/6	tx0/6	X0Y30	0x53	nc	-
TX2/7	tx0/7	X0Y29	0x55	nc	-
TX2/8	tx0/8	X0Y28	0x57	nc	-
TX2/9	tx0/9	X0Y27	0x59	nc	-
TX2/10	tx0/10	X0Y26	0x5b	nc	-
TX2/11	tx0/11	X0Y25	0x5d	nc	-
TX2/12	tx0/12	X0Y24	0x5f	nc	-
TX2/13	tx1/1	X0Y23	0x61	nc	-
TX2/14	tx1/2	X0Y22	0x63	nc	-
TX2/15	tx1/3	X0Y21	0x65	nc	-
TX2/16	tx1/4	X0Y20	0x67	nc	-
TX2/17	tx1/5	X0Y19	0x69	nc	-
TX2/18	tx1/6	X0Y18	0x6b	nc	-
TX2/19	tx1/7	X0Y17	0x6d	nc	-
TX2/20	tx1/8	X0Y16	0x6f	nc	-
TX2/21	tx1/9	X0Y15	0x71	nc	-
TX2/22	tx1/10	X0Y14	0x73	nc	-
TX2/23	tx1/11	X0Y13	0x75	nc	-
TX2/24	tx1/12	X0Y12	0x77	nc	-
TX2/25	tx2/1	X0Y11	0x79	nc	-
TX2/26	tx2/2	X0Y10	0x7b	nc	-
TX2/27	tx2/3	X0Y09	0x7d	nc	-
TX2/28	tx2/4	X0Y08	0x7f	nc	-
TX2/29	tx2/5	X0Y07	0x81	nc	-
TX2/30	tx2/6	X0Y06	0x83	nc	-
TX2/31	tx2/7	X0Y05	0x85	nc	-

Table 29: GTH output connections

<b>MTP48</b>	<b>minipod</b>	<b>GTH ch.</b>	<b>MP7 ch.</b>	<b>pp conn.</b>	<b>data</b>
TX2/32	tx2/8	X0Y04	0x87	nc	-
TX2/33	tx2/9	X0Y03	0x89	nc	-
TX2/34	tx2/10	X0Y02	0x8b	nc	-
TX2/35	tx2/11	X0Y01	0x8d	nc	-
TX2/36	tx2/12	X0Y00	0x8f	nc	-

## 7.4 Configuration of GTHs

The FPGA on MP7 board receives and transmits data via GTH transceivers. In Table 30 configuration of GTHs [6] for Global Trigger is shown<sup>5</sup>.

Table 30: Configuration of GTHs

Objects	Link	MGT	GTHE2	RX	TX
MU0..MU1	0	118	X1Y35	x	
MU2..MU3	1	118	X1Y34	x	
MU4..MU5	2	118	X1Y33	x	
MU6..MU7	3	118	X1Y32	x	
EG0..EG5	4	117	X1Y31	x	
EG6..EG11	5	117	X1Y30	x	
JET0..JET5	6	117	X1Y29	x	
JET6..JET11	7	117	X1Y28	x	
TAU0..TAU5	8	116	X1Y27	x	
TAU6..TAU11	9	116	X1Y26	x	
ESUMS	10	116	X1Y25	x	
free	11	116	X1Y24	x	
EXT_COND[0:63]	12	115	X1Y23	x	
EXT_COND[64:127]	13	115	X1Y22	x	
EXT_COND[128:191]	14	115	X1Y21	x	
EXT_COND[192:255]	15	115	X1Y20	x	
free	16	114	X1Y19	x	
free	17	114	X1Y18	x	
free	18	114	X1Y17	x	
free	19	114	X1Y16	x	
free	20	113	X1Y15	x	
free	21	113	X1Y14	x	
free	22	113	X1Y13	x	
free	23	113	X1Y12	x	
ALGO_AFTER_GTLOGIC[0:191]	16	114	X1Y19		x
ALGO_AFTER_GTLOGIC[192:383]	17	114	X1Y18		x
ALGO_AFTER_GTLOGIC[383:511]	18	114	X1Y17		x
ALGO_AFTER_BXMASK[0:191]	19	114	X1Y16		x
ALGO_AFTER_BXMASK[192:383]	20	113	X1Y15		x

<sup>5</sup>"MGT" means "MGT\_BANK", "GTHE2" means "GTHE2\_CHANNEL", "RX" means "GTH receiver", "TX" means "GTH transmitter"

Table 30: Configuration of GTHs

<b>Objects</b>	<b>Link</b>	<b>MGT</b>	<b>GTHE2</b>	<b>RX</b>	<b>TX</b>
ALGO_AFTER_BXMASK[383:511]	21	113	X1Y14		x
ALGO_AFTER_BXMASK[0:191]	22	113	X1Y13		x
ALGO_AFTER_BXMASK[192:383]	23	113	X1Y12		x
ALGO_AFTER_BXMASK[383:511]	24	112	X1Y11		x
Bunchcounters, ...	25	112	X1Y10		x

## 7.5 Configuration of optical input links

Figure 16 shows the configuration of optical links to Global Trigger.

Links 0..3 contains muon data from GMT, links 4..11 data from GCT and links 12..15 external conditions from AMC502 boards.

Frame/Link	Link 0 [mp7 ch 0x00]	Link 1 [mp7 ch 0x02]	Link 2 [mp7 ch 0x04]	Link 3 [mp7 ch 0x06]	Link 4 [mp7 ch 0x08]	Link 5 [mp7 ch 0x0a]	Link 6 [mp7 ch 0x0c]	Link 7 [mp7 ch 0x0e]	Link 8 [mp7 ch 0x10]	Link 9 [mp7 ch 0x12]	Link 10 [mp7 ch 0x14]	Link 11 [mp7 ch 0x16]	Link 12 [mp7 ch 0x18]	Link 13 [mp7 ch 0x1a]	Link 14 [mp7 ch 0x1c]	Link 15 [mp7 ch 0x1e]
Frame 0	free	free	free	free	EG0	EG6	JET0	JET6	TAU0	TAU6	MBP0 & ETTEM & ETT (No HF)	free	E(31:0)	E(95:64)	E(159:128)	E(223:192)
Frame 1	MU0 eta raw on bits 21:13 & MU1 eta raw on bits 30:22	MU2 eta raw on bits 21:13 & MU3 eta raw on bits 30:22	MU4 eta raw on bits 21:13 & MU5 eta raw on bits 30:22	MU6 eta raw on bits 21:13 & MU7 eta raw on bits 30:22	EG1	EG7	JET1	JET7	TAU1	TAU7	MBM0 & TOWERCNT & HTT (No HF)	free	E(63:32)	E(127:96)	E(191:160)	E(255:224)
Frame 2	MU0(31:0)	MU2(31:0)	MU4(31:0)	MU6(31:0)	EG2	EG8	JET2	JET8	TAU2	TAU8	MBP1 & ETmiss (No HF) & ASYM	free	free	free	free	free
Frame 3	MU0(63:32)	MU2(63:32)	MU4(63:32)	MU6(63:32)	EG3	EG9	JET3	JET9	TAU3	TAU9	MBM1 & HTmiss (No HF) & ASYM	free	free	free	free	free
Frame 4	MU1(31:0)	MU3(31:0)	MU5(31:0)	MU7(31:0)	EG4	EG10	JET4	JET10	TAU4	TAU10	ETmiss (With HF) & ASYM & CENT	free	free	free	free	free
Frame 5	MU1(63:32)	MU3(63:32)	MU5(63:32)	MU7(63:32)	EG5	EG11	JET5	JET11	TAU5	TAU11	[bits 19..0 reserved for: HTmiss (With HF)] & ASYM & CENT	free	free	free	free	free

Figure 16: Optical link inputs to Global Trigger

## 7.6 Configuration of links to AMC13 (readout)

Figure 17 shows the configuration of links from Global Trigger to AMC13 (readout).

Links 16..24 contains algo data (after GTL, after BX mask and after prescalers), link 25 contains several counter values.

	#1	#2	#3	#4	#5	#6	#7	#8	#9	#10
	Lane 16 [mp7 ch 0x21]	Lane 17 [mp7 ch 0x23]	Lane 18 [mp7 ch 0x25]	Lane 19 [mp7 ch 0x27]	Lane 20 [mp7 ch 0x29]	Lane 21 [mp7 ch 0x2b]	Lane 22 [mp7 ch 0x2d]	Lane 23 [mp7 ch 0x2f]	Lane 24 [mp7 ch 0x31]	Lane 25 [mp7 ch 0x33]
Frame 0	algo_after_gtLogic 0-31	algo_after_gtLogic 192-223	algo_after_gtLogic 384-415	algo_after_bxmask 0-31	algo_after_bxmask 192-223	algo_after_bxmask 384-415	algo_after_prescaler 0-31	algo_after_prescaler 192-223	algo_after_prescaler 384-415	tcn bunch counter (on bits 11..0)
Frame 1	algo_after_gtLogic 32-63	algo_after_gtLogic 224-255	algo_after_gtLogic 416-447	algo_after_bxmask 32-63	algo_after_bxmask 224-255	algo_after_bxmask 416-447	algo_after_prescaler 32-63	algo_after_prescaler 224-255	algo_after_prescaler 416-447	mp7 tic bunch counter (on bits 11..0)
Frame 2	algo_after_gtLogic 64-95	algo_after_gtLogic 256-287	algo_after_gtLogic 448-479	algo_after_bxmask 64-95	algo_after_bxmask 256-287	algo_after_bxmask 448-479	algo_after_prescaler 64-95	algo_after_prescaler 256-287	algo_after_prescaler 448-479	tcn bunch counter for FDL (on bits 11..0)
Frame 3	algo_after_gtLogic 96-127	algo_after_gtLogic 288-319	algo_after_gtLogic 480-511	algo_after_bxmask 96-127	algo_after_bxmask 288-319	algo_after_bxmask 480-511	algo_after_prescaler 96-127	algo_after_prescaler 288-319	algo_after_prescaler 480-511	[coming soon for scouting: orbit counter 47..32 (on bits 15..0)]
Frame 4	algo_after_gtLogic 128-159	algo_after_gtLogic 320-351	32bit hash of menu name	algo_after_bxmask 128-159	algo_after_bxmask 320-351	spare	algo_after_prescaler 128-159	algo_after_prescaler 320-351	veto + finor [0]	[coming soon for scouting: orbit counter 31..0]
Frame 5	algo_after_gtLogic 160-191	algo_after_gtLogic 352-383	32bit hash of firmware uuid	algo_after_bxmask 160-191	algo_after_bxmask 352-383	spare	algo_after_prescaler 160-191	algo_after_prescaler 352-383	prescale_factor_index [1]	free

[0]: In this field, the finor and veto information is stored (1 bit each): "00000000000000000000" & "00000000" & local\_veto & "00000000" & local\_finor

The local\_finor & local\_veto are the values from the local MP7 uGT module.

[1]: In this field, the 8 bit prescale factor index is stored: "00000000000000000000" + prescale\_factor\_index.

Algorithm results:

- algo\_after\_gtLogic: algorithm result after applying the criteria from uGT algorithm expression
  - algo\_after\_bxmask: algorithm result after applying the mask of BX number in an orbit - in hardware, the mask is applied on the algo\_after\_gtLogic
  - algo\_after\_prescaler: algorithm result after applying the prescale factor - in hardware, prescaling is done after applying the BX in orbit mask.
- This is the final algorithm result, used to compute the finor (together with the veto masks)

Figure 17: Outputs from Global Trigger to AMC13

## 7.7 Optical patch panel

The following Table 31 contains the optical patch panel ("uGT Patchpanel #1") connections for production crate<sup>6</sup>:

Table 31: uGT Patchpanel #1

source	fibre	data	LC	slot
uGMT	1	MU[0..1]	1/a	1..2
uGMT	2	MU[2..3]	1/b	1..2
uGMT	3	MU[4..5]	1/c	1..2
uGMT	4	MU[6..7]	1/d	1..2
demux	4b	EG[0..5]	2/a	1..2
demux	4a	EG[6..11]	2/b	1..2
demux	3b	JET[0..5]	2/c	1..2
demux	3a	JET[6..11]	2/d	1..2
demux	2b	TAU[0..5]	3/a	1..2
demux	2a	TAU[6..11]	3/b	1..2
demux	1b	Esums	3/c	1..2
demux	1a	free	3/d	1..2
ext_cond		ExtCond[0..63]	4/a	1..2
ext_cond		ExtCond[64..127]	4/b	1..2
ext_cond		ExtCond[128..191]	4/c	1..2
ext_cond		ExtCond[192..255]	4/d	1..2
-	-	free	5/a	1..2
-	-	free	5/b	1..2
-	-	free	5/c	1..2
-	-	free	5/d	1..2
-	-	free	6/a	1..2
-	-	free	6/b	1..2
-	-	free	6/c	1..2
-	-	free	6/d	1..2
uGMT	5	MU[0..1]	7/a	3..4
uGMT	6	MU[2..3]	7/b	3..4
uGMT	7	MU[4..5]	7/c	3..4
uGMT	8	MU[6..7]	7/d	3..4

---

<sup>6</sup>"source" means "source of MTP48 cable to uGT", "uGMT" means "microTCA Global Muon Trigger module", "demux" means "Calo-Layer2 demux module", "ext\_cond" means "External condition AMC502 module", "fibre" means "fibre number of a MTP48 cable", "LC" means "LC number of optical patch panel", "slot" means "destination MP7 slot number of microTCA crate".

Table 31: uGT Patchpanel #1

source	fibre	data	LC	slot
demux	12b	EG[0..5]	8/a	3..4
demux	12a	EG[6..11]	8/b	3..4
demux	11b	JET[0..5]	8/c	3..4
demux	11a	JET[6..11]	8/d	3..4
demux	10b	TAU[0..5]	9/a	3..4
demux	10a	TAU[6..11]	9/b	3..4
demux	9b	Esums	9/c	3..4
demux	9a	free	9/d	3..4
ext_cond		ExtCond[0..63]	10/a	3..4
ext_cond		ExtCond[64..127]	10/b	3..4
ext_cond		ExtCond[128..191]	10/c	3..4
ext_cond		ExtCond[192..255]	10/d	3..4
-	-	free	11/a	3..4
-	-	free	11/b	3..4
-	-	free	11/c	3..4
-	-	free	11/d	3..4
-	-	free	12/a	3..4
-	-	free	12/b	3..4
-	-	free	12/c	3..4
-	-	free	12/d	3..4
uGMT	9	MU[0..1]	13/a	5..6
uGMT	10	MU[2..3]	13/b	5..6
uGMT	11	MU[4..5]	13/c	5..6
uGMT	12	MU[6..7]	13/d	5..6
demux	8b	EG[0..5]	14/a	5..6
demux	8a	EG[6..11]	14/b	5..6
demux	7b	JET[0..5]	14/c	5..6
demux	7a	JET[6..11]	14/d	5..6
demux	18b	TAU[0..5]	15/a	5..6
demux	18a	TAU[6..11]	15/b	5..6
demux	17b	Esums	15/c	5..6
demux	17a	free	15/d	5..6
ext_cond		ExtCond[0..63]	16/a	5..6
ext_cond		ExtCond[64..127]	16/b	5..6
ext_cond		ExtCond[128..191]	16/c	5..6



Table 31: uGT Patchpanel #1

source	fibre	data	LC	slot
ext_cond		ExtCond[192..255]	16/d	5..6
-	-	free	17/a	5..6
-	-	free	17/b	5..6
-	-	free	17/c	5..6
-	-	free	17/d	5..6
-	-	free	18/a	5..6
-	-	free	18/b	5..6
-	-	free	18/c	5..6
-	-	free	18/d	5..6

The following Table 32 contains the optical patch panel ("uGT Patchpanel #3") connections for test crate<sup>6</sup>:

Table 32: uGT Patchpanel #3

source	fibre	data	LC	slot
uGMT	13	MU[0..1]	1/a	5..6
uGMT	14	MU[2..3]	1/b	5..6
uGMT	15	MU[4..5]	1/c	5..6
uGMT	16	MU[6..7]	1/d	5..6
demux	16b	EG[0..5]	2/a	5..6
demux	16a	EG[6..11]	2/b	5..6
demux	15b	JET[0..5]	2/c	5..6
demux	15a	JET[6..11]	2/d	5..6
demux	14b	TAU[0..5]	3/a	5..6
demux	14a	TAU[6..11]	3/b	5..6
demux	13b	Esums	3/c	5..6
demux	13a	free	3/d	5..6
ext_cond		ExtCond[0..63]	4/a	5..6
ext_cond		ExtCond[64..127]	4/b	5..6
ext_cond		ExtCond[128..191]	4/c	5..6
ext_cond		ExtCond[192..255]	4/d	5..6
-	-	free	5/a	5..6
-	-	free	5/b	5..6
-	-	free	5/c	5..6
-	-	free	5/d	5..6

Table 32: uGT Patchpanel #3

source	fibre	data	LC	slot
-	-	free	6/a	5..6
-	-	free	6/b	5..6
-	-	free	6/c	5..6
-	-	free	6/d	5..6
uGMT	17	MU[0..1]	7/a	1..2
uGMT	18	MU[2..3]	7/b	1..2
uGMT	19	MU[4..5]	7/c	1..2
uGMT	20	MU[6..7]	7/d	1..2
demux	26	EG[0..5]	8/a	1..2
demux	25	EG[6..11]	8/b	1..2
demux	28	JET[0..5]	8/c	1..2
demux	27	JET[6..11]	8/d	1..2
demux	30	TAU[0..5]	9/a	1..2
demux	29	TAU[6..11]	9/b	1..2
demux	32	Esums	9/c	1..2
demux	31	free	9/d	1..2
ext_cond		ExtCond[0..63]	10/a	1..2
ext_cond		ExtCond[64..127]	10/b	1..2
ext_cond		ExtCond[128..191]	10/c	1..2
ext_cond		ExtCond[192..255]	10/d	1..2
-	-	free	11/a	1..2
-	-	free	11/b	1..2
-	-	free	11/c	1..2
-	-	free	11/d	1..2
-	-	free	12/a	1..2
-	-	free	12/b	1..2
-	-	free	12/c	1..2
-	-	free	12/d	1..2
uGMT	21	MU[0..1]	13/a	3..4
uGMT	22	MU[2..3]	13/b	3..4
uGMT	23	MU[4..5]	13/c	3..4
uGMT	24	MU[6..7]	13/d	3..4
demux	34	EG[0..5]	14/a	3..4
demux	33	EG[6..11]	14/b	3..4

Table 32: uGT Patchpanel #3

source	fibre	data	LC	slot
demux	35	JET[0..5]	14/c	3..4
demux	36	JET[6..11]	14/d	3..4
demux	14	TAU[0..5]	15/a	3..4
demux	13	TAU[6..11]	15/b	3..4
demux	16	Esums	15/c	3..4
demux	15	free	15/d	3..4
ext_cond		ExtCond[0..63]	16/a	3..4
ext_cond		ExtCond[64..127]	16/b	3..4
ext_cond		ExtCond[128..191]	16/c	3..4
ext_cond		ExtCond[192..255]	16/d	3..4
-	-	free	17/a	3..4
-	-	free	17/b	3..4
-	-	free	17/c	3..4
-	-	free	17/d	3..4
-	-	free	18/a	3..4
-	-	free	18/b	3..4
-	-	free	18/c	3..4
-	-	free	18/d	3..4

Figure 18 shows the connections on Global Trigger patch panel for optical links.

Fiber cabling 28.2.2022

uGT Patchpanel #1:

for production crate

Mu0	EGO	Hau0	ExtCond0	...	Mu0	EGO	Hau0	ExtCond0	...	Mu0	EGO	Hau0	ExtCond0	...
Mu1	EGO	Hau1	ExtCond1	...	Mu1	EGO	Hau1	ExtCond1	...	Mu1	EGO	Hau1	ExtCond1	...
Mu2	Ext0	Ext0	ExtCond2	...	Mu2	Ext0	Ext0	ExtCond2	...	Mu2	Ext0	Ext0	ExtCond2	...
Mu3	Ext1	Ext1	ExtCond3	...	Mu3	Ext1	Ext1	ExtCond3	...	Mu3	Ext1	Ext1	ExtCond3	...

MP7 slot1 & slot2  
(modules 0 & 1)

from uGT	from device	from ExtCond boards
0	1.0	1.0
1	1.1	1.1
2	1.2	1.2
3	1.3	1.3
4	1.4	1.4

Note that uGT is connected by plastic clip & yellow strain relief

MP7 slot3 & slot4  
(modules 2 & 3)

from uGT	from device	from ExtCond boards
5	1.5	1.5
6	1.6	1.6
7	1.7	1.7
8	1.8	1.8
9	1.9	1.9

Note that uGT is connected by plastic clip & yellow strain relief

MP7 slot5 & slot6  
(modules 4 & 5)

from uGT	from device	from ExtCond boards
10	2.0	2.0
11	2.1	2.1
12	2.2	2.2
13	2.3	2.3
14	2.4	2.4

Note that uGT is connected by plastic clip & yellow strain relief

Fiber inputs @ uGT

uGT Patchpanel #3:

for test crate

Mu0	EGO	Hau0	ExtCond0	...	Mu0	EGO	Hau0	ExtCond0	...	Mu0	EGO	Hau0	ExtCond0	...
Mu1	EGO	Hau1	ExtCond1	...	Mu1	EGO	Hau1	ExtCond1	...	Mu1	EGO	Hau1	ExtCond1	...
Mu2	Ext0	Ext0	ExtCond2	...	Mu2	Ext0	Ext0	ExtCond2	...	Mu2	Ext0	Ext0	ExtCond2	...
Mu3	Ext1	Ext1	ExtCond3	...	Mu3	Ext1	Ext1	ExtCond3	...	Mu3	Ext1	Ext1	ExtCond3	...

MP7 slot1 & slot2  
(modules 0 & 1)

from uGT	from device	from ExtCond boards
0	1.0	1.0
1	1.1	1.1
2	1.2	1.2
3	1.3	1.3
4	1.4	1.4

Note that uGT is connected by plastic clip & yellow strain relief

MP7 slot3 & slot4  
(modules 2 & 3)

from uGT	from device	from ExtCond boards
5	1.5	1.5
6	1.6	1.6
7	1.7	1.7
8	1.8	1.8
9	1.9	1.9

Note that uGT is connected by plastic clip & yellow strain relief

MP7 slot5 & slot6  
(modules 4 & 5)

from uGT	from device	from ExtCond boards
10	2.0	2.0
11	2.1	2.1
12	2.2	2.2
13	2.3	2.3
14	2.4	2.4

Note that uGT is connected by plastic clip & yellow strain relief

Fiber inputs @ uGT

uGT Fibre

new 5x16 fibre

Figure 18: Global Trigger patch panel for optical links

## 7.8 ZDC 5G to 10G conversion scheme

Figure 19 shows ZDC 5G link to 10G link conversion scheme on a MP7 module in one slot of Global Trigger system.

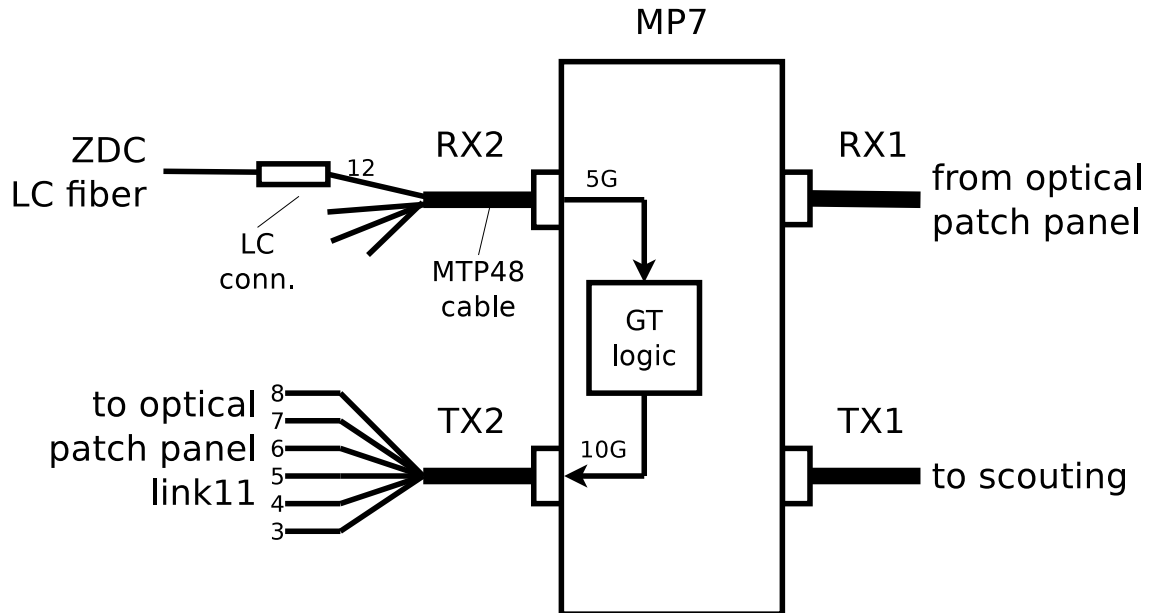


Figure 19: ZDC 5G link to 10G link conversion scheme

## 7.9 GTH I/Os

**Remark:** Connections of RX2 and TX2 must be checked and confirmed!!!

### 7.9.1 GTH input connections

The following Table contains the GTH input connections from MP7 MTP front connectors<sup>7</sup>:

MTP48	minipod	quad	GTH ch.	GTH	MP7 ch.	pp	lane	data
RX1/1	rx3/0	118	X1Y35	10G	0x00	1	0	muon
RX1/2	rx3/1		X1Y34	10G	0x02	2	1	muon
RX1/3	rx3/2		X1Y33	10G	0x04	3	2	muon
RX1/4	rx3/3		X1Y32	10G	0x06	4	3	muon
RX1/5	rx3/4	117	X1Y31	10G	0x08	5	4	eg
RX1/6	rx3/5		X1Y30	10G	0x0A	6	5	eg
RX1/7	rx3/6		X1Y29	10G	0x0C	7	6	jet
RX1/8	rx3/7		X1Y28	10G	0x0E	8	7	jet
RX1/9	rx3/8	116	X1Y27	10G	0x10	9	8	tau
RX1/10	rx3/9		X1Y26	10G	0x12	10	9	tau
RX1/11	rx3/10		X1Y25	10G	0x14	11	10	esums
RX1/12	rx3/11		X1Y24	10G	0x16	12	11	free
RX1/13	rx4/0	115	X1Y23	10G	0x18	13	12	external conditions
RX1/14	rx4/1		X1Y22	10G	0x1A	14	13	external conditions
RX1/15	rx4/2		X1Y21	10G	0x1C	15	14	external conditions
RX1/16	rx4/3		X1Y20	10G	0x1E	16	15	external conditions
RX1/17	rx4/4	114	X1Y19	10G	0x20	17	16	free
RX1/18	rx4/5		X1Y18	10G	0x22	18	17	free
RX1/19	rx4/6		X1Y17	10G	0x24	19	18	free
RX1/20	rx4/7		X1Y16	10G	0x26	20	19	free
RX1/21	rx4/8	113	X1Y15	10G	0x28	21	20	free
RX1/22	rx4/9		X1Y14	10G	0x2A	22	21	free
RX1/23	rx4/10		X1Y13	10G	0x2C	23	22	free
RX1/24	rx4/11		X1Y12	10G	0x2E	24	23	free
RX1/25	rx5/0	112	X1Y11	10G	0x30	nc	24	-
RX1/28	rx5/3		X1Y10	10G	0x32	nc	25	-
RX1/26	rx5/1		X1Y09	10G	0x34	nc	26	-
RX1/27	rx5/2		X1Y08	10G	0x36	nc	27	-
RX1/30	rx5/5	111	X1Y07	x	0x38	nc	28	-

---

<sup>7</sup>"ch." means "channel", "pp" means "optical patch panel connector number"

MTP48	minipod	quad	GTH ch.	GTH	MP7 ch.	pp	lane	data
RX1/29	rx5/4		X1Y06	x	0x3A	nc	29	-
RX1/31	rx5/6		X1Y05	x	0x3C	nc	30	-
RX1/32	rx5/7		X1Y04	x	0x3E	nc	31	-
RX1/33	rx5/8	110	X1Y03	x	0x40	nc	32	-
RX1/34	rx5/9		X1Y02	x	0x42	nc	33	-
RX1/35	rx5/10		X1Y01	x	0x44	nc	34	-
RX1/36	rx5/11		X1Y00	x	0x46	nc	35	-
RX2/26	rx2/1		X0Y00	x	0x48	nc	36	-
RX2/25	rx2/0		X0Y01	x	0x4A	nc	37	-
RX2/28	rx2/3		X0Y02	x	0x4C	nc	38	-
RX2/27	rx2/2	210	X0Y03	x	0x4E	nc	39	-
RX2/30	rx2/5		X0Y04	x	0x50	nc	40	-
RX2/29	rx2/4		X0Y05	x	0x52	nc	41	-
RX2/31	rx2/7		X0Y06	x	0x54	nc	42	-
RX2/32	rx2/6	211	X0Y07	x	0x56	nc	43	-
RX2/33	rx2/8		X0Y08	x	0x58	nc	44	-
RX2/35	rx2/10		X0Y09	x	0x5A	nc	45	-
RX2/34	rx2/9		X0Y10	x	0x5C	nc	46	-
RX2/36	rx2/11	212	X0Y11	x	0x5E	nc	47	-
RX2/14	rx1/1		X0Y12	x	0x60	nc	48	-
RX2/13	rx1/0		X0Y13	x	0x62	nc	49	-
RX2/16	rx1/3		X0Y14	x	0x64	nc	50	-
RX2/15	rx1/2	213	X0Y15	x	0x66	nc	51	-
RX2/18	rx1/5		X0Y16	x	0x68	nc	52	-
RX2/17	rx1/4		X0Y17	x	0x6A	nc	53	-
RX2/20	rx1/7		X0Y18	x	0x6C	nc	54	-
RX2/19	rx1/6	214	X0Y19	x	0x6E	nc	55	-
RX2/22	rx1/9		X0Y20	x	0x70	nc	56	-
RX2/21	rx1/8		X0Y21	x	0x72	nc	57	-
RX2/23	rx1/10		X0Y22	x	0x74	nc	58	-
RX2/24	rx1/11	215	X0Y23	x	0x76	nc	59	-
RX2/2	rx0/1		X0Y24	10G	0x78	nc	60	-
RX2/1	rx0/0		X0Y25	10G	0x7A	nc	61	-
RX2/4	rx0/3		X0Y26	10G	0x7C	nc	62	-
RX2/3	rx0/2	216	X0Y27	10G	0x7E	nc	63	-
RX2/6	rx0/5		X0Y28	10G	0x80	nc	64	-

MTP48	minipod	quad	GTH ch.	GTH	MP7 ch.	pp	lane	data
RX2/5	rx0/4		X0Y29	10G	0x82	nc	65	-
RX2/8	rx0/7		X0Y30	10G	0x84	nc	66	-
RX2/7	rx0/6	217	X0Y31	10G	0x86	nc	67	-
RX2/10	rx0/9		X0Y32	5G	0x88	nc	68	-
RX2/9	rx0/8		X0Y33	5G	0x8A	nc	69	-
RX2/11	rx0/10		X0Y34	5G	0x8C	nc	70	-
RX2/12	rx0/11	218	X0Y35	5G	0x8E	nc	71	ZDC 5G input

### 7.9.2 GTH output connections

The following Table contains the GTH output connections to MP7 MTP front connectors:

MTP48	minipod	quad	GTH ch.	GTH	MP7 ch.	pp	lane	data
TX1/1	tx3/0	118	X1Y35	10G	0x01	nc	0	-
TX1/2	tx3/1		X1Y34	10G	0x03	nc	1	-
TX1/3	tx3/2		X1Y33	10G	0x05	nc	2	-
TX1/4	tx3/3		X1Y32	10G	0x07	nc	3	-
TX1/5	tx3/4	117	X1Y31	10G	0x09	nc	4	-
TX1/6	tx3/5		X1Y30	10G	0x0b	nc	5	-
TX1/7	tx3/6		X1Y29	10G	0x0d	nc	6	-
TX1/8	tx3/7		X1Y28	10G	0x0f	nc	7	-
TX1/9	tx3/8	116	X1Y27	10G	0x11	nc	8	-
TX1/10	tx3/9		X1Y26	10G	0x13	nc	9	-
TX1/11	tx3/10		X1Y25	10G	0x15	nc	10	-
TX1/12	tx3/11		X1Y24	10G	0x17	nc	11	-
TX1/13	tx4/0	115	X1Y23	10G	0x19	nc	12	-
TX1/14	tx4/1		X1Y22	10G	0x1b	nc	13	-
TX1/15	tx4/2		X1Y21	10G	0x1d	nc	14	-
TX1/16	tx4/3		X1Y20	10G	0x1f	nc	15	-
TX1/17	tx4/4	114	X1Y19	10G	0x21	nc	16	readout (AMC13)
TX1/18	tx4/5		X1Y18	10G	0x23	nc	17	readout (AMC13)
TX1/19	tx4/6		X1Y17	10G	0x25	nc	18	readout (AMC13)
TX1/20	tx4/7		X1Y16	10G	0x27	nc	19	readout (AMC13)
TX1/21	tx4/8	113	X1Y15	10G	0x29	nc	20	readout (AMC13)
TX1/22	tx4/9		X1Y14	10G	0x2b	nc	21	readout (AMC13)
TX1/23	tx4/10		X1Y13	10G	0x2d	nc	22	readout (AMC13)
TX1/24	tx4/11		X1Y12	10G	0x2f	nc	23	readout (AMC13)

MTP48	minipod	quad	GTH ch.	GTH	MP7 ch.	pp	lane	data
TX1/25	tx5/0	112	X1Y11	10G	0x31	nc	24	readout (AMC13)
TX1/26	tx5/1		X1Y10	10G	0x33	nc	25	readout (AMC13)
TX1/27	tx5/2		X1Y09	10G	0x35	nc	26	-
TX1/28	tx5/3		X1Y08	10G	0x37	nc	27	-
TX1/29	tx5/4	111	X1Y07	x	0x39	nc	28	-
TX1/30	tx5/5		X1Y06	x	0x3b	nc	29	-
TX1/31	tx5/6		X1Y05	x	0x3d	nc	30	-
TX1/32	tx5/7		X1Y04	x	0x3f	nc	31	-
TX1/33	tx5/8	110	X1Y03	x	0x41	nc	32	-
TX1/34	tx5/9		X1Y02	x	0x43	nc	33	-
TX1/35	tx5/10		X1Y01	x	0x45	nc	34	-
TX1/36	tx5/11		X1Y00	x	0x47	nc	35	-
TX2/26	tx2/1		X0Y00	x	0x49	nc	36	-
TX2/25	tx2/0		X0Y01	x	0x4b	nc	37	-
TX2/28	tx2/3		X0Y02	x	0x4d	nc	38	-
TX2/27	tx2/2	210	X0Y03	x	0x4f	nc	39	-
TX2/30	tx2/5		X0Y04	x	0x51	nc	40	-
TX2/29	tx2/4		X0Y05	x	0x53	nc	41	-
TX2/32	tx2/7		X0Y06	x	0x55	nc	42	-
TX2/31	tx2/6	211	X0Y07	x	0x57	nc	43	-
TX2/34	tx2/8		X0Y08	x	0x59	nc	44	-
TX2/33	tx2/10		X0Y09	x	0x5b	nc	45	-
TX2/35	tx2/9		X0Y10	x	0x5d	nc	46	-
TX2/36	tx2/11	212	X0Y11	x	0x5f	nc	47	-
TX2/14	tx1/1		X0Y12	x	0x61	nc	48	-
TX2/13	tx1/0		X0Y13	x	0x63	nc	49	-
TX2/16	tx1/3		X0Y14	x	0x65	nc	50	-
TX2/15	tx1/2	213	X0Y15	x	0x67	nc	51	-
TX2/18	tx1/5		X0Y16	x	0x69	nc	52	-
TX2/17	tx1/4		X0Y17	x	0x6b	nc	53	-
TX2/20	tx1/7		X0Y18	x	0x6d	nc	54	-
TX2/19	tx1/6	214	X0Y19	x	0x6f	nc	55	-
TX2/22	tx1/9		X0Y20	x	0x71	nc	56	-
TX2/21	tx1/8		X0Y21	x	0x73	nc	57	-
TX2/23	tx1/10		X0Y22	x	0x75	nc	58	-
TX2/24	tx1/11	215	X0Y23	x	0x77	nc	59	-



MTP48	minipod	quad	GTH ch.	GTH	MP7 ch.	pp	lane	data
TX2/2	tx0/1		X0Y24	10G	0x79	nc	60	-
TX2/1	tx0/0		X0Y25	10G	0x7b	nc	61	-
TX2/4	tx0/3		X0Y26	10G	0x7d	nc	62	ZDC 10G output
TX2/3	tx0/2	216	X0Y27	10G	0x7f	nc	63	ZDC 10G output
TX2/6	tx0/5		X0Y28	10G	0x81	nc	64	ZDC 10G output
TX2/5	tx0/4		X0Y29	10G	0x83	nc	65	ZDC 10G output
TX2/8	tx0/7		X0Y30	10G	0x85	nc	66	ZDC 10G output
TX2/7	tx0/6	217	X0Y31	10G	0x87	nc	67	ZDC 10G output
TX2/10	tx0/9		X0Y32	5G	0x89	nc	68	-
TX2/9	tx0/8		X0Y33	5G	0x8b	nc	69	-
TX2/11	tx0/10		X0Y34	5G	0x8d	nc	70	-
TX2/12	tx0/11	218	X0Y35	5G	0x8f	nc	71	-

## 8 Glossary

electron/ $\gamma$  = electron/gamma objects over Calo-Layer2 (VHDL: eg)

jet = jet objects over Calo-Layer2 (VHDL: jet)

tau = tau objects over Calo-Layer2 (VHDL: tau)

muon = muon objects over  $\mu$ GMT (VHDL: muon)

ET = Scalar sum of transverse energy components over Calo-Layer2 (VHDL: ett)

ETTEM = Scalar sum of transverse energy components from ECAL only over Calo-Layer2 (VHDL: ettem)

MBTxHFy = Minimum bias HF bits (VHDL: MBT0HFP, MBT0HFM, MBT1HFP, MBT1HFM)

HT = Magnitude of the vectorial sum of transverse energy of jets (hadronic) over Calo-Layer2 (VHDL: htt)

TOWERCOUNT = tower counts (VHDL: towercount)

$ET_{\text{miss}}$  = 2-vector sum of transverse energy over Calo-Layer2 (VHDL: etm)

$HT_{\text{miss}}$  = Missing Total transverse energy of jets over Calo-Layer2 (VHDL: htm)

$ET_{\text{miss}}^{\text{HF}}$  = 2-vector sum of transverse energy including HF over Calo-Layer2 (VHDL: etmhf)

$HT_{\text{miss}}^{\text{HF}}$  = Missing Total transverse energy of jets including HF over Calo-Layer2 (VHDL: htmhf)

ASYMET = Asymmetry of ET over Calo-Layer2 (VHDL: asymet)

ASYMHT = Asymmetry of HT over Calo-Layer2 (VHDL: asymht)

ASYMETHF = Asymmetry of ET including HF over Calo-Layer2 (VHDL: asymethf)

ASYMHthf = Asymmetry of HT including HF over Calo-Layer2 (VHDL: asymhthf)

CENTx = Centrality bits [7:0] over Calo-Layer2 (VHDL: cent7, cent6, ...)

$p_{\text{T}}$  = transverse momentum of muon objects (VHDL: pt)

$E_{\text{T}}$  = energy of calorimeter objects (VHDL: et)

$\eta$  = pseudo-rapidity position (VHDL: eta)

$\varphi$  = azimuth angle position (VHDL: phi)

isolation = isolation information (VHDL: iso)

quality = quality information (VHDL: qual)

charge = charge information of muon objects (VHDL: ch)

unconstrained  $p_T$  = transverse momentum of muon objects (VHDL: upt)

impact parameter = impact parameter information of muon objects (VHDL: ip)

hadronic shower = hadronic shower (muon shower [mus]) information, on bit 61 of MU0, MU2, MU4 and MU6 (VHDL: mus0, mus1, musoot0, musoot1)

DISP = displaced bit of jet objects (VHDL: disp)

index bits = index bits of muon objects - currently not used

## 9 Acronyms

**AMC13** AMC board in uTCA crate for several features (readout, ...)

**DAQ** Data Acquisition

**FDL** Final Decision Logic Module

**GCT** Calorimeter Trigger Layer-2

**GMT** Global Muon Trigger

**GT** Global Trigger

**GTL** Global Trigger Logic Module

**ROP** Readout Process Module

**TCM** Timing Counter Manager Module

**TCDS** Trigger, Control and Distribution System

**TDF** Test and Development Framework

## List of Tables

2	Firmware versions . . . . .	11
3	Explanation of Listing 1 . . . . .	12
4	Explanation of Listing 2 . . . . .	16
5	Configuration of optical connections . . . . .	18
6	Current lane mapping . . . . .	19
7	Counters of Timer Counter Manager . . . . .	22
8	Framework register map . . . . .	24
8	Framework register map . . . . .	25
9	Explanation of Listing 4 . . . . .	37
10	$\eta$ scale of calorimeter objects . . . . .	40
11	$\varphi$ scale of calorimeter objects . . . . .	40
12	Definition of $e/\gamma$ and tau isolation bits . . . . .	41
13	$\eta$ scale of muon objects . . . . .	45
14	$\varphi$ scale of muon objects . . . . .	45
15	Definition of muon quality bits . . . . .	46
16	Definition of muon isolation bits . . . . .	46
17	Definition of hadronic (muon) shower bits on bit 61 of muon objects . . . . .	46
18	Definition of muon impact parameter bits . . . . .	46
19	LUT contents for isolation comparison . . . . .	49
20	LUT contents for impact parameter comparison . . . . .	50
21	LUT contents for quality comparison of muon objects . . . . .	51
22	Muon charge correlation - Double Muon . . . . .	54
23	Muon charge correlation - Triple Muon . . . . .	55
24	Muon charge correlation - Quad Muon . . . . .	55
25	Explanation of Listing 5 . . . . .	64
26	Explanation of Listing 6 . . . . .	77
27	$\mu$ FDL register map . . . . .	82
27	$\mu$ FDL register map . . . . .	83
28	GTH input connections . . . . .	93
28	GTH input connections . . . . .	94
28	GTH input connections . . . . .	95

29	GTH output connections . . . . .	96
29	GTH output connections . . . . .	97
29	GTH output connections . . . . .	98
30	Configuration of GTHs . . . . .	99
30	Configuration of GTHs . . . . .	100
31	uGT Patchpanel #1 . . . . .	102
31	uGT Patchpanel #1 . . . . .	103
31	uGT Patchpanel #1 . . . . .	104
32	uGT Patchpanel #3 . . . . .	104
32	uGT Patchpanel #3 . . . . .	105
32	uGT Patchpanel #3 . . . . .	106

## List of Figures

1	$\mu$ GT payload . . . . .	10
2	Memory subsystem . . . . .	21
3	start of the bunch crossing number with the first <i>bres_d</i> . . . . .	22
4	normal operation of the bunch crossing number . . . . .	22
5	set of the software register <i>err_det</i> when <i>bc_res_d</i> is not asserted correctly .	23
6	reset of the software register <i>err_det</i> when <i>err_det_reset_event</i> toggles . . .	23
7	$\mu$ GTL firmware . . . . .	31
8	VHDL file generation by VHDL Producer . . . . .	36
9	Scheme of $\mu$ GTL pipeline structure . . . . .	38
10	Setting the limits for "window"-comparators for $\varphi$ . . . . .	48
11	VHDL structure of cuts for correlation conditions . . . . .	66
12	Conversion of calorimeter $\eta$ and $\varphi$ to muon scales . . . . .	70
13	$\mu$ FDL firmware . . . . .	72
14	$\mu$ FDL pipeline . . . . .	73
15	Fractional prescaler . . . . .	79
16	Optical link inputs to Global Trigger . . . . .	101
17	Outputs from Global Trigger to AMC13 . . . . .	101
18	Global Trigger patch panel for optical links . . . . .	106
19	ZDC 5G link to 10G link conversion scheme . . . . .	107

## References

- [1] MP7 documentation:  
<http://www.hep.ph.ic.ac.uk/mp7> 1
- [2] MP7 firmware repository:  
<https://gitlab.cern.ch/cms-cactus/firmware/mp7> 1
- [3] Trigger Menu Editor repository:  
<https://github.com/cms-l1-globaltrigger/tm-editor> 4.3
- [4] VHDL Producer repository:  
<https://github.com/cms-l1-globaltrigger/tm-vhdlproducer> 4.3
- [5] Calo-layer2 and Global Muon Trigger interface documentation:  
[https://raw.githubusercontent.com/cms-l1-globaltrigger/mp7\\_ugt\\_legacy/master/doc/scales\\_inputs\\_2\\_ugt/pdf/scales\\_inputs\\_2\\_ugt.pdf](https://raw.githubusercontent.com/cms-l1-globaltrigger/mp7_ugt_legacy/master/doc/scales_inputs_2_ugt/pdf/scales_inputs_2_ugt.pdf) 4, 4.2
- [6] Xilinx Series 7 Transceivers (GTHs) documentation:  
[https://www.xilinx.com/support/documentation/user\\_guides/ug476\\_7Series\\_Transceivers.pdf](https://www.xilinx.com/support/documentation/user_guides/ug476_7Series_Transceivers.pdf) 7.3, 7.4