



In the box



Sofle Choc Space Black

Left and right halves, assembled, flashed and tested.

x1



Rotary encoders and knobs

To swap in for the key under each display. See inside.

x2



Keycap puller

Grip the keycap from two sides and pull straight up.

x1



Sticker

Codekeep, for wherever you like.

x1

Not in the box: a USB-C cable. Use one that carries data. A charge-only cable charges the keyboard but won't reach Keymap Studio or update the firmware.

Specs

Keys	58, split, column-staggered
Switches	Choc low profile, hotswap
Connection	Bluetooth, 5 profiles · USB-C
Battery	2000 mAh per half
Displays	Dual OLED, custom firmware
Lighting	Per-key RGB and underglow, 10 modes
Encoders	2 slots, clickable
Controller	nicelnano v2, one per half
Firmware	ZMK, with ZMK Studio

Built by hand


Every Codekeep board is assembled, flashed and tested by hand before it ships. The core parts are socketed: swap any of them later, no soldering.

TESTED BY	DATE

Help


Something not right? Message us on Etsy, where you bought it. Include what you pressed and what happened.

etsy.com/shop/CodeKeep

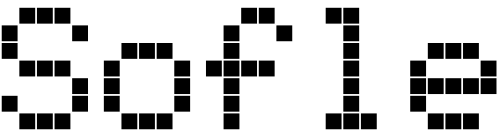

Choc · Space Black

QUICK START

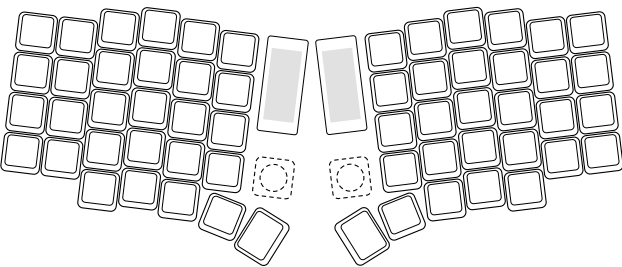

Getting started

Each half has its own controller and battery. The **left half** talks to your computer; the right half connects to the left one on its own.

- 1

Charge
Charge both halves over USB-C, one at a time.
- 2

Switch on
Slide the power switch on each half to on.
- 3

Wake
Press any key.
- 4

Pick a profile
Hold **RAISE** + **1**. This selects Bluetooth profile 1.
- 5

Pair
On your computer, open the Bluetooth settings and connect the new keyboard that shows up.
- 6

Lights
They start off. Turn them on with **LOWER** + **R**.


Wired

Plug the left half into your computer and it also types through the cable.

Battery and sleep

After a minute idle the lights go off; after 30 minutes it goes into deep sleep. Any key wakes it up. The lights are what use the most power.

Keys to know

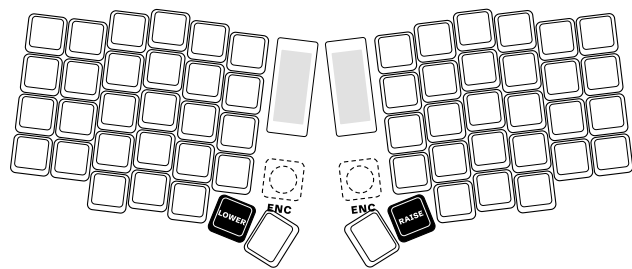

Hold **LOWER** or **RAISE** and the other keys change function; let go and they come back.

RAISE + 1 - 5	Bluetooth profile 1 to 5
RAISE + Esc	Clear the active profile
LOWER + R	Lights on or off
LOWER + T	Next light mode
LOWER + Z	Unlock for Keymap Studio

Fit the encoders

- 1

Switch both halves off and unplug them.
- 2

Pull the keycap under the display with the puller, then the switch below it. Keep both.
- 3

Fit the encoder in its place and push the knob onto the shaft.

Left	Turn: volume · Press: mute
Right	Turn: scroll · Press: play / pause

Online

Paper doesn't update. These do.



Manual

Every layer, key and light mode, kept up to date with the firmware.
codekeeb.github.io/manual



Keymap Studio

Remap any key live, no flashing. Chrome or Edge on a computer, left half over USB.
codekeeb.github.io/keymap-studio



Firmware

Source code and ready-to-flash files for each half.
github.com/codekeeb/sofle-choc-rgb-zmk



ZMK docs

The open firmware it runs on.
zmk.dev/docs