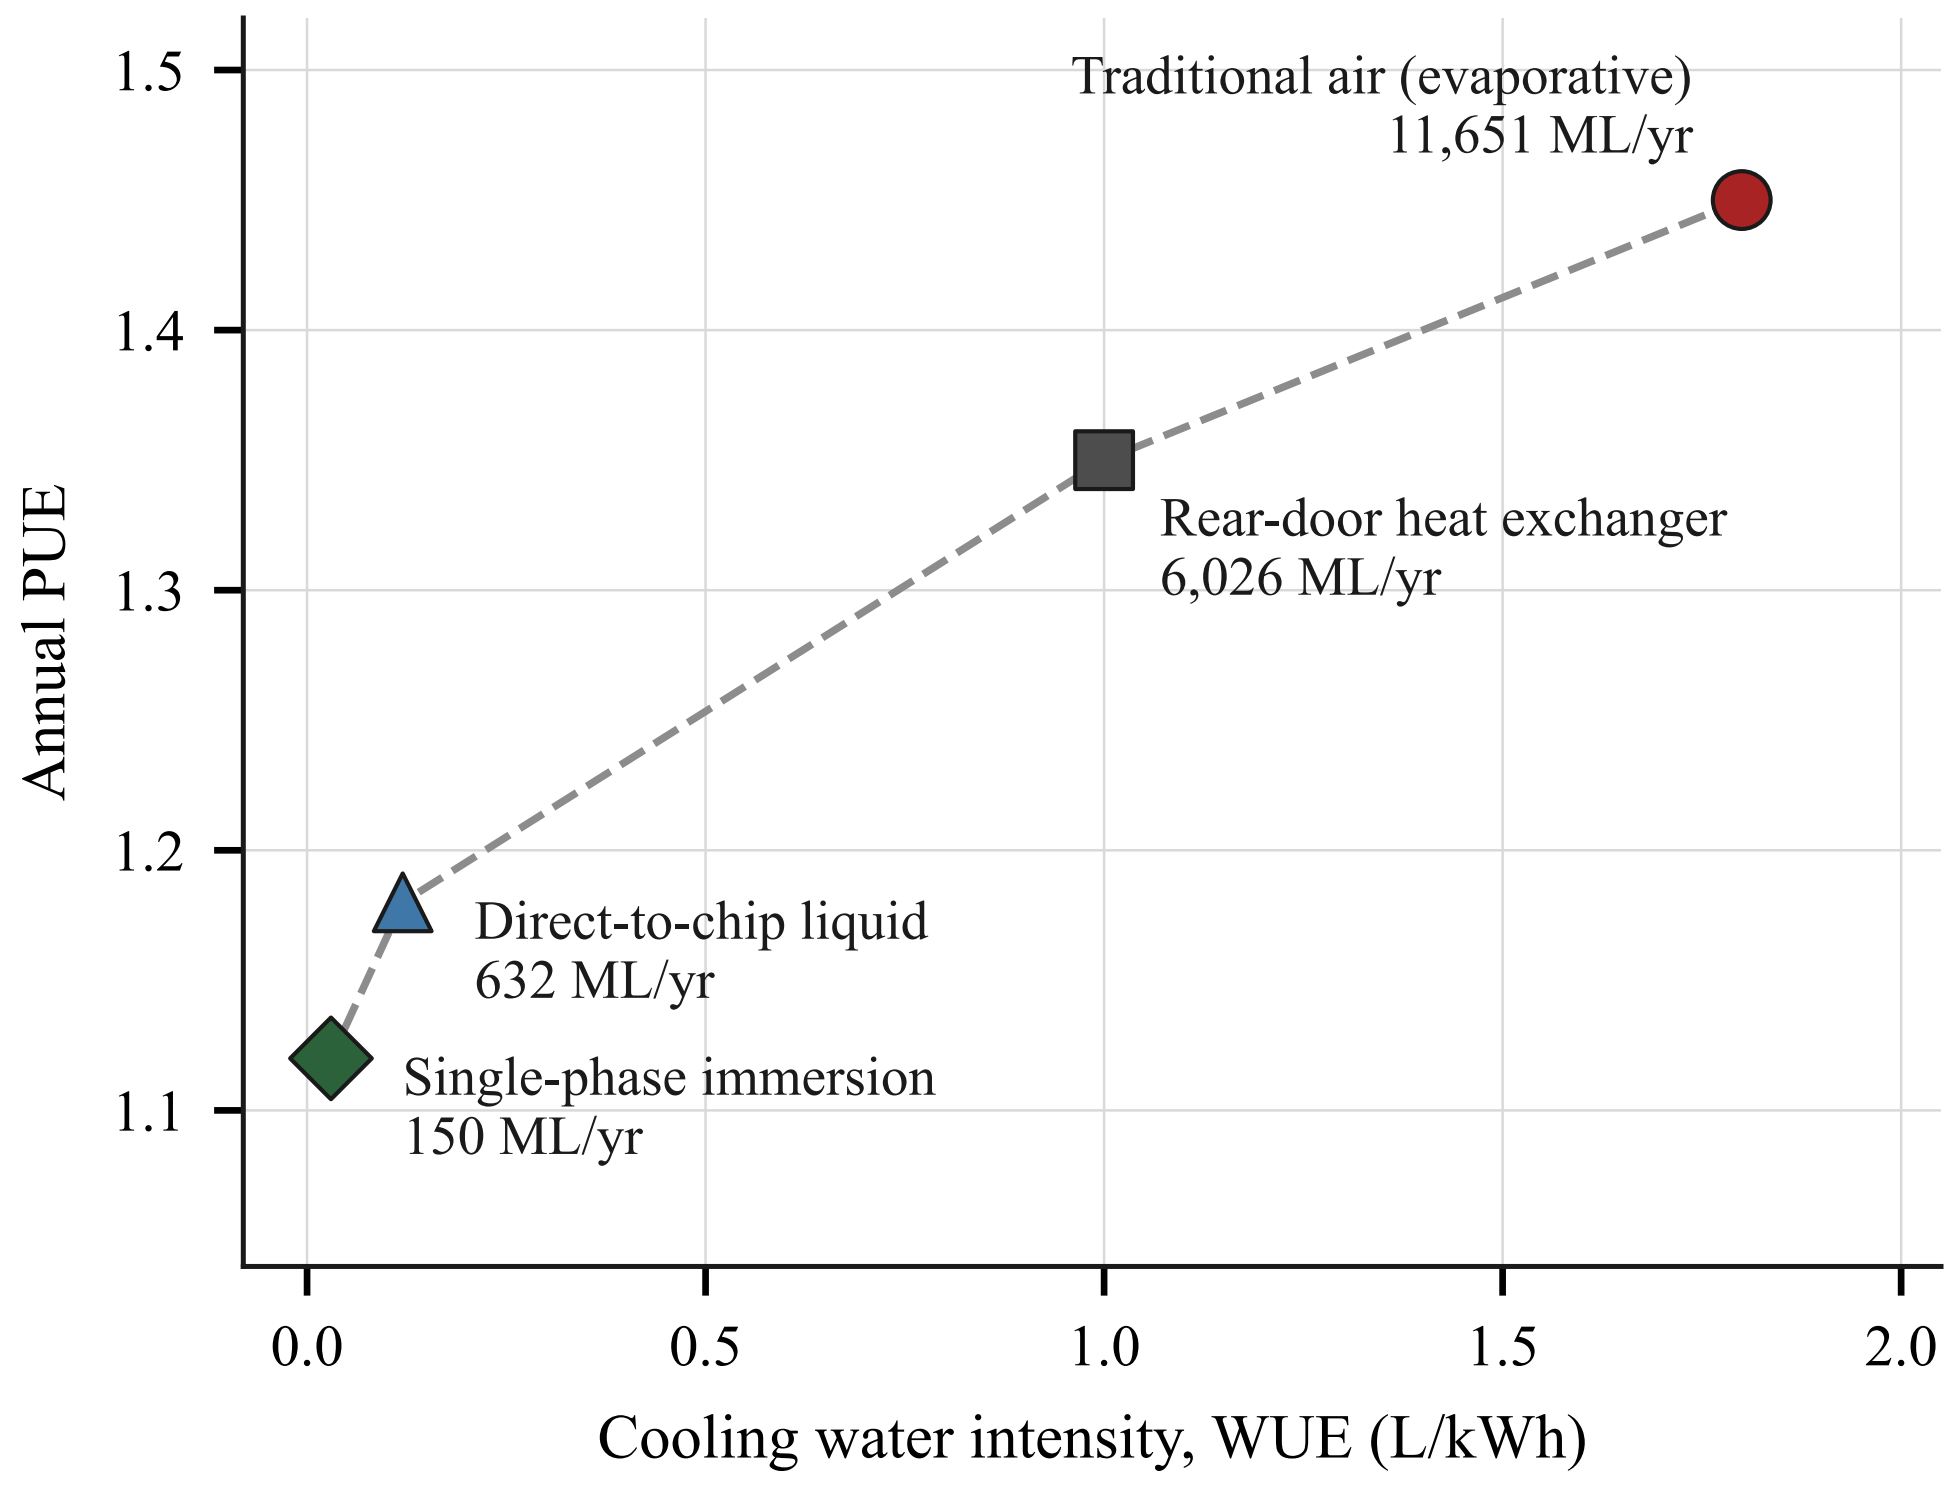
Traditional air (evaporative)
11,651 ML/yr
Rear-door heat exchanger
6,026 ML/yr
Direct-to-chip liquid
632 ML/yr
Single-phase immersion
150 ML/yr
Annual PUE
1.5
1.4
1.3
1.2
1.1
0.0
0.5
1.0
1.5
2.0
Cooling water intensity, WUE (L/kWh)