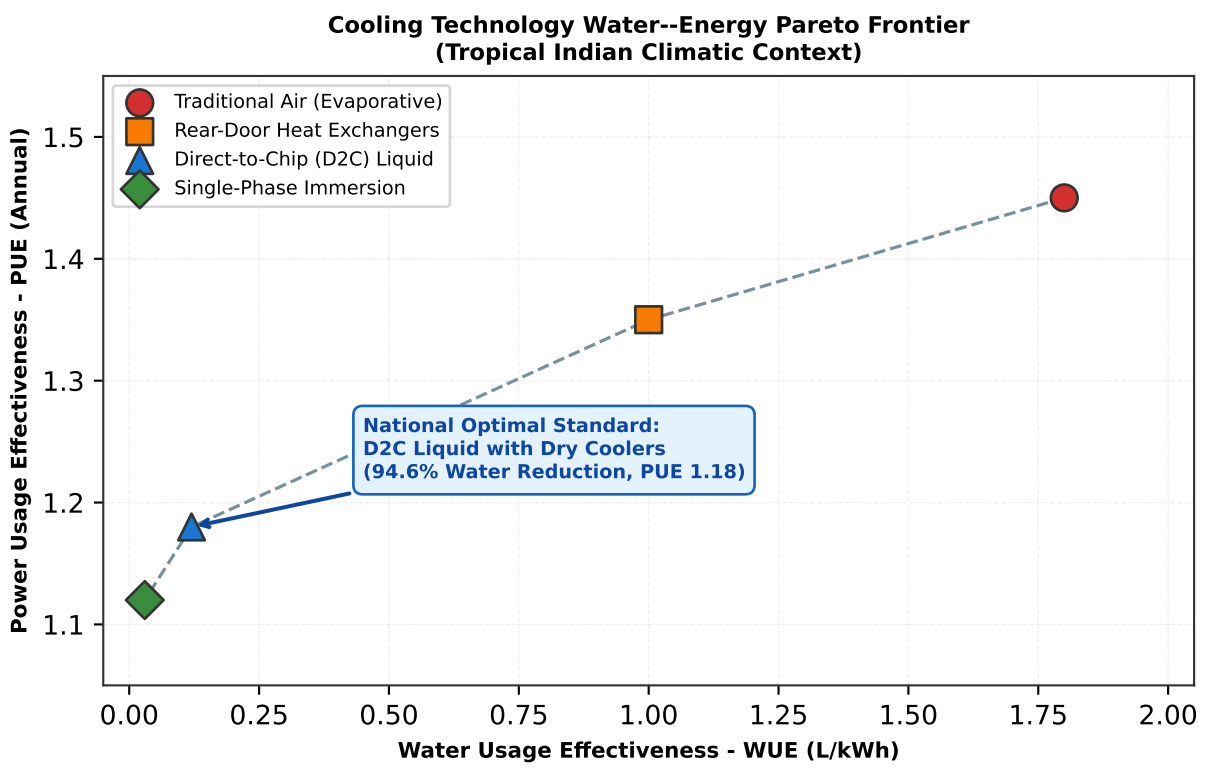
Cooling Technology Water--Energy Pareto Frontier
(Tropical Indian Climatic Context)
Traditional Air (Evaporative)
Rear-Door Heat Exchangers
Direct-to-Chip (D2C) Liquid
Single-Phase Immersion
National Optimal Standard:
D2C Liquid with Dry Coolers
(94.6% Water Reduction, PUE 1.18)
Power Usage Effectiveness - PUE (Annual)
1.5
1.4
1.3
1.2
1.1
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
Water Usage Effectiveness - WUE (L/kWh)