


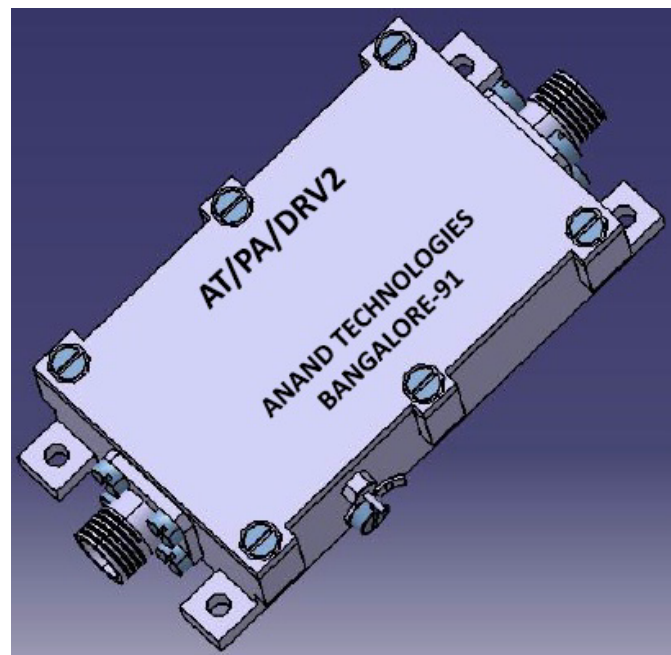

Typical Applications


- Repeaters
- Mobile infrastructure
- LTE, CDMA, GSM, GPRS, WCDMA
- General purpose wireless

Features

- 400 - 2600 MHz
- 31 dB Linear Gain at 2.3 GHz
- 1.5 dB Noise Figure at 2.3 GHz
- 50 Ω Cascadable Gain Block
- Unconditionally Stable
- High Input Power Capability
- Miniature Package


Electrical Specifications (at 25°C)

Operating Frequency Range	400 to 2600 MHz
Linear Gain	31 dB (Min)
Input Return Loss	15 dB
Output Return Loss	12 dB
Output Power (Pout)	+24 dBm (Min), with -4 dBm Power Input
Output IP3	+39 dBm (Typ), Pout = +3 dBm/tone, $\Delta f=1$ MHz
Noise Figure	1.5 dB (Max)
In / Out Connector	SMA (F)
Power Supply	+6.5 V , 270 mA (Max)
Operating Temperature	-30 to +55°C
Finish	Al Alloy Housing
Heat Transfer	Through Base Plate mounted on external heat sink

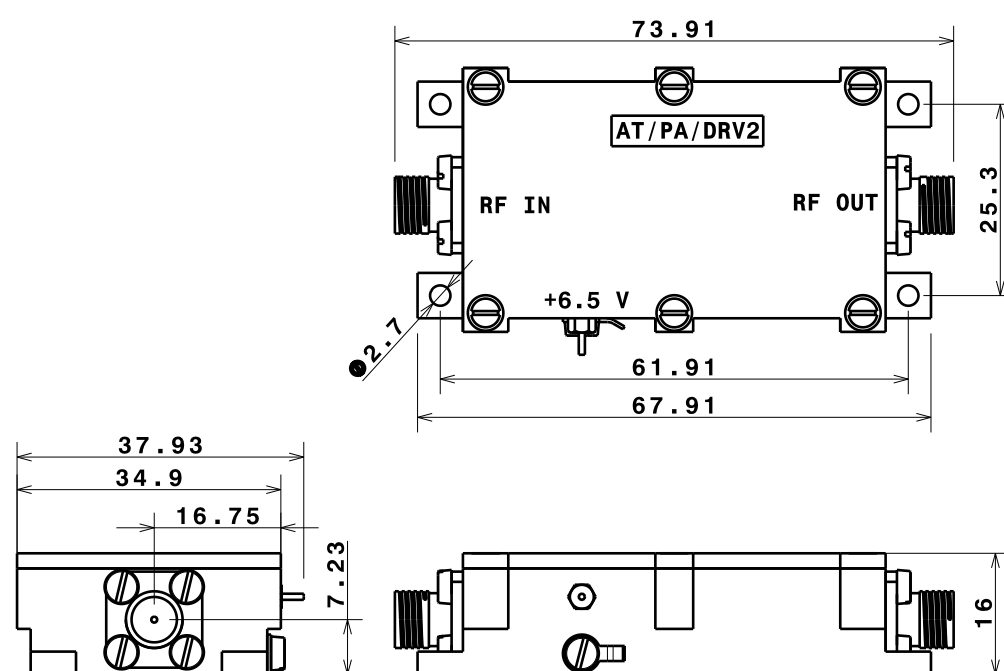

General Description

The AT/PA/DRV2 is a high linearity high gain block amplifier packaged in a miniature housing, operating on single supply with inbuilt regulator. The AT/PA/DRV2 covers 0.4 to 2.6 GHz frequency band and is targeted for wireless infrastructure or other applications requiring high linearity and low noise figure.

DESIGNED BY: GURU BIRADAR DATE: 02/08/2017		LINEAR HIGH GAIN AMPLIFIER	I	—	
CHECKED BY: Mr. S. METRI DATE: 02/08/2017			H	—	
SIZE A3			G	—	
		ANAND TECHNOLOGIES	F	—	
			E	—	
			D	—	
			C	—	
			B	—	
SCALE 1 : 1	WEIGHT (kg) NA	DRAWING NUMBER AT/PA/DRV2	SHEET 1 / 1	A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					