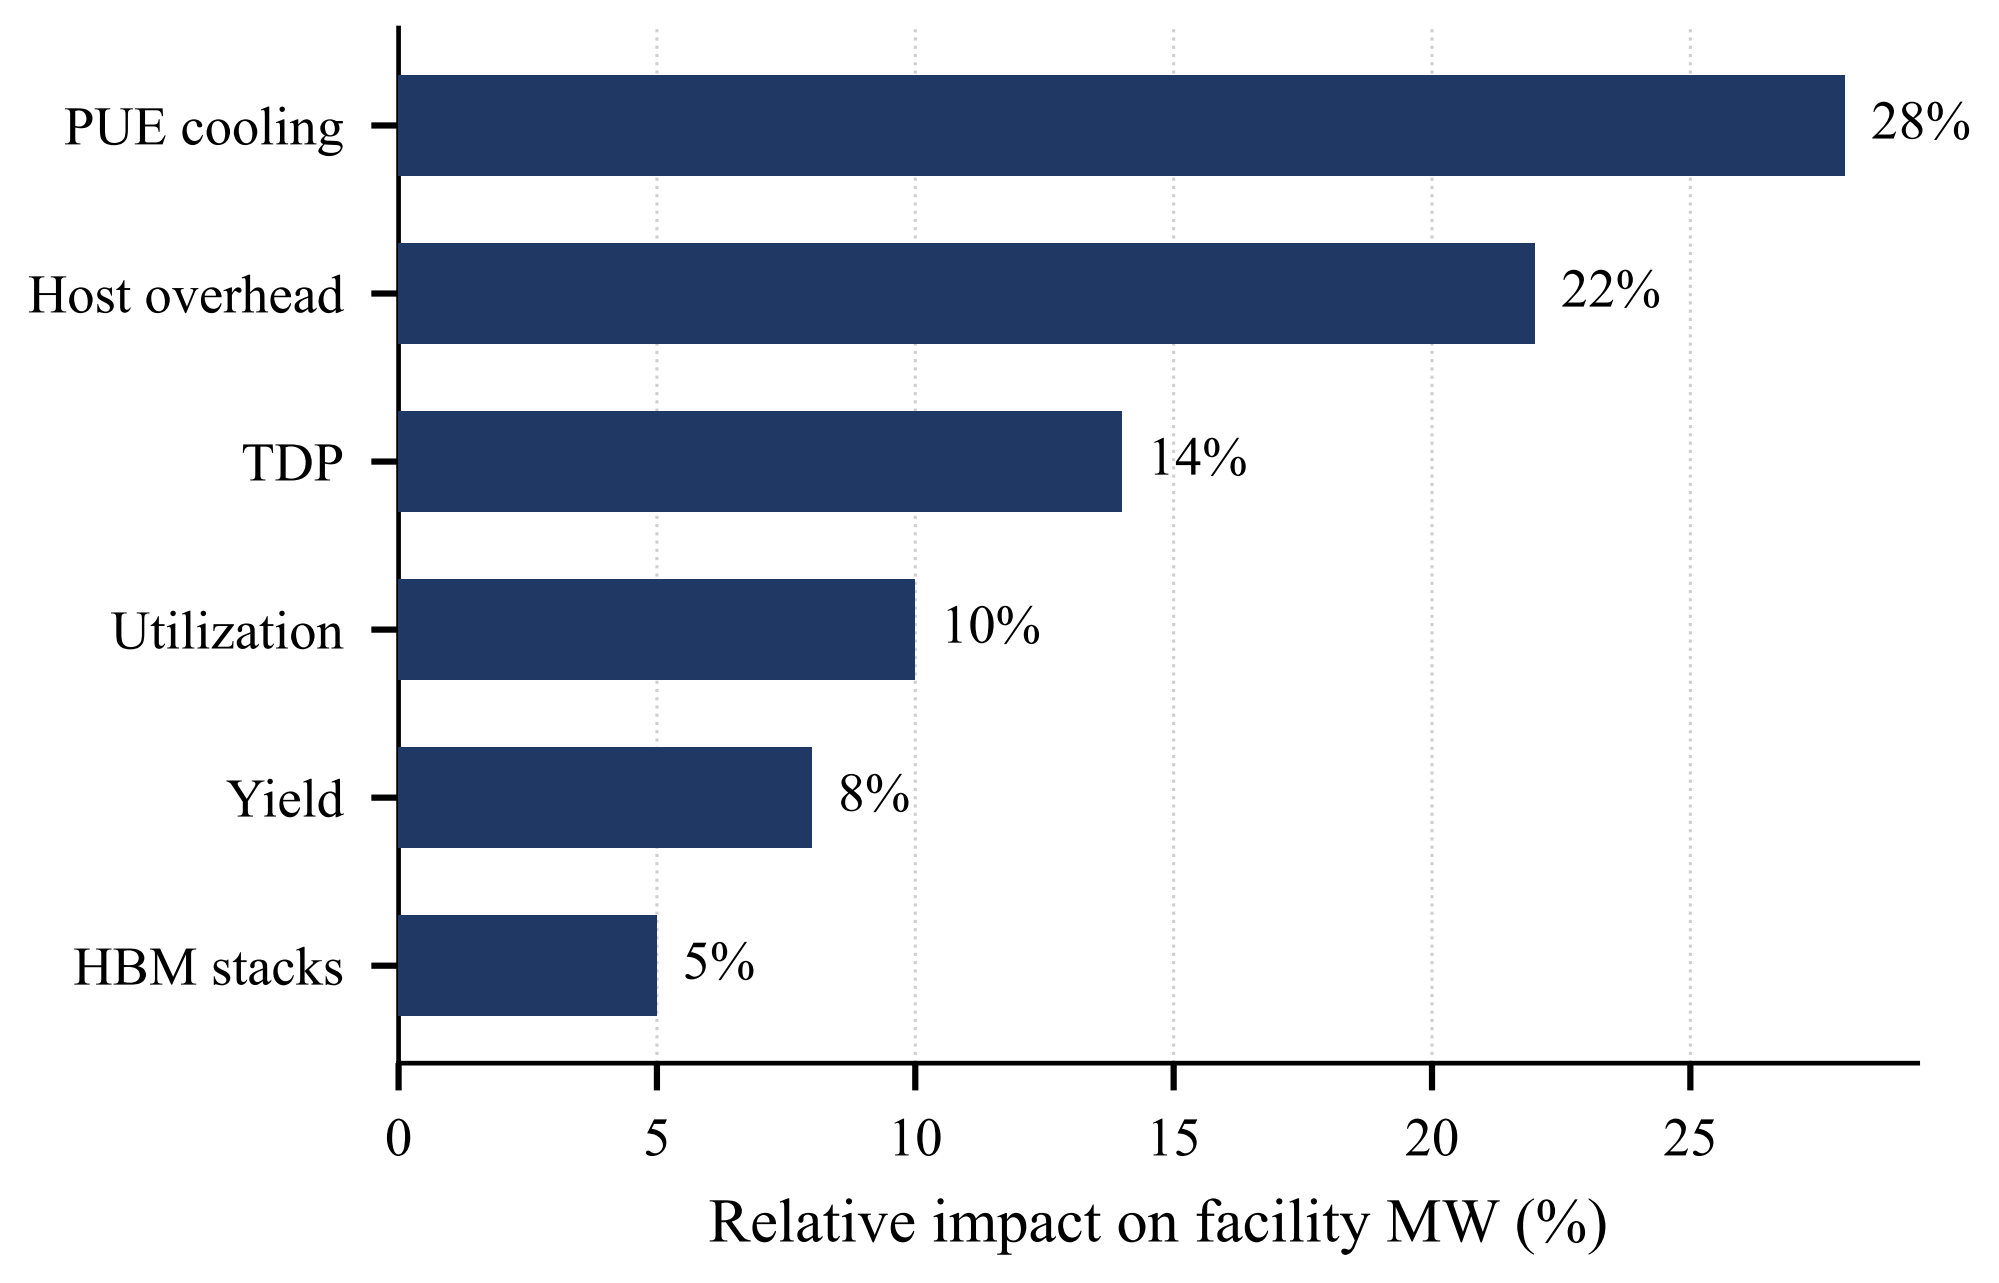
PUE cooling
28%
Host overhead
22%
TDP
14%
Utilization
10%
Yield
8%
HBM stacks
5%
0
5
10
15
20
25
Relative impact on facility MW (%)