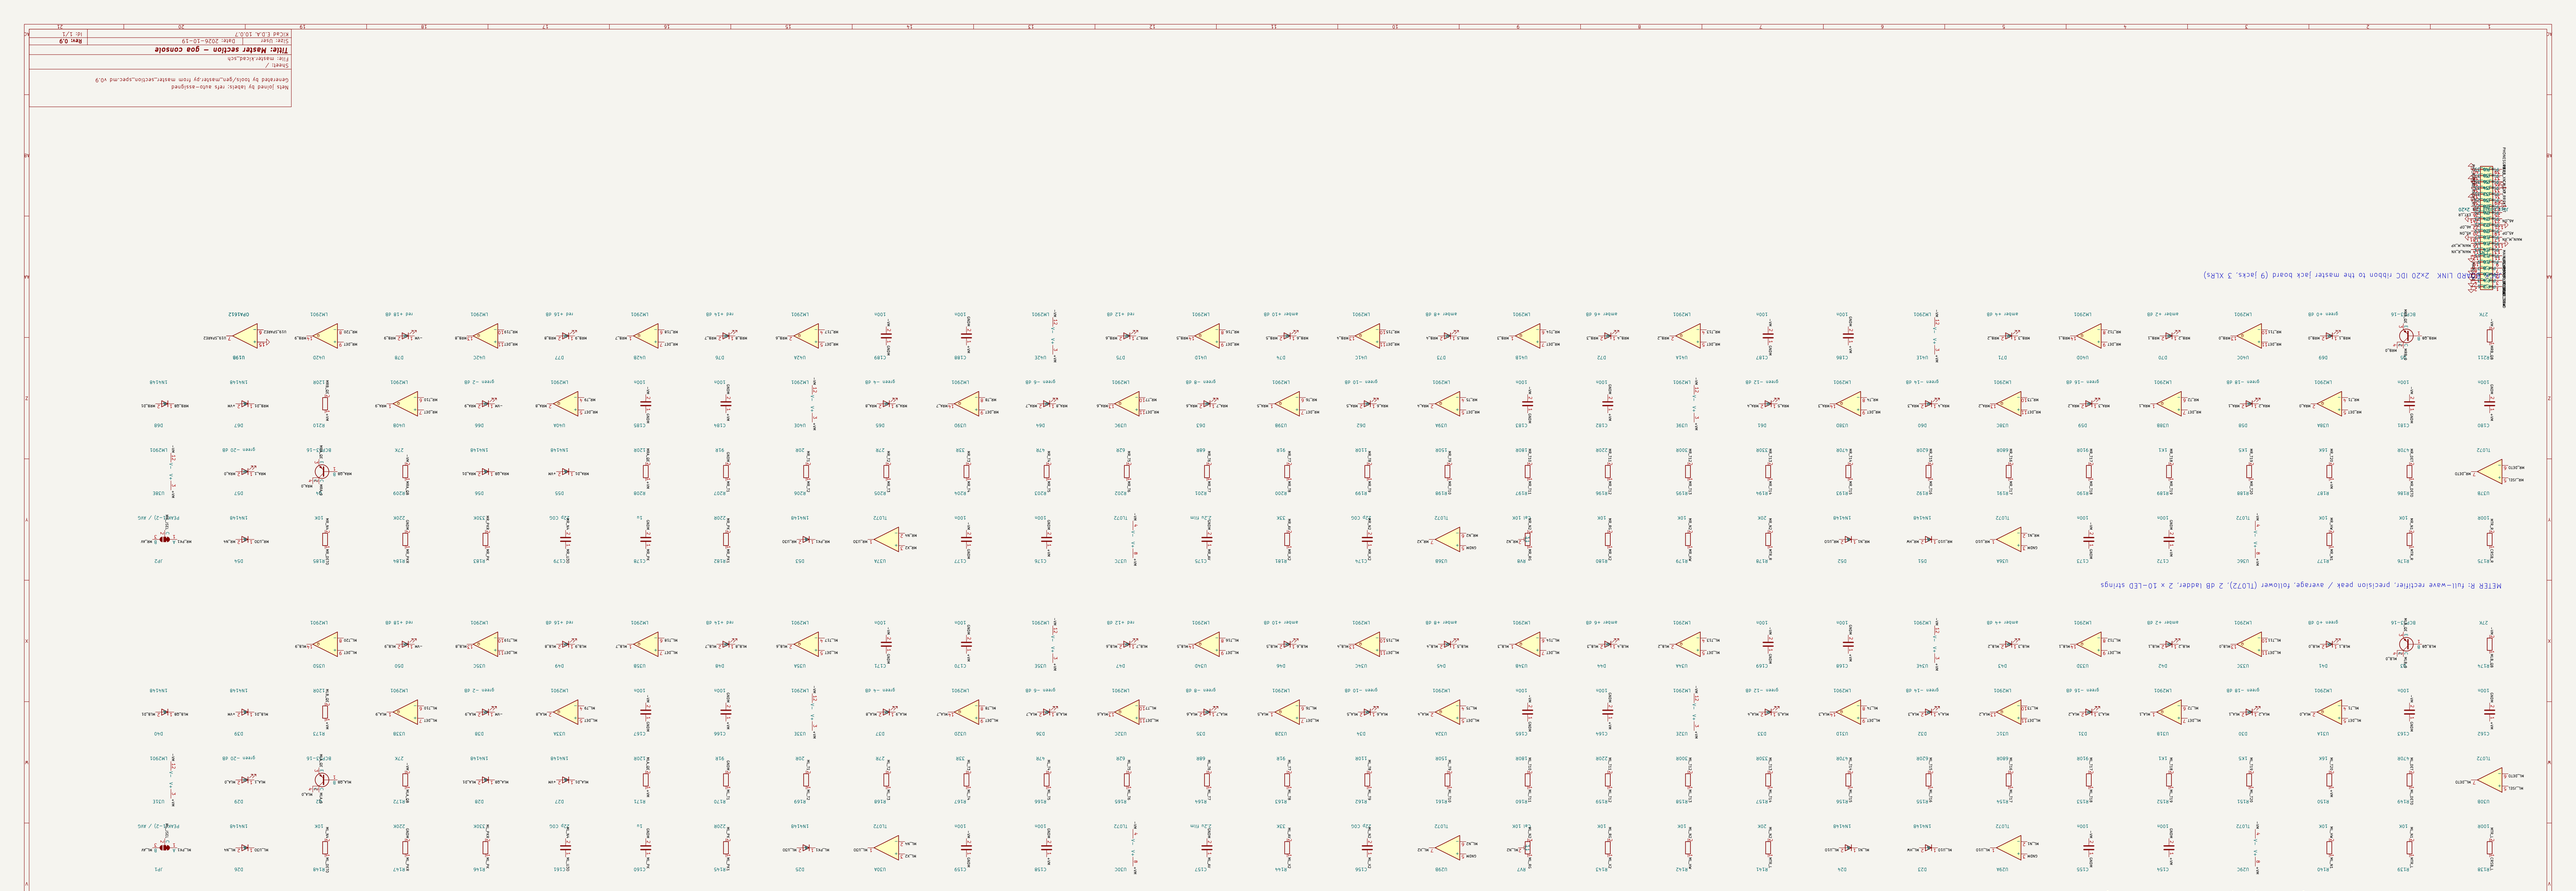

POWER ENTRY (7-pin XLR NC7MD-LX on the rear panel. two 5 A contacts per rail. 18 AWG to this terminal: +-17 V PSU)
DISTRIBUTION (PTC per wing per rail. 1.85 A hold. 7Z V; local branches VA audio. VP phones. VM meters. VL logic)
MONO: inverting sum of POST L+R. re-inverter
PFL SWITCHER: DG413 (PFL pressed = SW1/SW4. else SW2/SW3; break-before-make) -> CBS L/R OPA1656 followers
MAIN OUTPUTS: DRV134 -> 1Ω NP in the Sense loop -> mute relay (NO: NC grounds the line) -> XLR mate. pin 2 hot
POWER-ON MUTE: rails > -14 V for ~2.7 s closes all six relays; either rail low opens them at once
RUDE SOLO: ~2 Hz flasher. PFL ACTIVE LED. held off through FLiN while no key is pressed
CONTROL ROOM: C/ROOM dual A10K. followers. DRV134. mute relays. TRS outs
HEADPHONES: PHONES dual A10K. OPA4612 + LME49600 composite (+9.9 dB). 2Ω2 out. mute relay. PHONESGND
REMOTE METER HEADER (for a meter bridge)
EXT INPUT (2-track / DAW) and MIX / EXT monitor select (SW latched = EXT)
AUX MASTER 6: OPA4612 sum (22K || 100Ω) + re-inverting level buffer. DRV134 out. AFL
MIX R: summing amp (GCANCEL-referenced). re-inverter. master insert
MIX L: summing amp (GCANCEL-referenced). re-inverter. master insert
GROUND CANCEL BUFFER (feeds every re-inverter summing amps use the raw GCANCEL line; 100K keeper)
MOTHERLOOM (master in the center: CN1 = left wing. CN2 = right wing; Delta pinout)
MASTER FADER (dual 100 mm A10K. pin 1 = GNDA) + post-amps +10 dB