


POWER ENTRY, LOGIC SUPPLY, GROUNDS, DECOUPLING

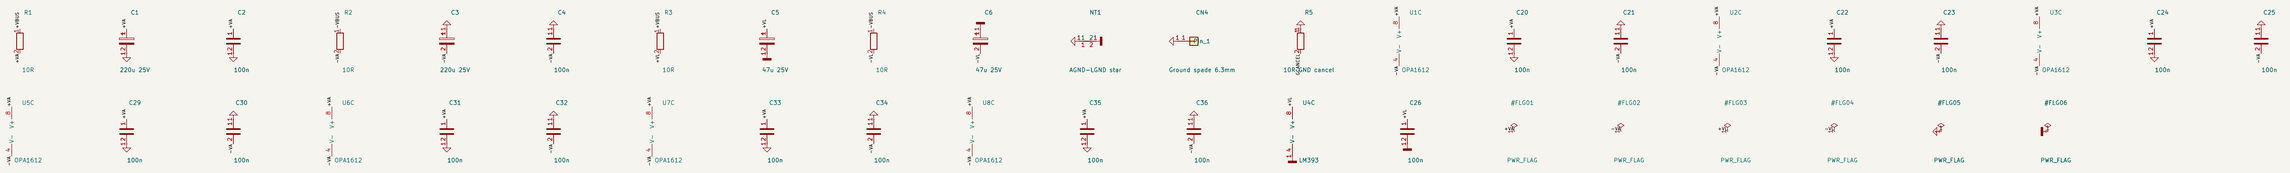

MOTHERLOOM (Delta pinout; one header, crimped socket on a daisy-chained ribbon)



LINE INPUT — ground-compensated receiver (inverting), Ø switch SW15: latched = phase reversed



GAIN −15..+15 dB, 0 dB at the detent (inverting: pot pin 3 = CW = input end)




HPF unity Sallen-Key Butterworth, −3 dB 87 Hz SW11: latched = HPF in (unlatched shorts the caps)



INSERT POSITION JUMPERS 1–2 = insert post-EQ (default); 2–3 on all three = insert pre-EQ



EQ Delta ED3344A/ED3151 values: HF shelf (U5B), HI-MID (U6A), LO-MID (U6B), LF (U7A); CW = boost

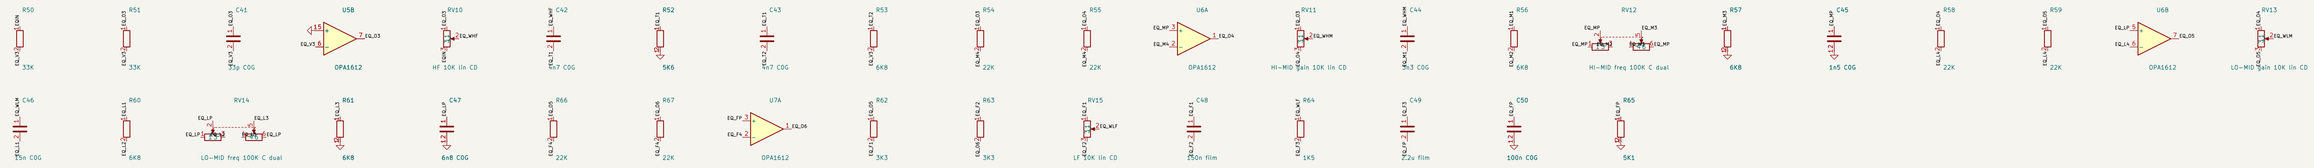

EQ IN SW12: latched = EQ in (unlatched = bypass from the EQ input); green EQ LED



INSERT (send = tip, return = ring, ring normalled to send) + return buffer




OVERLOAD DETECTOR (-+18 dBu)



PFL (pre-fade) SW3: A–B = ON




ON / SOFT MUTE (2x J112 shunt, ~20 ms ramp) SW4: latched = channel ON, green LED



FADER + POST-AMP (+10 dB; omit R38 for unity) JP1 = VCA bypass



AUX SENDS PRE switch per pair (latched = pre); jumpers 1–2 = pre-fader, 2–3 = pre-EQ. SW13 DIR: aux 6 pot -> direct out

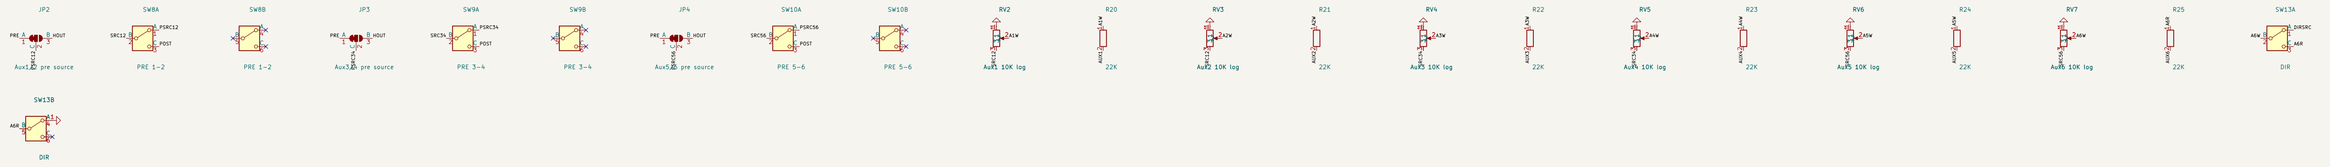


DIRECT OUT (level = aux 6 pot when DIR is latched; impedance-balanced TRS)




PAN + PAN BUFFERS (AC-coupled outputs)



PAN SWITCH SW14: latched = subgroups panned; unlatched = subgroups get POST, unpanned (MIX always panned)



ROUTING MATRIX 4K7 summing; DG413 at the bus end: assigned = bus, off = AGND. PVA2: pole A logic, pole B LED

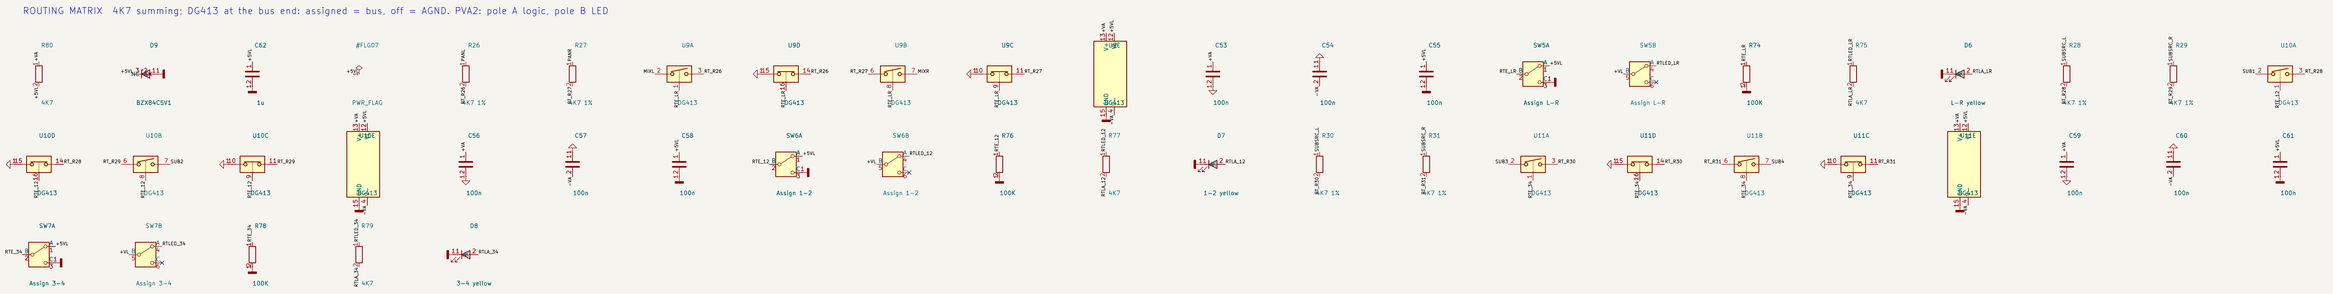

Nets joined by labels; tidy wiring in Eeschema as needed
Generated from channel_strip_schematic_spec.md v4.0

Sheet: /
File: channel_strip.kicad_sch

Title: Channel strip — goa console (Delta Theatre input without the mic stag

Size: User	Date: 2026-10-19	**Rev: 4.0**
KiCad E.D.A. 10.0.7		Id: 1/1