


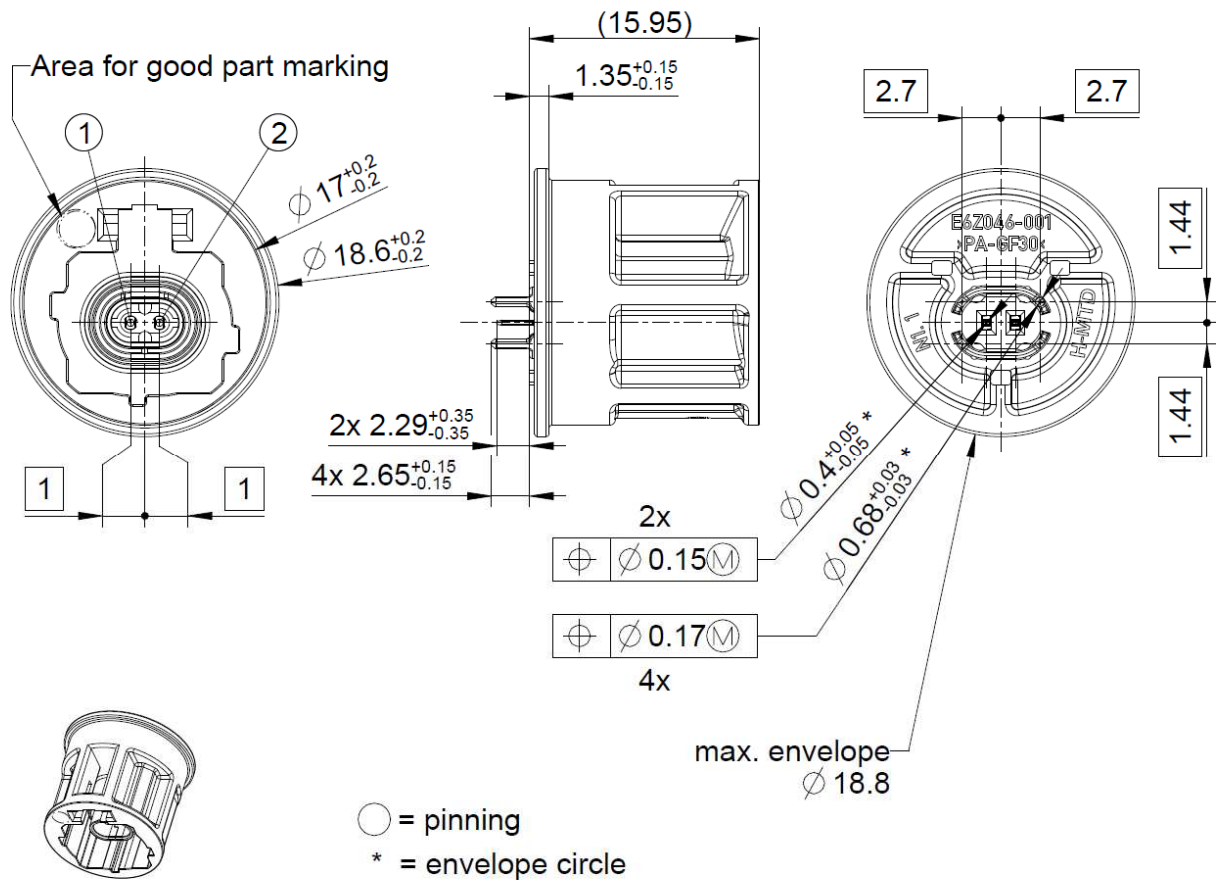

All dimensions are in mm. Y = Part number must be completed by selecting a coding.

Documents

Interface	RN_128-01
Panel piercing	MB_821
Pinning instruction	RN_143-01
Tape & reel packaging	VG507.10000

Material and plating

Connector parts

Signal contact

Material
Brass

Plating

Gold, min. 0.12 μ m, over Nickel (Interface)
Tin, min. 3 μ m, over Nickel (PCB)
Tin, min. 3 μ m
see section "Coding"

Outer contact
Housing

Bronze
HTN

Preliminary

Electrical data

Impedance	100 Ω
Frequency	DC to 10 GHz
Return loss	≥ 30 dB, 0,01 GHz to 3 GHz
	≥ 25 dB, 3 GHz to 6 GHz
	≥ 20 dB, 6 GHz to 10 GHz
Insulation resistance	≥ 100 M Ω
Signal contact resistance	≤ 10 m Ω
Outer contact resistance	≤ 7.5 m Ω
Working voltage (at sea level)	≤ 60 V DC
Power current	$\leq 1,5$ A DC

Connector only, electrical data in application depends decisively on PCB layout

Mechanical data

Mating cycles	min. 5
Engagement force	≤ 40 N
Retention force latch	≥ 110 N
Coding efficiency	≥ 80 N
Estimated weight	3,1 g / pc

Environmental data

Temperature range	-40°C to +105°C
Thermal shock	DIN EN 60068-2-14
Humidity	DIN EN 60068-2-30 @ +40°C
Dry heat	DIN EN 60068-2-2 @ +105°C
Vibration	DIN EN 60068-2-64
Mechanical Shock	DIN EN 60068-2-27
Water resistant	LV 214 / sim. DIN EN 60529 IPX7M, IPX9
Soldering profile acc. to	DIN EN 60068-2-58 group 3 (250°C/30s)
RoHS	compliant

Packing

Standard	100 pcs in tape & reel
----------	------------------------

Preliminary

Coding

Y = Part number must be completed by selecting a coding.

Coding	Plug	Colour	RAL	Part-Number
A		Jet black	sim. 9005	E6S14A-40MT5-A
B*		Pure white	sim. 9010	E6S14A-40MT5-B
C*		Light blue	sim. 5012	E6S14A-40MT5-C
D*		Claret violet	sim. 4004	E6S14A-40MT5-D
E*		May green	sim. 6017	E6S14A-40MT5-E
F*		Nut brown	sim. 8011	E6S14A-40MT5-F
G*		Platinum grey	sim. 7036	E6S14A-40MT5-G
H*		Light pink	sim. 3015	E6S14A-40MT5-H
J*		Beige	sim. 1001	E6S14A-40MT5-J
K*		Curry	sim. 1027	E6S14A-40MT5-K
L*		Yellow green	sim. 6018	E6S14A-40MT5-L
M*		Pastel orange	sim. 2003	E6S14A-40MT5-M
O*		Light green	sim. 6027	E6S14A-40MT5-O
Z		Water blue	sim. 5021	E6S14A-40MT5-Z

* Coding on request

Preliminary

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
L. Held	28.09.21	L. Held	22.09.22	200	22-v401	M. Henning	22.09.22
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 3 / 3