Geobit
Understand everything better

BETOFLEX®
REFINED QUALITY ENGINEERING



PRODUCT CATALOGUE

Advanced Waterproofing, Construction Solutions & Protective Coatings

INTRODUCTION

GEOBIT Industries manufactures, designs, and develops reliable and effective construction chemicals for a wide range of industries. Founded in 2015, the company has gained strong expertise in the manufacturing, import, and export of high-quality construction products.

As an ISO 9001:2015, ISO 14001:2015, and ISO 45001:2018 certified company, we specialize in delivering dependable and efficient solutions tailored to diverse industrial and infrastructure needs.

Quality is a fundamental element of our organization. These principles influence every aspect of our operations, ensuring that we deliver high-standard waterproofing materials. They are essential for achieving our vision of being recognized as a worldwide leading company in this sector.

Our Certifications

Dubai Central Laboratory

Peers Quality Assurance

In -Country Value

Abu Dhabi Commercial Engineering Services

Environment (ISO 14001:2015)

Quality (ISO 9001:2015)

Health & Safety (ISO 45001:2018)

COMPREHENSIVE SOLUTIONS ACROSS EVERY SEGMENT

Product Categories



Waterproofing


Concrete Repairs


Grout & Micro Concrete


Construction Chemicals


Joint Sealants


Thermal Insulation


Joint Filler Products


Flooring Systems


Tile Adhesive


Protective Coatings


Decorative Coatings


Miscellaneous Solutions

1.Waterproofing

Protects system from every aspects like water, moisture & dampness.

1.1 Primer

Betoprime



SB - Solvent based bitumen primer

WB - Water based bitumen primer

1K-PU -Drying moisture curing polyurethane

EP - Solvent Free Epoxy Resin Primer And Sealer

FEATURES

- Improves adhesion of bitumen based membranes & coatings
- Anti-corrosive
- Binder for dust particles
- Physical bond to all substrates including damp substrates.

USES

- SB & WB used as primer for concrete bitumen based membranes & coatings
- 1KPU used as primer for polyurethane coating
- EP used as epoxy floor bonding primer

Package (L) : 15,20,200 | **Color** : Black /Brown / Clear

1.2 SBS Bituminous Membrane

Betoflex 4S & 5S



SBS Modified torch applied waterproofing membrane

FEATURES

- Positive barrier to water and dampness.
- Accommodates structural movements.
- High cold flexibility.
- Resistant to chemical attack from soil or water

USES

- Foundations & Footings
- Below ground waterproofing
- Swimming pool / pool deck
- Tunnels and subway

Roll size(m) : 1 x 10 | **Reinforcement (g/m²)** : 180,200,250,270

Finish : Plain & slated | **Thickness (mm)** : 3,4 & 5

Variants : Available upon various cold flexibility





1.3 APP Bitumenous Membrane

Betoflex 4P & 5P



APP Modified torch applied waterproofing membrane

FEATURES

- Better UV resistance (Slated)
- Positive barrier to water and dampness.
- Accommodates structural movements.
- Maintains shape stability at high temperatures
- Resistant to chemical attack from soil or water

USES

- Roof, Wet area & Balcony.
- Slated membrane only for exposed area

Roll size(m) : 1 x 10 | **Reinforcement (g/m²)** :180,200,250,270

Finish : Plain & slated | **Thickness (mm)** : 3,4 & 5

Variants : Available upon various cold flexibility

1.4 Antiroot Membrane

Betoflex 4S Garden



Torch Applied Antiroot Waterproofing Membrane

FEATURES

- Positive barrier to water and dampness.
- Excellent root barrier membrane
- Accommodates structural movements.
- High resistance to root penetration.
- Resistant to chemical attack from soil or water

USES

- Landscape,
- Balcony
- Planter area, etc.

Roll size(m) : 1 x 10 | **Reinforcement (g/m²) :** 180,200,250,270

Thickness (mm) : 3,4 & 5

Variants : Available upon various cold flexibility



1.5 Self Adhesive Membrane

Betostick FP



Self adhesive waterproofing membrane

FEATURES

- Excellent adhesion
- Wide temperature tolerance
- Excellent elongation & recovery
- Easy application

USES

- Substructure
- Wet area
- External surface of underground water tanks
- Manhole and chamber

Roll size(L) : 1 x 10 , 1 x 15 | **Thickness (mm) :** 1.6,2 .1

Variants : Available upon various top surface film (XL/AL/PE/PP)

1.6 Double Reinforced Membrane-Special

Betoflex 4S & 5S DR



Torch applied SBS/APP double reinforced waterproofing membrane

FEATURES

- Bonds well to the substrate
- Maintains shape stability at high temperatures.
- Positive barrier to water and dampness.
- High puncture resistance

USES

- Foundations & Basements
- Car Park
- Concrete reatiang structures
- Roads and bridge

Roll size(m) : 1 x 10

Thickness (mm) : 4 & 5 | **Reinforcement (g/m²) :** 180P+60F,200P+50F

Variants : Available upon various cold flexibility

1.7 HDPE Membrane

Betoflex HP S



High density polyethylene loose laid membrane

FEATURES

- Faster installation, less site waste.
- Lowers temperature gain.
- Prevents water migration, unaffected by ground settlement.
- Saves time and cost.
- High resistant to acid , alkali & salts

USES

- Substructure /basement
- well compacted sand on rolled crushed stone
- Tunnels & subways
- Permanent & removable formwork
- rigid insulation

Roll size(m) : 1.2 x 20 | **Thickness (mm)** : 1.2 & 1.5



1.8 Protection board

Betoboard



Semi-flexible - rigid bituminous membrane

FEATURES

- High Puncture resistance
- Protection for waterproofing system
- Shields the membrane from sharp aggregates

USES

- To protect waterproofing membrane from site traffic / impact during backfilling

Sheet size (m) : 1 x 2 | **Thickness (mm)** : 3.2, 3.5, 4, 6.

Betostick PB



Self adhesive protection membrane

FEATURES

- High dimension stability
- Excellent puncture & UV resistant
- High tear strength
- Easy application

USES

- Foundations
- Manhol & pipes
- Tunnels & trenches

Sheet size (m) : 1 x 2 | **Thickness (mm)** : 3.5



1.9 Bitumen waterproof coating

Betocoat RBE



High Build Rubberized Bituminous Emulsion

FEATURES

- Excellent adhesion
- Non-hazardous
- Movements and hairline cracks
- Single component

USES

- Tanking, waterproofing concrete, cement blocks foundation, retaining wall, wet areas etc.
- Damp proof membrane in sandwich constructions
- Vapor proof barrier coating for interior & exterior floors & walls

Package (L) : 20,200 | **Color** : Brown liquid dries to black

Variants : Available upon various solid & rubber content

Betolast 1000



SBS Modified Rubberized Bituminous Liquid Applied Membrane


FEATURES

- Excellent Elongation 1000 %
- Single component, simple and quick application.
- High Elasticity

USES

- Foundation
- Wet area
- Interior & exterior floors & walls
- Planter boxes

Package (L) : 20 | **Color** : Black

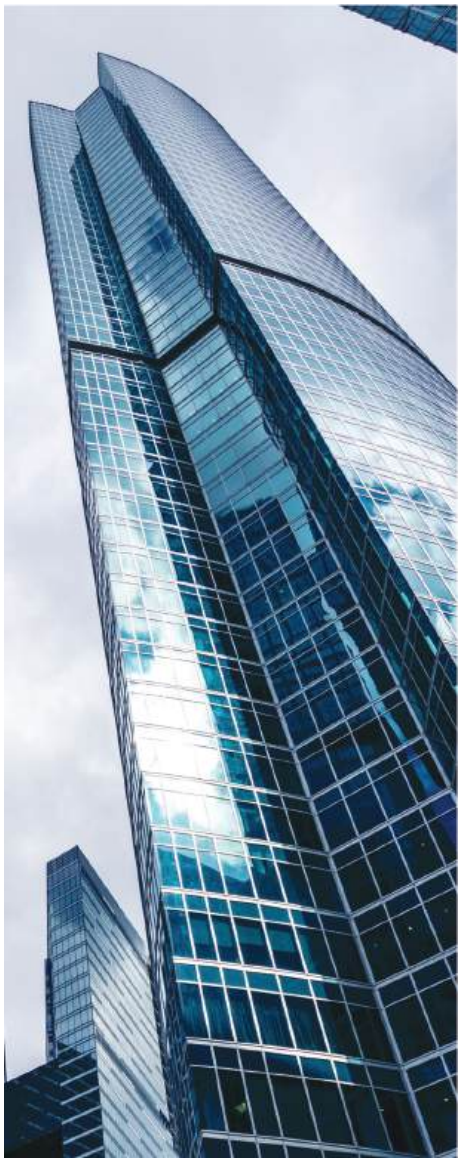

1.10 Cementitious waterpoof coating

Betoflex CM



CM- Acrylic Polymer Modified Cementitious Coating (Part A+B)

CM 588 - Acrylic Polymer Modified Cementitious Coating (Premium) (Part A+B)

FEATURES

- Nontoxic ideal for contact with potable water
- Excellent adhesion / UV Resistance
- Provides anti carbonation cover
- Prevents wetness/ dampness

USES

- Foundation protection
- wet area
- Roof
- pedestrian walkways in marine areas
- water retaining structures

Package (Kg) : 20,30 | **Color** : **Color** : White /grey /light grey

1.11 Polyurethane waterpoof coating

Betocoat PU



- Liquid applied polyurethane coating
- Hybrid polyurethane coating
- Pitch modified polyurethane coating

FEATURES

- High Tensile & Elongation
- Crack bridging greater than 3mm
- Excellent adhesion & Excellent UV

USES

- Foundation &wet area
- Roof
- Metal roof & sandwich panel
- Protective coating for PU foam

Package (KG) : 20, 25 | **Color** : Black /white/grey





Betocoat PU2K



- Two component Liquid applied polyurethane waterproof coating

FEATURES

- High Tensile & Elongation
- Low VOC
- Excellent adhesion
- Pitch coal tar free

USES

- Foundation & Wet Area
- Balcony & Terrace
- Pedestrain Traffic deck
- Under tile/screed

Package (Kg) : 24 | **Color** : Black /grey

Betourethane 1000



- High performance coatings and linings

FEATURES

- Complies to specification ASTM C836 & ASTM C957
- Maintains performance under movement and stress.
- Bonds to concrete,steel, metals, asphalt, glass, wood, and existing coatings.
- Impervious to water and most aqueous chemicals, suitable for tanks and pond liners.

USES

- Foundations
- Manhol
- Wet area
- Podium

Color : Black | **Package (L)** : 20

Betoroof Topcoat



UV Resistant Protective Polyurethane Coating

FEATURES

- Single component
- High Tensile & Elongation
- Excellent adhesion

USES

- Foundation
- Wet Area
- Balcony
- Terrace
- Pedestrain Traffic deck

Package (Kg) : 20 | **Color** : **Color** : White /grey



BETOUREA UV2



Polyurethane Hybrid Elastic Top Coat For Liquid Applied Membrane Waterproofing System

FEATURES

- Good chemical resistance
- High colour stability and gloss retention
- Low dirt pick-up and easy to clean
- Excellent long-term weathering performance

USES

- As a topcoat for 2 component spray applied polyurea
- Podium decks
- Exterior use only
- Flat and pitched roof structures

Package (L) : 12.5 | **Color** : **Color** : White or RAL Colours

1.12 Polyurea

Betourea H



Two Component Waterproofing Polyurea Spray Applied Membrane

FEATURES

- Good adhesion to most substrates
- Elastic and crack-bridging
- Total solids Fast application - application with 2-part hot
- spray equipment

USES

- Podium decks: Acts as a durable waterproofing layer beneath planting beds or hard landscaping.
- Other concrete structures: Suitable for waterproofing non-trafficked concrete areas, including those requiring UV protection with an additional topcoat.

Package (Kg) : 400 (Part A +Part B) | **Color** : Mixed product has a silk matt grey finish

1.13 Acrylic waterpoof coating

Betoflex AC



Acrylic Reinforced Flexible Protective Coating

FEATURES

- Single component
- Excellent UV resistance
- White color has high solar reflectivity index (SRI) to prevent heat island effect on roofs.
- Excellent adhesion

USES

- Water proofing of roof slabs, terraces, balconies, sun shades, parapet walls, etc
- Waterproofing cum decorating of external plastered walls
- Water proofing of car park deck.
- sandwich panel

Package (Kg) : 20 | **Color** : White /grey /light grey

Variants : Different types are available depending on the parameter values

Betoroof 6000



Heavy duty acrylic roof waterproofing membrane

FEATURES

- Excellent UV resistance
- Non hazardous
- Good resistance against chloride and sulphate ions
- Single component

USES

- Roof & Terrace
- Balcony
- For new & old surface
- For sandwich panel

Package (Kg) : 20 | **Color** : White /grey /light grey



2.Concrete Repairs

Concrete repairs are performed to restore the structural integrity, durability, and appearance of concrete structures that have been damaged, deteriorated, or compromised.

2.1 Mortar

Betopoxy NF



Epoxy Repair Putty, Bedding Mortar And Adhesive

FEATURES

- High Compressive strength
- Excellent impact resistance
- Resistant to saline water, salt, oil, grease, alkalis, and acids.
- Easy application.

USES

- Repairing damaged concrete, filling of cracks.
- As a skim coat/filler on prepared floors prior to application of floor coatings and screeds
- Excellent for anchoring bolts or replacement rebar and filling bolt pockets
- As a bonding agent: it bonds to almost all rigid surfaces.

Package (Kg) : 3 | **Appearance** : Paste

2.2 Injection Material

Betoproof PU



Polyurethane Injection Resin For Crack Injection

FEATURES

- Forms a durable, high-strength seal in cracks and joints.
- Excellent adhesion to mineral surfaces.
- Safe for contact with drinking water.
- Fast action

USES

- For hairline cracks needing low-viscosity resin penetration.
- For moving cracks requiring flexible sealing.
- For wide gaps needing a stable, seamless seal.

Package (L) : 4,10 | **Color** : Transparent Yellow Liquid

Betoseal PU



Polyurethane Injection Foam For Crack Injection

FEATURES

- Deeply penetrates fine cracks
- Forms a durable, high-strength seal
- No shrinkage after curing
- Fast-reacting semi-rigid PU foam for stopping active leaks under high flow.

USES

- Protection for basement water leakage
- Water sealing of cracks and big gaps in walls,floors, concrete constructions. It has the property of fast reacting to semi rigid PU foam once contacted with water

Package (L) : 4,10 | **Color** : Transparent Brown Liquid





3.Grouts & Micro concrete

Used for structural membrane and pile head treatment.

3.1 Cement based Grout

Betogrout NS



Non-Shrink Free Flowing Cementitious Grout

FEATURES

- Impact resistant.
- Non staining & non metallic
- Excellent bond strength to concrete and steel
- Cement based to ensure substrate compatibility

USES

- Concrete repairs
- Fixing, joining vertical & horizontal precast member.
- Void filling between old and new concrete.
- Pile head reprofiling

Package (Kg) : 25 | **Appearance** : Powder | **Color** : Grey

3.2 Epoxy based Grout

Betogrout EP 102



High Strength Flowable Epoxy Grout
For Pile Head Treatment


FEATURES

- Excellent adhesion to steel and concrete
- Permanent protection for water ingress
- Non shrink and rapid strength gain
- High resistance to dynamic loads and chemical attack

USES

- Pile cap waterproofing.
- Bridge bearing seats
- Anchors, rails and bolt fixing.
- Structural filling of holes and cavities in concrete.

Package (KG) : 30 | **Color** : Grey

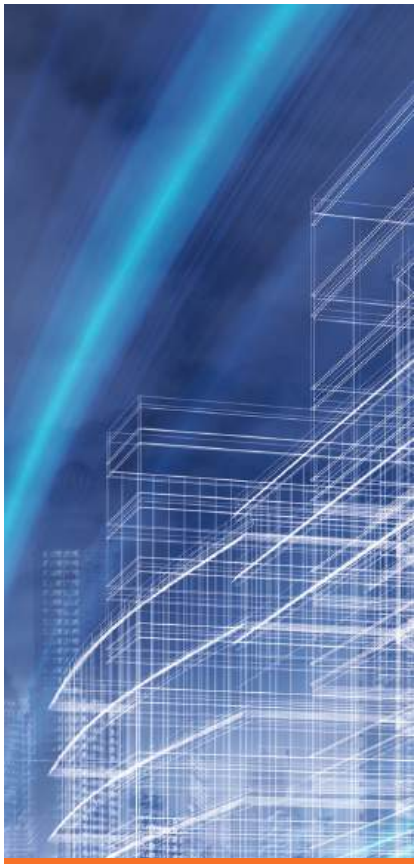

EVERY LAYER WE BUILD CARRIES OUR PROMISE OF RELIABILITY.

3.3 Micro-concrete

Betocrete MC



Flowable, Non-Shrink Micro-Concrete

FEATURES

- Free flowing
- Excellent bond strength to concrete and steel
- It is watertight and withstands chemically aggressive agents
- Impact resistant.

USES

- Pile cap waterproofing / Reprofiling
- Repair of precast concrete
- For anchoring of bolts, dowels etc.
- General Purpose grouting.
- Machinery and equipment foundations.

Package (Kg) : 25 | **Appearance** : Powder | **Color** : Grey

4.Construction chemical

Construction chemicals are specialized materials used to enhance the performance, durability, and quality of concrete, masonry, and other building works

4.1 Bonding agent

Betobond



- Betobond PVA -PVA Based
- Betobond SBR -SBR based

FEATURES

- Increase Strength
- Enhance adhesion
- Versatile
- Reduces Shrinkage
- Provides good resistance to water and moisture

USES

- Can be used as a surface sealer for concrete and floors
- Use as an admixture
- Repair of concrete

Package (L) : 5,20,200

Appearance : Liquid | **Color :** White

4.2 Curing Compound

Betocure



- Betocure W - Water Based
- Betocure R- Hydrocarbon resin based

FEATURES

- Retains sufficient moisture in concrete for total hydration and optimum strength development.
- Eliminates the need for water curing efficiency

USES

- Used on freshly poured concrete
- surfaces, which requires subsequent finisheste

Package (L) : 200 | **Appearance :** liquid

Color : White

4.3 Chemical Release Agent

Betorelease



- Betorelease S - Solvent Based
- Betorelease W - Water Based

FEATURES

- Easy removal for formwork
- Non staining
- Protects steel forms from corrosion.
- Reduces blow holes.

USES

- Steel /Aluminum Formwork
- Timber and plywood.

Package (L) : 200 | **Appearance :** liquid

Color : Clear / Milky white





5.Joint sealants

Prevents water leakage and accommodates thermal and structural movement without cracking or losing adhesion

5.1 Mastic based

Betomastic



Bitumen Mastic Sealant

FEATURES

- Flexible joint sealant.
- Excellent adhesion.
- Good expansion and contraction properties.
- Easy application

USES

- Used for Termination of membrane
- Pointing between brickwork and roof flashings.
- Sealing around roof/wet service pipes

Package (Kg) : 20 | **Appearance** : Semi stiff paste | **Color** : Black



5.2 Polyurethane based

Betoseal 1PU



Single Component Polyurethane Based, Non-Sag Elastomeric Sealant

FEATURES

- Short cut off string
- Excellent adhesion to different construction joints.
- Bubble free curing
- UV resistance

USES

- Concrete expansion joints.
- Precast concrete cladding.
- Parapet walls.
- Expansion and constructions joints in water retaining structures

Package (ml) : 600 (20 cartridges in a box) | **Appearance** : Smooth & pasty

Color : Grey, White, Beige, and other colors

5.3 Polysulphide based

Betoseal PS PG



High Performance Elastomeric Pouring -Grade Polysulphide Joint Sealant

FEATURES

- Good UV Resistance.
- High movement accommodation
- Non-staining.
- Non-toxic.

USES

- Floor Joints,
- Facade & External Joints,
- Waterproofing Joints,
- Expansion / Construction Joints.

Package (L) : 04 | **Appearance** : :Smooth & pasty | **Color** : Grey



5.4 Silicon sealant

Betoseal WS



Weather and chemical resistant sealant

FEATURES

- Fast curing with excellent UV stability
- Bonds strongly without primer.
- Resistant to seawater, mild acids, and alkalis.

USES

- Window and door perimeters.
- Skylights, hinges, and penetrations.
- HVAC units, flashings, and gutter joints.

Package (ml) : 600 (20 cartridges in a box) | **Appearance** : Smooth & pasty

Color : Black

6.Thermal Insulation Products

Thermal insulation products are used in construction to reduce heat transfer, improve energy efficiency, and maintain comfortable indoor temperatures.

6.1 Polyurethane foam

PU Chemical



Two Component, Spray Applied Polyurethane Foam System

FEATURES

- Thermal protection
- High compression strength
- High fire resistance
- Rapid installation
- High adhesive strength

USES

- Insulation for flat and sloped roofs.
- Sealing joints, gaps, and cracks in roofs, walls, and foundations
- For combo roofing system

Package (Kg) : 470 | **Variants** : Available upon different densities



6.2 Insulation Board

Betoboard EXP



EXTRUDED POLYSTYRENE RIGID HEAT INSULATION BOARD

FEATURES

- Excellent thermal insulation
- Durable and long-lasting with dimensional stability.
- Lightweight and easy to handle.

USES

- Used for combo system (BCRS)
- Thermal insulation for roof slabs, floors, and walls.
- Under screeds in floors
- Basements and foundation walls

Board Size (mm) : 1250 x 600

7.Joint Filler Products

Joint filler products are used to fill and protect joints in concrete and masonry structures for Movement Accommodation & Durability Enhancement

7.1 Backing Rod

Betorod



Extruded Polyethylene Backing Rod Foam

FEATURES

- Control the depth of applied sealant.
- Act as a barrier interface to prevent three sided adhesion (bond breaker)
- Provide a form to assist the sealant in developing the hourglass shape

USES

- Construction joint filling
- Window gap filling
- Used in combo system

Diameter (mm): 10,15,20,25,30 | **Roll length (m) :** 100,200,360,800

7.2 Filler Board

Betocell



Expansion Joint Filler Board Protection Board

FEATURES

- Easy process with common tools
- Standard sizes and customized panels & strips

USES

- Parking decks and podium slabs
- Concrete pavements and roads
- Industrial floors and warehouses
- Construction joint seperation

Thickness (mm): 8,10,12,15,18,19,20 | **Sheet Size (mm) :** 1180 x 2250





8. Flooring

To create durable, smooth, and protective floor surfaces in industrial, commercial, and residential setting for Durability & Strength.

8.1 Epoxy Based Coating

Betofloor FC



Solvent Free Epoxy Resin Coating

FEATURES

- Excellent adhesion to concrete and metal surfaces
- Durable and hardwearing
- High Chemical resistance
- Excellent resistance to a wide range of chemicals

USES

- Warehouses and factory floors
- Concrete surfaces.
- Coating for steel structures
- Pump & generator rooms
- Car parking areas

Package (Kg) : 22.5 | **Color :** Grey (other colors on request)



8.2 Self levelling

Betofloor SL 20



Epoxy resin based self-leveling floor topping

FEATURES

- 100% reactive system totally free of solvents
- Good resistance to a wide range of chemicals
- Self-Leveling
- Seamless floor, which helps in keeping the microbial count low.

USES

- Laboratories
- Plant room for pharmaceutical and health care product manufacturing units
- Food & beverage manufacturing industries
- Light industrial plants

Package (L) : 15 | **Finish :** Glossy

9.Tile Adhesive

Adhesive ensures strong tile bonding.

9.1 Cement Based Tile Adhesive

Betotile CM 16



Flexible polymer modified cementitious tile adhesive

FEATURES

- Strong bond strength
- Thin bed application
- Better flexibility

USES


- Walls & floors
- Ceramic, vitrified , porcelain, mosaic, granite,marble tiles,sand stones
- swimming pool & wet area

Package (Kg) : 20, 25

Color : Grey , white

Variants : Different types are available depending on the parameter values



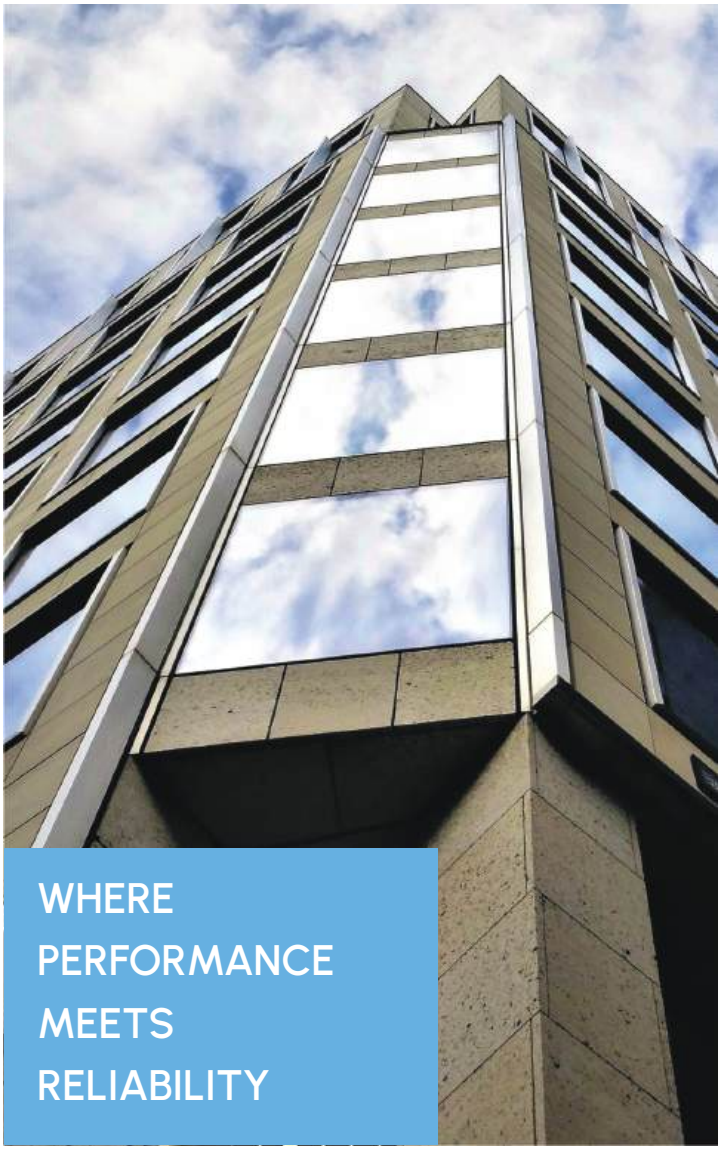

10.Protective coatings

Type of paint, film, or layer applied to a surface to protect it from environmental, chemical, or mechanical damage.

10.1 Primer

Betozinc Primer ZR



Epoxy Zinc Rich

FEATURES

- Ideal repair coat for inorganic zinc primers
- provide zinc anode protection
- Excellent resistance to weathering and protection
- Fast drying

USES

- Severe & marine environments
- Industrial, chemical Plants and refineries

Package (L) : 10 **Finish :** Matt
Color : Metallic Grey

Betoprime ZP



Alkyd Primer

FEATURES

- Excellent Adhesion
- Anti-corrosive
- Fast Drying & Easy Application

USES

- Prevents oxidation & corrosion
- Durable and moisture resistant

Package (L) : 20 **Finish :** Matt
Color : Grey / Red



SMART MATERIALS FOR A STRONGER TOMORROW.

Betoepoxy ZP 200



Epoxy Zinc Phosphate Anticorrosive Primer

FEATURES

- Excellent corrosion protection & Adhesion to Metal Surfaces
- Good Mechanical Strength
- Good Surface tolerance

USES

- Provides a chemically resistant primer for process equipment, pipework, and steel fabrications, Tanks, Oil & Gas Structures

Package (L) : 20 **Finish :** Matt
Color : Red oxide and Grey

Betocore ST 2000



High-build, surface-tolerant epoxy coating

FEATURES

- Can also be used as single coat primer cum top coat in low and moderate environments.

USES

- Suitable for pre-engineered building
- superstructures .

Package (L) : 20 **Gloss :** Semigloss

Color : RAL

Finish : Smooth with excellent flow & surface characteristics



Betozinc Primer ZS 1200



Epoxy Zinc Silicate Primer

FEATURES

- High Zinc Content & Galvanic (Cathodic) Protection
- Chemical & Corrosive Environment Resistance
- Thermal Stability & Low Shrinkage

USES

- Severe & marine environments
- Industrial, chemical Plants and refineries

Package (L) : 10 **Finish :** Matt

Color : Greenish Grey

Betobuild MIO



Fast drying ,high build , high solid epoxy coating undercoat

FEATURES

- Acts as an effective build coat providing thick, durable film in fewer coats
- Offers MIO & Non-MIO versions.
- suitable for use in corrosivety category with suitable primer & topcoat

USES

- Build coat for epoxy's
- Enhance adhesion and improves coating system

Package (L) : 20 **Finish :** Matt

Color : Grey / Red

10.2 High Performance Coating

Betocoal Epoxy



Coal tar epoxy

FEATURES

- Offers excellent resistance to abrasion, impact, and chemically aggressive water, including sewage.
- Ideal as an anti-corrosive coating.

USES

- Designed for the long-term protection of steel harbor and shoreline structures and concrete pipelines, as well as harbor & shoreline structures
- Suitable for use as an internal lining in crude oil storage tanks.
- For submerged or partially submerged areas such as piles, jetties,and dock gates.

Color : Black | **Finish** : semi-gloss | **Package (L)** : 20

Betofree SF



Solvent Free Epoxy

FEATURES

- High-build epoxy coating
- Chemical resistant
- Barrier protection in harsh environment
- Very high build thickness
- Highly durable under immersion

USES

- For protecting steel and concrete surfaces, ideal for internal tank linings and similar contaminant applications.

Package (L) : 20 | **Finish** : Gloss | **Color** : Selected Colors



10.3 Top Coats

Betogloss 700



High-solids aliphatic polyurethane coating

FEATURES


- Provides smooth, high gloss, semi-gloss or Matt finish
- Excellent gloss and color retention for long term exterior use
- Durable finish for exterior and interior structures above the waterline

USES

- industrial and chemically polluted environments
- plants, industrial facilities, and fabrication shops
- UV resistant

Package (L) : 20 **Finish :** Gloss, Semi-gloss ,Matt
Color : Red & yellow (limited colors), RAL, BS, Pantone



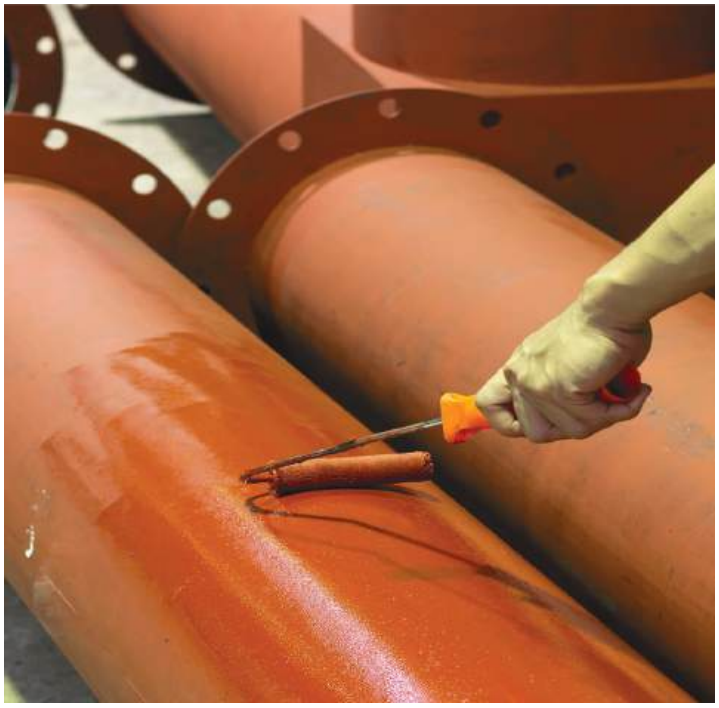

Betoenamel Gloss



Alkyd Top Coat

FEATURES

- Fast Air Drying
- No Catalyst Needed
- Moderate weather & UV resistance

USES

- General Steel Application
- Decorative Finish
- OEM & Fabrication industry

Package (L) : 20 **Finish :** Gloss
Color : RAL / BS

11.Decorative coatings

Type of paint or finish applied to surfaces primarily to enhance appearance while also offering basic protection to the substrate.

11.1 Primer

Betoflex Primeseal



High-adhesion PVA primer for sealed and uniform surfaces

FEATURES

- Good Adhesion to Dry, Porous Substrates
- Low odor & Low VOC
- White & tintable base

USES

- Priming new drywall
- Sealing interior masonry or plaster
- Concrete surface preparation
- undercoat for latex paints

Package (L) : 18 **Finish :** Matt
Color : White

11.2 Filler

Betoflex Wallsmooth



Wall filler for smooth, defect-free base preparation. Available in fine, medium & heavy textures

FEATURES

- smooth finishing for painting
- Excellent adhesion to cementitious substrate

USES

- filling surface imperfections
- leveling uneven surface
- Base for decorative coatings

Package (L) : 18 **Finish :** Matt
Color : White



EVERY LAYER WE BUILD CARRIES OUR PROMISE OF RELIABILITY.

11.3 Interior Topcoat

Softmatte Emulsion



Low-odor plastic emulsion with a soft matte finish.

FEATURES

- Matte to satin finish
- Good Washability
- Breathable film
- Economical

USES

- Interior wall & ceiling paints
- Economical decorative finish
- Suitable for new & previously painted surface
- Good washability & Stain resistance

Package (L) : 18 **Finish :** Matt,Gloss
Color : NCS,RAL,BS,Pantone,our catalogue

11.4 Exterior Topcoat

Betoflex Texture



Subtle textured finish for refined surface design. Available in fine, medium and heavy textures.

FEATURES


- Textured finish
- Weather resistance
- Variety of textures & colours

USES

- Exterior walls of residential, commercial buildings
- Architectural detailing and feature walls

Package (L) : 18 | **Finish :** Textured/smooth finish

Color : RAL, PANTONE,BS,OUR CATALOGUE

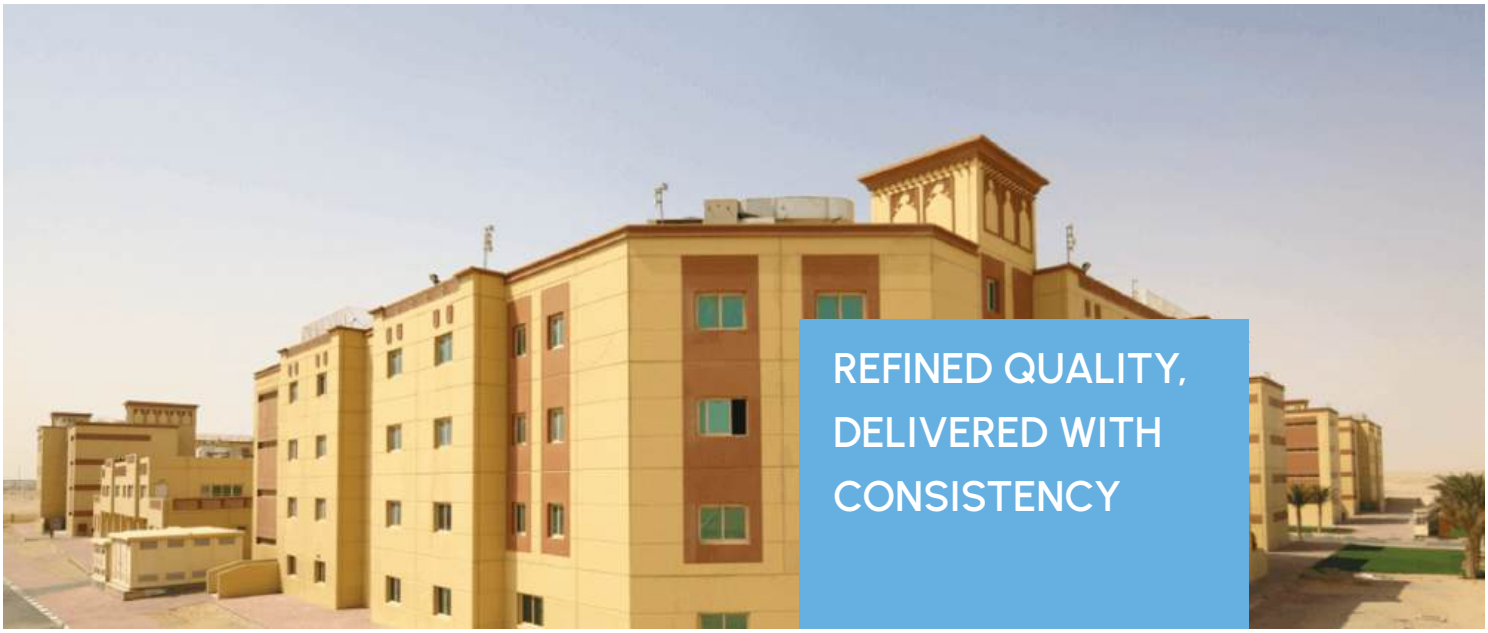

11.5 Luxury Topcoats

Eggshell Duratop



Elegant eggshell finish with enhanced stain resistance in matte and silk finishes.

FEATURES

- Available in silk and matte options
- Durable & scrub resistant
- Non Yellowing
- Low odor and washability

USES

- Interior walls for living room, bedroom, commercials
- Feature walls and accent areas

Package (L) : 18 | **Finish :** Silk & Matt

Color : RAL, PANTONE,BS,OUR CATALOGUE

12.Miscellaneous

12.1 Waterstop

Betostop



PVC waterstops for internal and external construction joints as well as for expansion joints

FEATURES

- High tensile strength & elongation
- Heat weldable
- Excellent chemical resistance
- Unique design. Specific ribbed profile for effective water sealing performance.

Roll length (m) : 15 | **Width (mm)**: 250
Color : Blue | **Thickness (mm)** : 04

USES

- All construction joints
- Underground car parks
- Below ground slabs
- Tunnels
- Retaining walls
- Water retaining structures

12.2 Geotextile

Betotec



Non-woven seperation layer membrane

FEATURES

- Permeability
- Durability
- Fabric Composition & Strength
- Cost-Effective & Flexibility
- High puncture resistance

USES

- Waterproofing
- Road and Pavement Construction
- Drainage Systems
- Separation & Filtration
- Reinforcement & Retaining Structures

Roll size (m) : 3. x 100 (Other sizes)
Color : White | **Mass /unit area (g/m2)**: 100,120,140 & So on



PRECISION-ENGINEERED FOR DEMANDING CONDITIONS.

12.3 Mesh

Betotec Mesh 65



High Quality Fiberglass Mesh

FEATURES

- Good smoothness.
- High tensile strength and resistance to deformation
- Perfect chemical stability

USES

- Used as a reinforcement mesh for all liquid waterproofing application

Roll size (m) : 1 x 10
Color : White

12.3 Polypropylene corrugated sheet

Betoboard PP



Polypropylene Corrugated Sheet

FEATURES

- Light weight and flexible
- Resistant to minerals and chemicals
- Easy to handle
- Can be cut with Stanley blades / by any other cutter, to any size & shape
- High puncture resistance

USES

- Temporary floor protection during construction
- Waterproofing protecting

Sheet size(m) : 1 x 2 | **Thickness (mm)** : 2, 3,4, 5 & 6 | **Color** : Blue



12.4 DPC Membrane

Betoflex DPC



Bituminous damp proof course Membrane

FEATURES

- Excellent resistance to weathering
- Durable
- High barrier to moisture and water
- High resistance to structural movement

USES

- Can be used for horizontal and vertical application.
- Block work
- Substrucure

Roll length (m) : 10 , 15 | **Width (mm)** : 100,150,200,250,300

Color : Black | **Thickness (mm)**: 1.5,2,3

Note: Product packaging shown in this catalogue is for illustration purposes only. Actual packaging may differ from the images displayed.

Geobit
Understand everything better

BETOFLEX®
REFINED QUALITY ENGINEERING

Head office
Geobit Industries LLC
Sharjah, United Arab Emirates.

P.O Box 231285, Dubai.
P.O Box 513571, Sharjah.

Tel: 065619003
Fax: 065619004
Email- contact@geobitgroup.com

Scan to Chat!

www.geobitgroup.com