

# BMA023

## Digital, triaxial acceleration sensor

### Data sheet

Bosch Sensortec



**BOSCH**

Invented for life




#### BMA023 Data sheet

Order code	0 273 141 065
Package type	12-pin LGA
Data sheet version	1.1
Document number	BST-BMA023-DS000-01
Release date	07 April 2009

#### Notes

Specifications are subject to change without notice.  
Product photos and pictures are for illustration purposes only and may differ from the real product's appearance.  
Proprietary information – not for publication.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## BMA023

### Digital, triaxial $\pm 2g/\pm 4g/\pm 8g$ acceleration sensor

#### Key features

- Three-axis accelerometer
- Small package
  - LGA package
  - Footprint 3mm x 3mm, height 0.90mm
- Digital interface
  - SPI (4-wire, 3-wire), I<sup>2</sup>C, interrupt pin
- Programmable functionality
  - g-range  $\pm 2g/\pm 4g/\pm 8g$ , bandwidth 25-1500Hz, internal acceleration evaluation for interrupt trigger, self-test
- Ultra-low power ASIC
  - Low current consumption, short wake-up time, advanced features for system power management
- RoHS compliant
- Halogen-free

#### Typical applications

- Menu scrolling
- Tap sensing functionality
- Gaming
- Pedometer, step-counting
- Drop detection for warranty logging
- Display profile switching
- Advanced system power management for mobile applications
- Shock detection


#### General description

The BMA023 is a triaxial, low-g acceleration sensor IC with digital output for consumer market applications. It allows measurements of acceleration in three perpendicular axes.

An evaluation circuitry converts the output of a three-channel micromechanical acceleration-sensing structure that works according to the differential capacitance principle.


Package and interface have been defined to match a multitude of hardware requirements. Since the sensor IC has small footprint and flat package it is attractive for mobile applications. The sensor IC can be programmed to optimize functionality, performance and power consumption in customer specific applications.

The BMA023 senses tilt, motion and shock vibration in cell phones, handhelds, computer peripherals, man-machine interfaces, virtual reality features and game controllers.


 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------

## Contents

<b>1. SPECIFICATION</b>	<b>5</b>
<b>2. MAXIMUM RATINGS</b>	<b>7</b>
<b>3. GLOBAL MEMORY MAP</b>	<b>8</b>
<b>3.1 OPERATIONAL REGISTERS</b>	<b>10</b>
3.1.1 <i>SPI4</i>	10
3.1.2 <i>Range</i>	10
3.1.3 <i>Bandwidth</i>	11
3.1.4 <i>Wake_up</i>	11
3.1.5 <i>Wake_up_pause</i>	12
3.1.6 <i>Shadow_dis</i>	12
<b>3.2 INTERRUPT SETTINGS</b>	<b>13</b>
3.2.1 <i>Enable_LG</i>	13
3.2.2 <i>Enable_HG</i>	13
3.2.3 <i>Enable_adv_INT</i>	13
3.2.4 <i>Any_motion</i>	13
3.2.5 <i>Alert</i>	13
3.2.6 <i>Latch_INT</i>	14
3.2.7 <i>LG_thres, LG_hyst, LG_dur, counter_LG</i>	14
3.2.8 <i>HG_thres, HG_hyst, HG_dur, counter_HG</i>	15
3.2.9 <i>Any_motion_thres, any_motion_dur</i>	16
3.2.10 <i>New_data_int</i>	18
<b>3.3 CONTROL REGISTERS</b>	<b>19</b>
3.3.1 <i>Reset_INT</i>	19
3.3.2 <i>Selftest_0</i>	19
3.3.3 <i>Selftest_1</i>	19
3.3.4 <i>Soft_reset</i>	19
3.3.5 <i>Sleep</i>	19
<b>3.4 STATUS REGISTERS</b>	<b>20</b>
3.4.1 <i>St_result</i>	20
3.4.2 <i>Alert_phase</i>	20
3.4.3 <i>LG_latched, HG_latched</i>	20
3.4.4 <i>Status_LG, status_HG</i>	20
3.4.5 <i>Customer_reserved 1, customer_reserved 2</i>	20
<b>3.5 DATA REGISTERS</b>	<b>21</b>
3.5.1 <i>Acc_x, acc_y, acc_z</i>	21
3.5.2 <i>New_data_x, new_data_y, new_data_z</i>	22
3.5.3 <i>AI_version, mI_version, chip_id</i>	22
<b>4. DIGITAL INTERFACE</b>	<b>23</b>
<b>4.1 SPI</b>	<b>23</b>
4.1.1 <i>Four-wire SPI interface</i>	23
4.1.2 <i>Three-wire SPI interface</i>	27
<b>4.2 I<sup>2</sup>C INTERFACE</b>	<b>30</b>
4.2.1 <i>I<sup>2</sup>C protocol</i>	34
<b>5. PACKAGE</b>	<b>36</b>

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

5.1 OUTLINE DIMENSIONS .....	36
5.2 AXES ORIENTATION .....	37
5.3 LANDING PATTERN RECOMMENDATIONS .....	38
5.4 MOISTURE SENSITIVITY LEVEL AND SOLDERING .....	39
5.5 RoHS COMPLIANCY .....	39
5.6 HALOGEN CONTENT .....	39
5.7 NOTE ON INTERNAL PACKAGE STRUCTURE .....	39
6. PIN-OUT OUT AND CONNECTION DIAGRAMS .....	40
7. OPERATION MODES .....	43
7.1 NORMAL OPERATIONAL MODE .....	43
7.2 SLEEP MODE .....	43
7.3 WAKE-UP MODE .....	43
8. DATA CONVERSION .....	47
8.1 ACCELERATION DATA .....	47
9. INTERNAL LOGIC FUNCTIONS .....	48
9.1 HIGH-G LOGIC .....	48
9.2 ANY MOTION DETECTION .....	48
9.3 ALERT MODE .....	48
10. LEGAL DISCLAIMER .....	49
10.1 ENGINEERING SAMPLES .....	49
10.2 PRODUCT USE .....	49
10.3 APPLICATION EXAMPLES AND HINTS .....	49
11. DOCUMENT HISTORY AND MODIFICATION .....	50


 <b>BOSCH</b>	<p style="text-align: center;">Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p style="text-align: center;">Bosch Sensortec</p>
--	---	--

## 1. Specification

If not stated otherwise, the given values are maximum values over lifetime and full performance temperature/voltage range in the normal operation mode, and min./max. values represent 3-sigma limits.

**Table 1: Operating range, output signal and mechanical specifications of BMA023**

Parameter	Symbol	Condition	Min	Typ	Max	Units
OPERATING RANGE						
Acceleration range	$g_{FS2g}$	Switchable via serial digital interface	-2		2	g
	$g_{FS4g}$		-4		4	g
	$g_{FS8g}$		-8		8	g
Supply voltage analogue	$V_{DD}$		2.0		3.6	V
Supply voltage for digital I/O	$V_{DDIO}$	$V_{DDIO} \leq V_{DD}$	1.62		3.6	V
Supply current in normal mode	$I_{DD}$	Digital and analog		200	290	$\mu A$
Supply current in stand-by mode *	$I_{DDsbm}$	Digital and analog		1	2	$\mu A$
Operating temperature	$T_A$		-40		+85	$^{\circ}C$
ACCELERATION OUTPUT SIGNAL						
Acceleration output resolution		Format: 2's complement			10	Bit
Sensitivity	$S_{2g}$	g-range $\pm 2g$ , $T_A = 25^{\circ}C$	238	256	274	LSB/g
	$S_{4g}$	g-range $\pm 4g$ , $T_A = 25^{\circ}C$	115	128	141	LSB/g
	$S_{8g}$	g-range $\pm 8g$ , $T_A = 25^{\circ}C$	57	64	71	LSB/g
Sensitivity temperature drift	TCS	Over $T_A$		$\pm 0.03$	$\pm 0.1$	%/K
Zero-g offset	Off	$T_A = 25^{\circ}C$ , calibrated	-75		+75	mg
Zero-g offset	Off	$T_A = 25^{\circ}C$ , over lifetime	-180		+180	mg
Zero-g offset temperature drift	TCO	Over $T_A$	-6	1	+6	mg/K
Power supply rejection ratio	PSRR	Over $V_{DD}$			0.2	LSB/V


 <b>BOSCH</b>	<p style="text-align: center;">Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p style="text-align: center;">Bosch Sensortec</p>
--	---	--

Parameter	Symbol	Condition	Min	Typ.	Max	Units
Bandwidth	bw	2 <sup>nd</sup> order analog filter		1500		Hz
		Digital filter **		25, 50, 100, 190, 375, 750		Hz
Acceleration data refresh rate (all axes)	f_rate		2700	3000	3300	Hz
Nonlinearity	NL	Best fit straight line	-0.5		0.5	%FS
Output noise	n <sub>rms</sub>	Rms		0.5		mg/ $\sqrt{\text{Hz}}$
MECHANICAL CHARACTERISTICS						
Cross axis sensitivity	$\bar{S}$	Relative contribution between 3 axes			2	%
POWERING UP CHARACTERISTICS						
Wake-up time	t <sub>wu</sub>	From standby		1	1.5	ms
Start-up time	t <sub>su</sub>	From power-off		3		ms

Notes:

\* For more details on the current consumption of the BMA023 during wake-up mode, please refer to chapter 7.3

\*\* Please refer to chapter 3.1.3 for more detailed explanations

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------


## 2. Maximum ratings

**Table 2:** Maximum ratings specified for the BMA023

Parameter	Condition	Min	Max	Units
Supply voltage	$V_{DD}$ and $V_{DDIO}$	-0.3	4.25	V
Storage temperature range		-50	+150	°C
Mechanical shock	Duration $\leq 100\mu s$		10,000	g
	Duration $\leq 1.0ms$		2,000	g
	Free fall onto hard surfaces		1.5	m
ESD	HBM, at any pin		2	kV
	CDM		500	V

**Note:**

Stress above these limits may cause damage to the device. Exceeding the specified electrical limits may affect the device reliability or cause malfunction.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3. Global memory map

All operational registers are accessible through serial interface with a standard protocol:

Type of Register	Function of Register	Command	Volatile / non-volatile
Data Registers	<ul style="list-style-type: none"> <li>– Chip identification, chip version</li> <li>– Acceleration data</li> </ul>	Read Read	non-volatile (hard coded) volatile
Control Registers	<ul style="list-style-type: none"> <li>– Activating self test, soft reset, switch to sleep mode etc.</li> </ul>	Read / Write	volatile
Status Registers	<ul style="list-style-type: none"> <li>– Interrupt status and self test status</li> </ul>	Read	Volatile
	<ul style="list-style-type: none"> <li>– Customer usable status bytes</li> </ul>	Read / Write	volatile
Setting Register	<ul style="list-style-type: none"> <li>– Functional settings (range, bandwidth)</li> </ul>	Read / Write	volatile
	<ul style="list-style-type: none"> <li>– Interrupt settings</li> </ul>	Read / Write	volatile
EEPROM	<ul style="list-style-type: none"> <li>– Default settings of functional and interrupt settings</li> </ul>	Write	non-volatile
	<ul style="list-style-type: none"> <li>– Trimming values</li> </ul>	Protected	non-volatile
	<ul style="list-style-type: none"> <li>– Bosch Sensortec reserved memory</li> </ul>	Protected	non-volatile




 <b>BOSCH</b>	<p style="text-align: center;">Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p style="text-align: center;">Bosch Sensortec</p>
--	---	--

Figure 1: Global memory map of BMA023

Memory Region	Register Address (hexadecimal)	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	type	Default setting
Default Settings	16h to 7Fh	reserved								reserved	NA
Operational Registers	15h	SPI4	enable_adv_INT	new_data_INT	latch_INT	shadow_dis	wake_up_pause		wake_up	control	1 0 0 0 0 0 0 b
	14h	reserved			range<1:0>		bandwidth<2:0>			control	XXX 00 000b
	13h	customer_reserved 2 <7:0>								status	NA
	12h	customer_reserved 1 <7:0>								status	NA
	11h	any_motion_dur		HG_hyst<2:0>			LG_hyst<2:0>			settings	NA
	10h	any_motion_thres<7:0>								settings	NA
	0Fh	HG_dur<7:0>								settings	NA
	0Eh	HG_thres<7:0>								settings	NA
	0Dh	LG_dur<7:0>								settings	NA
	0Ch	LG_thres<7:0>								settings	NA
	0Bh	alert	any motion	counter_HG		counter_LG		enable_HG	enable_LG	control	0
	0Ah	reserved	reset_INT	reserved	reserved	self_test_1	self_test_0	soft_reset	sleep	control	0
	09h	st_result	reserved		alert_phase	LG_latched	HG_latched	status_LG	status_HG	status	NA
	08h	unused								data	NA
	07h	acc_z<9:2> (msb)								data	NA
	06h	acc_z<1:0> (lsb)		unused					new_data_z	data	NA
	05h	acc_y<9:2> (msb)								data	NA
	04h	acc_y<1:0> (lsb)		unused					new_data_y	data	NA
	03h	acc_x<9:2> (msb)								data	NA
	02h	acc_x<1:0> (lsb)		unused					new_data_x	data	NA
	01h	al_version<3:0>				ml_version<3:0>				data	NA
	00h	unused					chip_id<2:0>			data	---- 010b


### Important notes:

1) Bits 5, 6 and 7 of register addresses 14h do contain critical sensor individual calibration data which must not be changed or deleted by any means.

In order to properly modify addresses 14h for range and/or bandwidth selection using bits 0, 1, 2, 3 and 4, it is highly recommended to read-out the complete byte, perform bit-slicing and write back the complete byte with unchanged bits 5, 6 and 7.

Otherwise the reported acceleration data may show incorrect results.

2) Bit 7, bit 5 and bit 4 of register 0Ah should be left at a value of "0".

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.1 Operational registers

#### 3.1.1 SPI4

The SPI4 bit (address 15h, bit 7) is used to select the correct SPI protocol (three-wire or four-wire, SPI-mode 3). The default value is SPI4=1 (four-wire SPI is default value). After power on reset or soft reset it is recommended to set the SPI4-bit to the correct value.

This first writing is possible because only CSB, SCK and SDI are required for a write sequence and the 3 bit timing diagrams are identical in three-wire and four-wire configuration.

Recommended procedure: Set SPI4 to the correct value (SPI4=0 for SPI three-wire, SPI4=1 for SPI four-wire (=default)) every time after power on reset or soft reset.

#### 3.1.2 Range


These two bits (address 14h, bits 4 and 3) are used to select the full scale acceleration range. Directly after changing the full scale range it takes  $1/(2 \cdot \text{bandwidth})$  to overwrite the data registers with filtered data according to the selected bandwidth.

**Table 3:** Settings of full scale range register

range<1:0>	Full scale acceleration range
00	+/- 2g
01	+/- 4g
10	+/- 8g
11	Not authorised code

**Important note:**

Please refer to the comment in chapter 3 of how to protect bits 5, 6 and 7 when modifying other bits of register 14h.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.1.3 Bandwidth

These three bits (address 14h, bits 2-0) are used to setup the digital filtering of ADC output data to obtain the desired bandwidth. A second order analogue filter defines the max. bandwidth to 1.5kHz. Digital filters can be activated to reduce the bandwidth down to 25Hz in order to reduce signal noise. The digital filters are moving average filters of various length with a refresh rate of 3kHz.

Since the bandwidth is reduced by a digital filter for the factor  $\frac{1}{2}$ ,  $\frac{1}{4}$ , ... of the analogue filter frequency of 1.5kHz the mean values of the bandwidth are slightly deviating from the rounded nominal values. Table 4 shows the corresponding data:

**Table 4:** Settings of bandwidth

bandwidth<2:0>	Nominal selected bandwidth [Hz]	Min.	Mean bandwidth[Hz]	Max.
000	25	-10%	23	+10%
001	50		47	
010	100		94	
011	190		188	
100	375		375	
101	750		750	
110	1500		1500	
111	Not authorised code	-	-	-

At wake-up from sleep mode to normal operation, the bandwidth is set to its maximum value and then reduced to bandwidth setting as soon as enough ADC samples are available to fill the whole digital filter.


Important note:

Please refer to the comment in chapter 3 of how to protect bits 5, 6 and 7 when modifying other bits of register 14h.

### 3.1.4 Wake\_up

This bit (address 15h, bit 0) makes BMA023 automatically switching from sleep mode to normal mode after the delay defined by wake\_up\_pause (section 3.1.5). When the sensor IC goes from sleep to normal mode, it starts acceleration acquisition and performs interrupt verification (section 3.2). The sensor IC automatically switches back from normal to sleep mode again if no fulfilment of programmed interrupt criteria has been detected. The IC wakes-up for a minimum duration which depends on the number of required valid acceleration data to determine if an interrupt should be generated.

If a latched interrupt is generated, this can be used to wake-up a microprocessor. The sensor IC will wait for a reset\_INT command and restart interrupt verification. BMA023 can not go back to sleep mode if reset\_INT is not issued after a latched interrupt.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

If a not-latched interrupt is generated, the device waits in the normal mode till the interrupt condition disappears. The minimum duration of interrupt activation is 330µs. If no interrupt is generated, the sensor IC goes to sleep mode for a defined time (wake\_up\_pause).

For more details on the wake-up functionality, please refer to chapter 7.3

### 3.1.5 Wake\_up\_pause

These bits (address 15h, bit 2 and 1) define the sleep phase duration between each automatic wake-up.


**Table 5:** Settings of wake\_up\_pause

wake_up_pause<1:0>	Sleep phase duration
00	20 ms
01	80 ms
10	320 ms
11	2560 ms

Note: The accuracy of the wake-up timer is about ±30%.

### 3.1.6 Shadow\_dis

BMA023 provides the possibility to block the update of data MSB while LSB are read out. This avoids a potential mixing of LSB and MSB of successive conversion cycles. When this bit (address 15h, bit 3) is at 1, the blocking procedure for MSB is not realized and MSB only reading is possible.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.2 Interrupt settings

Five different types of interrupts can be programmed. When the corresponding criterion becomes valid, the interrupt pin is triggered to a high level. All interrupt criteria are combined and drive the interrupt pad with a Boolean <OR> condition.

Interrupt generations may be disturbed by changes of control bits because some of these bits influence the interrupt calculation. As a consequence, no write sequence should occur when microprocessor is triggered by interrupt or the interrupt should be deactivated on the microprocessor side when write sequences are operated.

Interrupt criteria are using digital code coming from digital filter output. As a consequence all thresholds are scaled with range selection (section 3.1.3.2). Timings used for high acceleration and low acceleration debouncing are absolute values (1 LSB of HG\_dur and LG\_dur registers corresponds to 1 millisecond, timing accuracy is proportional to oscillator accuracy = +/-10%), thus it does not depend on selected bandwidth. Timings used for any motion interrupt and alert detection are proportional to bandwidth settings (section 3.1.3).

#### 3.2.1 Enable\_LG

This bit (address 0Bh, bit 0) enables the LG\_thres criteria to generate an interrupt.

#### 3.2.2 Enable\_HG

This bit (address 0Bh, bit 1) enables the HG\_thres criteria to generate an interrupt.

#### 3.2.3 Enable\_adv\_INT


This bit (address 15h, bit 6) is used to disable advanced interrupt control bits (any\_motion, alert). If enable\_adv\_INT=0, writing to these bits has no effect on sensor IC function.

#### 3.2.4 Any\_motion

This bit ((address 0Bh, bit 6) enables the any motion criteria to generate directly an interrupt. It can not be turned on simultaneously with alert. This bit can be masked by enable\_adv\_INT, the value of this bit is ignored when enable\_adv\_INT=0 (section 3.2.3).

#### 3.2.5 Alert

If this bit (address 0Bh, bit 7) is at 1, the any\_motion criterion will set BMA023 into alert mode (section 3.2.9). This bit can be masked by enable\_adv\_INT, the value of this bit is ignored when enable\_adv\_INT=0 (section 3.2.3).

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.2.6 Latch\_INT

If this bit (address 15h, bit 4) is at 1, interrupts are latched. The INT pad stays high until microprocessor detects it and writes reset\_INT control bit to 1 (section 3.3.1). When this bit is at 0, interrupts are set and reset directly by BMA023 according to programmable criteria (sections 3.2.7 and 3.2.8).

### 3.2.7 LG\_thres, LG\_hyst, LG\_dur, counter\_LG

LG\_thres (address 0C, bits 7-0 / low-g threshold) and LG\_hyst (address 11h, bits 2-0 / low-g threshold hysteresis) can basically (although not recommended with BMA023) be used to detect a free fall. The threshold and duration codes define one criterion for interrupt generation when absolute value of acceleration is low for long enough duration.

Data format is unsigned integer.

LG\_thres criterion\_x is true if  $|acc\_x| \leq LG\_thres / 255 * range$

LG\_thres interrupt is set if  $(LG\_thres\_criterion\_x \text{ AND } LG\_thres\_criterion\_y \text{ AND } LG\_thres\_criterion\_z) \text{ AND interrupt counter} = (LG\_dur+1)$

LG\_thres criterion\_x is false if  $|acc\_x| > (LG\_thres + 32*LG\_hyst) / 255 * range$

LG\_thres interrupt is reset if  $NOT(LG\_thres\_criterion\_x \text{ AND } LG\_thres\_criterion\_y \text{ AND } LG\_thres\_criterion\_z)$

LG\_thres and LG\_hyst codes must be chosen to have  $(LG\_thres + 32*LG\_hyst) < 511$ .


When LG\_thres criterion becomes active, an interrupt counter is incremented by 1 LSB/ms. When the low-g interrupt counter value equals (LG\_dur+1), an interrupt is generated. Depending on counter\_LG (address 0Bh, bit 3 and 2) register, the counter could also be reset or count down when LG\_thres criterion is false.

**Table 6:** Description of debouncing counter counter\_LG

counter_LG<1:0>	low acceleration interrupt counter status when LG_thres criteria is false
00	reset
01	Count down by 1 LSB/ms
10	Count down by 2 LSB/ms
11	Count down by 3 LSB/ms

If latch\_INT=0, the interrupt is not a latched interrupt and then it is reset as soon as LG\_thres criteria becomes false. When interrupt occurs, the interrupt counter is reset.

Remark: The LG\_thres criteria is set with an AND condition on all three axes to be used for free fall detection. However, please note due to the relatively wide sensitivity tolerance of the BMA023 the absolute threshold values for low-g and high-g interrupt can only provide a rough estimation of the motion profile.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.2.8 HG\_thres, HG\_hyst, HG\_dur, counter\_HG

HG\_thres (address 0Eh, bits 7-0 / high-g threshold) and HG\_hyst (address 11h, bits 5-3 / high-g threshold hysteresis) define the high-G level and its associated hysteresis. HG\_dur (high-g threshold qualification duration) and counter\_HG (address 0Bh, bits 5 and 4 / high-g counter down register) are used for debouncing the high-g criteria.

Threshold and duration codes define a criterion for interrupt generation when absolute value of acceleration is high for long enough duration.

The data format is unsigned integer.

HG\_threshold criterion\_x is true if  $|acc\_x| \geq HG\_thres / 255 * range$

HG\_threshold interrupt is set if  $(HG\_thres\_criterion\_x \text{ OR } HG\_thres\_criterion\_y \text{ OR } HG\_thres\_criterion\_z) \text{ AND } interrupt\ counter = (HG\_dur+1)$

HG\_threshold criterion\_x is false if  $|acc\_x| < (HG\_thres - 32*HG\_hyst) / 255 * range$

HG\_threshold interrupt is reset if  $NOT(HG\_thres\_criterion\_x \text{ OR } HG\_thres\_criterion\_y \text{ OR } HG\_thres\_criterion\_z)$


HG\_thres and HG\_hyst codes must be chosen to have  $(HG\_thres - 32*HG\_hyst) > 0$ .

When HG\_thres criterion becomes active, a counter is incremented by 1 LSB/ms. When the high-g acceleration interrupt counter value equals (HG\_dur+1), an interrupt is generated. Depending on counter\_HG register value, the counter could also be reset or count down when HG\_thres criterion is false.

**Table 7:** Description of debouncing counter\_HG

counter_HG<1:0>	High acceleration interrupt counter status when HG_thres criterion is false
00	reset
01	Count down by 1 LSB/ms
10	Count down by 2 LSB/ms
11	Count down by 3 LSB/ms

If latch\_INT=0, the interrupt is not a latched interrupt and then it is reset as soon as HG\_thres criterion becomes false. When interrupt occurs, the interrupt counter is reset.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.2.9 Any\_motion\_thres, any\_motion\_dur

For the evaluation using “any motion” criterion successive acceleration data from digital filter output are stored and moving differences for all axes are built. To calculate the difference the acceleration values of all axes at time t0 are compared to values at t0+3/(2\*bandwidth). The difference of both values is equal to the difference of two successive moving averages (from three data points).

The differential value is compared to a global critical threshold any\_motion\_thres (address 10h, bits 7-0). Interrupt can be generated when the absolute value of measured difference is higher than the programmed threshold for long enough duration defined by any\_motion\_dur (address 11h, bits 7 and 6).

Any\_motion\_thres and any\_motion\_dur data are unsigned integer. Any\_motion\_thres LSB size corresponds to 15.6mg for +/- 2g range and scales with range selection (section 3.1.2).

Any motion criterion is valid if  $|\text{acc}(t_0) - \text{acc}(t_0 + 3/(2 \cdot \text{bandwidth}))| \geq \text{any\_motion\_thres}$ .

An interrupt is set if (any motion criterion\_x OR any motion criterion\_y OR any motion criterion\_z) for any\_motion\_dur consecutive times.

The any motion interrupt is reset if NOT(any\_motion criterion\_x OR any\_motion criterion\_y OR any\_motion criterion\_z) for any\_motion\_dur consecutive times.


**Table 8:** any\_motion\_dur settings

any_motion_dur<1:0>	Number of required consecutive conditions to set or reset the any motion interrupt
00	1
01	3
10	5
11	7

Any\_motion\_dur is used to filter the motion profile and also to define a minimum interrupt duration because the reset condition is also filtered.


Any\_motion\_thres can be used to generate an any\_motion interrupt or to put BMA023 in alert mode to preload the low-g or high-g threshold logic (enables reduction of reaction time in tumbling mode); this is selected by alert bit (section 3.2.5). These two modes (any\_motion and alert) can not be turned on simultaneously.



 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

**Figure 2:** Any motion criterion (middle graph) is determined from digital filter output (upper graph) and depends on bandwidth settings: for example for any\_motion\_dur=01b and bandwidth=110b (1.5kHz), we have  $2 \cdot \text{bandwidth} = 3 \text{ksamples/s}$  which leads to reaction for interrupt activation of  $3 \cdot 333 \mu\text{s} = 1 \text{ms}$  and a minimum any motion interrupt duration of  $3 \cdot 333 \mu\text{s} = 1 \text{ms}$  (see lower graph).

If lower bandwidth is selected i) the digitally filtered values (lower noise) are taken for the verification of the any motion criterion and ii) the time scale to evaluate the criterion is stretched. Thus adjusting the bandwidth, the any motion threshold, the any motion duration as well as the full scale range enables to tailor the sensitivity of the any motion algorithm.

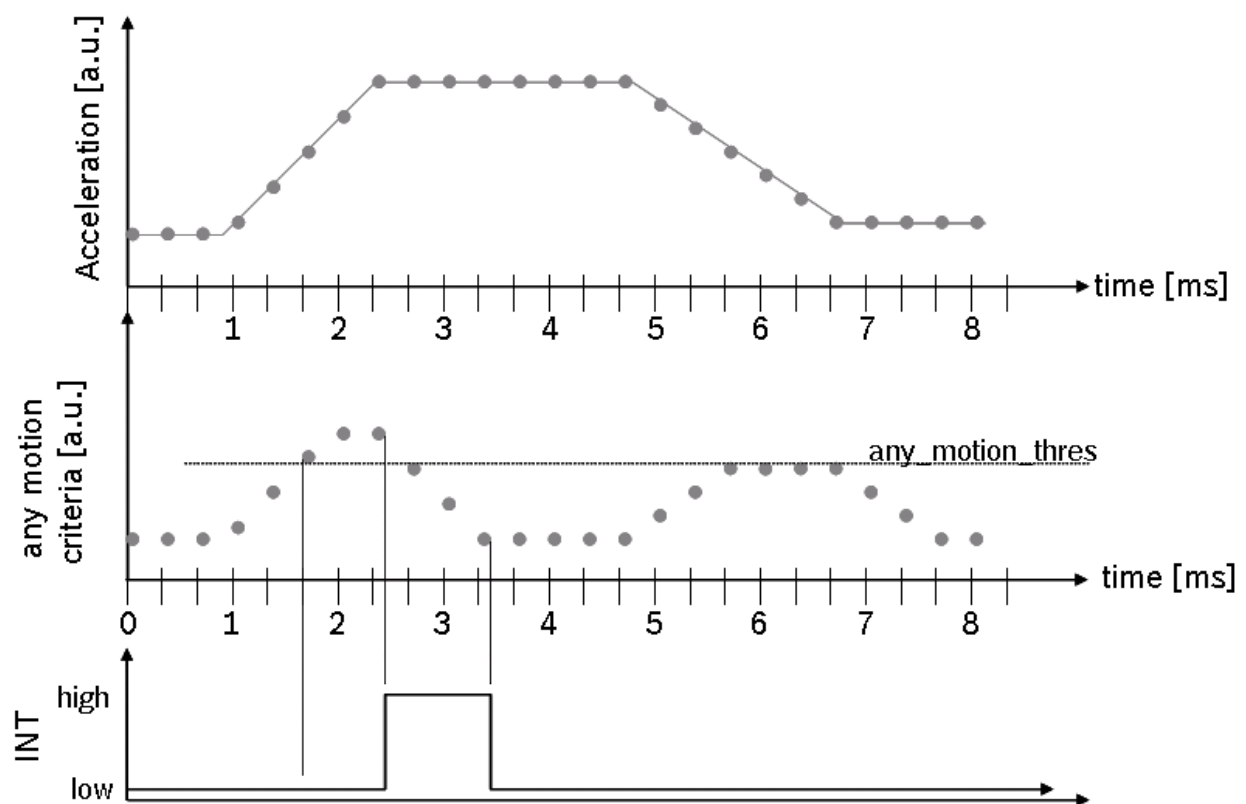


### 3.2.10 New\_data\_int

If this bit (address 15h, bit 5) is set to 1, an interrupt will be generated when all three axes acceleration values are new, i.e. BMA023 updated all acceleration values after latest serial read-out. Interrupt generated from new data detection is a latched one; microcontroller has to write reset\_INT at 1 after interrupt has been detected high (section 3.3.1). This interrupt is also reset by any acceleration byte read procedure (read access to address 02h to 07h).

New data interrupt always occurs at the end of the Z-axis value update in the output register (3kHz rate). Following figure shows two examples of X-axis read out and the corresponding interrupt generation.


**Figure 3:** Explanation of new data interrupt.

- left side - read out command of x-axis prior to next x-axis conversion  
 → new data interrupt after completion of current conversion cycle after z-axis conversion
- right side - read out of x-axis send after x-axis conversion  
 → new data interrupt at the end of next period when x axis has been updated

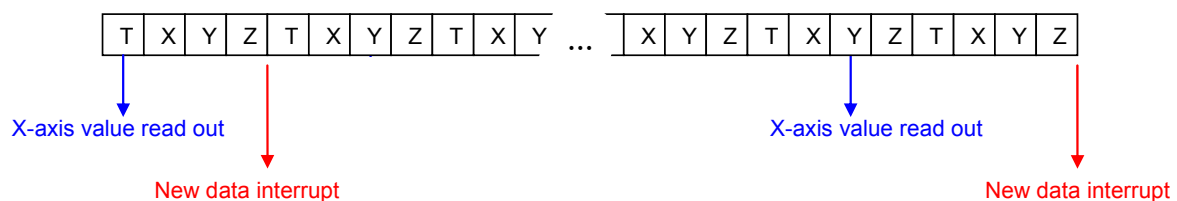

Please refer to chapter 8.1 for more details.

**Note:** When using the I<sup>2</sup>C interface for data transfer, the data read out phase can be longer than 330µs (depending on I<sup>2</sup>C clock frequency and the amount of data transmitted). Starting a new data read out sequence may lead to the situation that the new\_data\_int may not be cleared right in time. This must be considered and taken care of properly.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.3 Control registers

All single control bits are active at 1.

#### 3.3.1 Reset\_INT

This interrupt (address 0Ah, bit 6) is reset (interrupt pad goes to low) each time this bit is written to 1.

#### 3.3.2 Selftest\_0

The self-test command (address 0Ah, bit 2) uses electrostatic forces to move the MEMS common electrode. The result from selftest can be verified by reading st\_result (section 3.4.1). During the self-test procedure no external change of the acceleration should be generated.

#### 3.3.3 Selftest\_1

This self test bit (address 0Ah, bit3) does not generate any electrostatic force in the MEMS element but is used to verify the interrupt function is working correctly and that microprocessor is able to react to the interrupts.

0g acceleration is emulated at ADC input and the user can detect the whole logic path for interrupt, including the PCB path integrity. The LG\_thres register must be set to about 0.4g while LG\_dur = 0 to generate a low-g interrupt

#### 3.3.4 Soft\_reset

BMA023 is reset each time this bit (address 0Ah, bit 1) is written to 1. The effect is identical to power-on reset. Control, status and image registers are reset to values stored in the default setting registers (see also memory map). After soft\_reset or power-on reset BMA023 comes up in normal mode or wake-up mode. It is not possible to boot BMA023 to sleep mode.


No serial transaction should occur within 10µs after soft\_reset command.

The soft\_reset procedure may overwrite the SPI4 setting (section 3.1.1). Thus the correct interface configuration may have to be updated.

#### 3.3.5 Sleep

This bit (address 0Ah, bit 0) turns the sensor IC in sleep mode. Control and image registers are not cleared.

When BMA023 is in sleep mode no operation can be performed but wake-up the sensor IC by setting sleep=0 or soft\_reset. As a consequence all write and read operations are forbidden when the sensor IC is in sleep mode except command used to wake up the device or soft\_reset command. After sleep mode removal, it takes 1ms to obtain stable acceleration values (>99% data integrity).

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.4 Status registers

#### 3.4.1 St\_result

This is the self test result bit (address 09h, bit 7). It can be used together with selftest\_0 control bit (section 3.3.4). After selftest\_0 has been set, self-test procedure starts. At the end selftest\_0 is written to 0 and microcontroller can react by reading st\_result bit. When st\_result=1 the self test passed successfully.

The result of the st\_result can be taken into account to evaluate the basic function of the sensor. Note: Evaluation of the st\_result bit should only be understood as one part of a wider functionality test. It should not be taken into consideration as the only criterion.

#### 3.4.2 Alert\_phase

This status bit (address 09h, bit 4) is set when BMA023 has been set to alert mode (section 3.2.5) and an any motion criterion has been detected. During alert phase, HG\_dur and LG\_dur variables are decreased to have a smaller reaction time when HG\_thres and LG\_thres thresholds are crossed; the decrease rate is by 1 ms per ms.

The alert mode is reset when an interrupt generated due to a high threshold or a low threshold event or when both HG\_dur and LG\_dur variables are at 0. When alert is reset, HG\_dur and LG\_dur variables come back to their original values stored in image registers.

#### 3.4.3 LG\_latched, HG\_latched


These status bits (address 09h, bit 3 and address 09h, bit 2) are set when the corresponding criteria have been issued. They are latched and thus only the microcontroller can reset them. When both high acceleration and low acceleration thresholds are enabled, these bits can be used by microprocessor to detect which criteria generated the interrupt.

#### 3.4.4 Status\_LG, status\_HG

These status bits (address 09h, bit 1 and address 09h, bit 2) are set when the corresponding criteria have been issued; they are automatically reset by BMA023 when the criteria disappear.

#### 3.4.5 Customer\_reserved 1, customer\_reserved 2

Both bytes (address 12h, bit 7-0 and address 13h, bit 7-0) can be used by customer. Writing or reading of these registers has no effect on the sensor IC functionality.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

### 3.5 Data registers

#### 3.5.1 Acc\_x, acc\_y, acc\_z

Acceleration values are stored in the following registers to be read out through serial interface.

acc\_x (02h, 7-6; 03h, 7-0)

acc\_y (04h, 7-6; 05h, 7-0)

acc\_z (06h, 7-6; 07h, 7-0)

The description of the digital signals acc\_x, acc\_y and acc\_z is "2's complement".

From negative to positive accelerations, the following sequence for the  $\pm 2g$  measurement range can be observed ( $\pm 4g$  and  $\pm 8g$  correspondingly):

-2.000g	:	10 0000 0000
-1.996g	:	10 0000 0001
...		
-0.004g	:	11 1111 1111
0.000g	:	:00 0000 0000
+0.004g	:	00 0000 0001
...		
+1.992g	:	01 1111 1110
+1.996g	:	01 1111 1111

Data is periodically updated (rate 3kHz) with values from the digital filter output. LSB acceleration bytes must be read first. After an acceleration LSB byte read access, the corresponding MSB byte update can optionally be blocked until it is also accessed for read. Thus, MSB / LSB mix from different samples can be avoided (section 3.1.6).


It is not possible to read-out only MSB bytes if shadow\_dis=0, an LSB byte must first be read out. To be able to read out only MSB byte, shadow\_dis must be written to 1.

new\_data\_\* flags on bits 0 of acc\_x (LSB), acc\_y (LSB) and acc\_z (LSB) can be used to detect if acceleration values have already been read out (section 3.5.3).

If systematic acceleration values read out is planned (for signal processing by the microcontroller), the interrupt pad can be programmed to flag the new data (section 3.2.10). Every time all three axes values have been updated, the interrupt goes high and microcontroller can read out data. With this method, microcontroller accesses are synchronized with internal sensor IC updates.

Synchronization of read-out sequence has several advantages:

- it enables a constant phase shift between acceleration conversion and its corresponding digital value read by microprocessor
- it reduces interface communication by avoiding over-sampling.
- potential noise due to serial interface activity perturbation would always be generated during a less critical phase of the conversion cycle. The maximum delay advised to start read out acceleration data is 20 $\mu$ s after INT high (window 0-80 $\mu$ s).

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------


### 3.5.2 New\_data\_x, new\_data\_y, new\_data\_z

These bits (New\_data\_x (02h, 0), new\_data\_y (04h, 0), new\_data\_z (06h, 0)) are flags which are turned at 1 when acceleration registers have been updated. Reading acceleration data MSB or LSB registers turns the flags at 0. The flag value can be read by microprocessor.

### 3.5.3 Al\_version, ml\_version, chip\_id

al\_version (address 01h, bit 7-4) and ml\_version (address 01h, bit 3-0) are used to identify the chip revision. These codes are programmed with metal layer.

chip\_id (address 00h, bit 2-0) is used by customer to be able to recognize BMA023. This code is fixed to 010b.

 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------

## 4. Digital interface

BMA023 is capable to be adjusted to customer's specific hardware requirements. It provides three different digital interfaces (SPI 4-wire, SPI 3-wire, I<sup>2</sup>C) and an interrupt output pin.

The digital interface is used for regular reading of data registers (acceleration). For a complete read out of acceleration data two successive read cycles are required. The 10 bit coded data word is split into 8 MSB and 2 LSB. The most significant bit (MSB) is transferred first during address and data phases.

The serial interface is also used for verifying status registers or writing to control registers.

### 4.1 SPI

The SPI interfaces using three wire or four wire bus provide 16-bit protocols. Multiple read out is possible.

The communication is opened with a read/write control bit (R/W=0 for writing, R/W=1 for reading) followed by 7 address bits and at least 8 data bits (see figure 6 and figure 7). For a complete readout of 10 bit acceleration data from all axes the sensor IC provides the option to use an automatic incremented read command to read more than one byte (multiple read). This is activated when the serial enable pin CSB (chip select) stays active low after the read out of a data register. Thus, read out of data LSB will also cause read out of MSB if the CSB stays low for further 8 cycles of system clock.

The customer has the possibility to communicate with operational registers at addresses 00h-15h via SPI interface (chip identification Bytes, data Bytes, status and control registers with setting parameters). Access to the residual part of the memory map is locked (section 3.3.3). If the master addresses outside the range 00h-15h then SDI will go to tri-state enabling the communication of a second device on the same CSB and SDI line.


The CSB input has an internal 120kΩ pull-up resistor to V<sub>DDIO</sub>.

#### 4.1.1 Four-wire SPI interface


The 4-wire SPI is the default serial interface. The customer can easily activate the 3-wire SPI by writing a control bit (SPI4=0). The 4-wire SPI interface uses SCK (serial clock), CSB (chip select), SDI (serial data in) and SDO (serial data out).

CSB is active low. Data on SDI is latched by BMA023 at SCK rising edge and SDO is changed at SCK falling edge (SPI mode 3). Communication starts when CSB goes to low and stops when CSB goes to high; during these transitions on CSB, SCK must be high. While CSB=1, no SDI change is allowed when SCK=1.


**Figure 4:** Timing diagram for four-wire SPI interface

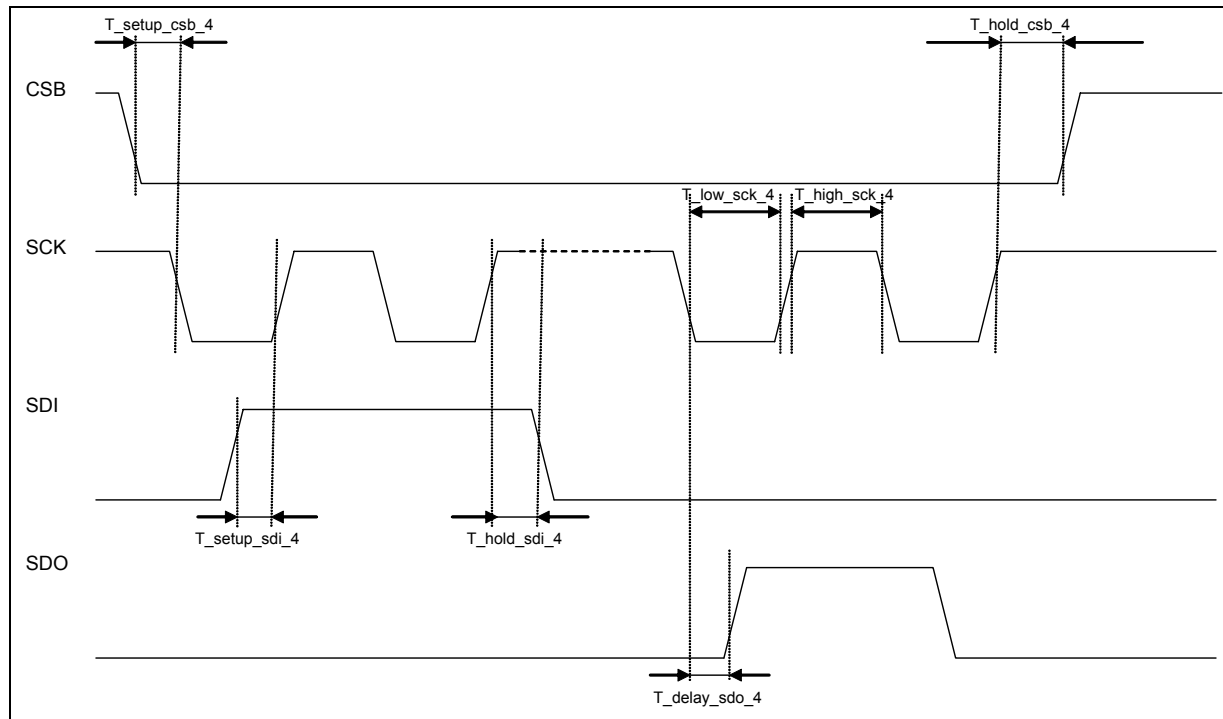

**Figure 5:** Four wire SPI bit transfer

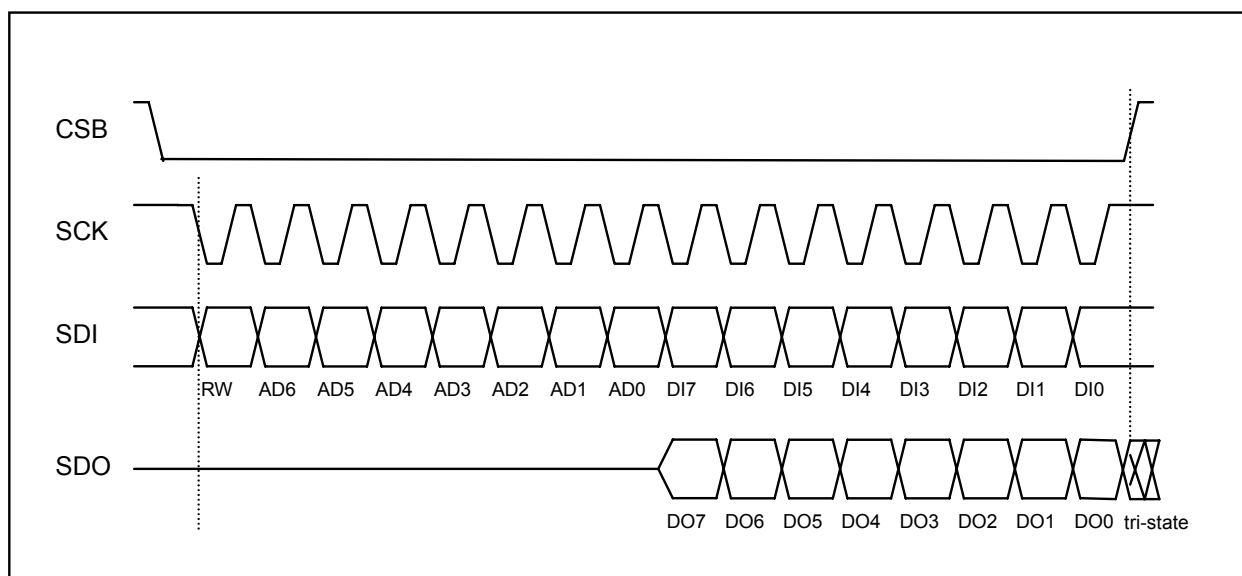



 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

**Table 9:** Specification of four-wire SPI serial interface

Interface parameters :		Conditions	Min.	Typ.	Max.	unit
Input - low level	Vil_si	V <sub>DDIO</sub> =1.62V to 3.6V			0.3*V <sub>DDIO</sub>	V
Input - high level	Vih_si	V <sub>DDIO</sub> =1.62V to 3.6V	0.7*V <sub>DDIO</sub>			V
Output – low level	Vol_SDI	V <sub>DDIO</sub> =1.8V, iol=3 mA			0.4	V
Output – high level	Voh_SDI	V <sub>DDIO</sub> =1.8V, ioh=1mA	1.4			V
Load capacitor (on SDO)	Csdo_spi	For 10MHz SPI transfer			25	pF
CSB pull-up resistor	CSB_pull_up	Internal pull-up resistance to V <sub>DDIO</sub>	70	120	190	kΩ
<b>4-wire SPI timings :</b>						
SPI clock input frequency	Fspi_4				10	MHz
SCK low pulse	Tlow_sck_4		5			ns
SCK high pulse	Thigh_sck_4		5			ns
SDI setup time	Tsetup_sdi_4		5			ns
SDI hold time	Thold_sdi_4		5			ns
SDO output delay	Tdelay_sdo_4				25	ns
CSB setup time	Tsetup_csb_4		5			ns
CSB hold time	Thold_csb_4		5			ns

**Figure 6:** When write is required, sequences of 2 bytes are necessary: 1 control byte to define the address to be written and the data byte.

[illegible]

**Figure 7:** When read access is required, the sequence consists of 1 control byte to define first address to be read followed by data bytes. Addresses are automatically incremented as long as CSB stays active low.


[illegible]


#### 4.1.2 Three-wire SPI interface

3-wire SPI is not the default serial interface. The customer can easily activate the 3-wire SPI by setting a control bit (SPI4=0). The 3-wire SPI interface uses SCK (serial clock), CSB (chip select, active low) and SDA (serial data in/out). A maximum clock frequency up to 70MHz can be handled.

The protocol data acquisition by the sensor IC occurs at the rising edge of SCK. The output data provided by the sensor IC is synchronized also on the rising edges of SCK. The 3-wire read protocol needs one extra clock cycle between address byte and data output byte.

**Figure 8:** Timing diagram for three-wire SPI interface (SDI = SDA)

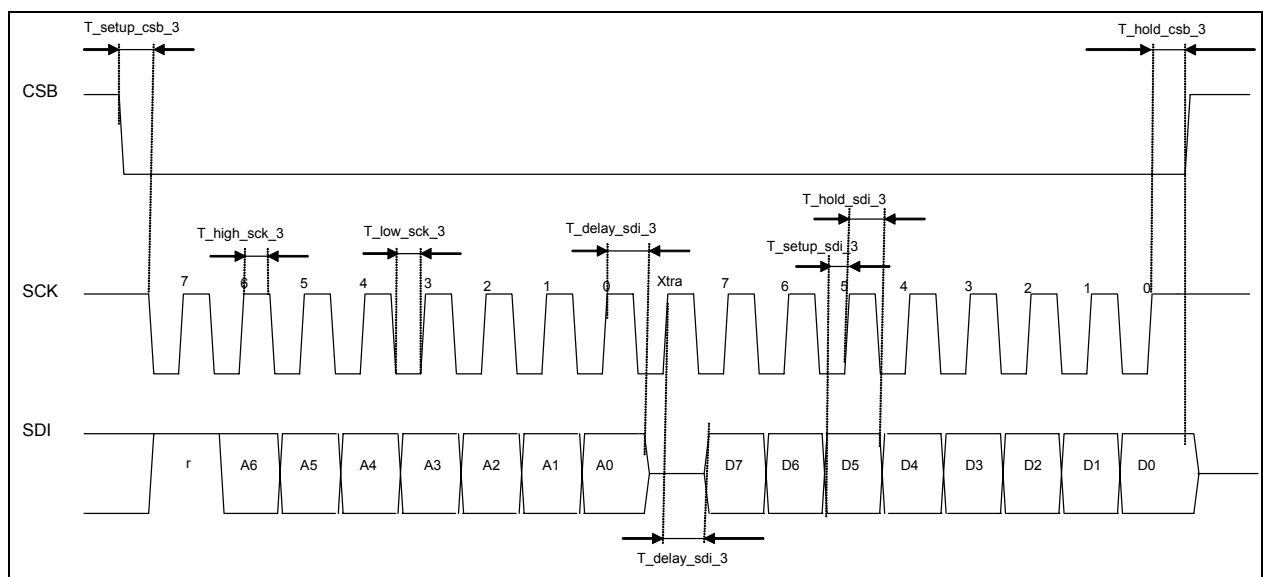


 <b>BOSCH</b>	<p style="text-align: center;">Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p style="text-align: center;">Bosch Sensortec</p>
--	---	--


**Table 10:** Specification of three-wire SPI serial interface


		Conditions	Min.	Typ.	Max.	unit
Input - low level	Vil_si	V <sub>DDIO</sub> =1.62V to 3.6V			0.3*V <sub>DDIO</sub>	V
Input - high level	Vih_si	V <sub>DDIO</sub> =1.62V to 3.6V	0.7*V <sub>DDIO</sub>			V
Output – low level	Vol_SDI	V <sub>DDIO</sub> =1.8V, iol=3 mA			0.4	V
Output – high level	Voh_SDI	V <sub>DDIO</sub> =1.8V, ioh=1mA	1.4			V
CSB pull-up resistor	CSB_pull_up	Internal pull-up resistance to V <sub>DDIO</sub>	70	120	190	kΩ
Load capacitor (on SDO)	Csdo_spi	for 70MHz SPI transfer			10	pF
<b>3-wire SPI timings :</b>						
SPI clock input frequency	Fspi_3				70	MHz
SCK low pulse	Tlow_sck_3		5			ns
SCK high pulse	Thigh_sck_3		5			ns
SDI setup time	Tsetup_sdi_3		3.8			ns
SDI hold time	Thold_sdi_3		2			ns
SDI output delay	Tdelay_sdi_3	when SDI is an output for read			10.5	ns
CSB setup time	Tsetup_csb_3		5			ns
CSB hold time	Thold_csb_3		5			ns

**Figure 9:** The three wire SPI write protocol is identical to four wire bus

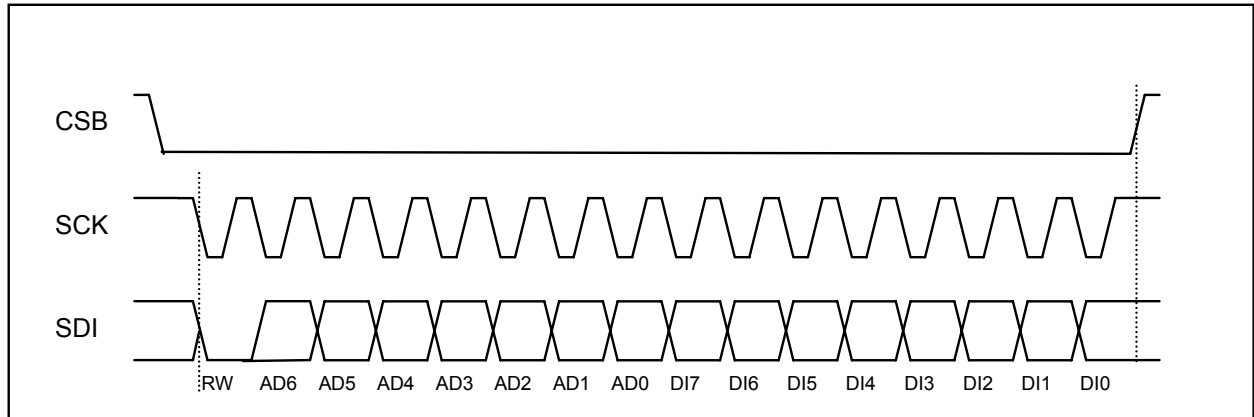

**Figure 10:** For three wire read protocol one extra clock between address byte and data out byte is required. Output data are changed on SDI (SDI=SDA) by SCK rising edge and should be latched by microprocessor during next SCK rising edge.

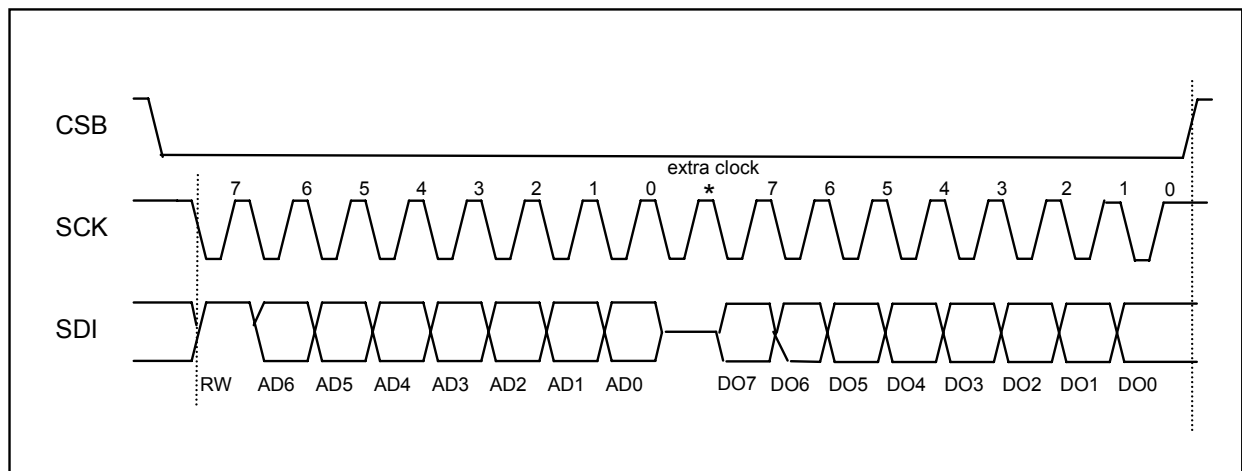



 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 4.2 I<sup>2</sup>C interface

The I<sup>2</sup>C bus uses SCK (serial clock) and SDA (=SDI, serial data input/output). SDA is bidirectional with open drain; it must be connected externally to  $V_{DDIO}$  via a pull up resistor. CSB is not used and must be connected to  $V_{DDIO}$ .

**Figure 11:** Timing diagram for I<sup>2</sup>C interface (SDI=SDA)

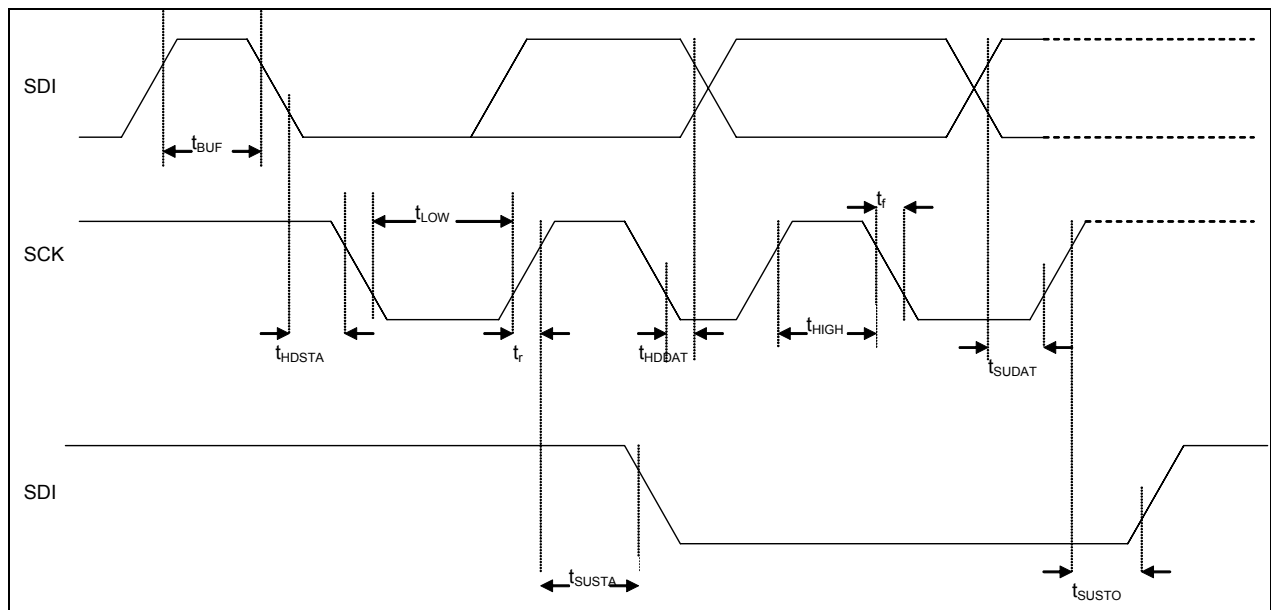

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------


**Table 11:** Specification of I<sup>2</sup>C serial interface (SDI=SDA)

Interface parameters :		Conditions	Min.	Typ.	Max.	unit
Input - low level	Vil_si	V <sub>DDIO</sub> =1.62V to 3.6V			0.3*V <sub>DDIO</sub>	V
Input - high level	Vih_si	V <sub>DDIO</sub> =1.62V to 3.6V	0.7*V <sub>DDIO</sub>			V
Output – low level	Vol_SDI	V <sub>DDIO</sub> =1.8V, iol=3 mA			0.4	V
Output – high level	Voh_SDI	V <sub>DDIO</sub> =1.8V, ioh=1mA	1.4			V
I <sup>2</sup> C bus load capacitor	Cb	On SDI and SCK			100	pF
<b>I<sup>2</sup>C timings :</b>						
SCK frequency	FI <sup>2</sup> C				3.4	MHz
SCK low period	Tlow		160			ns
SCK high period	Thigh		60			ns
SDI setup time	Tsudat		10			ns
SDI hold time	Thddat		10		70	ns
Setup time for a repeated start condition	Tsusta		160			ns
Hold time for a start condition	Thdsta		160			ns
Setup time for a stop condition	Tsusto		160			ns
Time before a new transmission can start	Tbuf		100			ns






**Figure 13:** Timing diagram for one bit transfer with I<sup>2</sup>C interface (SDI=SDA)

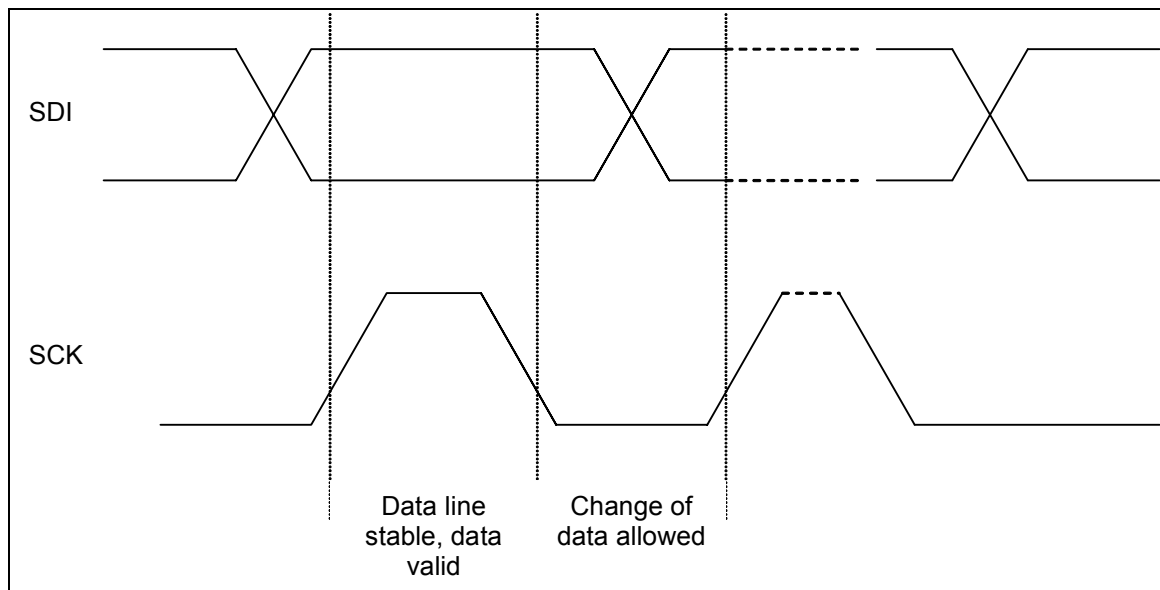

**Figure 14:** Timing diagram for I<sup>2</sup>C acknowledgement on SDI (SDI=SDA)

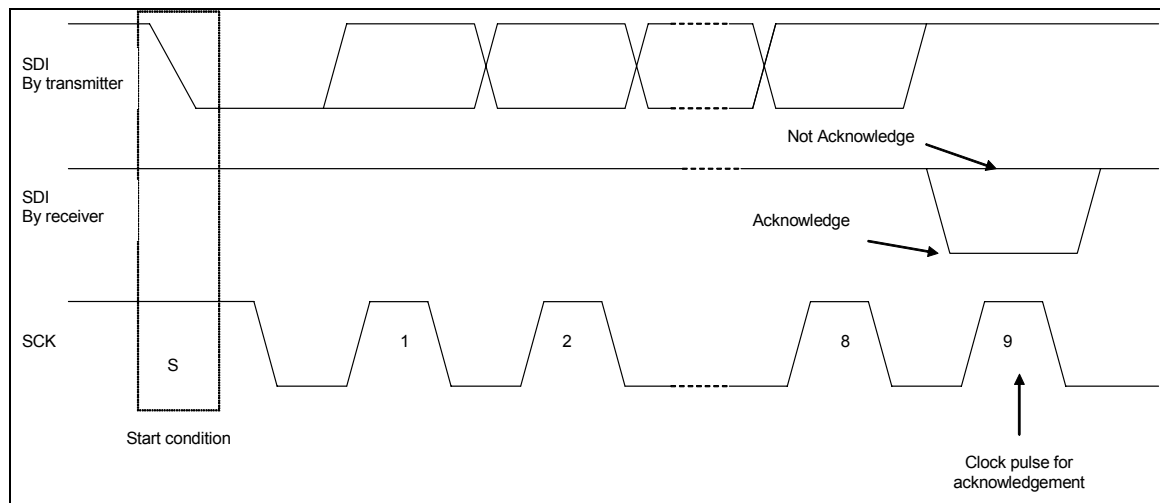

#### 4.2.1 I<sup>2</sup>C protocol:


The BMA023 I<sup>2</sup>C slave address is coded on 7 bits (0111000b=38h) fixed by a metal option. Thus I<sup>2</sup>C write address is 01110000b (=70h), read address is 01110001b (=71h).

After a start condition, the slave address + RW bit must be send. If the slave address does not match with BMA023 there is no acknowledgement and the following data transfer will not affect the chip. If the slave address corresponds to BMA023 it will acknowledge (pull SDA down during 9th clock pulse) and data transfer is enabled. The 8th bit RW sets the chip in read or write mode, RW=1 for reading, RW=0 for writing.

After slave address and RW bit, the master sends 1 control byte: the 7-bit register address and one dummy bit.


When BMA023 is accessed in write mode, sequences of 2 bytes (= 1 control byte to define which address will be written and 1 data byte) must be sent:


**Figure 15: I<sup>2</sup>C multiple write protocol**

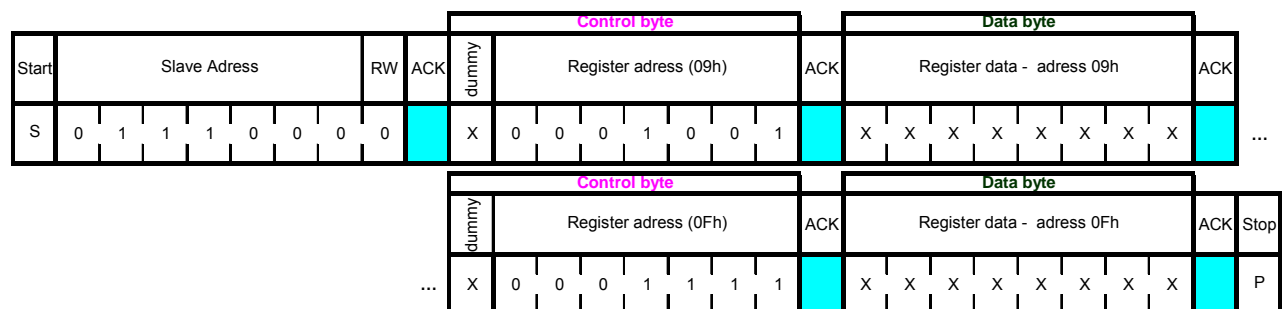

To be able to access registers in read mode, first address has to be send in write mode. Then a stop and a start conditions are issued and data bytes are transferred with automatic address increment:

**Figure 16:** I<sup>2</sup>C multiple read protocol. Address register is first written to BMA023, the RW=0 (lowest acceleration data located at address 02h). I<sup>2</sup>C transfer is stopped and restarted with RW=1, address is automatically incremented and the 6 bytes can be sequentially read out.

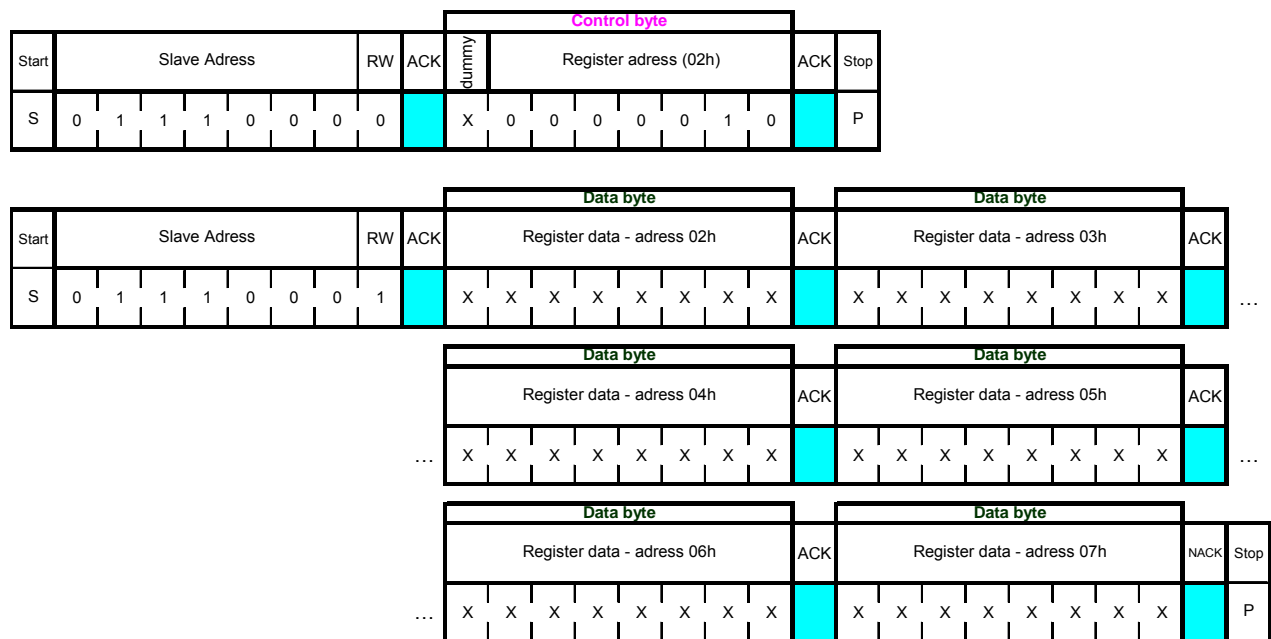

 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------

## 5. Package


### 5.1 Outline dimensions


The BMA023 is packaged in a 3mm x 3mm x 0.9mm LGA package following JEDEC MO-229.

Basic outline geometry is based on:

- Mold package footprint 3mm x 3mm (tolerance  $\pm 0.1\text{mm}$ )
- Height 0.9mm
- No. of leads 12
  - 8 used for electrical connection
  - 2 not used / reserved
  - 2 additional metal features on front edges without electrical functionality (not available on first engineering samples)
- Lead pitch 0.5mm

**Figure 17:** Top, bottom and side views of the 3mm x 3mm x 0.9mm LGA package outline drawing (dimensions in mm)

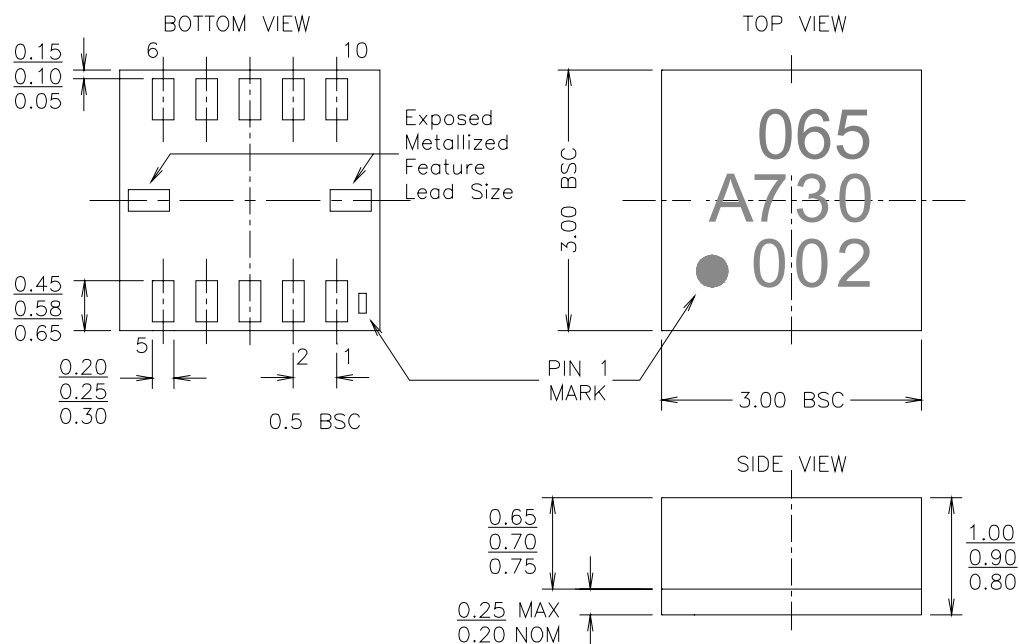



 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 5.2 Axes orientation

The following diagram describes the orientation of the package with respect to the axes of acceleration measurement.

**Figure 18:** Axes orientation of the BMA023

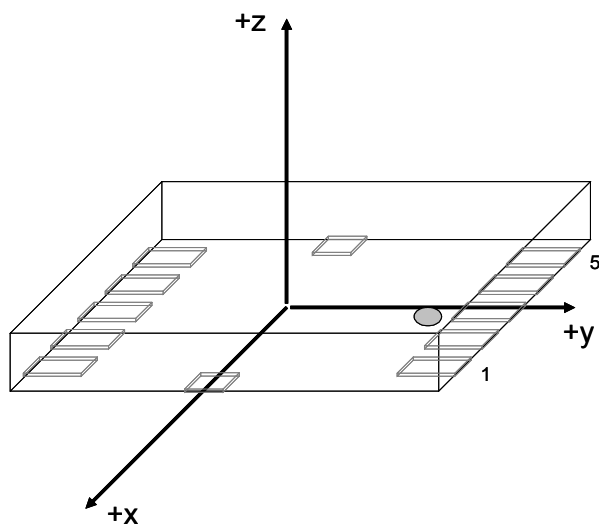


 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------


### 5.3 Landing pattern recommendations


As for the design of the landing patterns, the following recommendations can be given:

**Figure 19:** Landing patterns for the BMA023 relative to the device pins, dimensions are in mm

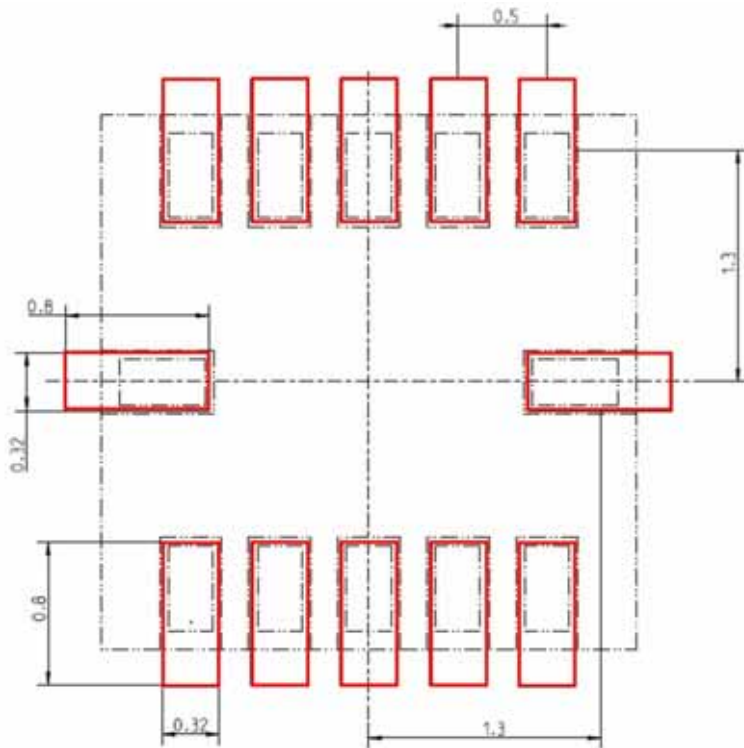

**Figure 20:** Perspective view of the BMA023 relative to the PCB landing pattern.

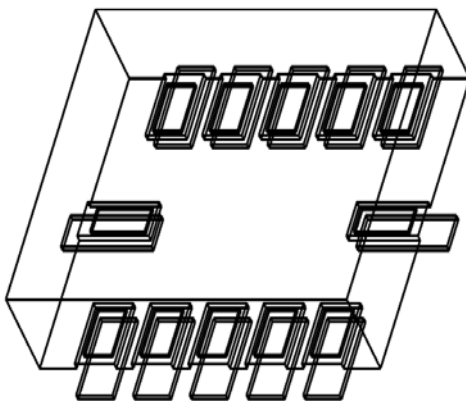

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 5.4 Moisture sensitivity level and soldering

The moisture sensitivity level (MSL) of the BMA023 sensor IC corresponds to JEDEC Level 1, see also

- IPC/JEDEC J-STD-020C "Joint Industry Standard: Moisture/Reflow Sensitivity Classification for Non-hermetic Solid State Surface Mount Devices"
- IPC/JEDEC J-STD-033A "Joint Industry Standard: Handling, Packing, Shipping and Use of Moisture/Reflow Sensitive Surface Mount Devices".

The sensor IC fulfils the lead-free soldering requirements of the above-mentioned IPC/JEDEC standard, i.e. reflow soldering with a peak temperature up to 260°C.

## 5.5 RoHS compliancy

The BMA023 sensor IC meets the requirements of the EC restriction of hazardous substances (RoHS) directive, see also

"Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment".

## 5.6 Halogen content

Results of chemical analysis show that the BMA023 contains less than 900ppm (by weight) of Fluorine, Chlorine, Iodine and Bromine (i.e. <900ppm per each substance).

Therefore the BMA023 can be regarded as halogen-free.


For more details on the analysis results please contact your Bosch Sensortec representative.

## 5.7 Note on internal package structure

Within the scope of Bosch Sensortec's ambition to improve its products and secure the product supply while in mass production, Bosch Sensortec qualifies additional sources for the LGA package of the BMA023.


While Bosch Sensortec took care that all of the technical package parameters as described above are 100% identical for both sources, there can be differences in the chemical analysis and internal structural between the different package sources.

However, as secured by the extensive product qualification processes of Bosch Sensortec, this has no impact to the usage or to the quality of the BMA023 product.

 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------

## 6. Pin-out out and connection diagrams

**Figure 21:** Pin-out of the BMA023 (bottom view);

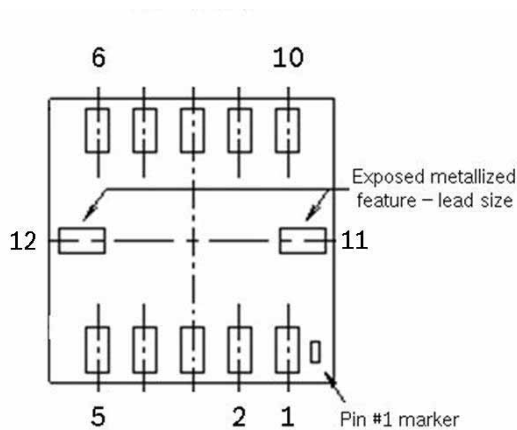


**Table 12:** Pin-out description of the BMA023


Pin No	Name	Type	Description	Connect to (in SPI 4w)	Connect to (in SPI 3w)	Connect to (in I <sup>2</sup> C)	Stand alone (without $\mu$ C)
1	reserved		Do not connect	NC	NC	NC	NC
2	V <sub>DD</sub>	Power	Analogue power supply	V <sub>DD</sub>	V <sub>DD</sub>	V <sub>DD</sub>	V <sub>DD</sub>
3	GND	Power	Ground	GND	GND	GND	GND
4	INT	Output	Interrupt	INT / NC	INT / NC	INT / NC	INT
5	CSB	Input	Chip select	CSB	CSB	V <sub>DDIO</sub>	V <sub>DD</sub>
6	SCK	Input	Serial clock	SCK	SCK	SCK	GND
7	SDO	Output	Serial data out	SDO	GND	GND	GND
8	SDI	Input / Output	Serial data in / out	SDI	SDA	SDA	GND
9	V <sub>DDIO</sub>	Power	Digital interface power supply	V <sub>DDIO</sub>	V <sub>DDIO</sub>	V <sub>DDIO</sub>	V <sub>DD</sub>
10	reserved		Do not connect	NC	NC	NC	NC
11	reserved		Do not connect	NC	NC	NC	NC
12	reserved		Do not connect	NC	NC	NC	NC

Recommendation for decoupling: between GND and VDD (pin 1 or 2) a 22nF capacitor and between GND and IOVDD (pin 9) a 100nF capacitor should be connected.





 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------

**Figure 22:** Connection diagram for use with 4-wire SPI interface

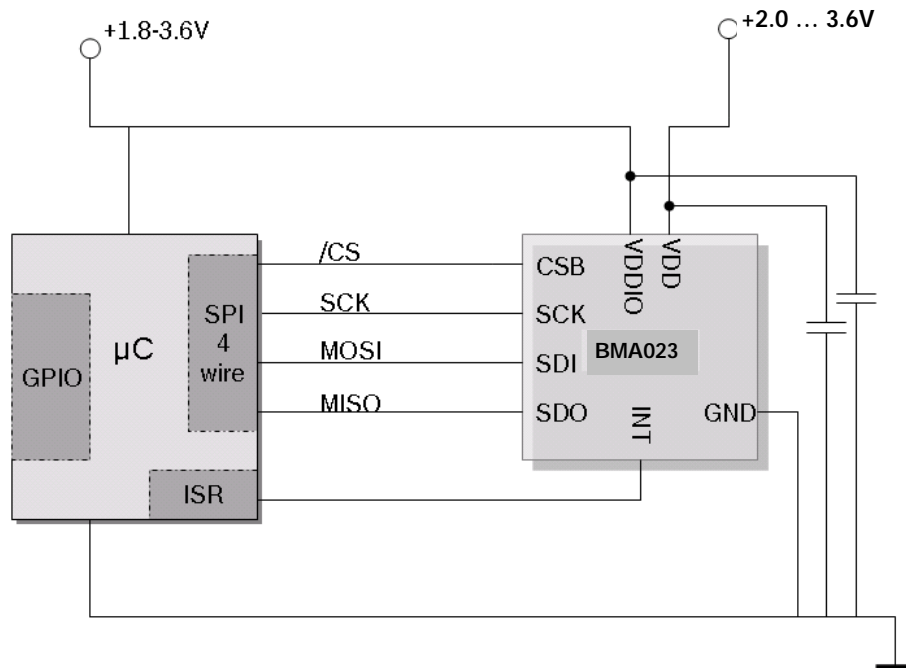



**Figure 23:** Connection diagram for use with 3-wire SPI interface

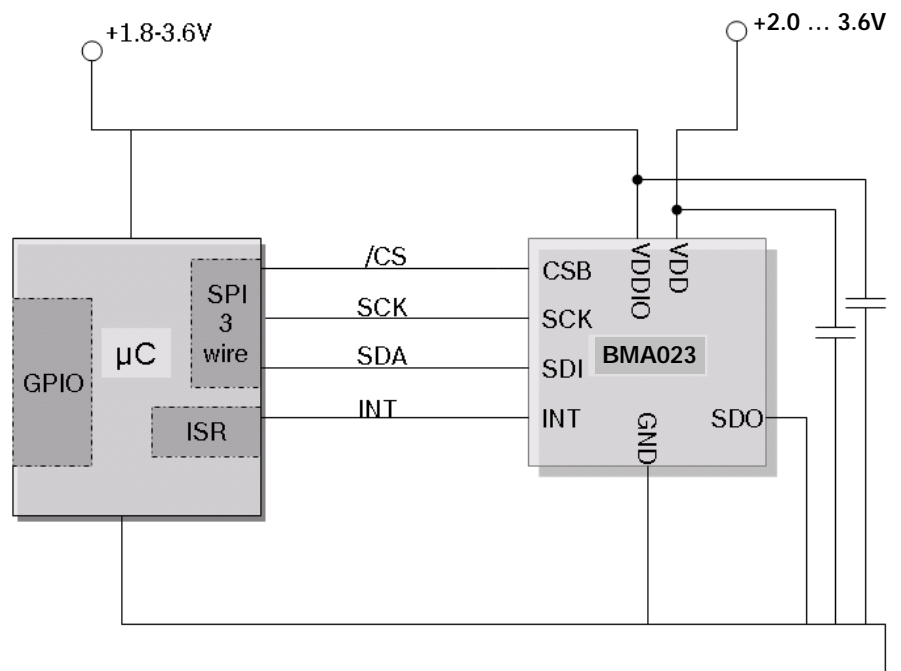

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

**Figure 24:** Connection diagram for use with I<sup>2</sup>C interface

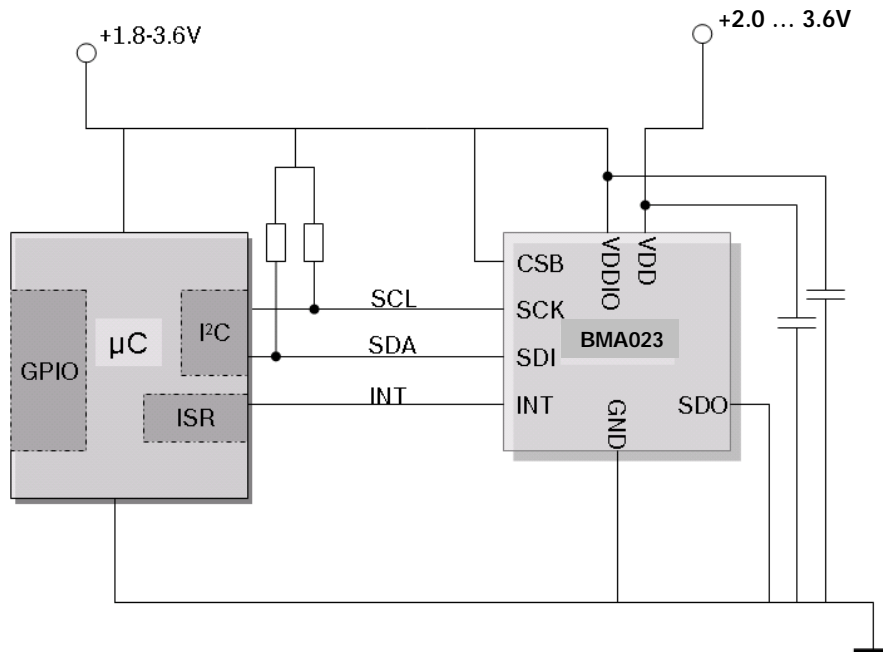

 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------

## 7. Operation modes

### 7.1 Normal operational mode

In normal operational mode the sensor IC can be addressed via digital interface. Data and status registers can be read out and control registers can be read and changed. In parallel to normal operation the user has the option to activate several internal logic paths and set criteria to trigger the interrupt pin. BMA023 is designed to enable low current consumption of 200µA in operational mode.

A self-test procedure can be started in operational mode for testing of the complete signal evaluation path including the micro-machined sensor IC structure, the evaluation ASIC and the physical connection to the host system.

### 7.2 Sleep mode

Sleep mode is activated by setting a control bit. In sleep mode no communication with the sensor IC is possible – all read and write commands are forbidden. The recommended command to switch to operational mode is the wake-up call.

Wake-up time from sleep to operational mode is 1ms.

In case of a soft-reset, it is recommended to do this reset after having switched from sleep to operational mode. In this case the total typical wake-up and reset time at maximum bandwidth is "switching to operational mode = 1ms" and "time after soft reset until acceleration data is available = 1.3ms", i.e. 2.3ms in total.

In case a soft-reset is activated during sleep mode it can take up to 30msec. until normal operation has resumed.


The current consumption in sleep mode is 1µA.

### 7.3 Wake-up mode

In general BMA023 is attributed to low power applications and can contribute to the system power management.

- Current consumption 200µA operational
- Current consumption 1µA sleep mode
- Wake-up time 1ms
- Start-up time 3ms
- Data ready indicator to reduce unnecessary interface communication
- Wake-up mode to trigger a system wake-up (interrupt output to master) when motion detected
- Current consumption in wake-up mode

The BMA023 provides the possibility to wake up a system master when specific acceleration values are detected. Therefore the BMA023 stays in an ultra low power mode and periodically evaluates the acceleration data with respect to interrupt criteria defined by the user. An interrupt

 <b>BOSCH</b>	<p style="text-align: center;">Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p style="text-align: center;">Bosch Sensortec</p>
--	---	--

output can be generated and trigger the system master. The wake-up mode is used for ultra-low power applications where inertial factors can be an indicator to change the activity mode of the system.

The following table shows values calculated for the average current consumption during the wake-up mode of the BMA023. The power consumption in wake-up mode is dependent on the duration of the interrupt algorithm (number of data acquisitions) and the bandwidth (for more details on setting of the bandwidth please refer to chapter 3.1.3).

Table 13: Average current consumption in self wake-up mode using high-g or low-g interrupt

	Current consumption during BMA023 wake-up mode [μA] (depending on bandwidth, calculated using typical values)						
Pause [ms]	(@ 1,500Hz)	(@ 750Hz)	(@375Hz)	(@190Hz)	(@100Hz)	(@50Hz)	(@25Hz)
20	16.3	21,8	31.8	48.4	71.6	102.9	134.7
80	5.1	6.6	9.7	15.4	25.0	42.3	68.4
360	1.9	2.3	3.0	4.4	6.9	12.0	21.3
2,560	1.1	1.2	1.3	1.5	1.9	2.6	4.1

Durations of the pause values can vary for about ±30% due to the accuracy of the ultra-low-power oscillator implemented within the sensor.

For estimating the typical current consumption in wake-up mode the following formula can be applied:


$$i_{self\_wake\_up} = (i_{DD} \cdot t_{active} + i_{DDsm} \cdot wake\_up\_pause) / (t_{active} + wake\_up\_pause)$$

With the approximation:

$$t_{active} = 1ms + 0.333ms \cdot (4 \cdot 750 / bandwidth) + 0.333ms \cdot (1500 / bandwidth) \cdot n$$

With the following parameters:

$i_{DD}$	Current in normal mode
$i_{DDsm}$	Current in sleep mode
wake_up_pause	Setting of wake-up pause
n	number of data points in any-motion logic (n=0 for high-g threshold and low-g threshold interrupt, n=3 for any-motion logic)
Bandwidth	Setting of bandwidth (750-25 Hz), for 1500Hz $t_{active} = 1ms + 0.333ms \cdot (1500/bandwidth) \cdot n$

 <b>BOSCH</b>	<p>Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor</p>	<p>Bosch Sensortec</p>
--	---	------------------------


So, the relevant parameters for power consumption in self-wake up mode are:

- the current consumption in normal mode
- the current consumption in sleep mode
- the self-wake up pause duration
- the bandwidth (ie. length of digital filter to be filled for one data point)
- the interrupt criteria (determines the duration of normal operation):
  - high-g and low-g criteria (ie. acquisition of one data point)
  - any-motion criterion (ie. four data points)


As some of these parameters have certain deviations from the typical value results of various example Monte Carlo Simulations on the current consumption are shown in figures 25, 26 and 27.

The graphs provide an indication on the expected current consumption for different settings.


**Figure 25:** Estimation of current consumption using Monte Carlo simulation, example #1: bandwidth 750Hz, 2560ms wake-up setting, any-motion interrupt

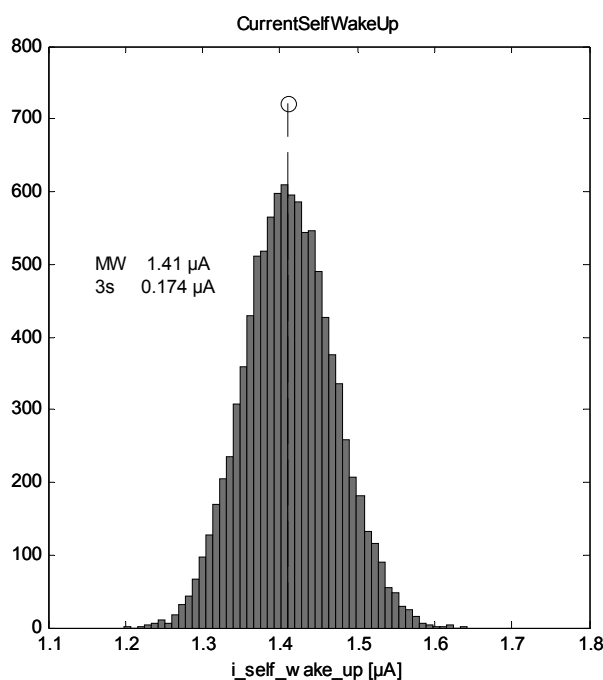


**Figure 26:** Estimation of current consumption using Monte Carlo simulation, example #2: bandwidth 47Hz, 2560ms wake-up setting, any-motion interrupt

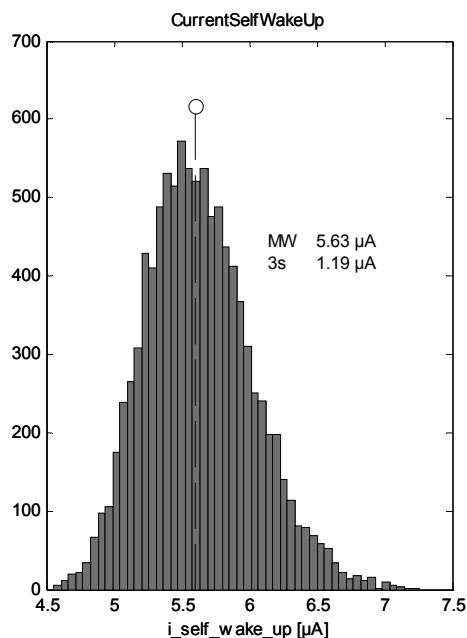

**Figure 27:** Estimation of current consumption using Monte Carlo simulation, example #3: Bandwidth 23Hz, 2560ms wake-up setting, any-motion interrupt

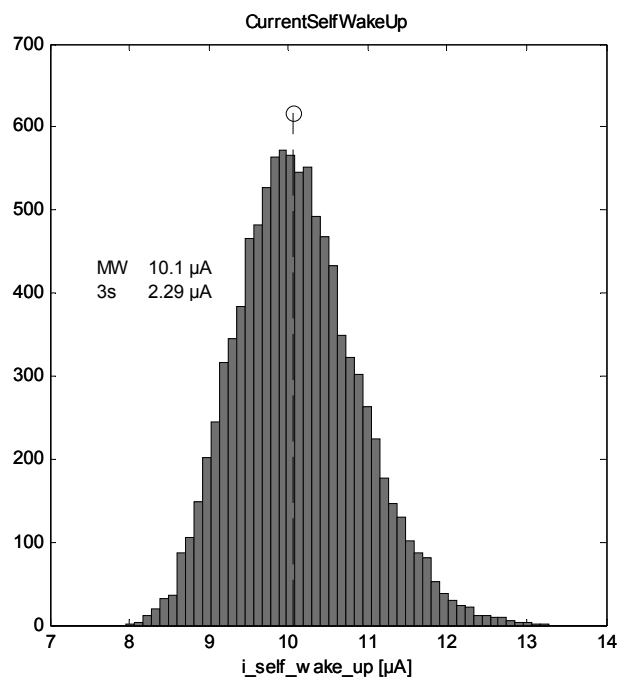

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 8. Data conversion

### 8.1 Acceleration data

Acceleration data are converted by a 10bit ADC. The description of the digital signal is "2's complement". The 10 bit data are available as LSB (at lower register address) and MSB. It is possible to read out MSB only (8 bit) and LSB/MSB (16 bits with 10 data bits and 1 data ready bit) while LSB- and MSB-data are closely linked to avoid unintentional LSB/MSB mixing when read out and data conversion overlap accidentally (section 3.5.1).

The update rate of data registers is 3 kHz, independent of the digital filter. The acceleration data is filtered by a second order analog filter at 1.5 kHz. Additionally the data can be processed by digital averaging filters (moving average) to reduce the noise level (750Hz – 25Hz).


The transfer function of the mechanical element is designed to avoid resonance effects at frequencies below the bandwidth of the ASIC.

The availability of new data can be checked in two ways:

- Bit 0 from the LSB data registers is an indicator whether the data have already been read out or the data are new (Bit0=1) (section 3.5.2).
- The interrupt pin can be configured to indicate new data availability (not possible in parallel to internal interrupt logic). The synchronization of data acquisition and data read out enables the customer to avoid unnecessary interface traffic in order to reduce the system power consumption and the crosstalk between interface communication and data conversion. For a detailed explanation see Figure 3. (section 3.2.10)

**Figure 28:** Explanation of data ready interrupt: For a bandwidth of e.g. 1.5kHz the data refresh cycle takes 330µs to update all data registers. After the final conversion of z-axis the INT pad will be set high. New data can be read out via interface. The interrupt resets automatically after read out.



 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 9. Internal logic functions

The sensor IC can inform the host system about specific conditions (e.g. new data ready flag or acceleration thresholds passed) by setting an interrupt pin high even if interface communication is not taking place. This feature can be used as “wake-up” indicator or “data ready flag” for instance.

The interrupt performance can be programmed by means of control bits. Thus the criteria to identify a special event can be tailored to a customer’s application and the sensor IC output can be defined specifically.

### 9.1 High-g logic

For indicating high-g events an upper threshold can be programmed. This logic can also be activated by a control bit. Threshold, duration and reset behaviour can be programmed. See also section 3.2.8.

### 9.2 Any motion detection

The “any motion algorithm” can be used to detect changes of the acceleration. Thus it provides a relative evaluation of the acceleration signals. The criterion is kind of a gradient threshold of the acceleration over time. Thus one can distinguish between fast events with strong inertial dynamic (e.g. shock), instant changes of force balance (e.g. drop, tumbling) and even slight changes (e.g. touch of a mobile device).

Due to a high bandwidth and a fast response MEMS device the BMA023 is capable to detect shock situations. The “any motion interrupt” or a high-g criterion setting can be used to give a shock alert. The phase shift between onset of mechanical shock and interrupt output is defined by the mechanical transfer function of the chassis and internal mounting interfaces (e.g. PDA shell) and the data output rate of the sensor IC (currently 330µs, 100µs under consideration).


See also section 3.2.9.

### 9.3 Alert mode

Using the BMA023 it is possible to combine the “any motion criterion” with low-g and high-g interrupt logic to improve the reaction time.

See also sections 3.2.9 and 3.4.2.



 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 10. Legal disclaimer

### 10.1 Engineering samples

Engineering Samples are marked with an asterisk (\*) or (e). Samples may vary from the valid technical specifications of the product series contained in this data sheet. They are therefore not intended or fit for resale to third parties or for use in end products. Their sole purpose is internal client testing. The testing of an engineering sample may in no way replace the testing of a product series. Bosch Sensortec assumes no liability for the use of engineering samples. The Purchaser shall indemnify Bosch Sensortec from all claims arising from the use of engineering samples.

### 10.2 Product use

Bosch Sensortec products are developed for the consumer goods industry. They may only be used within the parameters of this product data sheet. They are not fit for use in life-sustaining or security sensitive systems. Security sensitive systems are those for which a malfunction is expected to lead to bodily harm or significant property damage. In addition, they are not fit for use in products which interact with motor vehicle systems.


The resale and/or use of products are at the purchaser's own risk and his own responsibility. The examination of fitness for the intended use is the sole responsibility of the Purchaser.

The purchaser shall indemnify Bosch Sensortec from all third party claims arising from any product use not covered by the parameters of this product data sheet or not approved by Bosch Sensortec and reimburse Bosch Sensortec for all costs in connection with such claims.

The purchaser must monitor the market for the purchased products, particularly with regard to product safety, and inform Bosch Sensortec without delay of all security relevant incidents.

### 10.3 Application examples and hints

With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Bosch Sensortec hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights or copyrights of any third party. The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. They are provided for illustrative purposes only and no evaluation regarding infringement of intellectual property rights or copyrights or regarding functionality, performance or error has been made.

 <b>BOSCH</b>	Data sheet <b>BMA023</b> Digital, triaxial acceleration sensor	Bosch Sensortec
--	--	-----------------

## 11. Document history and modification

Rev. No	Chapter	Description of modification/changes	Date
1.0		Document creation	23-Feb-2009
1.1	1	Added comment on 3-sigma values	07-Apr-2009

Bosch Sensortec GmbH  
Gerhard-Kindler-Strasse 8  
72770 Reutlingen / Germany

contact@bosch-sensortec.com  
[www.bosch-sensortec.com](http://www.bosch-sensortec.com)

Modifications reserved | Printed in Germany  
Specifications subject to change without notice  
Document number: BST-BMA023-DS000-01  
Version\_1.1\_042009