SDR-Based Doppler Radar

Velocity measurement and speed camera with PlutoSDR, Arduino display and buzzer alarm

S/LT Bilal PN, S/LT Sanaullah PN, S/LT Farhan PN, S/LT Huzaifa PN
Advisor: Assistant Professor Mohammad Mustaqim

1. Objective

- Build a low-cost, software-defined CW Doppler radar that measures target speed in real time.
- Work like a street speed camera: hold each vehicle's peak speed and **capture** vehicles above a speed limit.
- Give feedback on a 4-digit LED display and a buzzer whose loudness, pitch and beep rate follow the target.

2. Principle

$$fd = 2 \cdot v \cdot fc / c \quad \rightarrow \quad v = fd \cdot c / (2 \cdot fc)$$

A wave reflected from a moving target is shifted by the Doppler frequency fd. At fc = 2.482 GHz, 1 m/s gives 16.5 Hz; a car at 50 km/h gives about 230 Hz. Positive fd = approaching, negative = receding.

3. System architecture

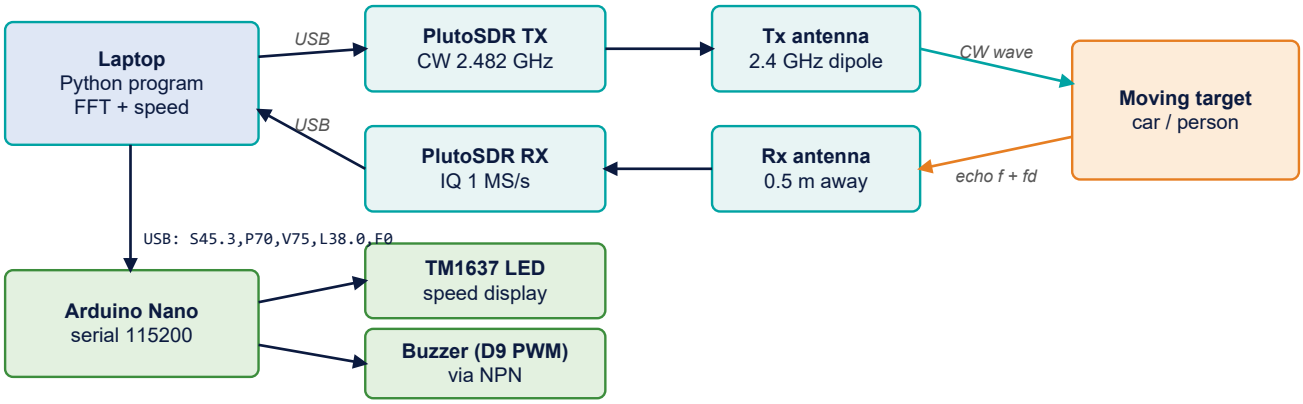


Figure 1 - One PlutoSDR transmits and receives at the same time; the laptop does all signal processing; the Arduino drives the display and buzzer.

4. Hardware

Component	Role
ADALM-PLUTO SDR (AD9363)	Full-duplex transceiver: CW transmitter and IQ receiver, USB 2.0
2 × 2.4 GHz dipole antennas + SMA cable	Separate Tx and Rx antennas, about 0.5 m apart
Laptop (Windows, Python 3.10+)	Down-conversion, FFT, detection, display, logging
Arduino Nano + TM1637 4-digit LED	Shows live speed, holds the last speed, blinks on capture
Passive buzzer + NPN (2N2222/BC547) + 1 kΩ + diode	Audible alarm driven by Timer1 PWM on pin D9

5. Signal-processing workflow

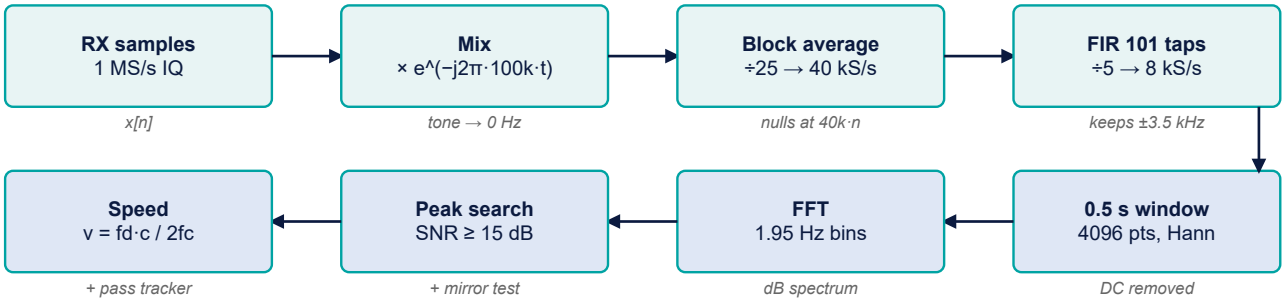


Figure 2 - Processing chain, executed every 64 ms on the laptop.

- **Transmit:** a CW tone at 2.482 GHz + 100 kHz. The offset keeps the echo away from the receiver's DC offset.
- **Down-convert:** mix the 100 kHz tone to 0 Hz and decimate 1 MS/s → 8 kS/s (block average, then FIR).
- **Spectrum:** 4096-point FFT over 0.5 s (Hann window) → 1.95 Hz bins = 0.42 km/h; peak interpolation gives a 0.1 km/h readout.
- **Detect:** the peak must be 15 dB above the median noise floor, 6 dB above its mirror frequency (rejects fans) and present in 2 consecutive frames.

6. Speed-camera logic

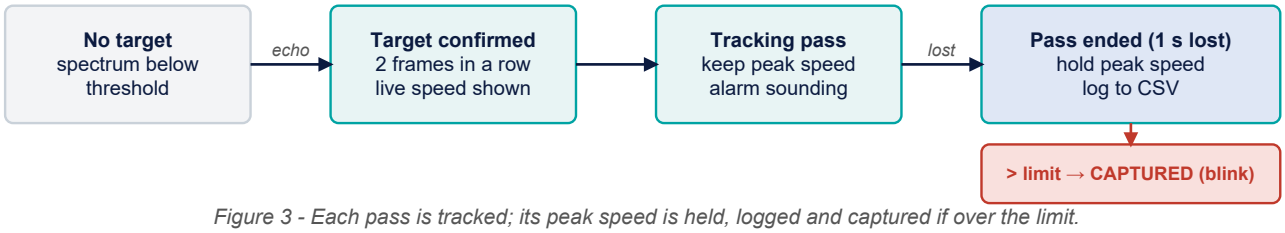


Figure 3 - Each pass is tracked; its peak speed is held, logged and captured if over the limit.

7. Outputs: display and buzzer

Output	Behaviour
Laptop screen	Live spectrum, live speed and direction, LAST SPEED, captures and top speed
LED display	Live speed during a pass, then holds the peak speed; blinks if captured; ---- = no pass yet
Buzzer volume	PWM duty cycle 2-50 %: faster target = louder
Buzzer pitch	600-1200 Hz: faster target = higher tone
Beep rate	1-10 beeps/s: stronger echo (closer target) = faster beeps
Speed log	speed_log.csv: date, time, speed, direction, limit, captured

8. Specifications and results

Parameter	Value
Carrier / waveform	2.482 GHz, continuous wave (ISM band)
Sample rate	1 MS/s, decimated to 8 kS/s
Speed resolution	0.42 km/h per FFT bin, 0.1 km/h readout
Speed range	3.3 - 218 km/h, approaching and receding
Update rate	64 ms per frame (measured: no dropped samples)
Safe shutdown	Transmitter muted (-89 dB) on every exit, verified on hardware

9. Development workflow

Stage	Work done	Outcome
1. Design	Doppler theory, carrier choice (2.482 GHz ISM), resolution and range budget	Specification: 0.42 km/h bins, 3-218 km/h
2. RF bring-up	Pluto drivers, Python control, TX/RX loop-back test	Peak at +100 kHz; RX gain set to 30 dB
3. Signal processing	Mixer, decimation, FFT, noise floor, mirror test, peak interpolation	Real-time loop at 64 ms per frame
4. Speed camera	Pass tracking, last-speed hold, capture over limit, CSV log	Peak speed held and logged
5. Display and buzzer	Arduino sketch, serial protocol, TM1637 display, Timer1 PWM buzzer	Live and held speed; alarm follows speed and distance
6. Integration and test	One-click launcher, safe TX shutdown, walking and vehicle tests	Complete system demonstrated

10. Running the system

- Connect the Pluto (middle USB port) and the Arduino to the laptop.
- Double-click **START_RADAR.bat**: it checks the setup and starts the radar (speed limit 50 km/h).
- Close the plot window to stop. **TOOLS.bat** offers hardware tests and a walking mode (limit 10 km/h).



PlutoSDR with antennas

11. Future work

- FMCW waveform for range as well as speed.
- Camera snapshot of captured vehicles.
- Directional patch antennas for longer range; multi-target tracking.