

Thesis presented to the Instituto Tecnológico de Aeronáutica, in partial fulfillment of the requirements for the degree of Doctor of Science in the Graduate Program of Engenharia Aeronáutica e Mecânica, Field of Sistemas Aeroespaciais e Mecatrônica.

**Daniel Vieira**

**ROBUST CONTROL OF LINEAR SYSTEMS WITH  
SWITCHED ACTUATORS SUBJECTED TO  
DWEELL-TIME CONSTRAINTS**

Thesis approved in its final version by signatories below:

Prof. Dr. Roberto Kawakami Harrop Galvão  
Advisor

Prof<sup>a</sup>. Dr<sup>a</sup>. ZZZZZZZZZZZZZZZZZZZZZ  
Co-advisor

Prof. Dr. ZZZZZZZZZZZZZZZZZZZZZ  
Dean for Graduate Education and Research

Campo Montenegro  
São José dos Campos, SP - Brazil  
2020

**Cataloging-in Publication Data**  
**Documentation and Information Division**

Vieira, Daniel  
Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints  
/ Daniel Vieira.  
São José dos Campos, 2020.  
68f.

Thesis of Doctor of Science – Course of Engenharia Aeronáutica e Mecânica. Area of Sistemas Aeroespaciais e Mecatrônica – Instituto Tecnológico de Aeronáutica, 2020. Advisor: Prof. Dr. Roberto Kawakami Harrop Galvão. Co-advisor: Prof<sup>a</sup>. Dr<sup>a</sup>. ZZZZZZZZZZZZZZZZZZZ.

1. Cupim. 2. Dilema. 3. Construção. I. Instituto Tecnológico de Aeronáutica. II. Title.

**BIBLIOGRAPHIC REFERENCE**

VIEIRA, Daniel. **Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints**. 2020. 68f. Thesis of Doctor of Science – Instituto Tecnológico de Aeronáutica, São José dos Campos.

**CESSION OF RIGHTS**

AUTHOR'S NAME: Daniel Vieira

PUBLICATION TITLE: Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints.

PUBLICATION KIND/YEAR: Thesis / 2020

It is granted to Instituto Tecnológico de Aeronáutica permission to reproduce copies of this thesis and to only loan or to sell copies for academic and scientific purposes. The author reserves other publication rights and no part of this thesis can be reproduced without the authorization of the author.

---

Daniel Vieira  
Pca Romao Gomes, 98  
12.233-066 – São José dos Campos–SP

# ROBUST CONTROL OF LINEAR SYSTEMS WITH SWITCHED ACTUATORS SUBJECTED TO DWEELL-TIME CONSTRAINTS

**Daniel Vieira**

Thesis Committee Composition:

|                                       |                                |            |   |        |
|---------------------------------------|--------------------------------|------------|---|--------|
| Prof. Dr.                             | Alan Turing                    | Presidente | - | ITA    |
| Prof. Dr.                             | Roberto Kawakami Harrop Galvão | Advisor    | - | ITA    |
| Prof <sup>a</sup> . Dr <sup>a</sup> . | ZZZZZZZZZZZZZZZZZZZZ           | Co-advisor | - | OVNI   |
| Prof. Dr.                             | Linus Torwald                  |            | - | UXXX   |
| Prof. Dr.                             | Richard Stallman               |            | - | UYYY   |
| Prof. Dr.                             | Donald Duck                    |            | - | DYSNEY |
| Prof. Dr.                             | Mickey Mouse                   |            | - | DISNEY |

**ITA**

Aos amigos da Graduação e Pós-Graduação do ITA por motivarem tanto a criação deste template pelo Fábio Fagundes Silveira quanto por motivarem a mim e outras pessoas a atualizarem e aprimorarem este excelente trabalho.

# Acknowledgments

Primeiramente, gostaria de agradecer ao Dr. Donald E. Knuth, por ter desenvolvido o T<sub>E</sub>X.

Ao Dr. Leslie Lamport, por ter criado o L<sup>A</sup>T<sub>E</sub>X, facilitando muito a utilização do T<sub>E</sub>X, e assim, eu não ter que usar o Word.

Ao Prof. Dr. Meu Orientador, pela orientação e confiança depositada na realização deste trabalho.

Ao Dr. Nelson D'Ávila, por emprestar seu nome a essa importante via de trânsito na cidade de São José dos Campos.

Ah, já estava esquecendo... agradeço também, mais uma vez ao T<sub>E</sub>X, por ele não possuir vírus de macro :-)

*"I am and always will be the optimist.  
The hoper of far-flung hopes, and the dreamer of improbable dreams."*  
— THE ELEVENTH DOCTOR

# Resumo

Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o sistema à trajetória cíclica alvo.

# Abstract

Switched actuators are difficult to handle because of some characteristic constraints of their nature. but they are efficient in numerous engineering applications, being applied, for example, in attitude control systems for space vehicles. Thus, knowing how to use this type of actuator is important and necessary. The main problem to be solved in this thesis is the design of a controller that guarantees the robustness of a system with switched actuators subjected to time constraints that limit the response window of their commands. In this approach, a limit cycle target trajectory search is performed and then the error of the states compared to the target trajectory is calculated. Then a predictive control technique is applied to correct the error and get the system to the cyclic target trajectory



# List of Figures

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| FIGURE 2.1 – Change in dynamics over trajectory time . . . . .                         | 18 |
| FIGURE 2.2 – Buck-Boost converter . . . . .                                            | 22 |
| FIGURE 2.3 – Buck-Boost converter: State trajectory . . . . .                          | 24 |
| FIGURE 2.4 – Buck-Boost converter: Command signal . . . . .                            | 24 |
| FIGURE 2.5 – Four-level three-cell converter . . . . .                                 | 25 |
| FIGURE 2.6 – Variant Dynamic Circuit 2: Voltage $C_1$ . . . . .                        | 27 |
| FIGURE 2.7 – Variant Dynamic Circuit 2: Voltage $C_2$ . . . . .                        | 28 |
| FIGURE 2.8 – Variant Dynamic Circuit 2: Current $L$ . . . . .                          | 28 |
| FIGURE 2.9 – Variant Dynamic Circuit 2: State Trajectory . . . . .                     | 29 |
| FIGURE 3.1 – Ilustracao para $n = 1$ estado, $p = 1$ entrada e $N = 1$ passo . . . . . | 40 |
| FIGURE 4.1 – Switching signals . . . . .                                               | 41 |
| FIGURE 4.2 – Reference signal for Double Integrator . . . . .                          | 52 |
| FIGURE 4.3 – State Trajectory MPC off, 4 cicles . . . . .                              | 54 |
| FIGURE 4.4 – State Trajectory MPC on, 50 cicles . . . . .                              | 55 |
| FIGURE 4.5 – Operation mode switch . . . . .                                           | 55 |
| FIGURE 4.6 – fig 1 . . . . .                                                           | 57 |
| FIGURE 4.7 – fig 2 . . . . .                                                           | 58 |
| FIGURE 4.8 – fig 1 . . . . .                                                           | 61 |
| FIGURE 4.9 – fig 2 . . . . .                                                           | 61 |
| FIGURE 4.10 –fig 3 . . . . .                                                           | 62 |
| FIGURE 4.11 –fig 4 . . . . .                                                           | 62 |
| FIGURE 4.12 –Variant Dynamic Circuit 2: State Trajectory . . . . .                     | 63 |

# List of Tables

|                               |    |
|-------------------------------|----|
| TABLE 4.1 – heading . . . . . | 59 |
|-------------------------------|----|

# List of Abbreviations and Acronyms

|        |                                     |
|--------|-------------------------------------|
| CTq    | computed torque                     |
| DC     | direct current                      |
| EAR    | Equação Algébrica de Riccati        |
| GDL    | graus de liberdade                  |
| ISR    | interrupção de serviço e rotina     |
| LMI    | linear matrices inequalities        |
| MIMO   | multiple input multiple output      |
| PD     | proporcional derivativo             |
| PID    | proporcional integrativo derivativo |
| PTP    | point to point                      |
| UARMII | Underactuated Robot Manipulator II  |
| VSC    | variable structure control          |

# List of Symbols

|                  |                                                                        |
|------------------|------------------------------------------------------------------------|
| $a$              | Distância                                                              |
| $\mathbf{a}$     | Vetor de distâncias                                                    |
| $\mathbf{e}_j$   | Vetor unitário de dimensão $n$ e com o $j$ -ésimo componente igual a 1 |
| $\mathbf{K}$     | Matriz de rigidez                                                      |
| $m_1$            | Massa do cumpim                                                        |
| $\delta_{k-k_f}$ | Delta de Kronecker no instante $k_f$                                   |

# Contents

|       |                                                          |    |
|-------|----------------------------------------------------------|----|
| 1     | INTRODUCTION . . . . .                                   | 15 |
| 1.1   | Motivation . . . . .                                     | 15 |
| 1.2   | Contributions of the present work . . . . .              | 16 |
| 1.3   | Outline of the remaining chapters . . . . .              | 16 |
| 2     | DETERMINATION OF TARGET PERIODIC TRAJECTORIES . . . . .  | 17 |
| 2.1   | Optimization . . . . .                                   | 17 |
| 2.1.1 | System Dynamics and Sequence . . . . .                   | 17 |
| 2.1.2 | Constraints Definition . . . . .                         | 18 |
| 2.1.3 | Optimization with FMINCON . . . . .                      | 18 |
| 2.1.4 | Cost Function and Trajectory Simulation . . . . .        | 19 |
| 2.1.5 | Cost Computation . . . . .                               | 19 |
| 2.2   | Calculating $x_0$ . . . . .                              | 19 |
| 2.3   | Application Examples . . . . .                           | 21 |
| 2.3.1 | Buck-boost converter . . . . .                           | 22 |
| 2.3.2 | Multilevel converter . . . . .                           | 25 |
| 3     | PREDICTIVE CONTROL: PRELIMINARIES AND NOTATION . . . . . | 30 |
| 3.1   | Cost Function . . . . .                                  | 30 |
| 3.2   | Constraints . . . . .                                    | 33 |
| 3.3   | Prediction Equation . . . . .                            | 35 |
| 3.4   | Optimization Problem . . . . .                           | 36 |
| 3.5   | Feasibility Region . . . . .                             | 38 |

|       |                                                                         |    |
|-------|-------------------------------------------------------------------------|----|
| 4     | PREDICTIVE CONTROL FOR STABILIZATION OF PERIODIC TRAJECTORIES . . . . . | 41 |
| 4.1   | Statement of the problem . . . . .                                      | 41 |
| 4.2   | Linearization procedure . . . . .                                       | 42 |
| 4.3   | MPC Problem . . . . .                                                   | 50 |
| 4.3.1 | Cost Function . . . . .                                                 | 50 |
| 4.3.2 | Dwell-time Constraints . . . . .                                        | 50 |
| 4.4   | Application Examples . . . . .                                          | 51 |
| 4.4.1 | Double Integrator . . . . .                                             | 52 |
| 4.4.2 | Buck-boost converter . . . . .                                          | 56 |
| 4.4.3 | Patino 2 . . . . .                                                      | 59 |
| 4.5   | Conclusion . . . . .                                                    | 64 |
| 5     | CONCLUSÃO . . . . .                                                     | 65 |
|       | BIBLIOGRAPHY . . . . .                                                  | 66 |
|       | APPENDIX A – TÓPICOS DE DILEMA LINEAR . . . . .                         | 67 |
| A.1   | Modelo de simulação . . . . .                                           | 67 |
| A.1.1 | get_x0 . . . . .                                                        | 67 |
| A.1.2 | get_xf . . . . .                                                        | 67 |
|       | ANNEX A – EXEMPLO DE UM PRIMEIRO ANEXO . . . . .                        | 68 |
| A.1   | Uma Seção do Primeiro Anexo . . . . .                                   | 68 |

# 1 Introduction

## 1.1 Motivation

The dynamics of switched affine systems can be described by a state equation of the form  $\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}, t \in \mathbb{R}_+$ . Where  $x(t) \in \mathbb{R}^n$  is the state vector and  $\sigma(t) \in \{1, 2, \dots, M\}$  is the switching state, which is associated to the matrix  $A_{\sigma(t)} \in \mathbb{R}^{n \times n}$  and the vector  $b_{\sigma(t)} \in \mathbb{R}^n$  at each time  $t$ .

The use of switched affine systems to solve problems in engineering can be seen in fields like biochemical reactions, where Parise *et al.* (2018) uses switched affine systems to represent the moments of evolution in a generic biochemical reaction network; urban traffic, where Hajiahmadi *et al.* (2016) approaches the urban traffic control; power converters, where Benmiloud *et al.* (2019) also uses this approach and other areas where the behavior of the system can be described as a switched affine system.

There is extensive research in this class of controllers, and most of them solve the problem by driving the system states to the neighborhood of the target states, not considering the trajectory behavior of the system. This can reduce the performance of the system when the system is affected by the trajectory of the limit cycle in steady operation.

This problem has been the target of many studies, Benmiloud *et al.* (2019) uses a hybrid Poincaré map approach to stabilize a switched affine system into the desired limit cycle and uses as an example a DC-DC converter. by Egidio *et al.* (2020b), which proposes a control design of a state-dependent switching function for discrete-time switched affine systems to drive the system to the desired limit cycle that is defined by design associated with the expected performance of the system. The solution was applied in an academic numerical example and a theoretical DC-DC converter. In Egidio *et al.* (2020a) the author expanded the work to continuous-time switched affine systems.

Some studies form the basis for the present work:

Vieira (2013) solved the problem for a particular class of affine systems. Here the controller drove the system to a target state using MILP (Mixed-Integer Linear Programming) and the cyclic trajectory was a consequence of the states as the system approached

the target.

Patino *et al.* (2010) defined the target trajectory using nonlinear programming and used this target trajectory in the predictive control in terms of errors.

Marcolino (2018) proposed a solution with a controller law that drives the switched affine system with dwell-time constraints to a target cyclic trajectory. In this work, the problem is addressed in two stages: first, the problem is interpreted as a convex optimization where the author can find a targeted cyclic trajectory that minimizes a cost function associated with the system performance; then a second part that uses the target trajectory as input and computes perturbation at the switching instants of the reference control signal using predictive control.

## 1.2 Contributions of the present work

This present work proposes to expand the solution from Marcolino (2018) and provide a broader solution that can be used for systems that have their dynamics changing over time.

In a system that can be represented by a switched affine system with the form  $\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}$  there are cases in which the dynamic response of the system can change depending on the operation mode. This can be represented in switched affine systems with proper matrices  $A_{\sigma(t)}$  and  $b_{\sigma(t)}$  for each operation mode. With the current implementation of Marcolino (2018) considering an invariant system during its operation, there is a need for expanding the solution so it can represent more systems and solve more engineering problems that can be expressed as switched affine systems.

## 1.3 Outline of the remaining chapters

The remaining of this text is organized as follows. Chapter 2 describes the problem of finding a target periodic trajectory for the given switched affine system. Chapter 3 proposes then a predictive control law that drives the system to the target cyclic trajectory. Finally, chapter 4 brings some remarks and considerations of the work.



## 2 Determination of Target Periodic Trajectories

The goal is to drive a system defined by an affine dynamic equation (eq. 2.1) to an optimal periodic trajectory, so the first step is to generate this trajectory. This trajectory is submitted to restrictions imposed by the dynamic of the system and also switching time restrictions.

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)} \quad (2.1)$$

Following the approach from Patino *et al.* (2010) we must establish a trajectory that yields the optimal time sequence  $\tau^\infty$ , the modes sequence  $\Omega^\infty$ , and its length  $s^\infty$  ( $1 < s^\infty < s_{max}$ ). To reduce the oscillations around a desired operation point, we choose an integral quadratic criterion centered on the average reference value  $\bar{x}^\infty$ :

$$J(\tau^\infty, \Omega^\infty, s^\infty) = \min_{\tau, \Omega, s} \int_0^{T_p} \left[ x(t) - \bar{x}^\infty \right]^T Q \left[ x(t) - \bar{x}^\infty \right] dt \quad (2.2)$$

where  $Q = Q^T > 0$  and  $T_p$  is the period of the cycle.

Since the trajectory is cyclic we can impose the constraint:

$$x(0) = x(T_p) \quad (2.3)$$

### 2.1 Optimization

#### 2.1.1 System Dynamics and Sequence

To begin, we create a list where each of its elements signifies the dynamics of the system. This is exemplified by the matrices A, B, C, and D. The order in which the elements appear in this list is defined by the sequence of modes. In simpler terms, the

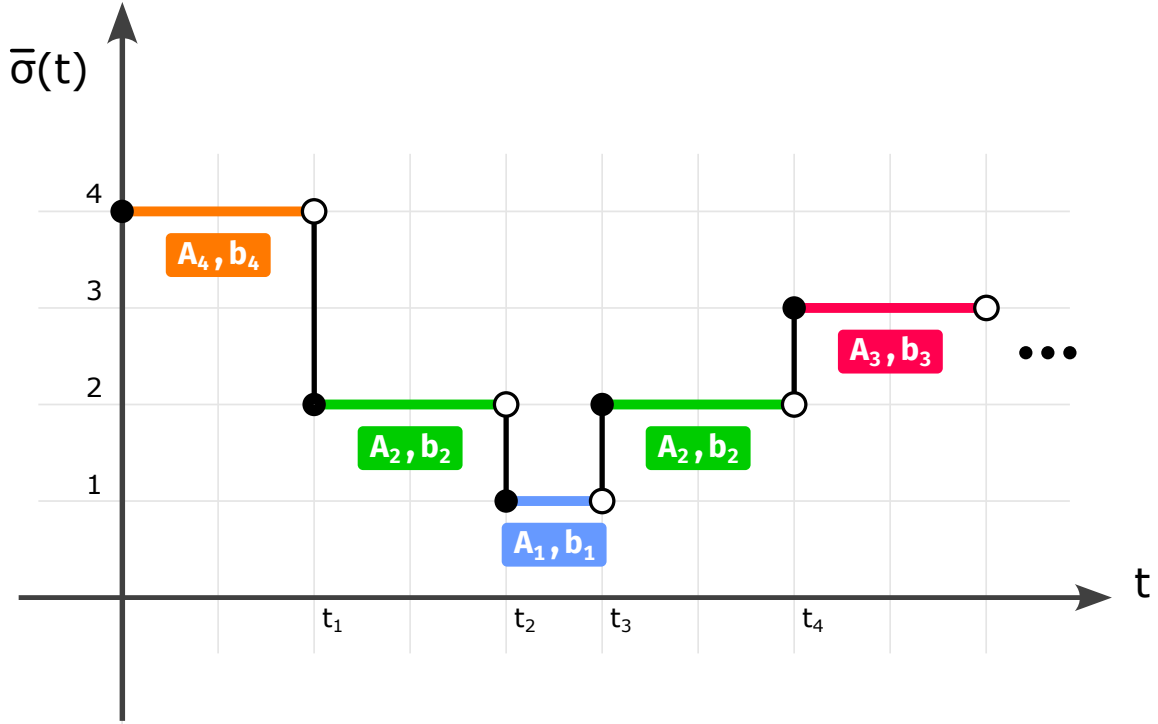


FIGURE 2.1 – Change in dynamics over trajectory time

positioning of these elements signifies the order they will be executed.

In Figure 2.1, we see a trajectory example. For this illustration, the system's list of dynamics is  $\{[A_1, b_1], [A_2, b_2], [A_3, b_3], [A_4, b_4]\}$ , and the sequence of modes is  $[4, 2, 1, 2, 3]$ . It's worth noting that a particular system dynamic can be employed multiple times or might not be used at all, depending on the desired target trajectory. The sequence of modes and the maximum period for the cycle are predetermined for this problem and the goal is to achieve the best trajectory that minimizes the cost function.

### 2.1.2 Constraints Definition

Once the list and sequence have been established, we need to apply the constraints. These constraints dictate the cycle's maximum duration, as well as the minimum and the maximum time permitted between switches in modes.

### 2.1.3 Optimization with FMINCON

For optimization purposes, the function FMINCON is employed. This function works in conjunction with a cost function. The cost function is designed to accept switching times generated from the optimization process. Its primary goal is to evaluate and discern the most cost-effective result that respects the imposed constraints.

FMINCON is a method of optimization in MATLAB's libraries that implements the method SQP (Sequential Quadratic Programming). The basic SQP algorithm is described in Chapter 18 of Nocedal e Wright (2006).

### 2.1.4 Cost Function and Trajectory Simulation

Taking a closer look at the cost function, its role is to simulate the trajectory using the dynamics taken from the previously defined list, all in line with the mode sequence. This trajectory is cyclic and to enforce this cyclic nature, the initial state's condition is calculated in such a way that the end product is a cyclic trajectory.

### 2.1.5 Cost Computation

The method of determining the cost is by computing the integral of the trajectory, centered around the average reference value, denoted as  $\bar{x}^\infty$ . The result is compliant with the system's dynamic constraints and also matches the properties of the final trajectory.

## 2.2 Calculating $x_0$

We need to compute the initial condition for the system for each evaluation of the cost function so that we have a periodic trajectory, meaning that the last states of the trajectory we the same as the initial condition.

We can have different dynamics for each switching instant, so the system behaves as

$$\begin{aligned}
 [0 \rightarrow t_1] : \dot{x} &= A_{\sigma(0)}x + b_{\sigma(0)} \\
 [t_1 \rightarrow t_2] : \dot{x} &= A_{\sigma(t_1)}x + b_{\sigma(t_1)} \\
 &\vdots \\
 [t_{N-1} \rightarrow t_N] : \dot{x} &= A_{\sigma(t_{N-1})}x + b_{\sigma(t_{N-1})}
 \end{aligned} \tag{2.4}$$

We can rewrite the solution for the first region as

$$\begin{aligned}
x(t_1) &= e^{A_{\sigma(0)}t_1}x(0) + \int_0^{t_1} e^{A_{\sigma(0)}(t_1-\tau)}b_{\sigma(0)}d\tau \\
x(t_1) &= e^{\textcolor{teal}{A}_{\sigma(0)}t_1}x(0) + \int_0^{\textcolor{teal}{t}_1} \textcolor{teal}{e}^{\textcolor{teal}{A}_{\sigma(0)}(t_1-\tau)}\textcolor{teal}{b}_{\sigma(0)}d\tau \\
x(t_1) &= \textcolor{teal}{F}_0x(0) + \textcolor{teal}{g}_0
\end{aligned} \tag{2.5}$$

then the behavior of the other regions of the system is

$$\begin{aligned}
x(t_1) &= F_0x(0) + g_0 \\
x(t_2) &= F_1x(1) + g_1 \\
&\vdots \\
x(t_N) &= F_{N-1}x(N-1) + g_{N-1}
\end{aligned} \tag{2.6}$$

with

$$F_i = e^{A_{\sigma(t_i)}(t_{i+1}-t_i)} \tag{2.7}$$

$$g_i = \int_{t_i}^{t_{i+1}} e^{A_{\sigma(t_i)}(t_{i+1}-\tau)}b_{\sigma(t_i)}d\tau = \int_0^{t_{i+1}-t_i} e^{A_{\sigma(t_i)}\tau}b_{\sigma(t_i)}d\tau \tag{2.8}$$

From (2.6) we can establish the relation between  $x(t_N)$  and  $x(0)$

$$\begin{aligned}
x(t_N) &= F_{N-1}F_{N-2}\dots F_0x(0) + \\
&\quad \textcolor{teal}{F}_{N-1}\textcolor{teal}{F}_{N-2}\dots \textcolor{teal}{F}_1g_0 + \textcolor{teal}{F}_{N-1}\textcolor{teal}{F}_{N-2}\dots \textcolor{teal}{F}_2g_1 + \dots + \textcolor{teal}{F}_{N-1}g_{N-2} + g_{N-1} \\
x(t_N) &= F_NF_{N-1}\dots F_1x(0) + c
\end{aligned} \tag{2.9}$$

We know that  $x(t_N) = x(0)$ , so the solution for  $x(0)$  is

$$\begin{aligned}
x(0) &= F_{N-1}F_{N-2}\dots F_0x(0) + c \\
(I - F_{N-1}F_{N-2}\dots F_0)x(0) &= c \\
x(0) &= (I - F_{N-1}F_{N-2}\dots F_0)^{-1}c
\end{aligned} \tag{2.10}$$

where

$$c = F_{N-1}F_{N-2}\dots F_1g_0 + F_{N-1}F_{N-2}\dots F_2g_1 + \dots + F_{N-1}g_{N-2} + g_{N-1} \tag{2.11}$$

assuming that the inverse indicated in (2.10) exists.

## **2.3 Application Examples**

### 2.3.1 Buck-boost converter

Considering a Buck-Boost converter in a Continuous Conduction Mode (CCM) whose topology is shown in Figure 2.2.

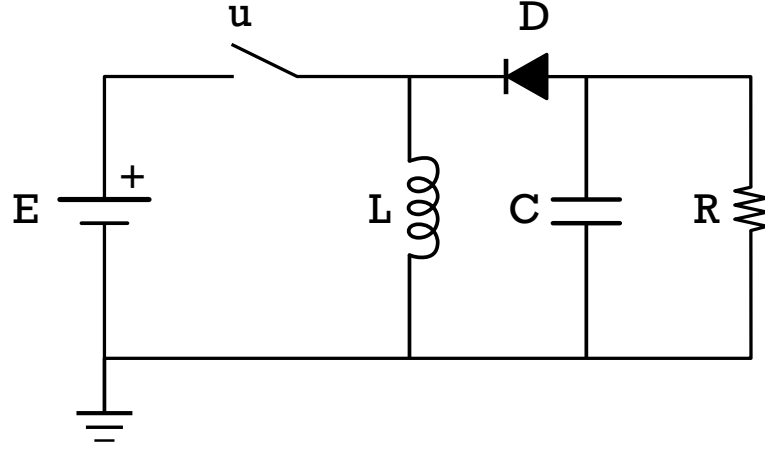


FIGURE 2.2 – Buck-Boost converter

The state variables are the capacitor voltage  $v_c$  and the inductor current  $i_L$ . Its dynamics are given by the equation:

$$\dot{x} = \begin{cases} A_1 x + b_1, & \text{for } u = 1 \text{ (closed switch - Mode 1)} \\ A_2 x + b_2, & \text{for } u = 0 \text{ (open switch - Mode 2)} \end{cases} \quad (2.12)$$

where

$$\begin{aligned} A_1 &= \begin{bmatrix} 0 & 0 \\ 0 & -\frac{1}{RC} \end{bmatrix} & A_2 &= \begin{bmatrix} 0 & \frac{1}{L_1} \\ -\frac{1}{C} & -\frac{1}{RC} \end{bmatrix} \\ b_1 &= \begin{bmatrix} \frac{E}{L} & 0 \end{bmatrix}^T & b_2 &= \begin{bmatrix} 0 & 0 \end{bmatrix}^T \end{aligned} \quad (2.13)$$

where  $R = L = C = E = 1$ .

The list of dynamics for this example is

$$\left\{ [A_1, b_1], [A_2, b_2] \right\} \quad (2.14)$$

where

$$A_1 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix}, b_1 = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad (2.15)$$

$$A_2 = \begin{bmatrix} 0 & 1 \\ -1 & -1 \end{bmatrix}, b_2 = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (2.16)$$

The criteria for the optimization is to compute the trajectory to minimize oscillation around the average value  $[2, -1]$  with the weight matrix  $Q = \text{diag}[1, 1]$ , the maximum cycle period of  $T_{p,max} = 1s$  and minimum dwell time of  $t_{min} = 0.25s$ .

The cost function takes a vector representing the  $dt$  for each switching moment as its input. For instance, with two switching instances, the vector could be  $[0.25, 0.35]$ . This implies the signal begins at time 0.0, transitions to the next dynamic at  $0.0 + 0.25 = 0.25$ , and then switches again at  $0.25 + 0.35 = 0.6$ . This gives us the signal sequence  $[0.0, 0.25, 0.6]$ .

In the Buck-Boost converter example, the initial values for the switching vector are represented by  $[0.25, 0.25]$ . The lower bounds are defined as  $[0.25, 0.25]$  and the upper bounds are set to  $[1.5, 1.5]$ . The solution provided by the FMINCON optimization yields  $\tau^\infty = \{0, 0.2509, 0.5\}$  and  $\Omega^\infty = \{1, 2\}$ .

The outcome under this condition is displayed in Figure (2.2), showcasing the cyclic trajectory around the average value  $[2, -1]$ . The corresponding command signal can be seen in Figure (2.4).

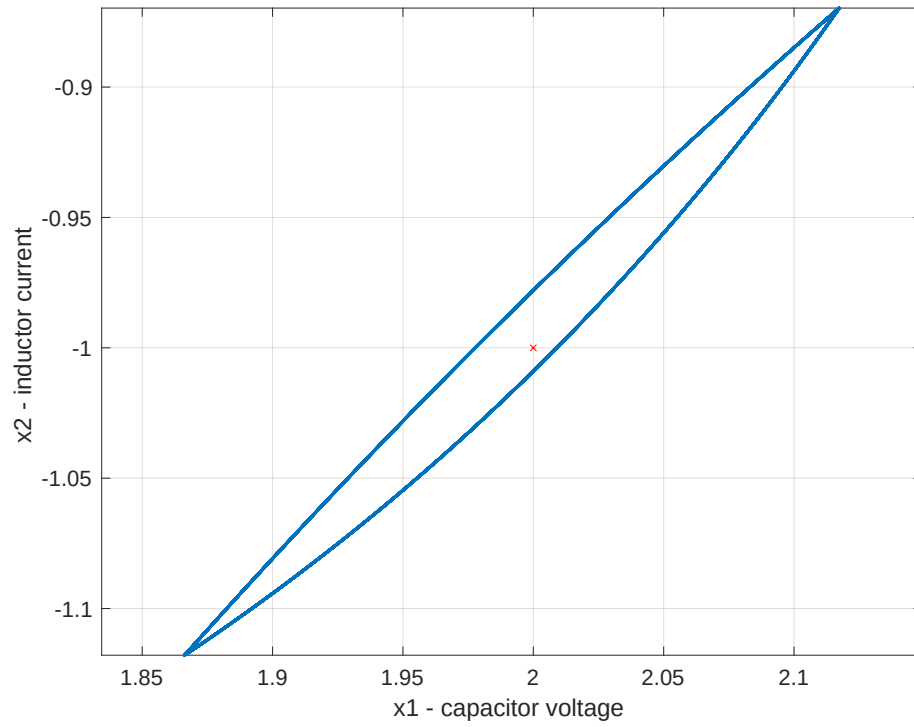


FIGURE 2.3 – Buck-Boost converter: State trajectory

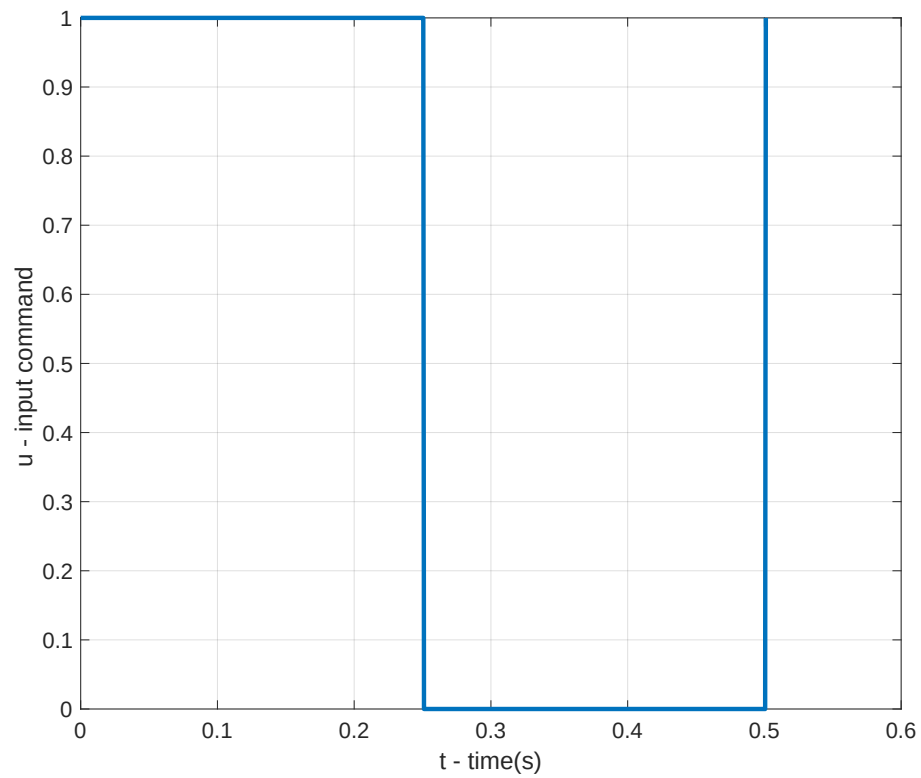


FIGURE 2.4 – Buck-Boost converter: Command signal



### 2.3.2 Multilevel converter

Considering a Multilevel converter whose topology is shown in Figure 2.5.

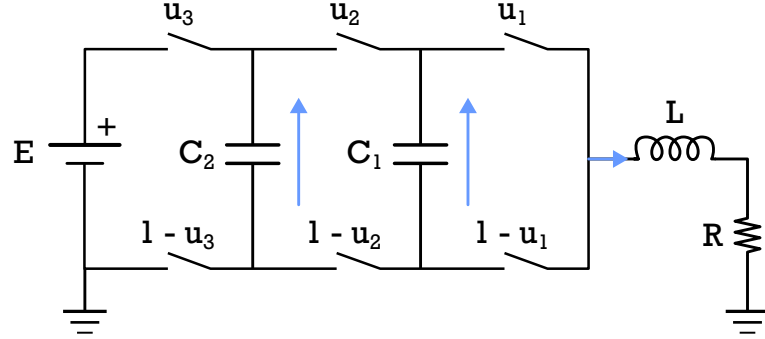


FIGURE 2.5 – Four-level three-cell converter

The state variables are the voltage on the capacitors  $x(t) = [v_{c_1}(t), v_{c_2}(t), i_L(t)]$ . Where  $v_{c_1}$ ,  $v_{c_2}$  are the voltages in each capacitor and  $i_L$  is the load current.

The dynamic of this system can be described as

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} -\frac{x_3(t)}{C_1} & \frac{x_3(t)}{C_1} & 0 \\ 0 & -\frac{x_3(t)}{C_2} & \frac{x_3(t)}{C_2} \\ \frac{x_1(t)}{L} & \frac{x_2(t)-x_1(t)}{L} & \frac{E-x_2(t)}{L} \end{bmatrix} \begin{bmatrix} u_1(t) \\ u_2(t) \\ u_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}x_3(t) \end{bmatrix} \quad (2.17)$$

rearranging the terms we have

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} 0 & 0 & \frac{u_2-u_1}{C_1} \\ 0 & 0 & \frac{u_3-u_2}{C_2} \\ \frac{u_1-u_2}{L} & \frac{u_2-u_3}{L} & \frac{-R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}u_3 \end{bmatrix} \quad (2.18)$$

Each combination of the switches determines a different behavior

$$\mathbf{u}_1 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}, A_1 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{-R}{L} \end{bmatrix}, b_1 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.19)$$

$$\mathbf{u}_2 = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}, A_2 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{1}{C_1} \\ 0 & \frac{-1}{L} & \frac{-R}{L} \end{bmatrix}, b_2 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.20)$$

$$\mathbf{u}_3 = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}, A_3 = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & \frac{-1}{C_2} \\ \frac{-1}{L} & \frac{1}{L} & \frac{-R}{L} \end{bmatrix}, b_3 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.21)$$

$$\mathbf{u}_4 = \begin{bmatrix} 0 \\ 1 \\ 1 \end{bmatrix}, A_4 = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & 0 \\ \frac{-1}{L} & 0 & \frac{-R}{L} \end{bmatrix}, b_4 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.22)$$

$$\mathbf{u}_5 = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}, A_5 = \begin{bmatrix} 0 & 0 & \frac{-1}{C_1} \\ 0 & 0 & 0 \\ \frac{1}{L} & 0 & \frac{-R}{L} \end{bmatrix}, b_5 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.23)$$

$$\mathbf{u}_6 = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix}, A_6 = \begin{bmatrix} 0 & 0 & \frac{-1}{C_1} \\ 0 & 0 & \frac{1}{C_2} \\ \frac{1}{L} & \frac{-1}{L} & \frac{-R}{L} \end{bmatrix}, b_6 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.24)$$

$$\mathbf{u}_7 = \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix}, A_7 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{-1}{C_1} \\ 0 & \frac{1}{L} & \frac{-R}{L} \end{bmatrix}, b_7 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.25)$$

$$\mathbf{u}_8 = \begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}, A_8 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{-R}{L} \end{bmatrix}, b_8 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.26)$$

With the detailed dynamic for each switching positions we can define the list of elements for the multilevel converter as  $\{A_1, A_2, A_3, A_4, A_5, A_6, A_7, A_8\}$  and  $\{b_1, b_2, b_3, b_4, b_5, b_6, b_7, b_8\}$ .

The criteria for the optimization is to compute the trajectory around the average value  $\left[\frac{2}{3}E, \frac{1}{3}E, 1\right]$  with  $E = 30V$ . The maximum cycle period is  $T_{p,max} = 0.4ms$  and minimum tweek time of  $t_{min} = 0.022ms$ .

The simulation parameters are  $C_1 = 40\mu F$ ,  $C_2 = 40\mu F$ ,  $L = 10mH$  and  $R = 10\Omega$  with the weight matrix  $Q = diag[10, 5, 20000]$ .

Using the optimal switching sequence

$$\Omega^\infty = \{1, 2, 4, 8, 3, 1, 5, 8, 5\} \quad (2.27)$$

The optimal switching instant is

$$\tau^\infty = \{0, 0.088, 0.110, 0.132, 0.154, 0.176, 0.198, 0.220, 0.242, 0.264\} \quad (2.28)$$

with the initial condition  $x(0) = [21.71, 3.29, 1.08]^T$ .

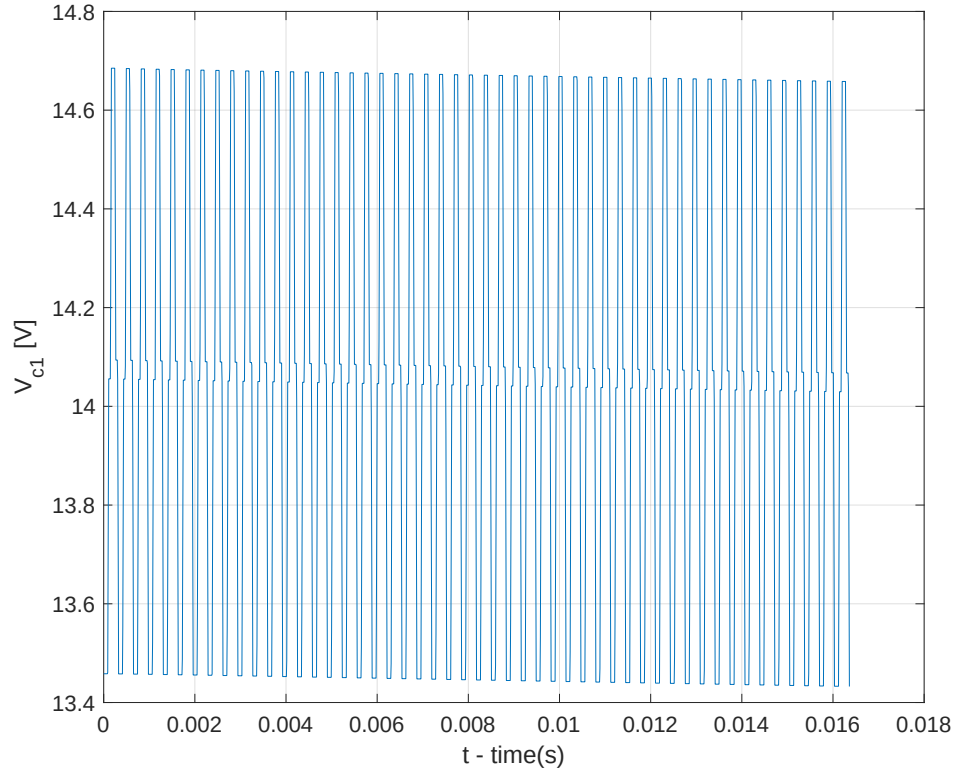
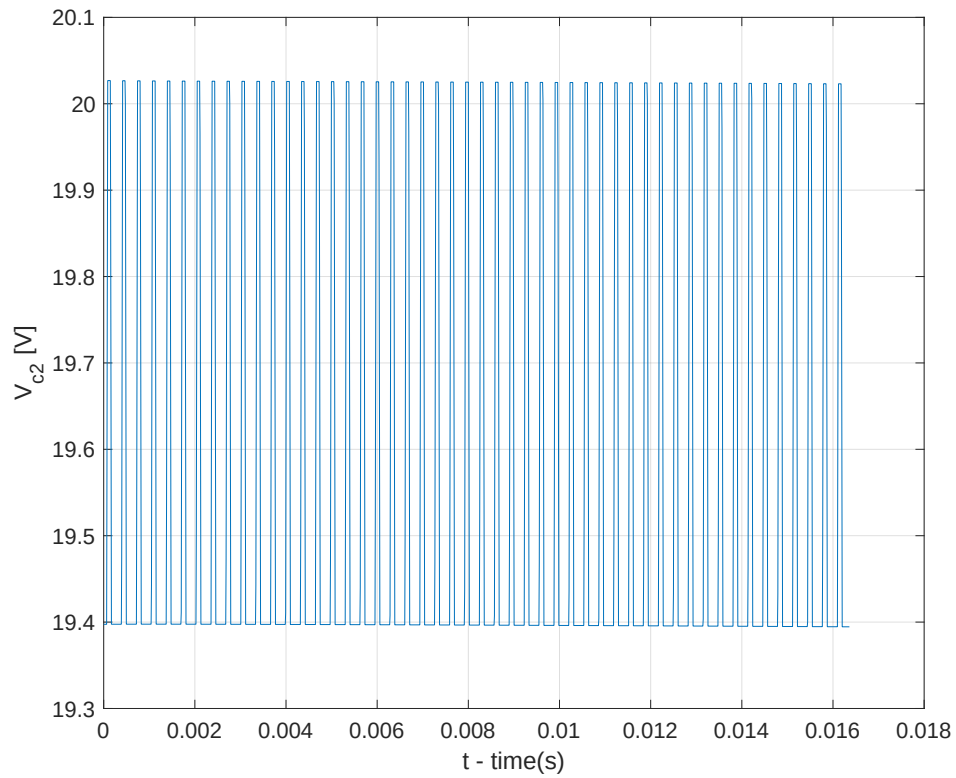
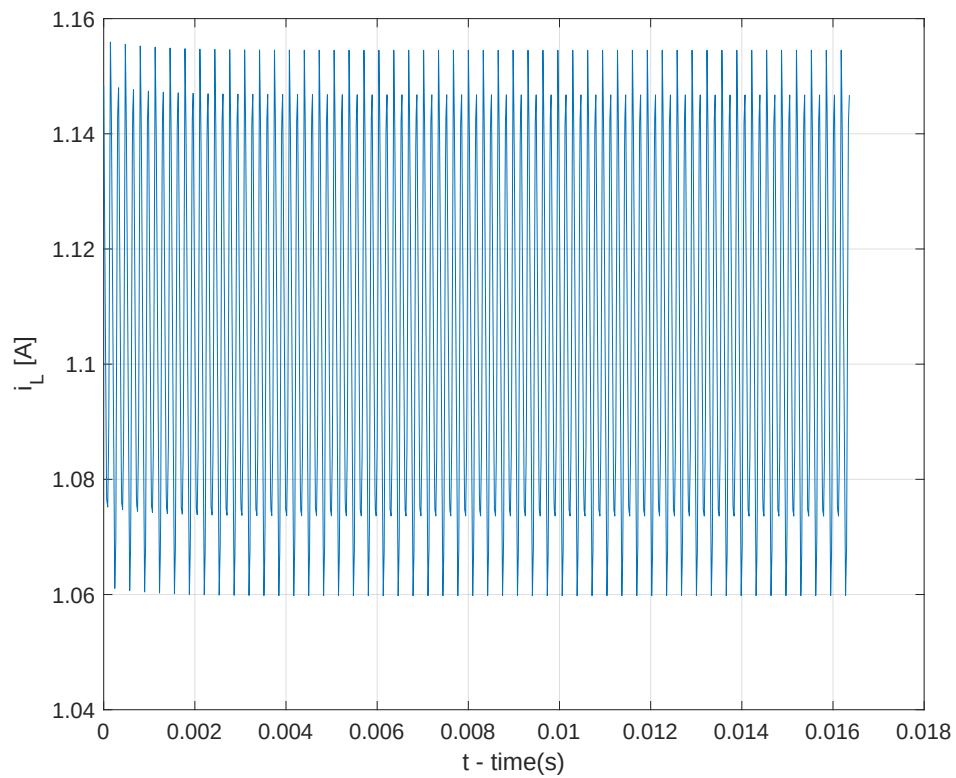


FIGURE 2.6 – Variant Dynamic Circuit 2: Voltage  $C_1$

FIGURE 2.7 – Variant Dynamic Circuit 2: Voltage  $C_2$ FIGURE 2.8 – Variant Dynamic Circuit 2: Current  $L$

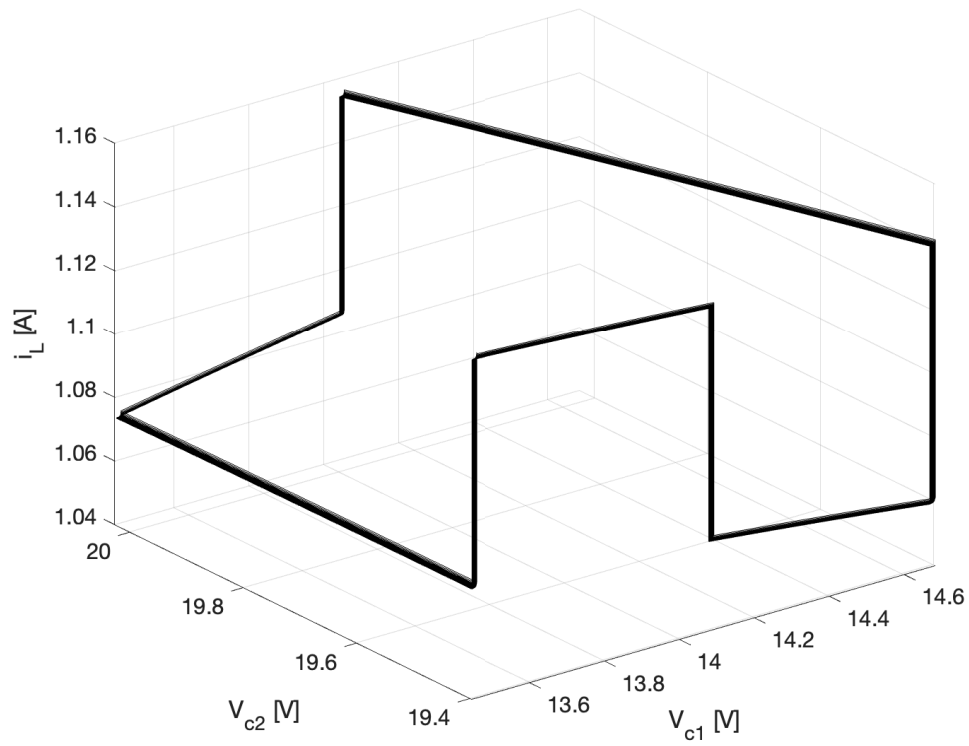


FIGURE 2.9 – Variant Dynamic Circuit 2: State Trajectory

## 3 Predictive control: Preliminaries and notation

Consider a system with dynamics described by

$$x[k+1] = Ax[k] + Bu[k] \quad (3.1)$$

The objective is to drive the state  $x[k]$  to the origin from a given initial condition while respecting state and control constraints in the form

$$x[k] \in \mathcal{X} \quad (3.2)$$

$$u[k] \in \mathcal{U} \quad (3.3)$$

$$\mathcal{U} = \{u \in \mathbb{R}^p : S_u u \leq b_u\} \quad (3.4)$$

and

$$\mathcal{X} = \{x \in \mathbb{R}^n : S_x x \leq b_x\} \quad (3.5)$$

### 3.1 Cost Function

The solution, if it exists, will not be unique. Therefore, it is necessary to adopt a criterion that allows for choosing the best sequence of control actions to perform the task.

The control problem consists of bringing the states to the origin, so we will employ a cost in the form

$$J = \left\| \hat{x}[k+N|k] \right\|_{P_f}^2 + \sum_{i=0}^{N-1} \left[ \left\| \hat{x}[k+i|k] \right\|_Q^2 + \left\| \hat{u}[k+i|k] \right\|_R^2 \right] \quad (3.6)$$

and initial condition

$$\hat{x}[k|k] = x[k] \quad (3.7)$$

The expression for  $J$  consists of a **terminal cost** term and a trajectory **cost term**.

With  $P_f$ ,  $Q$ ,  $R$  being symmetric and positive-definite, with  $P_f$  chosen so that the terminal cost term  $\left\| \hat{x}(k+N|k) - \bar{x} \right\|_{P_f}^2$  corresponds to the value function of the infinite horizon Discrete-Time Linear Quadratic Regulator (DLQR).

The cost function can be rewritten using the notation:

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathbb{R}^{nN} \quad (3.8)$$

and then the sum equation

$$\begin{aligned} \sum_{j=0}^{N-1} \left\| \hat{u}[j+k|k] \right\|_R^2 &= \hat{u}^T[k|k] R \hat{u}[k|k] + \hat{u}^T[k+1|k] R \hat{u}[k+1|k] + \cdots \\ &\quad + \hat{u}^T[k+N-1|k] R \hat{u}[k+N-1|k] \end{aligned} \quad (3.9)$$

becomes

$$\underbrace{\begin{bmatrix} \hat{u}^T[k|k] & \hat{u}^T[k+1|k] & \cdots & \hat{u}^T[k+N-1|k] \end{bmatrix}}_{\hat{\mathbf{u}}^T} \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} \underbrace{\begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix}}_{\hat{\mathbf{u}}} \quad (3.10)$$

Using the notation

$$\mathbf{R} = \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} = \text{diag}_N(R) \quad (3.11)$$

we get to

$$\sum_{j=0}^{N-1} \left\| \hat{u}[j] \right\|_R^2 = \left\| \hat{\mathbf{u}} \right\|_{\mathbf{R}}^2 \quad (3.12)$$

Similarly, we can write

$$\begin{aligned} & \left\| \hat{x}[k+N|k] \right\|_{P_f}^2 + \sum_{j=0}^{N-1} \left\| \hat{x}[k+j|k] \right\|_Q^2 = x^T[k|k]Qx[k|k] \\ & + \hat{x}^T[k+1|k]Q\hat{x}[k+1|k] + \cdots + \hat{x}^T[k+N-1|k]Q\hat{x}[k+N-1|k] + \hat{x}^T[k+N|k]P_f\hat{x}[k+N|k] \\ & = \hat{x}^T[k|k]Q\hat{x}[k|k] + \\ & \underbrace{\begin{bmatrix} \hat{x}^T[k+1|k] & \hat{x}^T[k+2|k] & \cdots & \hat{x}^T[k+N|k] \end{bmatrix}}_{\hat{\mathbf{x}}[k]^T} \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} \underbrace{\begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix}}_{\hat{\mathbf{x}}[k]} \end{aligned} \quad (3.13)$$

with the notation

$$Q = \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} = \begin{bmatrix} \text{diag}_{N-1}(Q) & 0 \\ 0 & P_f \end{bmatrix} \in \mathbb{R}^{nN \times nN} \quad (3.14)$$

as

$$\left\| \hat{x}[k+N|k] \right\|_P^2 + \sum_{j=0}^{N-1} \left\| \hat{x}[k+j|k] \right\|_Q^2 = \left\| x[k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_Q^2 \quad (3.15)$$

So, the cost function can be written in the form

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_Q^2 + \left\| \hat{\mathbf{u}} \right\|_{\mathbf{R}}^2 \quad (3.16)$$



## 3.2 Constraints

The constraints are introduced aiming to drive the states of the system to the origin while solving

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{nN}, \hat{\mathbf{u}} \in \mathbb{R}^{pN}} \mathbf{J}(\hat{\mathbf{x}}, \hat{\mathbf{u}}) \quad (3.17)$$

respecting constraints applied on

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathcal{U} \times \mathcal{U} \times \cdots \times \mathcal{U} = \mathcal{U}^N \quad (3.18)$$

$$\hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathcal{X} \times \mathcal{X} \times \cdots \times \mathcal{X}_f = \mathcal{X}^{N-1} \times \mathcal{X}_f \quad (3.19)$$

$\mathcal{X}_f$  is the maximum invariant and admissible set (MAS) with respect to the terminal state and control constraints under the action of a terminal control force.

$$\{\hat{x} \in \mathbb{R}^n : S_f \hat{x} \leq b_f\} \quad (3.20)$$

The constraint on  $\hat{\mathbf{u}}$  can be written as

$$\begin{bmatrix} S_u & 0 & \cdots & 0 \\ 0 & S_u & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_u \end{bmatrix} \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \leq \begin{bmatrix} b_u \\ b_u \\ \vdots \\ b_u \end{bmatrix} \quad (3.21)$$

or, in a shorter form

$$\mathbf{S}_u \hat{\mathbf{u}} \leq \mathbf{b}_u \quad (3.22)$$

with

$$\mathbf{S}_u = \text{diag}_N(S_u), \mathbf{b}_u = \text{col}_N(b_u) \quad (3.23)$$

Similarly, the constraints on  $\hat{\mathbf{x}}$  can be written as

$$\begin{bmatrix} S_x & 0 & \cdots & 0 \\ 0 & S_x & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_x \end{bmatrix} \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \leq \begin{bmatrix} b_x \\ b_x \\ \vdots \\ b_x \end{bmatrix} \quad (3.24)$$

or, in short

$$\mathbf{S}_x \hat{\mathbf{x}} \leq \mathbf{b}_x \quad (3.25)$$

with

$$\mathbf{S}_x = \begin{bmatrix} \text{diag}_{N-1}(S_x) & 0 \\ 0 & S_f \end{bmatrix}, \mathbf{b}_x = \begin{bmatrix} \text{col}_{N-1}(b_x) \\ b_f \end{bmatrix} \quad (3.26)$$

The vectors  $\hat{\mathbf{x}}[k|k]$  and  $\hat{\mathbf{u}}[k|k]$  are linked by

$$\hat{\mathbf{x}}[k+1|k] = A\hat{\mathbf{x}}[k|k] + B\hat{\mathbf{u}}[k|k] \quad (3.27)$$

so the constraint

$$\mathbf{S}_x \mathbf{x} \leq \mathbf{b}_x \quad (3.28)$$

can be rewritten as

$$\mathbf{S}_x \mathbf{B} \mathbf{u} \leq \mathbf{b}_x - \mathbf{S}_x \mathbf{A} x(0) \quad (3.29)$$

Combined with  $\mathbf{S}_u \mathbf{u} \leq \mathbf{b}_u$ , it can be expressed in the form

$$\mathbf{S} \mathbf{u} \leq \mathbf{b} \quad (3.30)$$

with

$$\mathbf{S} = \begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix}, \mathbf{b} = \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} \hat{x}[k|k] \\ \mathbf{b}_u \end{bmatrix} \quad (3.31)$$

### 3.3 Prediction Equation

Let's express the relationship between the vectors

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \quad (3.32)$$

based on the state equation

$$\hat{x}[k+i+1|k] = A\hat{x}[k|k] + B\hat{u}[k|k] \quad (3.33)$$

and initial condition  $x[k]$ .

The solution for the state equation is:

$$\hat{x}[k+i|k] = A^i \hat{x}[k|k] + \sum_{j=0}^{i-1} A^{i-1-j} B \hat{u}[k+j|k] \quad (3.34)$$

and it can be written for  $k = 1, 2, \dots, N$  as

$$\hat{x}[k+1|k] = A\hat{x}[k|k] + B\hat{u}[k|k] \quad (3.35)$$

$$\hat{x}[k+2|k] = A^2\hat{x}[k|k] + AB\hat{u}[k|k] + B\hat{u}[k+1|k] \quad (3.36)$$

$$\vdots \quad (3.37)$$

$$\hat{x}[k+N|k] = A^N \hat{x}[k|k] + A^{N-1}B\hat{u}[k|k] + \dots + AB\hat{u}[k+N-2|k] + B\hat{u}[k+N-1|k] \quad (3.38)$$

or

$$\begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix} x(0) + \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \quad (3.39)$$

This can be written in a shorter form as

$$\hat{\mathbf{x}} = \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \quad (3.40)$$

with

$$\mathbf{A} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix}, \mathbf{B} = \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \quad (3.41)$$

### 3.4 Optimization Problem

We can rewrite the cost function as

$$J = \left\| x[k|k] \right\|_P^2 + \overbrace{\left\| \hat{\mathbf{x}} \right\|_Q^2}^{\square} + \left\| \hat{\mathbf{u}} \right\|_R^2 \quad (3.42)$$

$$\square = \left\| \hat{\mathbf{x}} \right\|_Q^2 \quad (3.43)$$

$$= \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.44)$$

$$= \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.45)$$

$$= \left\| \mathbf{A}x[k|k] \right\|_Q^2 + \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.46)$$

replacing  $\square$  back in the cost equation and reordering the elements

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k|k] \right\|_P^2 + \left\| \mathbf{A}x[k|k] \right\|_Q^2 \quad (3.47)$$

$$+ \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \quad (3.48)$$

$$+ \hat{\mathbf{u}}^T \mathbf{R} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.49)$$

The constant part will be denoted by  $c_0$

Recalling that the matrix  $\mathbf{Q}$  is symmetric, we have:

$$\left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} = \left\{ \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \right\}^T \quad (3.50)$$

As these terms are scalars, it can be concluded that they are equal to each other, therefore:

$$\begin{aligned} \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x(0) \\ = 2 \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \end{aligned} \quad (3.51)$$

Finally, it can be written

$$J(\hat{\mathbf{u}}) = \hat{\mathbf{u}}^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \hat{\mathbf{u}} + 2 \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + c_0 \quad (3.52)$$

with

$$c_0 = \left\| x(0) \right\|_P^2 + \left\| \mathbf{A}x(0) \right\|_Q^2 \quad (3.53)$$

$$c_0 = \left\| x[k|k] \right\|_P^2 + \left\| \mathbf{A}x[k|k] \right\|_Q^2$$

Note that we will now use the notation  $J(\hat{\mathbf{u}})$  instead of  $J(\hat{\mathbf{x}}, \hat{\mathbf{u}})$ , since  $\hat{\mathbf{x}}$  has been eliminated from the cost expression.

To finalize the restructuring of the optimization problem in terms of  $\hat{\mathbf{u}}$ , the relation between  $\hat{\mathbf{x}}$  and  $\hat{\mathbf{u}}$  in the **restrictions** must be considered.

The optimization problem can be expressed as

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{n_N}, \hat{\mathbf{u}} \in \mathbb{R}^{p_N}} J(\hat{x}, \hat{u}) \quad (3.54)$$

where

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k|k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_Q^2 + \left\| \hat{\mathbf{u}} \right\|_R^2 \quad (3.55)$$

with

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathbb{R}^{nN}, \quad (3.56)$$

subject to

$$\mathbf{S}_x \hat{\mathbf{x}}[k] \leq \mathbf{b}_x \quad (3.57)$$

$$\mathbf{S}_u \hat{\mathbf{u}}[k] \leq \mathbf{b}_u \quad (3.58)$$

Thus, the cost can be rewritten as

$$J(\hat{\mathbf{u}}[k]) = \hat{\mathbf{u}}[k]^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \hat{\mathbf{u}}[k] + 2 \left[ \mathbf{A} \hat{x}[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}}[k] + c_0$$

with

$$c_0 = \left\| \hat{x}[k|k] \right\|_P^2 + \left\| \mathbf{A} \hat{x}[k|k] \right\|_Q^2$$

and the constraints can be expressed as

$$\mathbf{S} \hat{\mathbf{u}}[k] \leq \mathbf{b} \quad (3.59)$$

Having obtained the solution  $\hat{\mathbf{u}}[k|k]$  for the problem  $\mathbb{P}(\hat{x}[k|k])$ , the control to be applied to the plant is given by

$$\hat{u}[k|k] = \hat{u}^*[k|k]$$

where  $\hat{u}^*[k|k]$  corresponds to the first  $p$  elements of  $\hat{\mathbf{u}}^*[k|k]$ .

### 3.5 Feasibility Region

We aim to determine the set  $\mathcal{D}$  of points  $x(0) \in \mathcal{X}$  for which there exists  $\mathbf{u} \in \mathbb{R}^{pN}$  satisfying the constraints

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix} \mathbf{u} \leq \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} x(0) \\ \mathbf{b}_u \end{bmatrix} \quad (3.60)$$

These restrictions can be rewritten as

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & x(0) \end{bmatrix} \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix} \leq \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \end{bmatrix} \quad (3.61)$$

adding a restriction  $S_x x(0) \leq b_x$

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & x(0) \\ 0 & S_x \end{bmatrix} \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix} \leq \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \\ b_x \end{bmatrix} \quad (3.62)$$

This can be written in a shorter form

$$S_w w \leq b_w \quad (3.63)$$


with

$$w = \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix}, S_w = \begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \\ 0 & S_x \end{bmatrix}, b_w = \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \\ b_x \end{bmatrix} \quad (3.64)$$

The constraint  $S_w w \leq b_w$  define a polyhedron  $\mathcal{P}_w$  in the space  $\mathbb{R}^{(pN+n)}$  corresponding to the variables  $\mathbf{u}, x(0)$ .

The set  $\mathcal{D}$  is obtained by projection  $\mathcal{P}_w$  onto the subspace of its last  $n$  components.

The **projection** can be performed using the *projection* function from the *MPT Toolbox*.

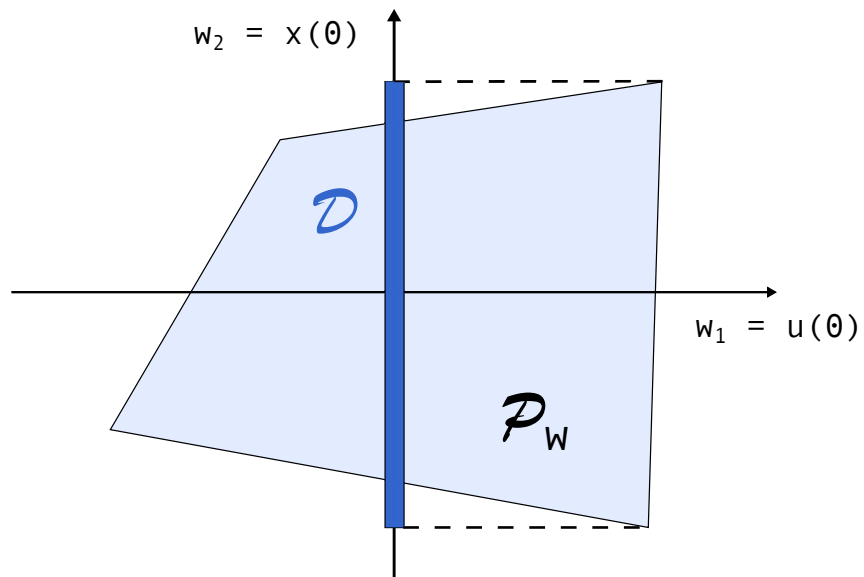FIGURE 3.1 – Ilustracao para  $n = 1$  estado,  $p = 1$  entrada e  $N = 1$  passo



# 4 Predictive Control for Stabilization of Periodic Trajectories

## 4.1 Statement of the problem

Considering a plant of an affine switched system described by:

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)} \quad (4.1)$$

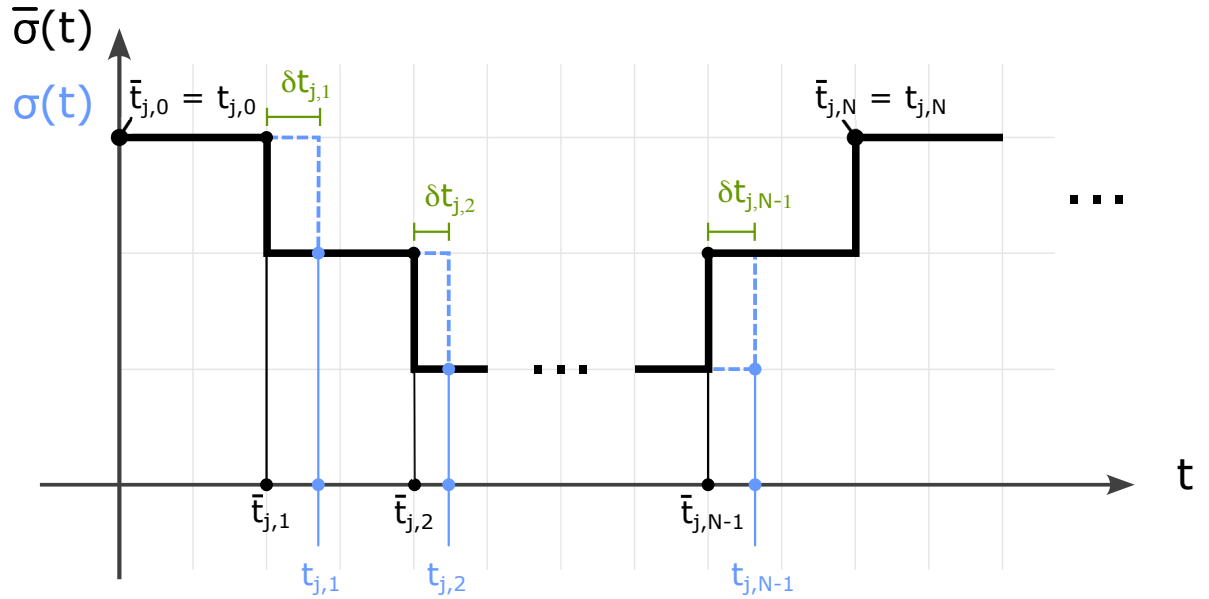


FIGURE 4.1 – Switching signals

We assume the existence of a periodic switching signal  $\bar{\sigma}(t)$  associated with a periodic trajectory  $\bar{x}(t)$ , as obtained in Chapter 2. Our objective is to introduce perturbations in the switching instants such that the trajectory  $x(t)$  converges to the reference trajectory  $\bar{x}(t)$ .

Figure 4.1 displays the  $j$ th cycle of the switching signals  $\bar{\sigma}(t)$  and  $\sigma(t)$ , which comprise  $N$  switching actions. Within this cycle, the  $i$ th switching times of  $\bar{\sigma}(t)$  and  $\sigma(t)$  are denoted by  $\bar{t}_{j,i}$  and  $t_{j,i}$ , respectively. The relation between  $\bar{t}_{j,i}$  and  $t_{j,i}$  is given by

$$t_{j,i} = \bar{t}_{j,i} + \delta t_{j,i} \quad (4.2)$$

To do this using predictive control, we need to find a linear equation that relates the switching times and the resulting system at the end of one cycle.

## 4.2 Linearization procedure

The solution for the state equation (4.1) at time  $t_1$ , starting from the initial condition  $x(t_0)$ , is of the form

$$x(t_1) = e^{A_1(t_1-t_0)}x(t_0) + \int_{t_0}^{t_1} e^{A_1(t_1-\tau)}B_1d\tau \quad (4.3)$$

$$\bar{x}(\bar{t}_1) = e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) + \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)}B_1d\tau \quad (4.4)$$

subtracting (4.4) from (4.3) we get

$$\begin{aligned} x(t_1) - \bar{x}(\bar{t}_1) &= \overbrace{e^{A_1(t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0)}^{\square} \\ &\quad + \underbrace{\int_{t_0}^{t_1} e^{A_1(t_1-\tau)}B_1d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)}B_1d\tau}_{\bigcirc} \end{aligned} \quad (4.5)$$

expanding (4.5) first in  $\square$ :

$$\begin{aligned} \square &= e^{A_1(t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_1(\bar{t}_1+\delta t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_1(\bar{t}_1-t_0)}e^{\delta t_1}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= \bar{F}_1 e^{\delta t_1}x(t_0) - \bar{F}_1 \bar{x}(\bar{t}_0) \\ &= \bar{F}_1 (I + A_1 \delta t_1)x(t_0) - \bar{F}_1 \bar{x}(\bar{t}_0) \\ &= \bar{F}_1 [x(t_0) - \bar{x}(\bar{t}_0)] + \bar{F}_1 A_1 \delta t_1 \end{aligned} \quad (4.6)$$

and then in  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_0}^{t_1} e^{A_1(t_1-\tau)} B_1 d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= \int_{t_0}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_1+\delta t_1-\tau)} B_1 d\tau - \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_1} \left[ \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau + \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \right] - \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_1} [\bar{G}_1 + B_1\delta t_1] - \bar{G}_1 \\
 &= (I + A_1\delta t_1)[\bar{G}_1 + B_1\delta t_1] - \bar{G}_1 \\
 &= \cancel{\bar{G}_1} + B_0\delta t_1 + A_1\bar{G}_1\delta t_1 + \cancel{A_1B_1\delta t_1\delta t_1} - \cancel{\bar{G}_1} \\
 &= A_1\bar{G}_1\delta t_1 + B_1\delta t_1
 \end{aligned} \tag{4.7}$$

the resulting equations (4.6) and (4.7) are replaced back in (4.5) to complete the difference equation

$$x(t_1) - \bar{x}(\bar{t}_1) = \bar{F}_1[x(t_0) - \bar{x}(\bar{t}_0)] + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \delta t_1 \tag{4.8}$$

Repeating the steps for  $x(t_2)$  we have

$$x(t_2) = e^{A_2(t_2-t_1)} x(t_1) + \int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau \tag{4.9}$$

$$\bar{x}(\bar{t}_2) = e^{A_2(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1) + \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \tag{4.10}$$

subtracting (4.10) from (4.9)

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \overbrace{e^{A_2(t_2-t_1)} x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1)}^{\square} \\
 &\quad + \underbrace{\int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau}_{\bigcirc}
 \end{aligned} \tag{4.11}$$

expanding  $\square$  in (4.11):

$$\begin{aligned}
 \square &= e^{A_2(\bar{t}_2+\delta t_2-\bar{t}_1-\delta t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) \\
 &= e^{A_2(\bar{t}_2-\bar{t}_1)}e^{A_2(\delta t_2-\delta t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) \\
 &= \bar{F}_2[I + A_2(\delta t_2 - \delta t_1)]x(t_1) - \bar{F}_2\bar{x}(\bar{t}_1) \\
 &= \bar{F}_2[x(t_1) - \bar{x}(\bar{t}_1)] + \bar{F}_2A_2x(t_1)\delta t_2 - \bar{F}_2A_2x(t_1)\delta t_1
 \end{aligned} \tag{4.12}$$

and expanding  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_1}^{t_2} e^{A_2(t_2-\tau)}B_2d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \\
 &= \int_{\bar{t}_1+\delta t_1}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2+\delta t_2-\tau)}B_2d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \\
 &= e^{A_2\delta t_2} \left[ \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_2(\bar{t}_2-\tau)}B_2d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \right] \\
 &\quad - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \\
 &= (I + A_2\delta t_2) \left[ \bar{G}_2 - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_2(\bar{t}_2-\tau)}B_2d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_2) \left[ \bar{G}_2 - e^{A_2(\bar{t}_2-\bar{t}_1)}B_2\delta t_1 + B_2\delta t_2 \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_2) \left[ \bar{G}_2 - \bar{F}_2B_2\delta t_1 + B_2\delta t_2 \right] - \bar{G}_2 \\
 &= \cancel{\bar{G}_2} - \bar{F}_2B_2\delta t_1 + B_2\delta t_2 + A_2\bar{G}_2\delta t_2 - \cancel{\bar{G}_2} \\
 &= A_2\bar{G}_2\delta t_2 + B_2\delta t_2 - \bar{F}_2B_2\delta t_1
 \end{aligned} \tag{4.13}$$

and replacing (4.12) and (4.13) back into equation (4.11) we get to the difference equation for  $x(t_2) - \bar{x}(\bar{t}_2)$

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2[x(t_1) - \bar{x}_1(\bar{t}_1)] \\
 &\quad - \bar{F}_2[A_2x(t_1) + B_2]\delta t_1 \\
 &\quad + [\bar{F}_2A_2\underbrace{x(t_1)}_{\triangle} + A_2\bar{G}_2 + B_2]\delta t_2
 \end{aligned} \tag{4.14}$$

from (4.14),  $\triangle$  can be expanded by replacing the resulting equation of (4.8)

$$\triangle = x(t_1) = \bar{x}(\bar{t}_1) + \bar{F}_1[x(t_0) - \bar{x}(t_0)] + [\bar{F}_1A_1x(t_0) + A_1\bar{G}_1 + B_1]\delta t_1 \tag{4.15}$$

note that when  $\triangle$  is replaced in eq. (4.14) it will produce a product with  $\delta t_1$  and  $\delta t_2$  like

$$x(t_1)\delta t_1 = \bar{x}(\bar{t}_1)\delta t_1 + \bar{F}_1 \overbrace{[x(t_0) - \bar{x}(t_0)]\delta t_1}^{\square} + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \overbrace{\delta t_1 \delta t_1}^{\circ}$$

both  $\square$  and  $\circ$  are products of differences that produces a smaller number and they will be neglected in the first order approximations

$$x(t_1)\delta t_1 \doteq \bar{x}(\bar{t}_1)\delta t_1 \quad (4.16)$$

replacing (4.8) and (4.15) in (4.14) it follows that

$$\begin{aligned} x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 \{ \bar{F}_1 [x(t_0) - \bar{x}(t_0) + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \delta t_1] \\ &\quad - \bar{F}_2 [A_2 \bar{x}(t_1) + B_2] \delta t_1 \\ &\quad + [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \end{aligned}$$

$$\begin{aligned} x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\ &\quad + \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\ &\quad + [\bar{F}_2 A_2 \bar{x}(\bar{t}_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \end{aligned}$$

(4.17)

Repeating the procedure for  $x(t_3)$  we have

$$x(t_3) = e^{A_3(t_3-t_2)}x(t_2) + \int_{t_2}^{t_3} e^{A_3(t_3-\tau)}B_3d\tau \quad (4.18)$$

$$\bar{x}(\bar{t}_3) = e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2) + \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \quad (4.19)$$

subtracting (4.18) from (4.19)

$$\begin{aligned} x(t_3) - \bar{x}(\bar{t}_3) &= \overbrace{e^{A_3(t_3-t_2)}x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2)}^{\square} \\ &\quad + \underbrace{\int_{t_2}^{t_3} e^{A_3(t_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau}_{\circ} \end{aligned} \quad (4.20)$$

expanding  $\square$  in (4.20):

$$\begin{aligned}
 \square &= e^{A_3(\bar{t}_3+\delta t_3-\bar{t}_2-\delta t_2)}x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2) \\
 &= e^{A_3(\bar{t}_3-\bar{t}_2)}e^{A_3(\delta t_3-\delta t_2)}x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2) \\
 &= \bar{F}_3[I + A_3(\delta t_3 - \delta t_2)]x(t_2) - \bar{F}_3\bar{x}(\bar{t}_2) \\
 &= \bar{F}_3[x(t_2) - \bar{x}(\bar{t}_2)] + \bar{F}_3A_3x(t_2)\delta t_3 - \bar{F}_3A_3x(t_2)\delta t_2
 \end{aligned} \tag{4.21}$$

and expanding  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_2}^{t_3} e^{A_3(t_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \\
 &= \int_{\bar{t}_2+\delta t_2}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3+\delta t_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \\
 &= e^{A_3\delta t_3} \left[ \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_3(\bar{t}_3-\tau)}B_3d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \right] \\
 &\quad - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \\
 &= (I + A_3\delta t_3) \left[ \bar{G}_3 - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_3(\bar{t}_3-\tau)}B_3d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \right] - \bar{G}_3 \\
 &= (I + A_3\delta t_3) \left[ \bar{G}_3 - e^{A_3(\bar{t}_3-\bar{t}_2)}B_3\delta t_2 + B_3\delta t_3 \right] - \bar{G}_3 \\
 &= (I + A_3\delta t_3) \left[ \bar{G}_3 - \bar{F}_3B_3\delta t_2 + B_3\delta t_3 \right] - \bar{G}_3 \\
 &= \cancel{\bar{G}_3} - \bar{F}_3B_3\delta t_2 + B_3\delta t_3 + A_3\bar{G}_3\delta t_3 - \cancel{\bar{G}_3} \\
 &= A_3\bar{G}_3\delta t_3 + B_3\delta t_3 - \bar{F}_3B_3\delta t_2
 \end{aligned} \tag{4.22}$$

and then replacing (4.21) in (4.22) back in eq. (4.20) we get to the difference equation for  $x(t_3) - \bar{x}(\bar{t}_3)$

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \bar{F}_3[x(t_2) - \bar{x}(\bar{t}_2)] \\
 &\quad - \bar{F}_3[A_3x(t_2) + B_3]\delta t_2 \\
 &\quad + [\bar{F}_3A_3x(t_2) + A_3\bar{G}_3 + B_3]\delta t_3
 \end{aligned} \tag{4.23}$$

from (4.17),  $\triangle$  can be expanded the same way as in the past iteration and  $x(t_2) - \bar{x}(\bar{t}_2)$  can be replaced in (4.23)

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) = & \bar{F}_3 \{ \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \} \\
 & - \bar{F}_3 [A_3 \bar{x}(t_2) + B_3] \delta t_2 \\
 & + [\bar{F}_3 A_3 \bar{x}(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned}$$

after rearranging the terms, one arrives at

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) = & \bar{F}_3 \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_3 \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + \bar{F}_3 [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & + [\bar{F}_3 A_3 \bar{x}(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned} \tag{4.24}$$

Now, there are enough iterations to deduce a pattern on each increment of the equation, so the equation for  $x(t_i)$  can be deduced as

$$\begin{aligned}
 x(t_i) - \bar{x}(\bar{t}_i) = & \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_1 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_2 [\bar{F}_2 A_2 x(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & \vdots \\
 & + \bar{F}_i [\bar{F}_{i-1} A_{i-1} \bar{x}(t_{i-2}) + A_{i-1} \bar{G}_{i-1} - A_i \bar{x}(\bar{t}_{i-1}) + B_{i-1} - B_i] \delta t_{i-1} \\
 & + [\bar{F}_i A_i \bar{x}(t_i) + A_i \bar{G}_i + B_i] \delta t_i
 \end{aligned}$$

(4.25)

and then, for  $x(t_N)$  the equation is as follows

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) &= \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 \overbrace{[\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2]}^{\square} \delta t_1 \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [\bar{F}_2 A_2 x(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 &\quad \vdots \\
 &\quad + \bar{F}_N [\bar{F}_{N-1} A_{N-1} \bar{x}(t_{N-2}) + A_{N-1} \bar{G}_{N-1} - A_N \bar{x}(\bar{t}_{N-1}) \\
 &\quad \quad + B_{N-1} - B_N] \delta t_{N-1} \\
 &\quad + \underbrace{[\bar{F}_N A_{N-1} \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N]}_{\bigcirc} \delta t_N
 \end{aligned} \tag{4.26}$$

The equation (4.26) can be developed further to remove the dependencies on the intermediary states  $x(t_0), x(t_1), \dots, x(t_{N-2})$ . By expanding  $\square$  and  $\bigcirc$ , the following identity holds

$$\begin{aligned}
 \square &= \bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 \bar{F}_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 [\bar{x}(\bar{t}_1) - \bar{G}_1] + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 \bar{x}(\bar{t}_1) - \cancel{A_1 \bar{G}_1} + \cancel{A_1 \bar{G}_1} - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= (A_1 - A_2) \bar{x}(\bar{t}_1) + B_1 - B_2
 \end{aligned} \tag{4.27}$$

$$\begin{aligned}
 \bigcirc &= \bar{F}_N A_N \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N \\
 &= A_N \bar{F}_N \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N \\
 &= A_N [\bar{x}(\bar{t}_N) - \bar{G}_N] + A_N \bar{G}_N + B_N \\
 &= A_N \bar{x}(\bar{t}_N) - \cancel{A_N \bar{G}_N} + \cancel{A_N \bar{G}_N} + B_N \\
 &= A_N \bar{x}(\bar{t}_N) + B_N
 \end{aligned} \tag{4.28}$$

replacing (4.27) and (4.28) in (4.26)

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) &= \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 [(A_1 - A_2) \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [(A_2 - A_3) \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 &\quad \vdots \\
 &\quad + \bar{F}_N [(A_{N-1} - A_N) \bar{x}(\bar{t}_{N-1}) + B_{N-1} - B_N] \delta t_{N-1} \\
 &\quad + [A_N \bar{x}(\bar{t}_N) + B_N] \delta t_N
 \end{aligned} \tag{4.29}$$



and renaming the terms of (4.29) to

$$e(t) = x(t) - \bar{x}(\bar{t}) \quad (4.30)$$

$$\Phi = \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 \quad (4.31)$$

$$\begin{aligned} \Gamma = & \begin{bmatrix} \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 [(A_1 - A_2)\bar{x}(\bar{t}_1) + B_1 - B_2], \\ \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [(A_2 - A_3)\bar{x}(\bar{t}_2) + B_2 - B_3], \\ \vdots \\ \bar{F}_N [(A_{N-1} - A_N)\bar{x}(\bar{t}_{N-1}) + B_{N-1} - B_N], \\ A_N \bar{x}(\bar{t}_N) + B_N \end{bmatrix} \end{aligned} \quad (4.32)$$

$$\delta t = [\delta t_1, \delta t_2, \dots, \delta t_N]^T \quad (4.33)$$

we get to the affine equation

$$\boxed{e(t_N) = \Phi e(t_0) + \Gamma \delta t} \quad (4.34)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.35)$$

where  $\bar{x}$  is calculated as

$$\bar{x}(\bar{t}_1) = F_1 \bar{x}(\bar{t}_0) + G_1 \quad (4.36)$$

$$\bar{x}(\bar{t}_2) = F_2 \bar{x}(\bar{t}_1) + G_2 \quad (4.37)$$

$$\vdots$$

$$\bar{x}(\bar{t}_N) = F_N \bar{x}(\bar{t}_{N-1}) + G_N \quad (4.38)$$

and  $F_i$  and  $G_i$  are calculated as

$$[F_i, G_i] = c2dm(Ai, Bi, [], [], dti, 'zoh') \quad (4.39)$$

### 4.3 MPC Problem

Note that the equation (4.34) relates to the equation (3.1) as both describe the evolution of a system over time. The equation (3.1) represents the system's state and input at a given time step, and the equation (4.34) describes the error between the system's predicted and actual values at two different time points.

Referring to equation (3.1), we can make some substitutions to simplify our discussion. We'll replace variable  $x$  with  $e$ , and  $u$  with  $\delta t$ . Additionally, we'll denote the cycle index with  $k$ . With these substitutions in place, we arrive at equation (4.34).

#### 4.3.1 Cost Function

$$J = \|e[N_p]\|_{P_f}^2 + \sum_{j=0}^{N_p-1} \|e[j]\|_Q^2 + \|\delta t[j]\|_R^2 \quad (4.40)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.41)$$

where  $Q = Q^T > 0$ ,  $\rho > 0$

$$\delta t[j] = \left[ t_{j,1} - \bar{t}_{j,1}, t_{j,2} - \bar{t}_{j,2}, \dots, t_{j,N-1} - \bar{t}_{j,N-1} \right]^T \quad (4.42)$$

#### 4.3.2 Dwell-time Constraints

We want to enforce a constraint on the dwell times where the switching times will be greater than a minimum value

$$(t_i - t_{i-1}) \geq \Delta t_{i,min}, \quad i = 1, 2, \dots, N \quad (4.43)$$

we can write this as

$$\delta t_1 \geq -\Delta \bar{t}_1 + \Delta t_{1,min} \quad (4.44)$$

$$\delta t_i - \delta t_{i-1} \geq -\Delta \bar{t}_i + \Delta t_{i,min}, \quad i = 1, 2, \dots, N \quad (4.45)$$

$$\delta t_{N-1} \geq -\Delta \bar{t}_N + \Delta t_{N,min} \quad (4.46)$$

with

$$\Delta \bar{t}_i = \bar{t}_i - \bar{t}_{i-1} \quad (4.47)$$

Rearranging this to a matrix form we have

$$L\delta t \geq c \quad (4.48)$$

with

$$L = \begin{bmatrix} 1 & 0 & 0 & \cdots & 0 & 0 \\ -1 & 1 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \\ 0 & 0 & 0 & \cdots & -1 & 1 \\ 0 & 0 & 0 & \cdots & 0 & -1 \end{bmatrix} \quad (4.49)$$

$$\delta t = \begin{bmatrix} \delta t_1 \\ \delta t_2 \\ \vdots \\ \delta t_{N-1} \\ \delta t_N \end{bmatrix} \quad (4.50)$$

$$c = \begin{bmatrix} -\Delta \bar{t}_1 + \Delta t_{1,min} \\ -\Delta \bar{t}_2 + \Delta t_{2,min} \\ \vdots \\ -\Delta \bar{t}_{N-1} + \Delta t_{N-1,min} \\ -\Delta \bar{t}_N + \Delta t_{N,min} \end{bmatrix} \quad (4.51)$$

To use this with the constraints  $S\hat{u}[k] \leq b$ , this can be rearranged as

$$-L\delta t \leq -c$$

## 4.4 Application Examples

### 4.4.1 Double Integrator

#### 4.4.1.1 Parameters of the Simulation

This example describes the double integrator model used in Marcolino (2018) of the form

$$\dot{x}(t) = A_x x(t) + B_c u(t) \quad (4.52)$$

where

$$A_c = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}, B_c = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad (4.53)$$

and the associated input signal is

$$u_r = \begin{bmatrix} 1 \\ 0 \\ -1 \\ 0 \end{bmatrix}, T_s = [0 \quad 2 \quad 3 \quad 5 \quad 6] \quad (4.54)$$

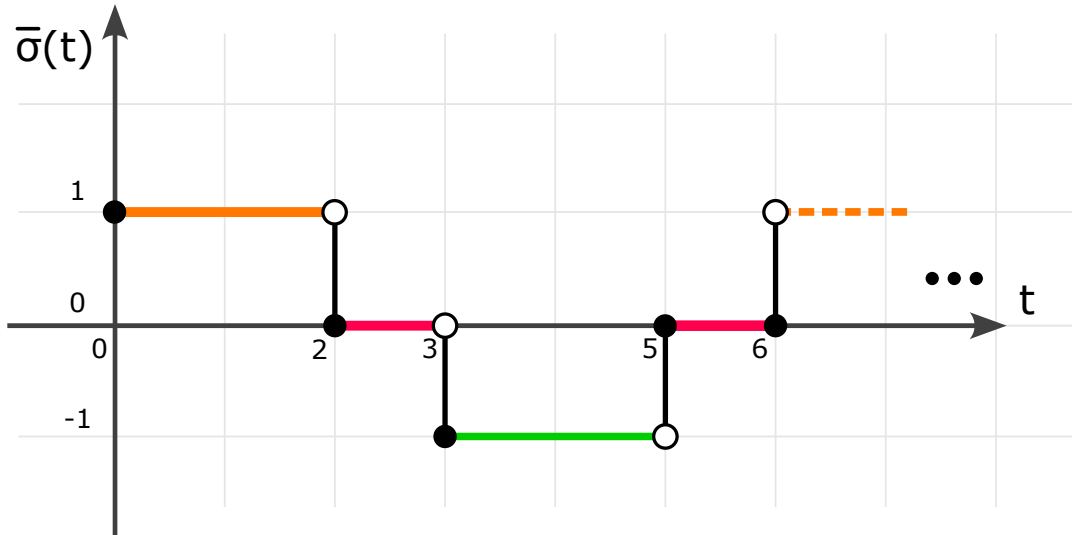


FIGURE 4.2 – Reference signal for Double Integrator

The original problem has the same dynamics during all operation, so we need to construct the associated  $A_i, b_i$  for each operation mode. One solution is to create 3 unique pairs

$$A_1 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \quad A_2 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \quad A_3 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$$

$$b_1 = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad b_2 = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad b_3 = \begin{bmatrix} 0 \\ -1 \end{bmatrix}$$

and the index for the operation mode  $\Omega = [1, 2, 3, 2]$ , with reference state vector for this trajectory is  $x_{ref} = [2, -1]$ , the maximum value for the period of the trajectory cycle  $T_{pmax} = 1$  and initial state of the nominal target trajectory  $x_0 = [1.5, -1]$ .

#### 4.4.1.2 Prediction Matrices

From (4.32) and (4.33) we construct

$$\Phi = \begin{bmatrix} 1 & 6 \\ 0 & 1 \end{bmatrix} \quad (4.55)$$

$$\Gamma = \begin{bmatrix} 4 & 3 & -1 \\ 1 & 1 & -1 \end{bmatrix} \quad (4.56)$$

with the switching time constraints

$$c = \begin{bmatrix} \Delta t_{r_1} - \Delta t_{r_{1,min}} \\ \Delta t_{r_2} - \Delta t_{r_{2,min}} \\ \vdots \\ \Delta t_{r_{N-1}} - \Delta t_{r_{N-1,min}} \\ \Delta t_{r_N} - \Delta t_{r_{N,min}} \end{bmatrix} = \begin{bmatrix} -2 + 1.625 \\ -1 + 0.635 \\ -2 + 1.625 \\ -1 + 0.625 \end{bmatrix} = \begin{bmatrix} -0.375 \\ -0.365 \\ -0.375 \\ -0.365 \end{bmatrix} \quad (4.57)$$

#### 4.4.1.3 Results

##### - FALTA SIMULAR A REGIAO DE FACTIBILIDADE

The simulation uses the system (4.54) with the command signal (4.54) and with a initial condition  $x_0 = [1.5, -0.5]$ . Figure 4.3 shows the simulation without the MPC control being applyied running for 5 cycles and we can see that the trajectory is diverging from the initial position of the target cyclic trajectory  $x_{0ref} = [-0.5, -1.0]$  position.

Now, for the same condition, we can turn on the MPC controller and run the simulation for 50 cycles. Figure 4.4 shows the resulting trajectory and Figure 4.5 shows the associated command signal. We can see that the controler drives the trajectory of the system to the

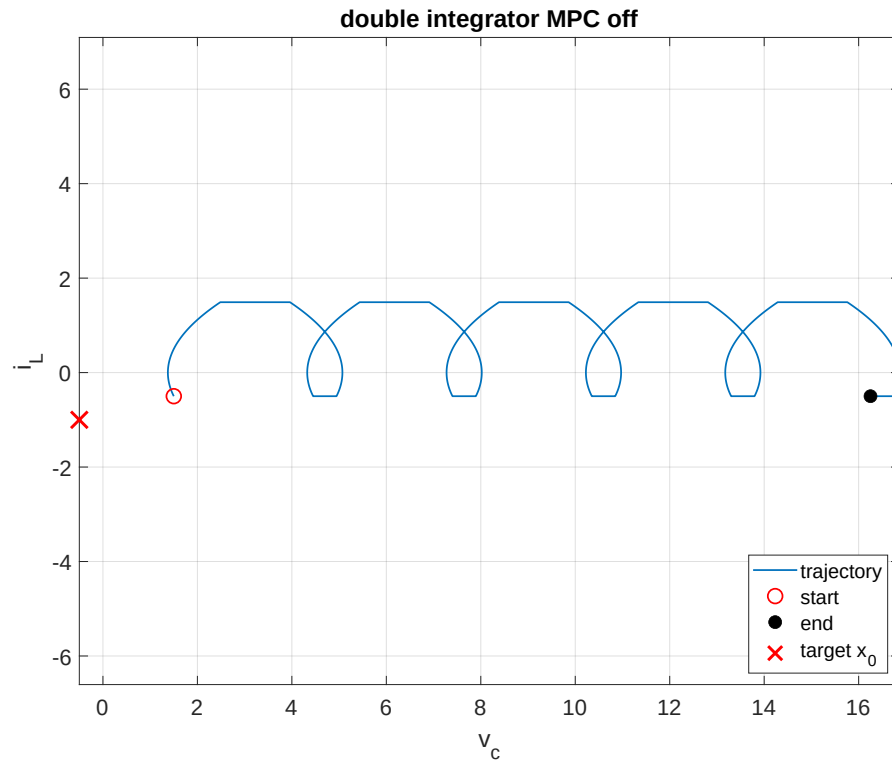


FIGURE 4.3 – State Trajectory MPC off, 4 cycles

target cyclic trajectory, we also that the command signal get in sync with the reference command.

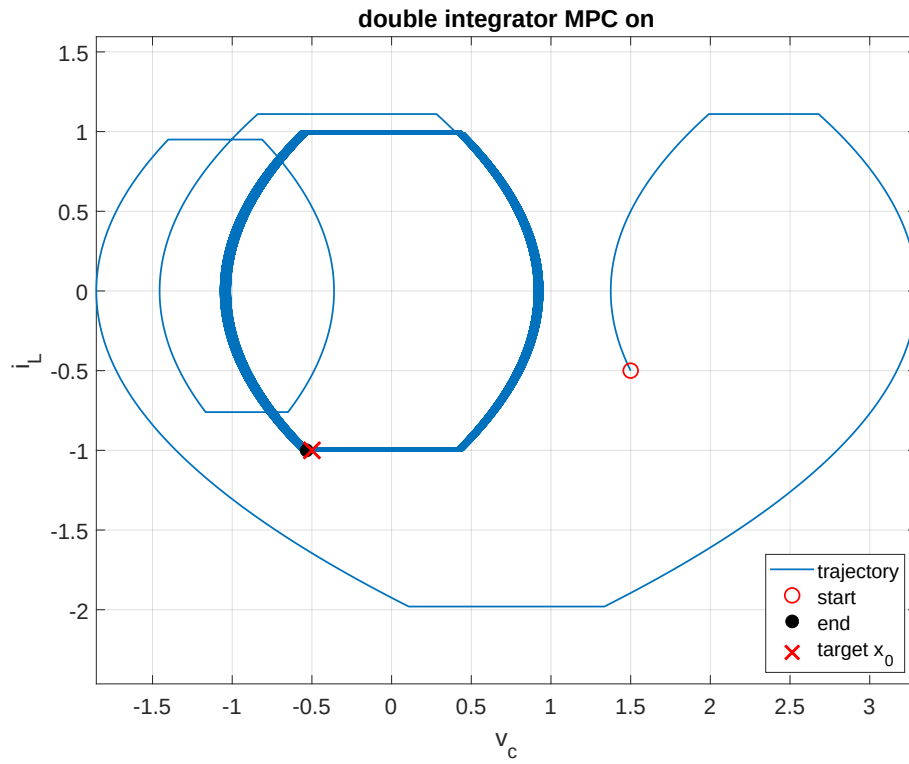


FIGURE 4.4 – State Trajectory MPC on, 50 cycles

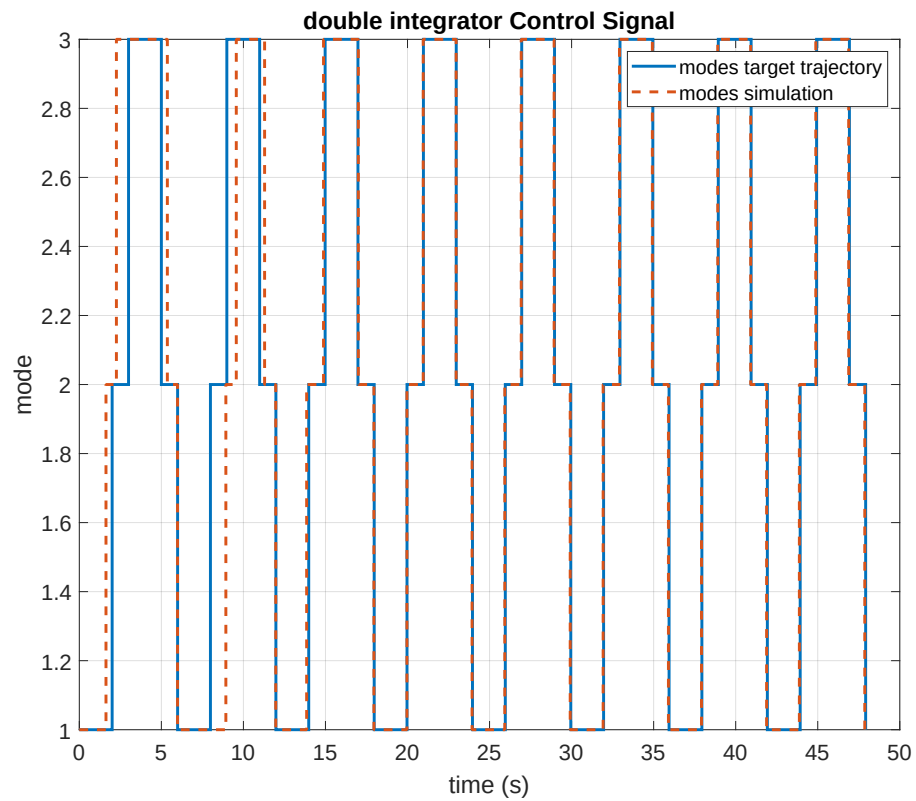


FIGURE 4.5 – Operation mode switch

## 4.4.2 Buck-boost converter

### 4.4.2.1 Parameters of the Simulation

- $\Omega$ :  $[1, 2]$ ,
- $s_{max}$  is set to 2,
- The dynamics of the system:

$$\begin{aligned} A_1 &= \begin{bmatrix} 0 & 0 \\ 0 & -1/(RC) \end{bmatrix} & A_2 &= \begin{bmatrix} 0 & 1/L \\ -1/C & -1/(RC) \end{bmatrix} \\ b_1 &= \begin{bmatrix} E/L \\ 0 \end{bmatrix} & b_2 &= \begin{bmatrix} 0 \\ 0 \end{bmatrix} \end{aligned} \tag{4.58}$$

where  $R = 1$ ,  $L = 1$ ,  $C = 1$ ,  $E = 1$ ,

- $t_{step}$  is set to  $1e-5$ .
- $x_{ref}$  is set to  $[2, -1]$ .
- $Q$  which is a diagonal matrix with both diagonal elements equal to 1.
- $T_{p_{max}}$  set to 1.
- $T_s$  defined as  $[0, 0.2513520, 0.5914520]$ .
- $x_0$  set to  $[1.870801, -1.119853]$ .

### 4.4.2.2 Computation of the Target Trajetory

$$T_s = \begin{bmatrix} 0 & 0.2500021 & 0.5004299 \end{bmatrix} \tag{4.59}$$

### 4.4.2.3 Prediction Matrices

$$\Phi = \begin{bmatrix} 0.9713 & 0.2192 \\ -0.1707 & 0.5857 \end{bmatrix} \tag{4.60}$$

$$\Gamma = \begin{bmatrix} 2.4556 \\ 0.9280 \end{bmatrix} \tag{4.61}$$



#### 4.4.2.4 Time Constraints

$$c = \begin{bmatrix} \Delta t_{r_1} - \Delta t_{r_1, \min} \\ \Delta t_{r_2} - \Delta t_{r_2, \min} \\ \vdots \\ \Delta t_{r_{N-1}} - \Delta t_{r_{N-1}, \min} \\ \Delta t_{r_N} - \Delta t_{r_N, \min} \end{bmatrix} = \begin{bmatrix} -0.25 + 0.25 \\ -0.2504 + 0.25 \end{bmatrix} = \begin{bmatrix} 0 \\ -0.04 \end{bmatrix} \quad (4.62)$$

#### 4.4.2.5 Results

Simulating 50 cycles:

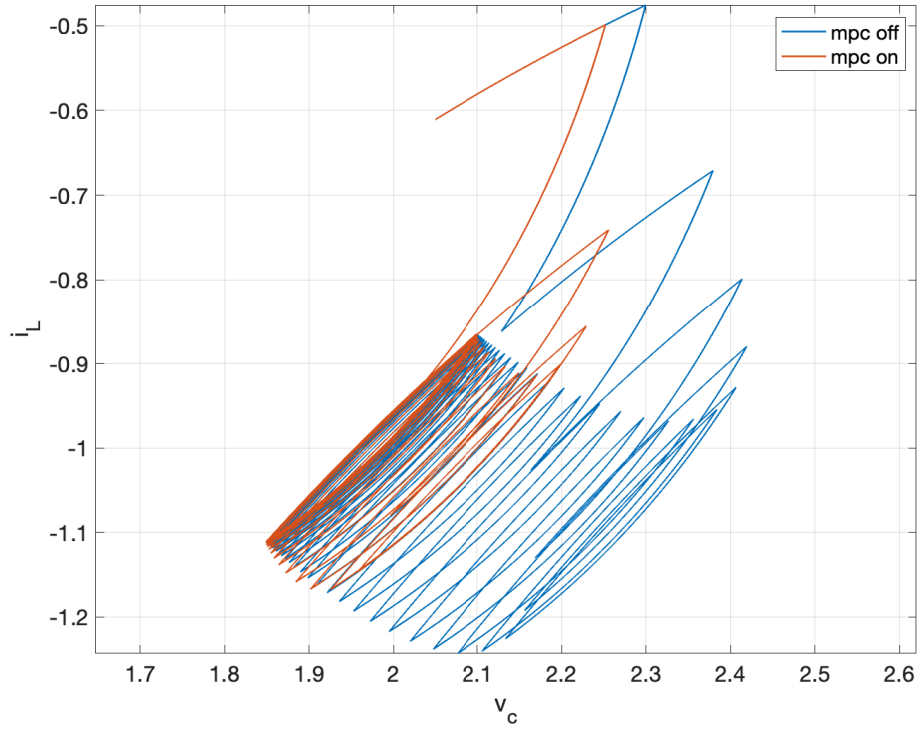


FIGURE 4.6 – fig 1

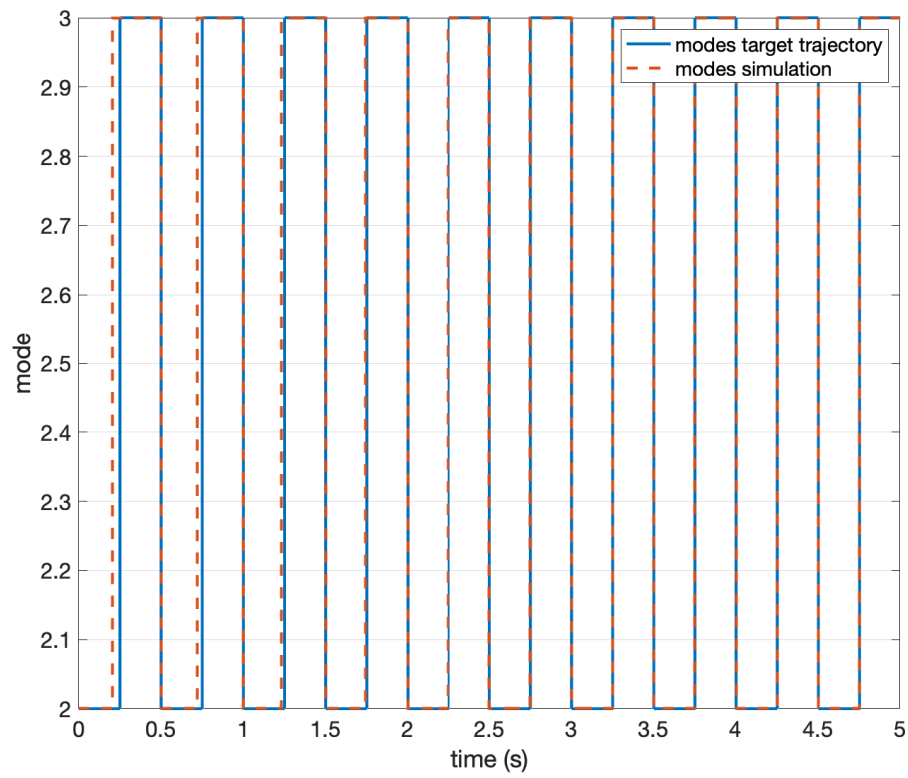


FIGURE 4.7 – fig 2

### 4.4.3 Patino 2

#### 4.4.3.1 Parameters of the Simulation

The values used to simulate the Buck-boost converter example are:

- $\Omega$ :  $[1, 2, 4, 8, 3, 1, 5, 8, 5]$
- $s_{max}$  is set to 12.
- The dynamics of the system are defined by

$$A_i = \begin{bmatrix} 0 & 0 & \left(u_2(i) - u_1(i)\right)/C1 \\ 0 & 0 & \left(u_3(i) - u_2(i)\right)/C2 \\ \left(u_1(i) - u_2(i)\right)/L & \left(u_2(i) - u_3(i)\right)/L & -R/L \end{bmatrix} \quad (4.63)$$

$$b_i = \begin{bmatrix} 0 \\ 0 \\ \left(E/L\right)u_3(i) \end{bmatrix}$$

where  $R = 10.0 \, \Omega$ ,  $L = 10.0 \, mH$ ,  $C_1 = 40.0 \, \mu F$ ,  $C_2 = 40.0*1e-6 \, \mu F$ ,  $E = 30.0 \, V$

and  $u(i)$  is

TABLE 4.1 – heading

| mode (i) | $u_1$ | $u_2$ | $u_3$ |
|----------|-------|-------|-------|
| 1        | 0     | 0     | 0     |
| 2        | 0     | 0     | 1     |
| 3        | 0     | 1     | 0     |
| 4        | 0     | 1     | 1     |
| 5        | 1     | 0     | 0     |
| 6        | 1     | 0     | 1     |
| 7        | 1     | 1     | 0     |
| 8        | 1     | 1     | 1     |

#### 4.4.3.2 Computation of the Target Trajetory

$$T_s = \begin{bmatrix} 0 & 0.0639 & 0.0878 & 0.1119 & 0.1344 & 0.1567 & 0.2065 & 0.23 & 0.2529 & 0.2756 \end{bmatrix} \quad (4.64)$$

#### 4.4.3.3 Prediction Matrices

$$\Phi = \begin{bmatrix} 0.999539 & 0.001900 & -0.124610 \\ -0.002031 & 0.999915 & 0.000764 \\ -0.000461 & -0.000290 & 0.759578 \end{bmatrix} \quad (4.65)$$

$$\Gamma = \begin{bmatrix} 0.007784 & -2.578391 & -0.081618 \\ -2.400410 & 2.472097 & -0.079094 \\ 2.477894 & 0.042370 & -0.076050 \\ -2.602774 & 2.388977 & 0.171509 \\ 2.472432 & -2.594318 & 0.102211 \\ 2.703328 & 0 & -0.087828 \\ -2.354659 & 0 & -0.189865 \\ 2.354483 & 0 & 0.199932 \end{bmatrix}^T * \times 10^4 \quad (4.66)$$

#### 4.4.3.4 Time Constraints

$$c = \begin{bmatrix} \Delta t_{r_1} - \Delta t_{r_1, \min} \\ \Delta t_{r_2} - \Delta t_{r_2, \min} \\ \vdots \\ \Delta t_{r_{N-1}} - \Delta t_{r_{N-1}, \min} \\ \Delta t_{r_N} - \Delta t_{r_N, \min} \end{bmatrix} = \begin{bmatrix} -0.638811 + 0.20 \\ -0.239318 + 0.20 \\ -0.240440 + 0.20 \\ -0.225094 + 0.20 \\ -0.223339 + 0.20 \\ -0.497696 + 0.20 \\ -0.235714 + 0.20 \\ -0.228086 + 0.20 \\ -0.227575 + 0.20 \end{bmatrix} \times 10^{-4} = \begin{bmatrix} -0.438811 \\ -0.039318 \\ -0.040440 \\ -0.025094 \\ -0.023339 \\ -0.297696 \\ -0.035714 \\ -0.028086 \\ -0.027575 \end{bmatrix} \times 10^{-4} \quad (4.67)$$

#### 4.4.3.5 Results

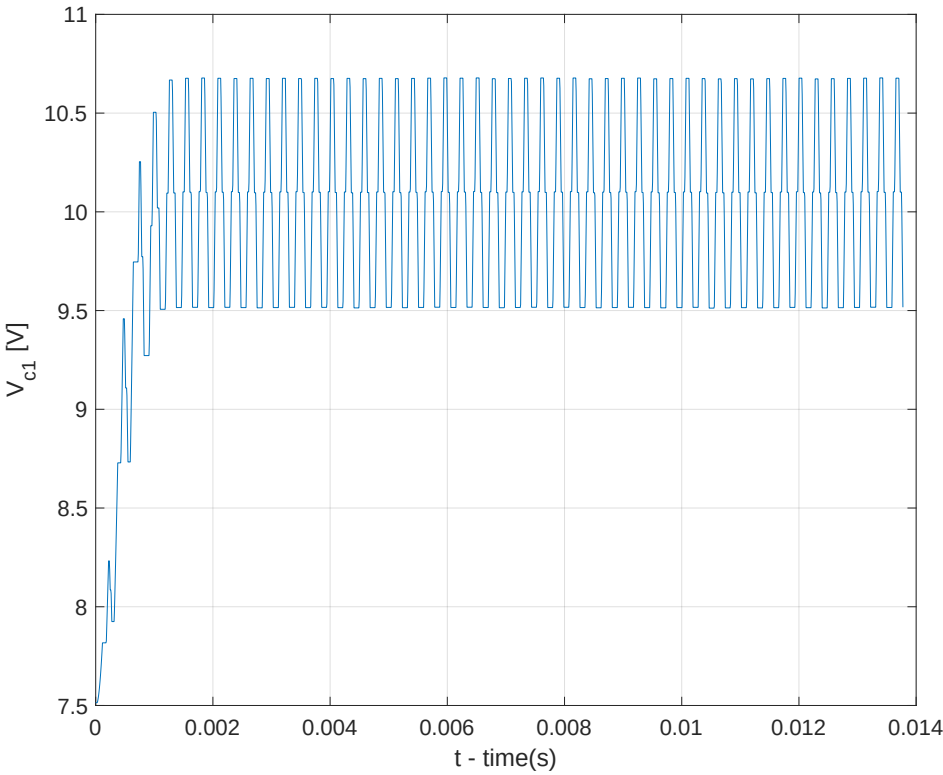


FIGURE 4.8 – fig 1

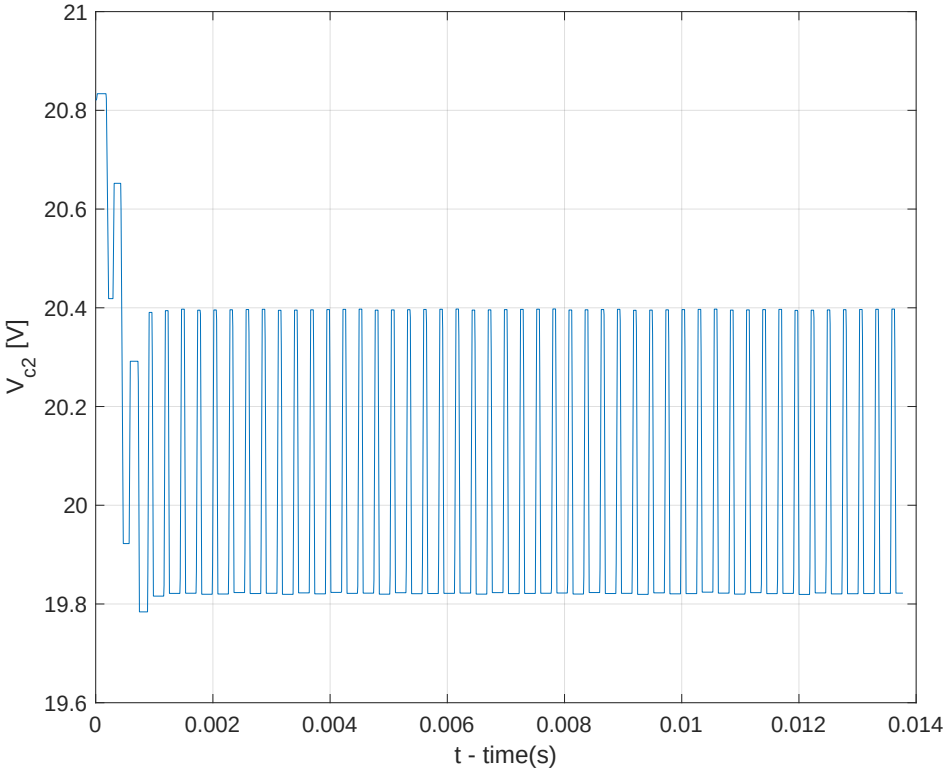


FIGURE 4.9 – fig 2

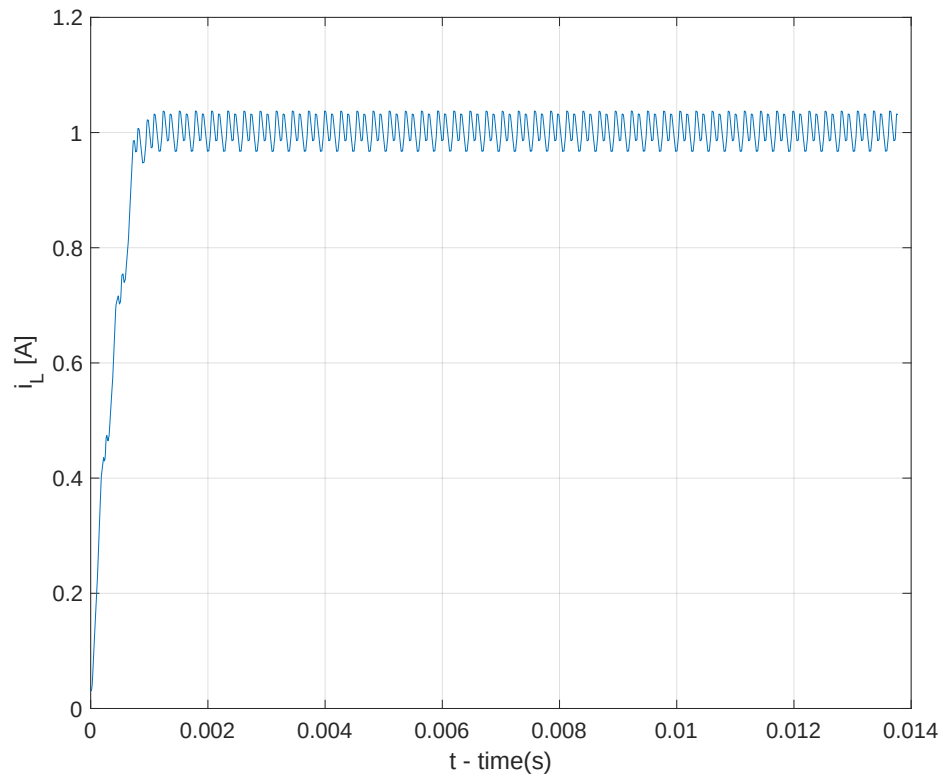


FIGURE 4.10 – fig 3

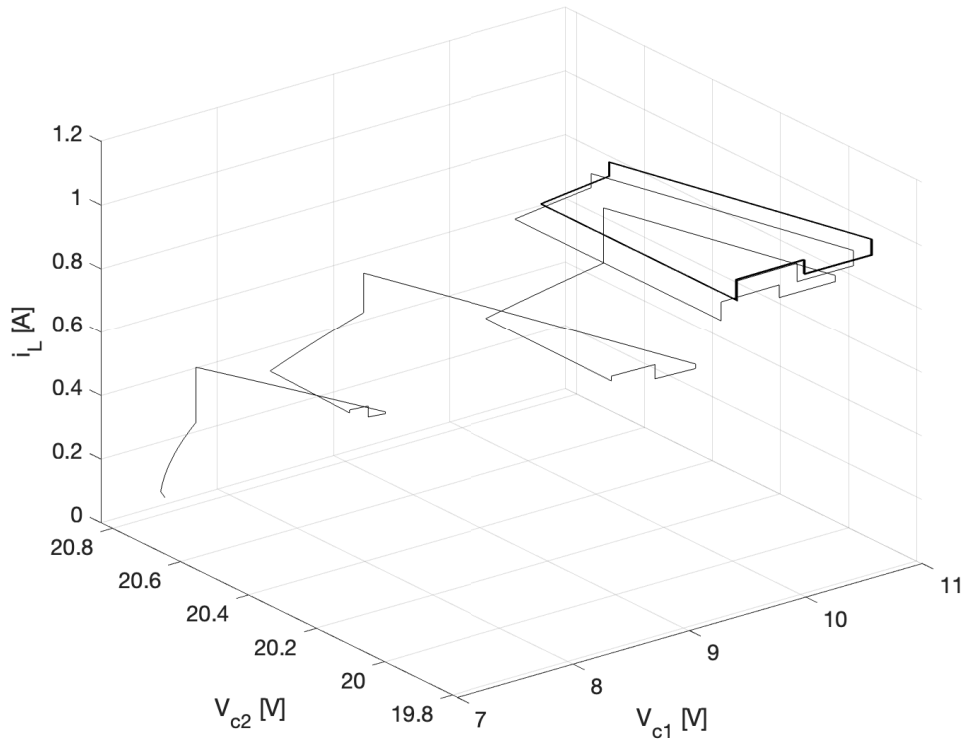


FIGURE 4.11 – fig 4

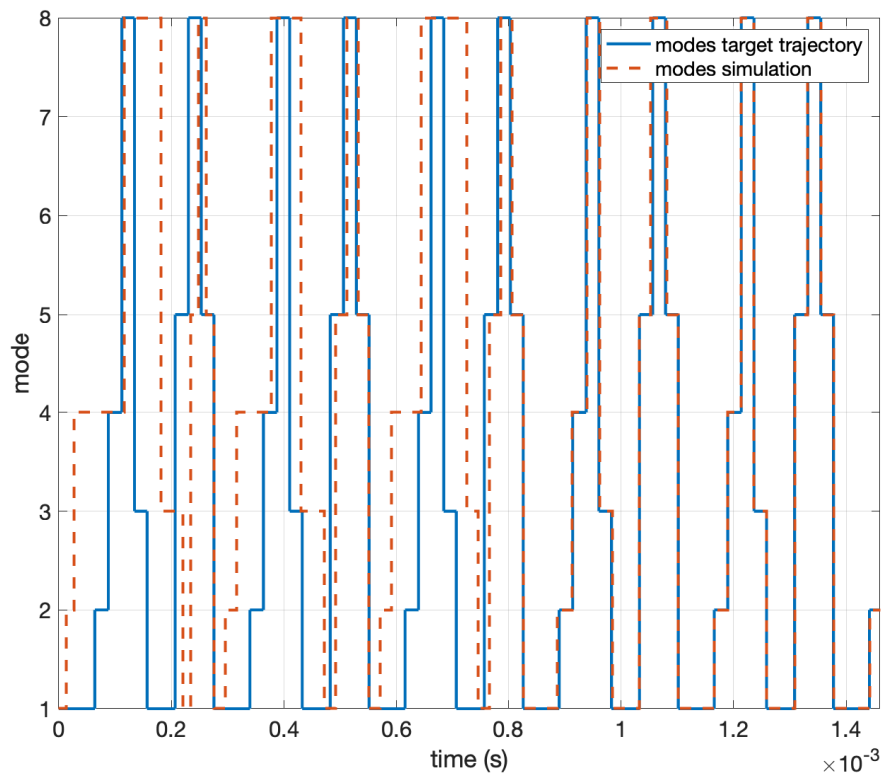


FIGURE 4.12 – Variant Dynamic Circuit 2: State Trajectory

---

## 4.5 Conclusion

mostrar o modelo em malha aberta indo para a sua trajetoria ciclica estavel junto com o modelo com controle ativo mostrando a convergencia mais rapida



## **5 Conclusão**

# Bibliography

BENMILOUD, M.; BENALIA, A.; DJEMAI, M.; DEFOORT, M. On the local stabilization of hybrid limit cycles in switched affine systems. **IEEE Transactions on Automatic Control**, v. 64, n. 2, p. 841–846, 2019.

EGIDIO, L.; DEAECTO, G.; GEROMEL, J. Limit cycle global asymptotic stability of continuous-time switched affine systems. **IFAC-PapersOnLine**, v. 53, p. 6121–6126, 01 2020.

EGIDIO, L. N.; DAIHA, H. R.; DEAECTO, G. S. Global asymptotic stability of limit cycle and  $h_2/h_\infty$  performance of discrete-time switched affine systems. **Automatica**, v. 116, p. 108927, 2020. ISSN 0005-1098.

HAJIAHMADI, M.; SCHUTTER, B. D.; HELLENDORRN, H. Robust  $h_\infty$  switching control techniques for switched nonlinear systems with application to urban traffic control. **International Journal of Robust and Nonlinear Control**, Wiley Online Library, v. 26, n. 6, p. 1286–1306, 2016.

MARCOLINO, M. H. **Stabilization of Periodic trajectories through receding horizon optimization of switching times**. 2018. 79 f. Tese (Doutorado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2018.

NOCEDAL, J.; WRIGHT, S. J. **Numerical Optimization, Second Edition**. [S.l.]: Springer Verlag, 2006. (Springer Series in Operations Research).

PARISE, F.; VALCHER, M. E.; LYGEROS, J. Computing the projected reachable set of stochastic biochemical reaction networks modeled by switched affine systems. **IEEE Transactions on Automatic Control**, v. 63, n. 11, p. 3719–3734, 2018.

PATINO, D.; RIEDINGER, P.; RUIZ, F. A predictive control approach for dc-dc power converters and cyclic switched systems. In: IEEE. **2010 IEEE International Conference on Industrial Technology**. [S.l.], 2010. p. 1259–1264.

VIEIRA, M. S. **Controle Preditivo de sistemas com atuadores sujeitos a restorções temporais de chaveamento**. 2013. 119 f. Dissertação (Mestrado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2013.

# Appendix A - Tópicos de Dilema Linear

## A.1 Modelo de simulação

```
+engine
├─ CORES.m
├─ fun_custo_patino.m
├─ get_config_sim_matheus.m
├─ get_config_sim_patino_1.m
├─ get_config_sim_patino_2.m
├─ get_config.m
├─ get_otmin_opt.m
├─ get_ts.m
├─ get_x0.m
├─ get_xr.m
├─ nonlincon_patino.m
├─ otmin.m
├─ sim_1.m
├─ sim_n.m
└─ +mpc
    ├─ construcao_modelo_instantes.m
    ├─ matrizes_ss_mpc_dualmode_switching.m
    └─ mpc_dualmode_switching.m
```

### A.1.1 get\_x0

funcao de calculo da condicao inicial

### A.1.2 get\_xf

Texto do modelo de simulação sendo colocado aqui.

# **Annex A - Exemplo de um Primeiro Anexo**

## **A.1 Uma Seção do Primeiro Anexo**

Algum texto na primeira seção do primeiro anexo.

## FOLHA DE REGISTRO DO DOCUMENTO

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                |                                         |                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------------|------------------------|
| 1. CLASSIFICAÇÃO/TIPO<br>TD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2. DATA<br>25 de março de 2015 | 3. DOCUMENTO Nº<br>DCTA/ITA/DM-018/2015 | 4. Nº DE PÁGINAS<br>68 |
| 5. TÍTULO E SUBTÍTULO:<br>Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                |                                         |                        |
| 6. AUTOR(ES):<br><b>Daniel Vieira</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                         |                        |
| 7. INSTITUIÇÃO(ÕES)/ÓRGÃO(S) INTERNO(S)/DIVISÃO(ÕES):<br>Instituto Tecnológico de Aeronáutica – ITA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                |                                         |                        |
| 8. PALAVRAS-CHAVE SUGERIDAS PELO AUTOR:<br>Cupim; Cimento; Estruturas                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                         |                        |
| 9. PALAVRAS-CHAVE RESULTANTES DE INDEXAÇÃO:<br>Cupim; Dilema; Construção                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                |                                         |                        |
| 10. APRESENTAÇÃO: (X) Nacional ( ) Internacional<br>ITA, São José dos Campos. Curso de Mestrado. Programa de Pós-Graduação em Engenharia Aeronáutica e Mecânica. Área de Sistemas Aeroespaciais e Mecatrônica. Orientador: Prof. Dr. Adalberto Santos Dupont. Coorientadora: Prof <sup>ª</sup> . Dr <sup>ª</sup> . Doralice Serra. Defesa em 05/03/2015. Publicada em 25/03/2015.                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                |                                         |                        |
| 11. RESUMO:<br>Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o systema à trajetória cíclica alvo. |                                |                                         |                        |
| 12. GRAU DE SIGILO:<br>(X) OSTENSIVO ( ) RESERVADO ( ) SECRETO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                |                                         |                        |