

Thesis presented to the Instituto Tecnológico de Aeronáutica, in partial fulfillment of the requirements for the degree of Doctor of Science in the Graduate Program of Engenharia Eletrônica e Computação, Field of Sistemas e Controle.

**Daniel Vieira**

**PREDICTIVE CONTROL OF SWITCHED AFFINE  
SYSTEMS SUBJECTED TO DWELL TIME  
CONSTRAINTS**

Thesis approved in its final version by signatories below:

Prof. Dr. Roberto Kawakami Harrop Galvão  
Advisor

Prof. Dra. Emilia Villani  
Dean for Graduate Education and Research

Campo Montenegro  
São José dos Campos, SP - Brazil  
2024

**Cataloging-in Publication Data**  
**Documentation and Information Division**

Vieira, Daniel

Predictive control of switched affine systems subjected to dwell time constraints / Daniel Vieira.  
São José dos Campos, 2024.  
71f.

Thesis of Doctor of Science – Course of Engenharia Eletrônica e Computação. Area of Sistemas e Controle – Instituto Tecnológico de Aeronáutica, 2024. Advisor: Prof. Dr. Roberto Kawakami Harrop Galvão.

1. Dilema. 2. Construção. I. Instituto Tecnológico de Aeronáutica. II. Title.

**BIBLIOGRAPHIC REFERENCE**

VIEIRA, Daniel. **Predictive control of switched affine systems subjected to dwell time constraints**. 2024. 71f. Thesis of Doctor of Science – Instituto Tecnológico de Aeronáutica, São José dos Campos.

**CESSION OF RIGHTS**

AUTHOR'S NAME: Daniel Vieira

PUBLICATION TITLE: Predictive control of switched affine systems subjected to dwell time constraints.

PUBLICATION KIND/YEAR: Thesis / 2024

It is granted to Instituto Tecnológico de Aeronáutica permission to reproduce copies of this thesis and to only loan or to sell copies for academic and scientific purposes. The author reserves other publication rights and no part of this thesis can be reproduced without the authorization of the author.

---

Daniel Vieira  
Kastanjelaan, 1  
5616LH – Eindhoven–Netherlands

# **PREDICTIVE CONTROL OF SWITCHED AFFINE SYSTEMS SUBJECTED TO DWELL TIME CONSTRAINTS**

**Daniel Vieira**

Thesis Committee Composition:

|                                          |           |     |
|------------------------------------------|-----------|-----|
| Prof. Dr. Karl Jeinz Kienitz             | -         | ITA |
| Prof. Dr. Roberto Kawakami Harrop Galvão | Advisor - | ITA |
| Prof. Dr. Rubens Junqueira               | -         | ITA |

escrever texto de dedicatória

# Acknowledgments

estrever agradecimento

*"I am and always will be the optimist.  
The hoper of far-flung hopes, and the dreamer of improbable dreams."*  
— THE ELEVENTH DOCTOR

# Resumo

Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o sistema à trajetória cíclica alvo.

# Abstract

Switched actuators are difficult to handle because of some characteristic constraints of their nature. but they are efficient in numerous engineering applications, being applied, for example, in attitude control systems for space vehicles. Thus, knowing how to use this type of actuator is important and necessary. The main problem to be solved in this thesis is the design of a controller that guarantees the robustness of a system with switched actuators subjected to time constraints that limit the response window of their commands. In this approach, a limit cycle target trajectory search is performed and then the error of the states compared to the target trajectory is calculated. Then a predictive control technique is applied to correct the error and get the system to the cyclic target trajectory



# List of Figures

|                                                                                          |    |
|------------------------------------------------------------------------------------------|----|
| FIGURE 2.1 – Change in dynamics over trajectory time . . . . .                           | 20 |
| FIGURE 2.2 – Buck-Boost converter . . . . .                                              | 24 |
| FIGURE 2.3 – Buck-Boost converter: State trajectory . . . . .                            | 26 |
| FIGURE 2.4 – Buck-Boost converter: Switch command . . . . .                              | 27 |
| FIGURE 2.5 – Four-level three-cell converter . . . . .                                   | 28 |
| FIGURE 2.6 – Variant Dynamic Circuit 2: Voltage $C_1$ . . . . .                          | 31 |
| FIGURE 2.7 – Variant Dynamic Circuit 2: Voltage $C_2$ . . . . .                          | 31 |
| FIGURE 2.8 – Variant Dynamic Circuit 2: Current $L$ . . . . .                            | 32 |
| FIGURE 2.9 – Variant Dynamic Circuit 2: State Trajectory . . . . .                       | 32 |
| FIGURE 3.1 – Illustration for $n = 1$ state, $p = 1$ input and $N = 1$ step . . . . .    | 42 |
| FIGURE 4.1 – Switching signals . . . . .                                                 | 43 |
| FIGURE 4.2 – Reference signal for Double Integrator . . . . .                            | 54 |
| FIGURE 4.3 – State Trajectory MPC off, 4 cycles . . . . .                                | 56 |
| FIGURE 4.4 – State Trajectory MPC on, 50 cycles . . . . .                                | 57 |
| FIGURE 4.5 – Operation mode switch . . . . .                                             | 57 |
| FIGURE 4.6 – Reference sequence for Buck-boost converter . . . . .                       | 58 |
| FIGURE 4.7 – State Trajectory for Buck-Boost converter . . . . .                         | 60 |
| FIGURE 4.8 – Control Signal Sequence for Buck-Boost converter . . . . .                  | 60 |
| FIGURE 4.9 – Reference sequence for Multilevel converter . . . . .                       | 61 |
| FIGURE 4.10 –Multilevel converter: State Trajectory, $x_0 = [7.51, 20.82, 0.03]^T$ . . . | 64 |
| FIGURE 4.11 –Multilevel converter: State Trajectory, $x_0 = [9.31, 19.52, 0.73]^T$ . . . | 64 |
| FIGURE 4.12 –Multilevel Converter: Current $i_L$ . . . . .                               | 65 |

---

|                                                             |    |
|-------------------------------------------------------------|----|
| FIGURE 4.13 –Multilevel Converter: Voltage $C_1$ . . . . .  | 65 |
| FIGURE 4.14 –Multilevel Converter: Voltage $C_2$ . . . . .  | 66 |
| FIGURE 4.15 –Multilevel Converter: Control Signal . . . . . | 66 |

# List of Tables

|                                                                    |    |
|--------------------------------------------------------------------|----|
| TABLE 4.1 – Values of $u_i$ for the Multilevel converter . . . . . | 62 |
|--------------------------------------------------------------------|----|

# List of Abbreviations and Acronyms

|        |                                     |
|--------|-------------------------------------|
| CTq    | computed torque                     |
| DC     | direct current                      |
| EAR    | Equação Algébrica de Riccati        |
| GDL    | graus de liberdade                  |
| ISR    | interrupção de serviço e rotina     |
| LMI    | linear matrices inequalities        |
| MIMO   | multiple input multiple output      |
| PD     | proporcional derivativo             |
| PID    | proporcional integrativo derivativo |
| PTP    | point to point                      |
| UARMII | Underactuated Robot Manipulator II  |
| VSC    | variable structure control          |

# List of Symbols

|                  |                                                                        |
|------------------|------------------------------------------------------------------------|
| $a$              | Distância                                                              |
| $\mathbf{a}$     | Vetor de distâncias                                                    |
| $\mathbf{e}_j$   | Vetor unitário de dimensão $n$ e com o $j$ -ésimo componente igual a 1 |
| $\mathbf{K}$     | Matriz de rigidez                                                      |
| $m_1$            | Massa do cumpim                                                        |
| $\delta_{k-k_f}$ | Delta de Kronecker no instante $k_f$                                   |

# Contents

|       |                                                                         |    |
|-------|-------------------------------------------------------------------------|----|
| 1     | INTRODUCTION . . . . .                                                  | 16 |
| 1.1   | Motivation . . . . .                                                    | 16 |
| 1.2   | Contributions of the present work . . . . .                             | 17 |
| 1.3   | Outline of the remaining chapters . . . . .                             | 18 |
| 2     | DETERMINATION OF TARGET PERIODIC TRAJECTORIES . . . . .                 | 19 |
| 2.1   | Optimization . . . . .                                                  | 19 |
| 2.1.1 | System Dynamics and Sequence . . . . .                                  | 20 |
| 2.1.2 | Constraints Definition . . . . .                                        | 20 |
| 2.1.3 | Optimization with FMINCON . . . . .                                     | 21 |
| 2.1.4 | Cost Function and Trajectory Simulation . . . . .                       | 21 |
| 2.2   | Calculating $x_0$ . . . . .                                             | 21 |
| 2.3   | Application Examples . . . . .                                          | 23 |
| 2.3.1 | Buck-boost converter . . . . .                                          | 24 |
| 2.3.2 | Multilevel converter . . . . .                                          | 28 |
| 3     | PREDICTIVE CONTROL: PRELIMINARIES AND NOTATION . . . . .                | 33 |
| 3.1   | Cost Function . . . . .                                                 | 34 |
| 3.2   | Constraints . . . . .                                                   | 35 |
| 3.3   | Prediction Equation . . . . .                                           | 37 |
| 3.4   | Optimization Problem . . . . .                                          | 38 |
| 3.5   | Feasibility Region . . . . .                                            | 41 |
| 4     | PREDICTIVE CONTROL FOR STABILIZATION OF PERIODIC TRAJECTORIES . . . . . | 43 |

---

|            |                                               |    |
|------------|-----------------------------------------------|----|
| <b>4.1</b> | <b>Statement of the problem</b>               | 43 |
| <b>4.2</b> | <b>Linearization procedure</b>                | 44 |
| <b>4.3</b> | <b>MPC Problem</b>                            | 52 |
| 4.3.1      | Cost Function                                 | 52 |
| 4.3.2      | Dwell-time Constraints                        | 52 |
| <b>4.4</b> | <b>Application Examples</b>                   | 53 |
| 4.4.1      | Double Integrator                             | 54 |
| 4.4.2      | Buck-boost converter                          | 58 |
| 4.4.3      | Multilevel converter                          | 61 |
| <b>4.5</b> | <b>Conclusion</b>                             | 67 |
| <b>5</b>   | <b>CONCLUSÃO</b>                              | 68 |
|            | <b>BIBLIOGRAPHY</b>                           | 69 |
|            | <b>APPENDIX A – TÓPICOS DE DILEMA LINEAR</b>  | 70 |
| <b>A.1</b> | <b>Modelo de simulação</b>                    | 70 |
| A.1.1      | get_x0                                        | 70 |
| A.1.2      | get_xf                                        | 70 |
|            | <b>ANNEX A – EXEMPLO DE UM PRIMEIRO ANEXO</b> | 71 |
| <b>A.1</b> | <b>Uma Seção do Primeiro Anexo</b>            | 71 |

# 1 Introduction

## 1.1 Motivation

The dynamics of switched affine systems can be described by a state equation of the form  $\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}, t \in \mathbb{R}_+$ , where  $x(t) \in \mathbb{R}^n$  is the state vector and  $\sigma(t) \in \{1, 2, \dots, M\}$  is the switching state associated with the matrices  $A_{\sigma(t)} \in \mathbb{R}^{n \times n}$  and the vectors  $b_{\sigma(t)} \in \mathbb{R}^n$  at each time  $t$ .

There is extensive research in the synthesis of controllers for switched affine systems. However, the design procedures are typically concerned with driving the state  $x(t)$  to the vicinity of a given target, without considering the subsequent evolution of the state in that region. This issue is especially relevant when the switching state  $\sigma(t)$  is subjected to dwell-time constraints. In that case, rather than driving the state to an equilibrium point, the design should be aimed at achieving a suitable limit cycle.

O que esses tres trabalhos nao fizeram, no que diz respeito ao escopo desse doutorado? ou seja, o que estamos fazendo que eles nao fizeram? eh o tratamento de restricoes de dwell-time?

A resposta para essa pergunta servira de base para a ligacao do texto com o proximo paragrafo.

- the work treats the case of changing dynamics
- computes the dwell-time constraints
- has the convenience of solving the problem with quadratic programming convex optimization

The present work extends the problem to work with changing dynamics at switching times and applies the dwell-time constraints using predictive control. The formulation of the solution also has the convenience of solving the problem with quadratic programming convex optimization. dafsfad



This problem has been addressed, for instance, by Benmiloud *et al.* (2019) who uses a hybrid Poincaré map approach to stabilize a switched affine system into the desired limit cycle and a DC-DC converter was employed as an illustrative example. Egidio *et al.* (2020b) proposed the control design of a state-dependent switching function for discrete-time switched affine systems to stabilize a limit cycle determined according to criteria of interest related to the steady-state behavior. The control design applies a switched rule to orchestrate the state trajectories based on a time-varying convex Lyapunov function that drives the system from the initial condition toward the desired limit cycle. The proposed method uses a voltage regulation of a simulated DC-DC multicellular converter as an illustrative example. This work was extended to continuous time switched-affine systems by Egidio *et al.* (2020a)

Some studies form the basis for the present work:

Vieira (2013) solved the problem using predictive control to account for the dwell-time constraints of switching affine systems. Here the controller drove the system to a target state using MILP (Mixed-Integer Linear Programming) and the cyclic trajectory was a consequence of the states as the system approached the target.

Patino *et al.* (2010) defined the target trajectory using nonlinear programming and used this target trajectory in the predictive control in terms of errors.

Marcolino (2018) proposed a solution with a controller law that drives the switched affine system with dwell-time constraints to a target cyclic trajectory. In this work, the problem is addressed in two stages: first, the problem is interpreted as a convex optimization where the author can find a targeted cyclic trajectory that minimizes a cost function associated with the system performance; then a second part that uses the target trajectory as input and computes perturbation at the switching instants of the reference control signal using predictive control.

## 1.2 Contributions of the present work

This present work proposes an extension of the solution from Marcolino *et al.* (2021) to a general case of switched affine systems.

The work proposed by Marcolino *et al.* (2021) has an approach with three basic elements: the determination of a target cyclic trajectory, a linearization of the cycle-to-cycle dynamics of the system around the target trajectory that applies the control in the switching time perturbation, the use of the linearized model with predictive formulation to impose the dwell time constraints.

### 1.3 Outline of the remaining chapters

The remainder of this text is organized as follows. Chapter 2 describes the problem of finding a target periodic trajectory for the given switched affine system. Chapter 3 proposes a predictive control law that drives the system to the target cyclic trajectory. Finally, chapter 4 brings some remarks and considerations of the work.

## 2 Determination of Target Periodic Trajectories

Consider a switching affine system of the form

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)},$$

the goal is to drive a system defined by an affine dynamic equation to an optimal periodic trajectory, so the first step is to generate this trajectory. This trajectory is submitted to restrictions imposed by the dynamic of the system and also switching time restrictions.

### 2.1 Optimization

Following the approach from Patino *et al.* (2010) we must establish a trajectory that yields the optimal time sequence  $\tau^\infty$ , the modes sequence  $\Omega^\infty$ , and its length  $s^\infty (1 < s^\infty < s_{max})$ . To reduce the oscillations around a desired operation point, we choose an integral quadratic criterion centered on the average reference value  $\bar{x}^\infty$ :

- seria conveniente tambem incluir  $x(0)$  como variavel de optimizacao, pois a trajetoria  $x(\cdot)$  depende de  $x(0)$

- nao eh mais assim, vide a fig 2.1 ???

$$J(\tau^\infty, \Omega^\infty, s^\infty, x_0) = \min_{\tau, \Omega, s} \int_0^{T_p} \left[ x(t) - \bar{x}^\infty \right]^T Q \left[ x(t) - \bar{x}^\infty \right] dt \quad (2.1)$$

where  $\tau^\infty = [t_1, t_2, \dots, t_{s^\infty}]$ ,  $\Omega^\infty = [\sigma_1, \sigma_2, \dots, \sigma_{s^\infty}]$ ,  $Q = Q^T > 0$  and  $T_p$  is the period of the cycle.

Since the trajectory is cyclic we can impose the constraint:

$$x(0) = x(T_p) \quad (2.2)$$

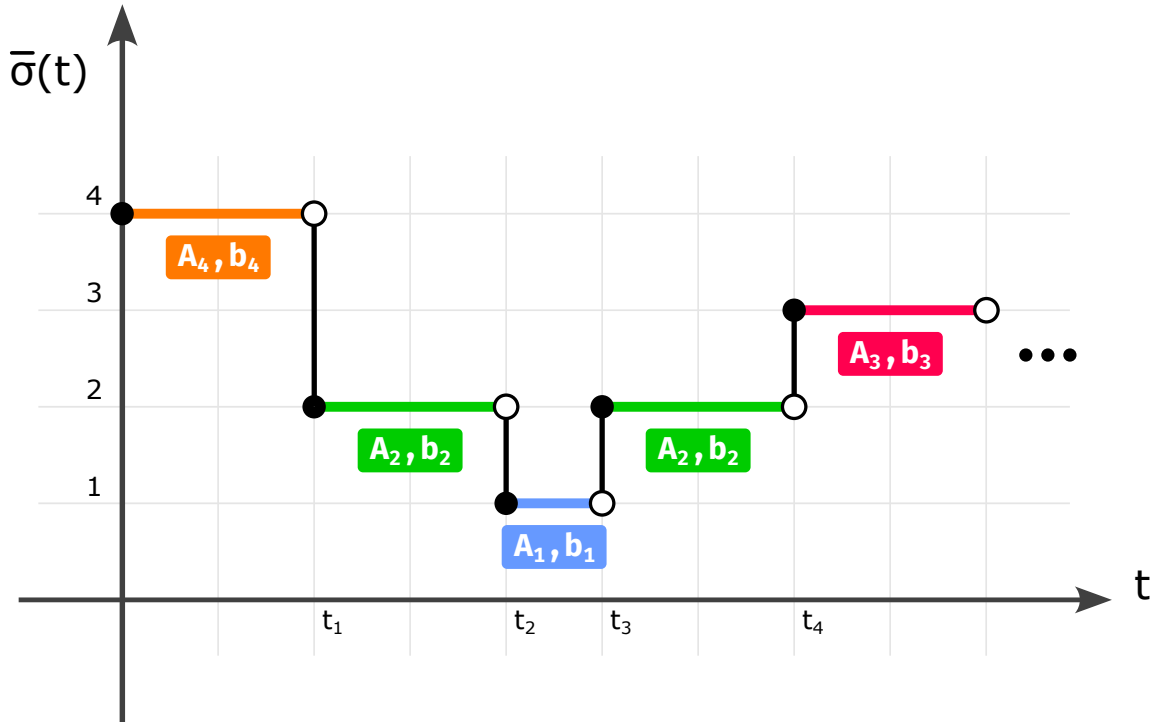


FIGURE 2.1 – Change in dynamics over trajectory time

### 2.1.1 System Dynamics and Sequence

To begin, we create a list where each of its elements signifies the dynamics of the system. This is exemplified by the matrices  $A$ ,  $B$ ,  $C$ , and  $D$ . The order in which the elements appear in this list is defined by the sequence of modes. In simpler terms, the positioning of these elements signifies the order they will be executed.

In Figure 2.1, we see a trajectory example. For this illustration, the system's list of dynamics is  $\{[A_1, b_1], [A_2, b_2], [A_3, b_3], [A_4, b_4]\}$ , and the sequence of modes is  $[4, 2, 1, 2, 3]$ . It's worth noting that a particular system dynamic can be employed multiple times or might not be used at all, depending on the desired target trajectory. The sequence of modes and the maximum period for the cycle are predetermined for this problem and the goal is to achieve the best trajectory that minimizes the cost function.

### 2.1.2 Constraints Definition

as restricoes precisam ser apresentadas matematicamente, usando a notacao apresentada na definicao de tau\_inf

Once the list and sequence have been established, we need to apply the constraints. These constraints dictate the cycle's maximum duration, as well as the minimum time permitted between switches in modes.

$$(t_i - t_{i-1}) \geq \Delta t_{i,min} , \quad i = 1, 2, \dots, N \quad (2.3)$$

where  $\Delta t_{i,min}$  is the minimum duration time permitted between switch  $i$ .

### 2.1.3 Optimization with FMINCON

precisaria vir depois do desenvolvimento apresentado na secao 2.2, que ainda faz parte da formulacao do problema de otimizacao em si

For optimization purposes, the function FMINCON is employed. This function works in conjunction with a cost function. The cost function is designed to accept switching times generated from the optimization process. Its primary goal is to evaluate and discern the most cost-effective result that respects the imposed constraints.

FMINCON is a method of optimization in MATLAB's libraries that implements the method SQP (Sequential Quadratic Programming). The basic SQP algorithm is described in Chapter 18 of Nocedal e Wright (2006).

### 2.1.4 Cost Function and Trajectory Simulation

Taking a closer look at the cost function, its role is to simulate the trajectory using the dynamics taken from the previously defined list, all in line with the mode sequence. This trajectory is cyclic and to enforce this cyclic nature, the initial state's condition is calculated in such a way that the end product is a cyclic trajectory.

The method of determining the cost is by computing the integral of the trajectory, centered around the average reference value, denoted as  $\bar{x}^\infty$ . The result is compliant with the system's dynamic constraints and also matches the properties of the final trajectory.

## 2.2 Calculating $x_0$

precisaria vir antes do 'optimization with FMINCON', que ainda faz parte da formulacao do problema de otimizacao em si

We need to compute the initial condition for the system for each evaluation of the cost function so that we have a periodic trajectory, meaning that the last states of the trajectory we the same as the initial condition.

We can have different dynamics for each switching instant, so the system behaves as

$$\begin{aligned}
 [0 \rightarrow t_1] : \dot{x} &= A_{\sigma(0)}x + b_{\sigma(0)} \\
 [t_1 \rightarrow t_2] : \dot{x} &= A_{\sigma(t_1)}x + b_{\sigma(t_1)} \\
 &\vdots \\
 [t_{N-1} \rightarrow t_N] : \dot{x} &= A_{\sigma(t_{N-1})}x + b_{\sigma(t_{N-1})}
 \end{aligned} \tag{2.4}$$

We can rewrite the solution for the first region as

$$\begin{aligned}
 x(t_1) &= e^{A_{\sigma(0)}t_1}x(0) + \int_0^{t_1} e^{A_{\sigma(0)}(t_1-\tau)}b_{\sigma(0)}d\tau \\
 x(t_1) &= e^{A_{\sigma(0)}t_1}x(0) + \int_0^{t_1} e^{A_{\sigma(0)}(t_1-\tau)}b_{\sigma(0)}d\tau \\
 x(t_1) &= F_0x(0) + g_0
 \end{aligned} \tag{2.5}$$

then the behavior of the other regions of the system is

$$\begin{aligned}
 x(t_1) &= F_0x(0) + g_0 \\
 x(t_2) &= F_1x(1) + g_1 \\
 &\vdots \\
 x(t_N) &= F_{N-1}x(N-1) + g_{N-1}
 \end{aligned} \tag{2.6}$$

with

$$F_i = e^{A_{\sigma(t_i)}(t_{i+1}-t_i)} \tag{2.7}$$

$$g_i = \int_{t_i}^{t_{i+1}} e^{A_{\sigma(t_i)}(t_{i+1}-\tau)}b_{\sigma(t_i)}d\tau = \int_0^{t_{i+1}-t_i} e^{A_{\sigma(t_i)}\tau}b_{\sigma(t_i)}d\tau \tag{2.8}$$

From (2.6) we can establish the relation between  $x(t_N)$  and  $x(0)$

$$\begin{aligned}
 x(t_N) &= F_{N-1}F_{N-2}\dots F_0x(0) + \\
 &\quad F_{N-1}F_{N-2}\dots F_1g_0 + F_{N-1}F_{N-2}\dots F_2g_1 + \dots + F_{N-1}g_{N-2} + g_{N-1} \\
 x(t_N) &= F_NF_{N-1}\dots F_1x(0) + c
 \end{aligned} \tag{2.9}$$

We know that  $x(t_N) = x(0)$ , so the solution for  $x(0)$  is

$$\begin{aligned} x(0) &= F_{N-1}F_{N-2}\dots F_0x(0) + c \\ \left(I - F_{N-1}F_{N-2}\dots F_0\right)x(0) &= c \\ x(0) &= \left(I - F_{N-1}F_{N-2}\dots F_0\right)^{-1}c \end{aligned} \tag{2.10}$$

where

$$c = F_{N-1}F_{N-2}\dots F_1g_0 + F_{N-1}F_{N-2}\dots F_2g_1 + \dots + F_{N-1}g_{N-2} + g_{N-1} \tag{2.11}$$

assuming that the inverse indicated in (2.10) exists.

## 2.3 Application Examples

### 2.3.1 Buck-boost converter

Atentar para sentencas que comecam com gerundio e nao terminam

Citar artigo do patino

convem que o tamanho e o tipo da font usada na figura seja igual ao do texto principal. Neste caso, seria conveniente escrever  $E$ ,  $L$ ,  $C$ ,  $R$  em italico. Tambem seria bom indicar a tensao  $v_C$  e a corrent  $i_L$  no circuito.

Considering a Buck-Boost converter in Continuous Conduction Mode (CCM) which the topology is shown in Figure 2.2.

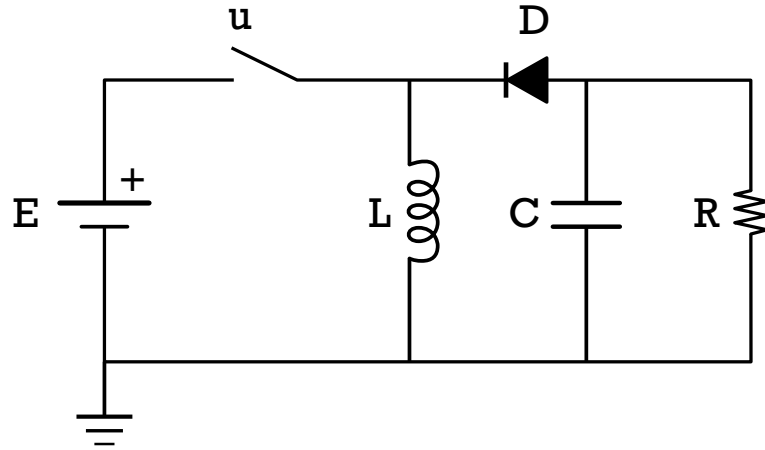


FIGURE 2.2 – Buck-Boost converter

The state variables are the capacitor voltage  $v_c$  and the inductor current  $i_L$ . Its dynamics are given by the equation:

$$\dot{x} = \begin{cases} A_1 x + b_1, & \text{for } u = 1 \text{ (closed switch - Mode 1)} \\ A_2 x + b_2, & \text{for } u = 0 \text{ (open switch - Mode 2)} \end{cases} \quad (2.12)$$

where

$$\begin{aligned} A_1 &= \begin{bmatrix} 0 & 0 \\ 0 & -\frac{1}{RC} \end{bmatrix} & A_2 &= \begin{bmatrix} 0 & \frac{1}{L} \\ -\frac{1}{C} & -\frac{1}{RC} \end{bmatrix} \\ b_1 &= \begin{bmatrix} \frac{E}{L} & 0 \end{bmatrix}^T & b_2 &= \begin{bmatrix} 0 & 0 \end{bmatrix}^T \end{aligned} \quad (2.13)$$



where (in normalized values)  $R = L = C = E = 1$ .

The list of dynamics for this example is

$$\left\{ [A_1, b_1], [A_2, b_2] \right\} \quad (2.14)$$

where

$$A_1 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix}, b_1 = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad (2.15)$$

$$A_2 = \begin{bmatrix} 0 & 1 \\ -1 & -1 \end{bmatrix}, b_2 = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (2.16)$$

seria melhor fazer mencao ao custo em (2.2) e indicar que  $\bar{x}^\infty = [2, -1]^T$

acho que tambem faltou mencionar a restricao de minimum dwell time.  
ela teria que ser formalizada em termos dos elementos  $\tau^\infty$

acho que ficou faltando mencionar a restricao  $T_p \leq T_{p,max}$  na formula-  
cao do problema de otimizacao

o uso de  $dt$  ja precisaria ser explicado na formulacao do problema de  
otimizacao. talvez seja possivel aproveitar a discutir sobre o uso de  $dt$   
para introduzir a restricao de minimum dwell time.

The criteria for the optimization is to compute the trajectory to minimize equation (2.1) with  $\bar{x}^\infty = [2, -1]^T$  with the weight matrix  $Q = \text{diag}[1, 1]$ , the maximum cycle period of  $T_{p,max} = 1s$  and minimum dwell time of  $t_{min} = 0.25s$ .

The cost function takes a vector representing the  $dt$  for each switching moment as its input. For instance, with two switching instances, the vector could be  $[0.25, 0.35]$ . This implies the signal begins at time  $0.0$ , transitions to the next dynamic at  $0.0 + 0.25 = 0.25$ , and then switches again at  $0.25 + 0.35 = 0.6$ . This gives us the signal sequence  $[0.0, 0.25, 0.6]$ .

In the Buck-Boost converter example, the initial values for the switching vector are represented by  $[0.25, 0.25]$ . The lower bounds are defined as  $[0.25, 0.25]$  and the upper bounds are set to  $[1.5, 1.5]$ . The solution provided by the FMINCON optimization yields

$$\begin{aligned}\tau^\infty &= [0, 0.2513, 0.5914], \\ \Omega^\infty &= [1, 2].\end{aligned}\tag{2.17}$$

nao usar parenteses na numeracao d figuras

The outcome under this condition is displayed in Figure 2.3, showcasing the cyclic trajectory around the average value  $[2, -1]^T$ . The corresponding switch command signal  $u$  can be seen in Figure 2.4.

usar  $x_1$  e  $x_2$  nos labels dos eixos da figura

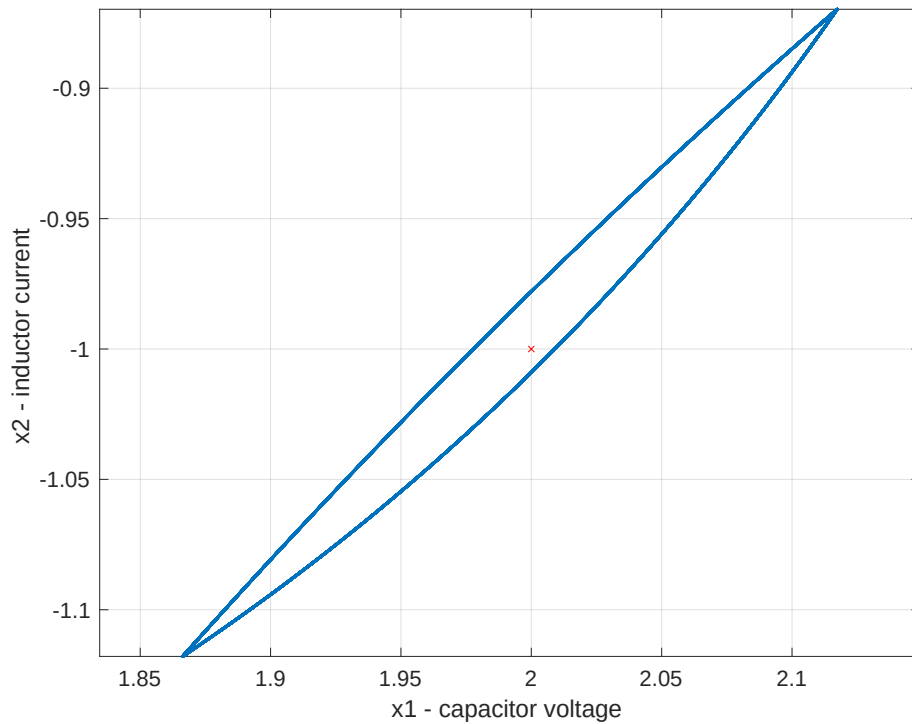


FIGURE 2.3 – Buck-Boost converter: State trajectory

xlabel: u - switch command

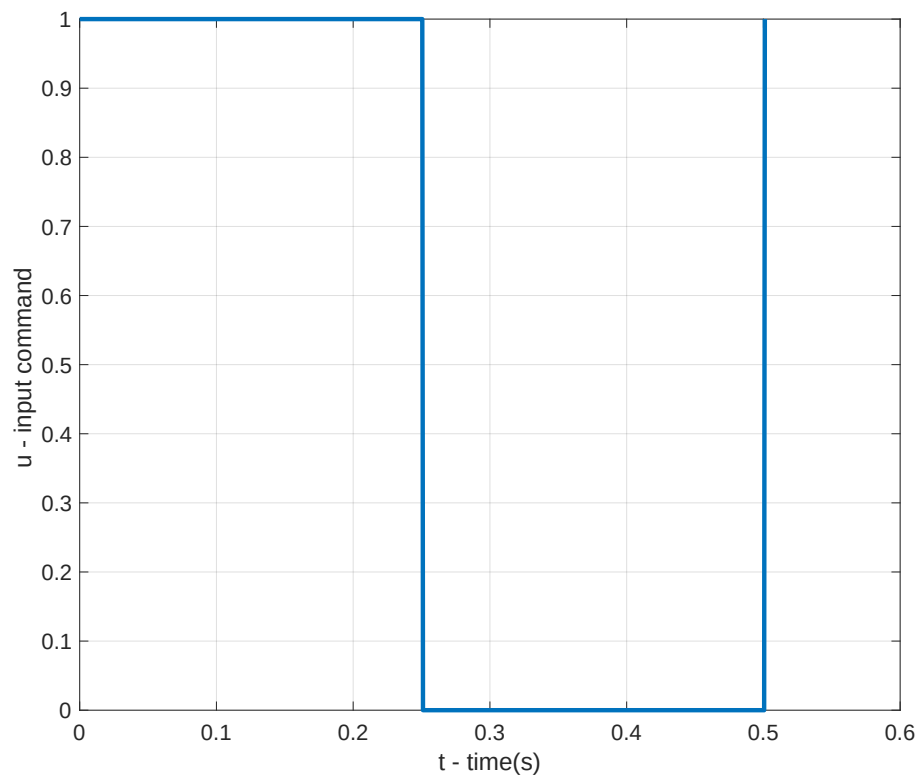


FIGURE 2.4 – Buck-Boost converter: Switch command

### 2.3.2 Multilevel converter

[citar artigo do patino](#)

Considering a Multilevel converter whose topology is shown in Figure 2.5.

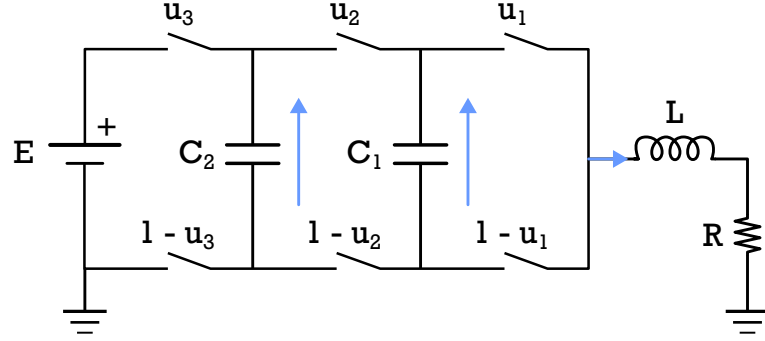


FIGURE 2.5 – Four-level three-cell converter

The state vector is the voltage on the capacitors  $x(t) = [v_{c_1}(t), v_{c_2}(t), i_L(t)]$ , where  $v_{c_1}$ ,  $v_{c_2}$  are the voltages in each capacitor and  $i_L$  is the load current.

The dynamic of this system can be described as

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} -\frac{x_3(t)}{C_1} & \frac{x_3(t)}{C_1} & 0 \\ 0 & -\frac{x_3(t)}{C_2} & \frac{x_3(t)}{C_2} \\ \frac{x_1(t)}{L} & \frac{x_2(t)-x_1(t)}{L} & \frac{E-x_2(t)}{L} \end{bmatrix} \begin{bmatrix} u_1(t) \\ u_2(t) \\ u_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}x_3(t) \end{bmatrix} \quad (2.18)$$

rearranging the terms we have

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} 0 & 0 & \frac{u_2-u_1}{C_1} \\ 0 & 0 & \frac{u_3-u_2}{C_2} \\ \frac{u_1-u_2}{L} & \frac{u_2-u_3}{L} & \frac{-R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}u_3 \end{bmatrix} \quad (2.19)$$

Each combination of the switches determines a different behavior:

$$\mathbf{u}_1 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}, A_1 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{-R}{L} \end{bmatrix}, b_1 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.20)$$

$$\mathbf{u}_2 = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}, A_2 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{1}{C_1} \\ 0 & \frac{-1}{L} & \frac{-R}{L} \end{bmatrix}, b_2 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.21)$$

$$\mathbf{u}_3 = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}, A_3 = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & \frac{-1}{C_2} \\ \frac{-1}{L} & \frac{1}{L} & \frac{-R}{L} \end{bmatrix}, b_3 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.22)$$

$$\mathbf{u}_4 = \begin{bmatrix} 0 \\ 1 \\ 1 \end{bmatrix}, A_4 = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & 0 \\ \frac{-1}{L} & 0 & \frac{-R}{L} \end{bmatrix}, b_4 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.23)$$

$$\mathbf{u}_5 = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}, A_5 = \begin{bmatrix} 0 & 0 & \frac{-1}{C_1} \\ 0 & 0 & 0 \\ \frac{1}{L} & 0 & \frac{-R}{L} \end{bmatrix}, b_5 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.24)$$

$$\mathbf{u}_6 = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix}, A_6 = \begin{bmatrix} 0 & 0 & \frac{-1}{C_1} \\ 0 & 0 & \frac{1}{C_2} \\ \frac{1}{L} & \frac{-1}{L} & \frac{-R}{L} \end{bmatrix}, b_6 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.25)$$

$$\mathbf{u}_7 = \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix}, A_7 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{-1}{C_1} \\ 0 & \frac{1}{L} & \frac{-R}{L} \end{bmatrix}, b_7 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.26)$$

$$\mathbf{u}_8 = \begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}, A_8 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{-R}{L} \end{bmatrix}, b_8 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.27)$$

With the detailed dynamic for each switching position, we can define the list of elements for the multilevel converter as  $\{A_1, A_2, A_3, A_4, A_5, A_6, A_7, A_8\}$  and  $\{b_1, b_2, b_3, b_4, b_5, b_6, b_7, b_8\}$ .

The criteria for the optimization is to compute the trajectory around the average value  $\left[\frac{1}{3}E, \frac{2}{3}E, 1\right]$  with  $E = 30 \text{ V}$ . The maximum cycle period is  $T_{p,max} = 0.4 \text{ ms}$  and minimum tweek time of  $t_{min} = 0.022 \text{ ms}$ .

unidades (como F, J, etc.) devem ser escritas em tipo romano, isto eh, nao italico. deve haver um espaco separando o valor da unidade.

The simulation parameters are  $C_1 = 40 \mu\text{F}$ ,  $C_2 = 40 \mu\text{F}$ ,  $L = 10 \text{ mH}$  and  $R = 10 \Omega$  with the weight matrix  $Q = \text{diag}[10, 5, 20000]$ .

Using the optimal switching sequence

$$\Omega^\infty = \{1, 2, 4, 8, 3, 1, 5, 8, 5\} \quad (2.28)$$



The optimal switching instant is

indicar unidades

$$\tau^\infty = \{0, 0.064, 0.088, 0.112, 0.134, 0.157, 0.206, 0.230, 0.253, 0.276\} \text{ ms} \quad (2.29)$$

with the initial condition  $x(0) = [9.514 \text{ V}, 19.821 \text{ V}, 1.031 \text{ A}]^T$ .

citar as figuras

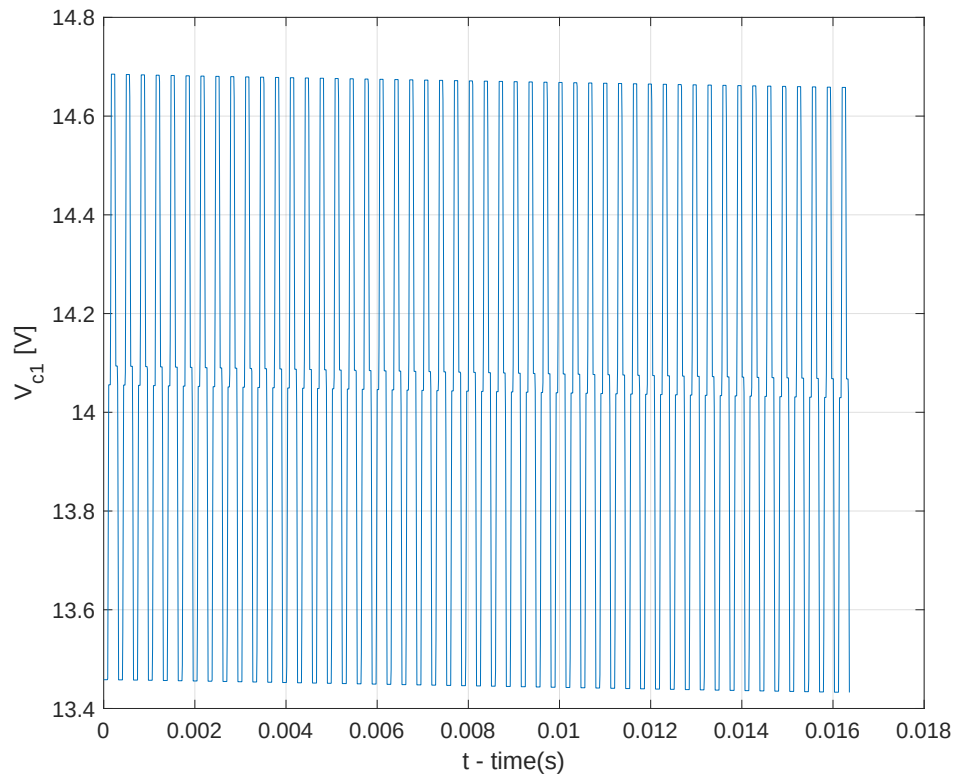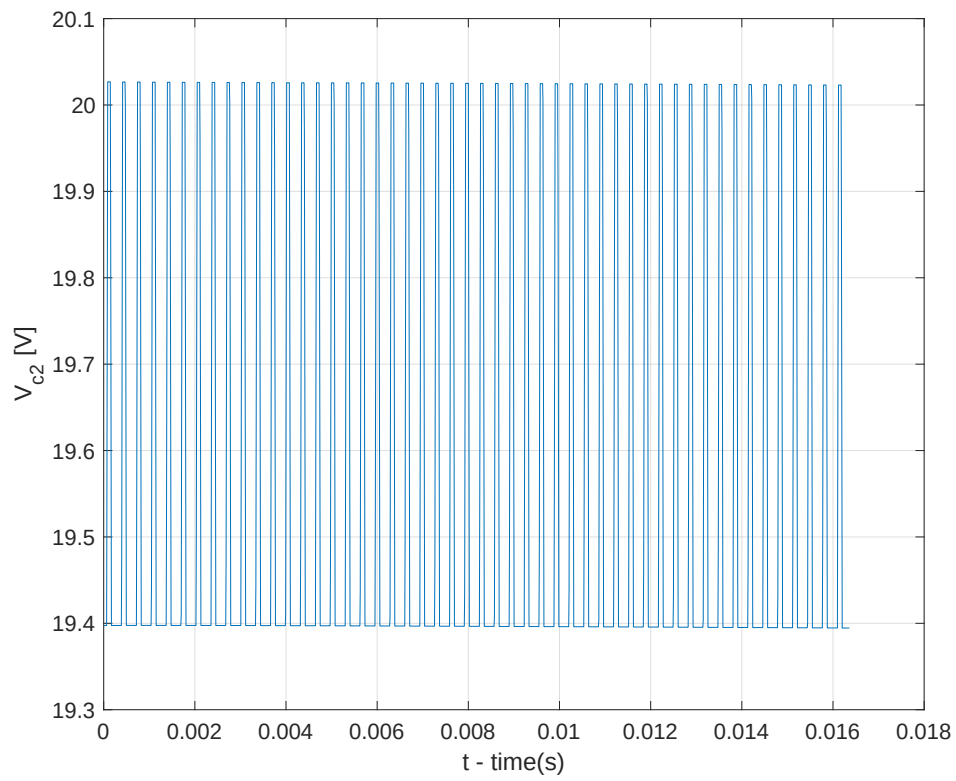FIGURE 2.6 – Variant Dynamic Circuit 2: Voltage  $C_1$ FIGURE 2.7 – Variant Dynamic Circuit 2: Voltage  $C_2$


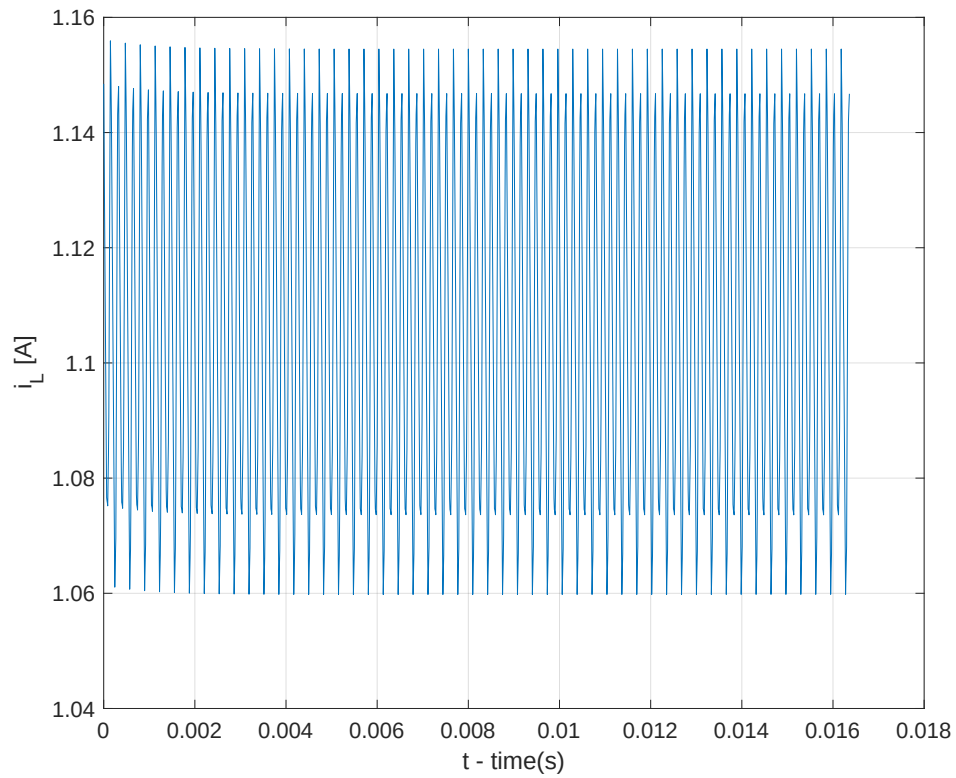
FIGURE 2.8 – Variant Dynamic Circuit 2: Current  $L$ 

FIGURE 2.9 – Variant Dynamic Circuit 2: State Trajectory

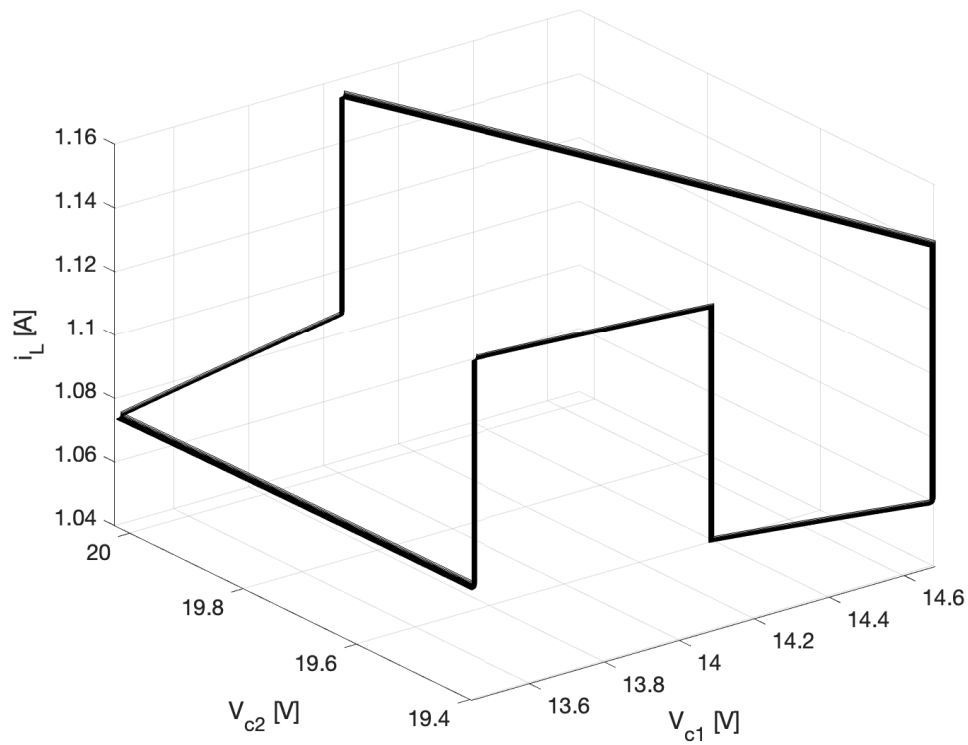

### 3 Predictive control: Preliminaries and notation

Consider a system with discrete-time dynamics described by

$$x[k+1] = Ax[k] + Bu[k] \quad (3.1)$$

where  $x[k] \in \mathbb{R}^n$  and  $u[k] \in \mathbb{R}^p$  are the state and control vectors at the  $k$ th time instant.

The goal is to drive the state  $x[k]$  to the origin from a given initial condition while respecting state and control constraints in the form

$$x[k] \in \mathcal{X} \quad (3.2)$$

$$u[k] \in \mathcal{U} \quad (3.3)$$

where  $\mathcal{U}$  and  $\mathcal{X}$  are polyhedral sets containing the origin in their interior. It is assumed that  $\mathcal{U}$  and  $\mathcal{X}$  are described in half-space representation as

$$\mathcal{U} = \{u \in \mathbb{R}^p : S_u u \leq b_u\} \quad (3.4)$$

and

$$\mathcal{X} = \{x \in \mathbb{R}^n : S_x x \leq b_x\} \quad (3.5)$$

with  $S_u, b_u$  and  $S_x, b_x$  of suitable dimensions.

### 3.1 Cost Function

At each time  $k$ , the control action  $u[k]$  will be determined by solving an optimization problem with the cost given by

$$J = \left\| \hat{x}[k + N|k] \right\|_{P_f}^2 + \sum_{i=0}^{N-1} \left[ \left\| \hat{x}[k + i|k] \right\|_Q^2 + \left\| \hat{u}[k + i|k] \right\|_R^2 \right] \quad (3.6)$$

where  $\hat{x}[k + i|k]$  are predicted values of the state and control vectors, which are related through the following equations:

$$\hat{x}[k|k] = x[k] \quad (3.7)$$

$$\hat{x}[k + i + 1|k] = A\hat{x}[k + i|k] + B \quad (3.8)$$

$$\hat{x}[k + i|k], \quad i = 0, 1, \dots, N - 1 \quad (3.9)$$

The expression for  $J$  consists of a **terminal cost** term and a trajectory **cost term**.

With  $P_f$ ,  $Q$ ,  $R$  being symmetric and positive-definite, with  $P_f$  chosen so that the terminal cost term corresponds to the value function of an infinite horizon Discrete-Time Linear Quadratic Regulator (DLQR) designed with weights  $Q$ ,  $R$ .

By using the notation:

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k + 1|k] \\ \vdots \\ \hat{u}[k + N - 1|k] \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k + 1|k] \\ \hat{x}[k + 2|k] \\ \vdots \\ \hat{x}[k + N|k] \end{bmatrix} \in \mathbb{R}^{nN} \quad (3.10)$$

colocar a definicao da matriz R negrito aqui

and then the cost term

rever essa parte

$$\begin{aligned} \sum_{i=0}^{N-1} \left\| \hat{u}[k + i|k] \right\|_R^2 &= \hat{u}^T[k|k] R \hat{u}[k|k] + \hat{u}^T[k + 1|k] R \hat{u}[k + 1|k] + \dots \\ &\quad + \hat{u}^T[k + N - 1|k] R \hat{u}[k + N - 1|k] \end{aligned} \quad (3.11)$$

becomes

$$\sum_{i=0}^{N-1} \|\hat{u}[i]\|_R^2 = \|\hat{\mathbf{u}}\|_{\mathbf{R}}^2 \quad (3.12)$$

Similarly, we can write

$$\|\hat{x}[k+N|k]\|_P^2 + \sum_{j=0}^{N-1} \|\hat{x}[k+j|k]\|_Q^2 = \|x[k]\|_P^2 + \|\hat{\mathbf{x}}\|_{\mathbf{Q}}^2 \quad (3.13)$$

where

$$Q = \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} = \begin{bmatrix} \text{diag}_{N-1}(Q) & 0 \\ 0 & P_f \end{bmatrix} \in \mathbb{R}^{nN \times nN} \quad (3.14)$$

as

So, the cost function can be written in the form

conferir o indice, troquei  $\mathbf{P}$  por  $\mathbf{Q}$

incluir  $[k]$  nas demais equacoes daqui em diante, sempre que necessario

$$J(\hat{\mathbf{x}}[k], \hat{\mathbf{u}}[k]) = \|x[k]\|_Q^2 + \|\hat{\mathbf{x}}[k]\|_{\mathbf{Q}}^2 + \|\hat{\mathbf{u}}[k]\|_{\mathbf{R}}^2 \quad (3.15)$$

## 3.2 Constraints

In view of (3.2) and (3.3), the constraints on the optimization variables can be expressed as

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathcal{U} \times \mathcal{U} \times \cdots \times \mathcal{U} = \mathcal{U}^N \quad (3.16)$$

$$\hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathcal{X} \times \mathcal{X} \times \cdots \times \mathcal{X}_f = \mathcal{X}^{N-1} \times \mathcal{X}_f \quad (3.17)$$

where

$$\mathcal{X}_f = \{x \in \mathbb{R}^n : S_f x \leq b_f\} \quad (3.18)$$

is the maximum invariant and admissible set (MAS) concerning the terminal state and control constraints under the infinite-horizon DLQR control law.

$$\{\hat{x} \in \mathbb{R}^n : S_f \hat{x} \leq b_f\} \quad (3.19)$$

The constraint on  $\hat{\mathbf{u}}$  can be written as

$$\begin{bmatrix} S_u & 0 & \cdots & 0 \\ 0 & S_u & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_u \end{bmatrix} \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \leq \begin{bmatrix} b_u \\ b_u \\ \vdots \\ b_u \end{bmatrix} \quad (3.20)$$

or, in a shorter form

$$\mathbf{S}_u \hat{\mathbf{u}} \leq \mathbf{b}_u \quad (3.21)$$

with

$$\mathbf{S}_u = \text{diag}_N(S_u), \mathbf{b}_u = \text{col}_N(b_u) \quad (3.22)$$

Similarly, in light of (3.5), the constraints on  $\hat{\mathbf{x}}$  can be written as

$$\begin{bmatrix} S_x & 0 & \cdots & 0 \\ 0 & S_x & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_x \end{bmatrix} \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \leq \begin{bmatrix} b_x \\ b_x \\ \vdots \\ b_x \end{bmatrix} \quad (3.23)$$

or, in short

$$\mathbf{S}_x \hat{\mathbf{x}} \leq \mathbf{b}_x \quad (3.24)$$

with

$$\mathbf{S}_x = \begin{bmatrix} \text{diag}_{N-1}(S_x) & 0 \\ 0 & S_f \end{bmatrix}, \mathbf{b}_x = \begin{bmatrix} \text{col}_{N-1}(b_x) \\ b_f \end{bmatrix} \quad (3.25)$$

essa discussao tem que ser apresentada depois de se deduzir a equacao de predicao na secao 3.3 ↓↓

The vectors  $\hat{\mathbf{x}}[k|k]$  and  $\hat{\mathbf{u}}[k|k]$  are linked by

$$\hat{\mathbf{x}}[k+1|k] = A\hat{\mathbf{x}}[k|k] + B\hat{\mathbf{u}}[k|k] \quad (3.26)$$

so the constraint

$$\mathbf{S}_x \mathbf{x} \leq \mathbf{b}_x \quad (3.27)$$

can be rewritten as

$$\mathbf{S}_x \mathbf{B} \mathbf{u} \leq \mathbf{b}_x - \mathbf{S}_x \mathbf{A} x(0) \quad (3.28)$$

Combined with  $\mathbf{S}_u \mathbf{u} \leq \mathbf{b}_u$ , it can be expressed in the form

$$\mathbf{S} \mathbf{u} \leq \mathbf{b} \quad (3.29)$$

with

$$\mathbf{S} = \begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix}, \mathbf{b} = \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} \hat{x}[k|k] \\ \mathbf{b}_u \end{bmatrix} \quad (3.30)$$

essa discussao tem que ser apresentada depois de se deduzir a equacao de predicao na secao 3.3 ↑↑

### 3.3 Prediction Equation

Let's express the relationship between the vectors

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \quad (3.31)$$

based on the prediction equation

$$\hat{x}[k+i+1|k] = A\hat{x}[k+i|k] + B\hat{u}[k+i|k], i = 0, 1, \dots, N \quad (3.32)$$

and initial condition  $\hat{x}[k|k] = x[k]$ .

From (3.32), it follows that

$$\hat{x}[k+i|k] = A^i \hat{x}[k|k] + \sum_{j=0}^{i-1} A^{i-1-j} B \hat{u}[k+j|k] \quad (3.33)$$

which can be written for  $i = 1, 2, \dots, N$  as

$$\hat{x}[k+1|k] = Ax[k] + B\hat{u}[k|k] \quad (3.34)$$

$$\hat{x}[k+2|k] = A^2x[k] + AB\hat{u}[k|k] + B\hat{u}[k+1|k] \quad (3.35)$$

$$\vdots \quad (3.36)$$

$$\hat{x}[k+N|k] = A^Nx[k] + A^{N-1}B\hat{u}[k|k] + \dots + AB\hat{u}[k+N-2|k] + B\hat{u}[k+N-1|k] \quad (3.37)$$

or

$$\begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix} x(0) + \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \quad (3.38)$$

This can be written in a shorter form as

$$\hat{\mathbf{x}}[k] = \mathbf{A}x[k] + \mathbf{B}\hat{\mathbf{u}}[k] \quad (3.39)$$

- ajustar notacao x hat k
- procurar x[k|k] -> x[k] (negrito)
- procurar u negrito -> u hat negrito [k]
- conferir duplicidade de notacao

with

$$\mathbf{A} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix}, \mathbf{B} = \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \quad (3.40)$$

### 3.4 Optimization Problem

We can rewrite the cost function as

$$J = \left\| x[k|k] \right\|_P^2 + \overbrace{\left\| \hat{\mathbf{x}} \right\|_{\mathbf{Q}}^2}^{\square} + \left\| \hat{\mathbf{u}} \right\|_{\mathbf{R}}^2 \quad (3.41)$$

$$\square = \left\| \hat{\mathbf{x}} \right\|_{\mathbf{Q}}^2 \quad (3.42)$$

$$= \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.43)$$

$$= \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[ \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.44)$$

$$= \left\| \mathbf{A}x[k|k] \right\|_{\mathbf{Q}}^2 + \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.45)$$

replacing  $\square$  back in the cost equation and reordering the elements

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k|k] \right\|_P^2 + \left\| \mathbf{A}x[k|k] \right\|_{\mathbf{Q}}^2 \quad (3.46)$$

$$+ \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \quad (3.47)$$

$$+ \hat{\mathbf{u}}^T \mathbf{R} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.48)$$

The constant part will be denoted by  $c_0$

Recalling that the matrix  $\mathbf{Q}$  is symmetric, we have:

$$\left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} = \left\{ \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \right\}^T \quad (3.49)$$

As these terms are scalars, it can be concluded that they are equal to each other, therefore:

$$\begin{aligned} & \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \\ &= 2 \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \end{aligned} \quad (3.50)$$

Finally, it can be written

$$J(\hat{\mathbf{u}}) = \hat{\mathbf{u}}^T \left( \mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B} \right) \hat{\mathbf{u}} + 2 \left[ \mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + c_0 \quad (3.51)$$

with

$$c_0 = \left\| x(0) \right\|_P^2 + \left\| \mathbf{A}x(0) \right\|_{\mathbf{Q}}^2 \quad (3.52)$$

$$c_0 = \left\| x[k|k] \right\|_P^2 + \left\| \mathbf{A}x[k|k] \right\|_{\mathbf{Q}}^2$$

Note that we will now use the notation  $J(\hat{\mathbf{u}})$  instead of  $J(\hat{\mathbf{x}}, \hat{\mathbf{u}})$ , since  $\hat{\mathbf{x}}$  has been eliminated from the cost expression.

To finalize the restructuring of the optimization problem in terms of  $\hat{\mathbf{u}}$ , the relation between  $\hat{\mathbf{x}}$  and  $\hat{\mathbf{u}}$  in the **restrictions** must be considered.

The optimization problem can be expressed as

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{nN}, \hat{\mathbf{u}} \in \mathbb{R}^{pN}} J(\hat{x}, \hat{u}) \quad (3.53)$$

where

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k|k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_{\mathbf{Q}}^2 + \left\| \hat{\mathbf{u}} \right\|_{\mathbf{R}}^2 \quad (3.54)$$

with

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathbb{R}^{nN}, \quad (3.55)$$

subject to

$$\mathbf{S}_{\mathbf{x}} \hat{\mathbf{x}}[k] \leq \mathbf{b}_{\mathbf{x}} \quad (3.56)$$

$$\mathbf{S}_{\mathbf{u}} \hat{\mathbf{u}}[k] \leq \mathbf{b}_{\mathbf{u}} \quad (3.57)$$

Thus, the cost can be rewritten as

$$J(\hat{\mathbf{u}}[k]) = \hat{\mathbf{u}}[k]^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \hat{\mathbf{u}}[k] + 2 \left[ \mathbf{A} \hat{x}[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}}[k] + c_0$$

with

$$c_0 = \left\| \hat{x}[k|k] \right\|_P^2 + \left\| \mathbf{A} \hat{x}[k|k] \right\|_{\mathbf{Q}}^2$$

and the constraints can be expressed as

$$\mathbf{S} \hat{\mathbf{u}}[k] \leq \mathbf{b} \quad (3.58)$$

Having obtained the solution  $\hat{\mathbf{u}}^*[k|k]$  for the problem  $\mathbb{P}(\hat{x}[k|k])$ , the control to be applied to the plant is given by

$$\hat{u}[k] = \hat{u}^*[k|k]$$

where  $\hat{u}^*[k|k]$  corresponds to the first  $p$  elements of  $\hat{\mathbf{u}}^*[k|k]$ .



### 3.5 Feasibility Region

We aim to determine the set  $\mathcal{D}$  of points  $x[k] \in \mathcal{X}$  for which there exists  $\hat{\mathbf{u}}[\mathbf{k}] \in \mathbb{R}^{pN}$  satisfying the constraints

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix} \mathbf{u} \leq \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} x[k] \\ \mathbf{b}_u \end{bmatrix} \quad (3.59)$$

These restrictions can be rewritten as

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix} \leq \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \end{bmatrix} \quad (3.60)$$

adding a restriction  $S_x x(0) \leq b_x$

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \\ 0 & S_x \end{bmatrix} \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix} \leq \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \\ b_x \end{bmatrix} \quad (3.61)$$

This can be written in a shorter form

$$S_w w \leq b_w \quad (3.62)$$

with


$$w = \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix}, S_w = \begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \\ 0 & S_x \end{bmatrix}, b_w = \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \\ b_x \end{bmatrix} \quad (3.63)$$

The constraint  $S_w w \leq b_w$  define a polyhedron  $\mathcal{P}_w$  in the space  $\mathbb{R}^{(pN+n)}$  corresponding to the variables  $\mathbf{u}, x(0)$ .

The set  $\mathcal{D}$  is obtained by projection  $\mathcal{P}_w$  onto the subspace of its last  $n$  components.

acertar a notacao nos eixos

The **projection** can be performed using the *projection* function from the *MPT Toolbox*.

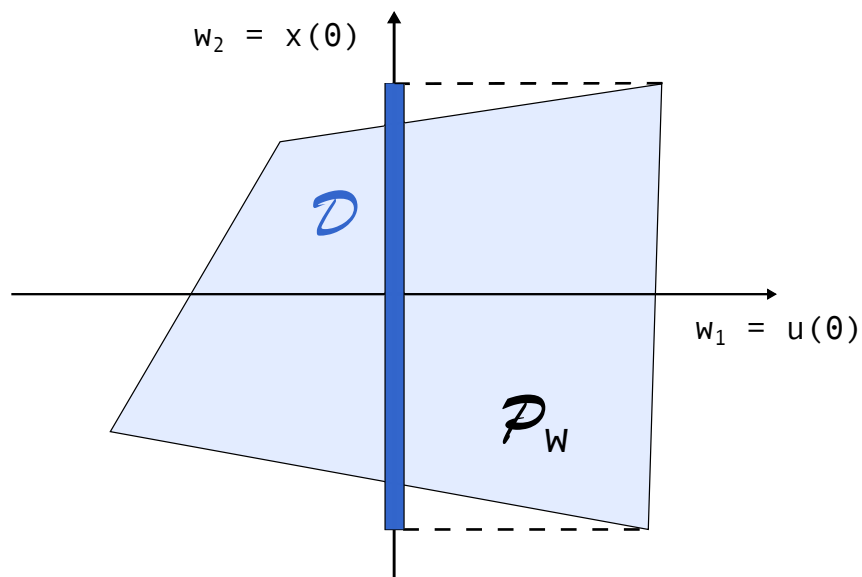FIGURE 3.1 – Illustration for  $n = 1$  state,  $p = 1$  input and  $N = 1$  step

# 4 Predictive Control for Stabilization of Periodic Trajectories

## 4.1 Statement of the problem

Considering a plant with switched-affine dynamics described by:

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)} \quad (4.1)$$

We assume the existence of a periodic switching signal  $\bar{\sigma}(t)$  associated with a periodic trajectory  $\bar{x}(t)$ , as obtained in Chapter 2. Our objective is to introduce perturbations in the switching instants such that the trajectory  $x(t)$  converges to the reference trajectory  $\bar{x}(t)$ .

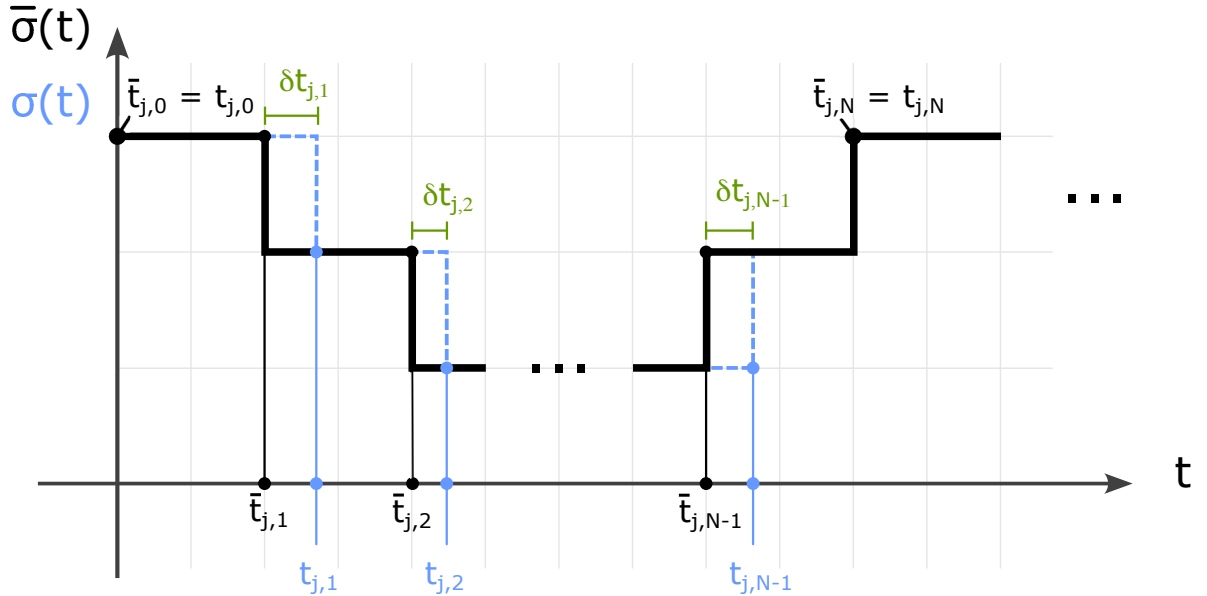


FIGURE 4.1 – Switching signals

Figure 4.1 displays the  $j$ th cycle of the switching signals  $\bar{\sigma}(t)$  and  $\sigma(t)$ , which comprise  $N$  switching actions. Within this cycle, the  $i$ th switching times of  $\bar{\sigma}(t)$  and  $\sigma(t)$  are denoted by  $\bar{t}_{j,i}$  and  $t_{j,i}$ , respectively. The relation between  $\bar{t}_{j,i}$  and  $t_{j,i}$  is

given by

$$t_{j,i} = \bar{t}_{j,i} + \delta t_{j,i} \quad (4.2)$$

In what follows, we derive a linear equation that relates the switching times and the resulting deviation of  $x(t)$  with respect to  $\hat{x}(t)$  at the end of one cycle.

## 4.2 Linearization procedure

explicar que o indice  $j$  sera "dropped for brevity" no desenvolvimento apresentado abaixo

The solution for the state equation (4.1) at time  $t_1$ , starting from the initial condition  $x(t_0)$ , is of the form

$$x(t_1) = e^{A_1(t_1-t_0)}x(t_0) + \int_{t_0}^{t_1} e^{A_1(t_1-\tau)}B_1d\tau \quad (4.3)$$

$$\bar{x}(\bar{t}_1) = e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) + \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)}B_1d\tau \quad (4.4)$$

subtracting (4.4) from (4.3) we get

$$\begin{aligned} x(t_1) - \bar{x}(\bar{t}_1) &= \overbrace{e^{A_1(t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0)}^{\square} \\ &+ \underbrace{\int_{t_0}^{t_1} e^{A_1(t_1-\tau)}B_1d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)}B_1d\tau}_{\bigcirc} \end{aligned} \quad (4.5)$$

expanding (4.5) first in  $\square$ :

$$\begin{aligned} \square &= e^{A_1(t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_1(\bar{t}_1+\delta t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_1(\bar{t}_1-t_0)}e^{\delta t_1}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= \bar{F}_1 e^{\delta t_1}x(t_0) - \bar{F}_1 \bar{x}(\bar{t}_0) \\ &= \bar{F}_1 (I + A_1 \delta t_1)x(t_0) - \bar{F}_1 \bar{x}(\bar{t}_0) \\ &= \bar{F}_1 [x(t_0) - \bar{x}(\bar{t}_0)] + \bar{F}_1 A_1 \delta t_1 \end{aligned} \quad (4.6)$$

and then in  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_0}^{t_1} e^{A_1(t_1-\tau)} B_1 d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= \int_{t_0}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_1+\delta t_1-\tau)} B_1 d\tau - \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_1} \left[ \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau + \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_1(t_1-\tau)} B_1 d\tau \right] - \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_1} [\bar{G}_1 + B_1\delta t_1] - \bar{G}_1 \\
 &= (I + A_1\delta t_1)[\bar{G}_1 + B_1\delta t_1] - \bar{G}_1 \\
 &= \cancel{\bar{G}_1} + B_0\delta t_1 + A_1\bar{G}_1\delta t_1 + \cancel{A_1B_1\delta t_1\delta t_1} - \cancel{\bar{G}_1} \\
 &= A_1\bar{G}_1\delta t_1 + B_1\delta t_1
 \end{aligned} \tag{4.7}$$

the resulting equations (4.6) and (4.7) are replaced back in (4.5) to complete the difference equation

$$x(t_1) - \bar{x}(\bar{t}_1) = \bar{F}_1[x(t_0) - \bar{x}(\bar{t}_0)] + [\bar{F}_1A_1x(t_0) + A_1\bar{G}_1 + B_1]\delta t_1 \tag{4.8}$$

Repeating the steps for  $x(t_2)$  we have

$$x(t_2) = e^{A_2(t_2-t_1)}x(t_1) + \int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau \tag{4.9}$$

$$\bar{x}(\bar{t}_2) = e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) + \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \tag{4.10}$$

subtracting (4.10) from (4.9)

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \overbrace{e^{A_2(t_2-t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1)}^{\square} \\
 &\quad + \underbrace{\int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau}_{\bigcirc}
 \end{aligned} \tag{4.11}$$

expanding  $\square$  in (4.11):

$$\begin{aligned}
 \square &= e^{A_2(\bar{t}_2+\delta t_2-\bar{t}_1-\delta t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) \\
 &= e^{A_2(\bar{t}_2-\bar{t}_1)}e^{A_2(\delta t_2-\delta t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) \\
 &= \bar{F}_2[I + A_2(\delta t_2 - \delta t_1)]x(t_1) - \bar{F}_2\bar{x}(\bar{t}_1) \\
 &= \bar{F}_2[x(t_1) - \bar{x}(\bar{t}_1)] + \bar{F}_2A_2x(t_1)\delta t_2 - \bar{F}_2A_2x(t_1)\delta t_1
 \end{aligned} \tag{4.12}$$

and expanding  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \\
 &= \int_{\bar{t}_1+\delta t_1}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2+\delta t_2-\tau)} B_2 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \\
 &= e^{A_2\delta t_2} \left[ \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \right] \\
 &\quad - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \\
 &= (I + A_2\delta t_2) \left[ \bar{G}_2 - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_2) \left[ \bar{G}_2 - e^{A_2(\bar{t}_2-\bar{t}_1)} B_2 \delta t_1 + B_2 \delta t_2 \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_2) \left[ \bar{G}_2 - \bar{F}_2 B_2 \delta t_1 + B_2 \delta t_2 \right] - \bar{G}_2 \\
 &= \cancel{\bar{G}_2} - \bar{F}_2 B_2 \delta t_1 + B_2 \delta t_2 + A_2 \bar{G}_2 \delta t_2 - \cancel{\bar{G}_2} \\
 &= A_2 \bar{G}_2 \delta t_2 + B_2 \delta t_2 - \bar{F}_2 B_2 \delta t_1
 \end{aligned} \tag{4.13}$$

and replacing (4.12) and (4.13) back into equation (4.11) we get to the difference equation for  $x(t_2) - \bar{x}(\bar{t}_2)$

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 [x(t_1) - \bar{x}_1(\bar{t}_1)] \\
 &\quad - \bar{F}_2 [A_2 x(t_1) + B_2] \delta t_1 \\
 &\quad + [\bar{F}_2 A_2 \underbrace{x(t_1)}_{\triangle} + A_2 \bar{G}_2 + B_2] \delta t_2
 \end{aligned} \tag{4.14}$$

from (4.14),  $\triangle$  can be expanded by replacing the resulting equation of (4.8)

$$\triangle = x(t_1) = \bar{x}(\bar{t}_1) + \bar{F}_1 [x(t_0) - \bar{x}(t_0)] + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \delta t_1 \tag{4.15}$$

note that when  $\triangle$  is replaced in eq. (4.14) it will produce a product with  $\delta t_1$  and  $\delta t_2$  like

$$x(t_1) \delta t_1 = \bar{x}(\bar{t}_1) \delta t_1 + \bar{F}_1 \overbrace{[x(t_0) - \bar{x}(t_0)]}^{\square} \delta t_1 + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \overbrace{\delta t_1 \delta t_1}^{\bigcirc}$$

both  $\square$  and  $\bigcirc$  are products of differences that produces a smaller number and they will be neglected in the first order approximations

$$x(t_1) \delta t_1 \doteq \bar{x}(\bar{t}_1) \delta t_1 \tag{4.16}$$

replacing (4.8) and (4.15) in (4.14) it follows that

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 \{ \bar{F}_1 [x(t_0) - \bar{x}(t_0) + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \delta t_1] \} \\
 &\quad - \bar{F}_2 [A_2 \bar{x}(t_1) + B_2] \delta t_1 \\
 &\quad + [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 + B_2] \delta t_2
 \end{aligned}$$

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 &\quad + [\bar{F}_2 A_2 \bar{x}(\bar{t}_1) + A_2 \bar{G}_2 + B_2] \delta t_2
 \end{aligned} \tag{4.17}$$

Repeating the procedure for  $x(t_3)$  we have

$$x(t_3) = e^{A_3(t_3-t_2)} x(t_2) + \int_{t_2}^{t_3} e^{A_3(t_3-\tau)} B_3 d\tau \tag{4.18}$$

$$\bar{x}(\bar{t}_3) = e^{A_3(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2) + \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau \tag{4.19}$$

subtracting (4.18) from (4.19)

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \overbrace{e^{A_3(t_3-t_2)} x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2)}^{\square} \\
 &\quad + \underbrace{\int_{t_2}^{t_3} e^{A_3(t_3-\tau)} B_3 d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau}_{\bigcirc}
 \end{aligned} \tag{4.20}$$

expanding  $\square$  in (4.20):

$$\begin{aligned}
 \square &= e^{A_3(\bar{t}_3+\delta t_3-\bar{t}_2-\delta t_2)} x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2) \\
 &= e^{A_3(\bar{t}_3-\bar{t}_2)} e^{A_3(\delta t_3-\delta t_2)} x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2) \\
 &= \bar{F}_3 [I + A_3(\delta t_3 - \delta t_2)] x(t_2) - \bar{F}_3 \bar{x}(\bar{t}_2) \\
 &= \bar{F}_3 [x(t_2) - \bar{x}(\bar{t}_2)] + \bar{F}_3 A_3 x(t_2) \delta t_3 - \bar{F}_3 A_3 x(t_2) \delta t_2
 \end{aligned} \tag{4.21}$$

and expanding  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_2}^{t_3} e^{A_3(t_3-\tau)} B_3 d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau \\
 &= \int_{\bar{t}_2+\delta t_2}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3+\delta t_3-\tau)} B_3 d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau \\
 &= e^{A_3\delta t_3} \left[ \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau \right] \\
 &\quad - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau \\
 &= (I + A_3\delta t_3) \left[ \bar{G}_3 - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3-\tau)} B_3 d\tau \right] - \bar{G}_3 \\
 &= (I + A_3\delta t_3) \left[ \bar{G}_3 - e^{A_3(\bar{t}_3-\bar{t}_2)} B_3 \delta t_2 + B_3 \delta t_3 \right] - \bar{G}_3 \\
 &= (I + A_3\delta t_3) \left[ \bar{G}_3 - \bar{F}_3 B_3 \delta t_2 + B_3 \delta t_3 \right] - \bar{G}_3 \\
 &= \cancel{\bar{G}_3} - \bar{F}_3 B_3 \delta t_2 + B_3 \delta t_3 + A_3 \bar{G}_3 \delta t_3 - \cancel{\bar{G}_3} \\
 &= A_3 \bar{G}_3 \delta t_3 + B_3 \delta t_3 - \bar{F}_3 B_3 \delta t_2
 \end{aligned} \tag{4.22}$$

and then replacing (4.21) in (4.22) back in eq. (4.20) we get to the difference equation for  $x(t_3) - \bar{x}(\bar{t}_3)$

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \bar{F}_3 [x(t_2) - \bar{x}(\bar{t}_2)] \\
 &\quad - \bar{F}_3 [A_3 x(t_2) + B_3] \delta t_2 \\
 &\quad + [\bar{F}_3 A_3 x(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned} \tag{4.23}$$

from (4.17),  $\triangle$  can be expanded the same way as in the past iteration and  $x(t_2) - \bar{x}(\bar{t}_2)$  can be replaced in (4.23)

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \bar{F}_3 \{ \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 &\quad + [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \} \\
 &\quad - \bar{F}_3 [A_3 \bar{x}(t_2) + B_3] \delta t_2 \\
 &\quad + [\bar{F}_3 A_3 \bar{x}(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned}$$

after rearranging the terms, one arrives at



$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) = & \bar{F}_3 \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_3 \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + \bar{F}_3 [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & + [\bar{F}_3 A_3 \bar{x}(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned} \tag{4.24}$$

Now, there are enough iterations to deduce a pattern on each increment of the equation, so the equation for  $x(t_i)$  can be deduced as

$$\begin{aligned}
 x(t_i) - \bar{x}(\bar{t}_i) = & \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_1 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_2 [\bar{F}_2 A_2 x(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & \vdots \\
 & + \bar{F}_i [\bar{F}_{i-1} A_{i-1} \bar{x}(t_{i-2}) + A_{i-1} \bar{G}_{i-1} - A_i \bar{x}(\bar{t}_{i-1}) + B_{i-1} - B_i] \delta t_{i-1} \\
 & + [\bar{F}_i A_i \bar{x}(t_i) + A_i \bar{G}_i + B_i] \delta t_i
 \end{aligned}$$

(4.25)

and then, for  $x(t_N)$  the equation is as follows

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) = & \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 \overbrace{[\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2]}^{\square} \delta t_1 \\
 & + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [\bar{F}_2 A_2 x(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & \vdots \\
 & + \bar{F}_N [\bar{F}_{N-1} A_{N-1} \bar{x}(t_{N-2}) + A_{N-1} \bar{G}_{N-1} - A_N \bar{x}(\bar{t}_{N-1}) \\
 & \quad + B_{N-1} - B_N] \delta t_{N-1} \\
 & + \underbrace{[\bar{F}_N A_{N-1} \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N]}_{\bigcirc} \delta t_N
 \end{aligned} \tag{4.26}$$

The equation (4.26) can be developed further to remove the dependencies on the in-

termediary states  $x(t_0), x(t_1), \dots, x(t_{N-2})$ . By expanding  $\square$  and  $\bigcirc$ , the following identity holds

$$\begin{aligned}
 \square &= \bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 \bar{F}_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 [\bar{x}(\bar{t}_1) - \bar{G}_1] + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 \bar{x}(\bar{t}_1) - \cancel{A_1 \bar{G}_1} + \cancel{A_1 \bar{G}_1} - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= (A_1 - A_2) \bar{x}(\bar{t}_1) + B_1 - B_2
 \end{aligned} \tag{4.27}$$

$$\begin{aligned}
 \bigcirc &= \bar{F}_N A_N \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N \\
 &= A_N \bar{F}_N \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N \\
 &= A_N [\bar{x}(\bar{t}_N) - \bar{G}_N] + A_N \bar{G}_N + B_N \\
 &= A_N \bar{x}(\bar{t}_N) - \cancel{A_N \bar{G}_N} + \cancel{A_N \bar{G}_N} + B_N \\
 &= A_N \bar{x}(\bar{t}_N) + B_N
 \end{aligned} \tag{4.28}$$

replacing (4.27) and (4.28) in (4.26)

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) &= \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 [(A_1 - A_2) \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [(A_2 - A_3) \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 &\quad \vdots \\
 &\quad + \bar{F}_N [(A_{N-1} - A_N) \bar{x}(\bar{t}_{N-1}) + B_{N-1} - B_N] \delta t_{N-1} \\
 &\quad + [A_N \bar{x}(\bar{t}_N) + B_N] \delta t_N
 \end{aligned}$$

(4.29)

and renaming the terms of (4.29) to

$$e(t) = x(t) - \bar{x}(\bar{t}) \quad (4.30)$$

$$\Phi = \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 \quad (4.31)$$

$$\begin{aligned} \Gamma = & \begin{bmatrix} \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 [(A_1 - A_2)\bar{x}(\bar{t}_1) + B_1 - B_2], \\ \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [(A_2 - A_3)\bar{x}(\bar{t}_2) + B_2 - B_3], \\ \vdots \\ \bar{F}_N [(A_{N-1} - A_N)\bar{x}(\bar{t}_{N-1}) + B_{N-1} - B_N], \\ A_N \bar{x}(\bar{t}_N) + B_N \end{bmatrix} \end{aligned} \quad (4.32)$$

$$\delta t = [\delta t_1, \delta t_2, \dots, \delta t_N]^T \quad (4.33)$$

we get to the affine equation

$$e(t_N) = \Phi e(t_0) + \Gamma \delta t \quad (4.34)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.35)$$

where  $\bar{x}$  is calculated as

$$\bar{x}(\bar{t}_1) = F_1 \bar{x}(\bar{t}_0) + G_1 \quad (4.36)$$

$$\bar{x}(\bar{t}_2) = F_2 \bar{x}(\bar{t}_1) + G_2 \quad (4.37)$$

$$\vdots$$

$$\bar{x}(\bar{t}_N) = F_N \bar{x}(\bar{t}_{N-1}) + G_N \quad (4.38)$$

and  $F_i$  and  $G_i$  are calculated as

$$F_i = e^{A_i(t_i - t_{i-1})} \quad (4.39)$$

$$G_i = \int_{\bar{t}_{i-1}}^{\bar{t}_i} e^{A_i(\bar{t}_i - \tau)} B_i d\tau \quad (4.40)$$

### 4.3 MPC Problem

Note that the equation (4.34) relates to the equation (3.1) as both describe the evolution of a system over time. The equation (3.1) represents the system's state and input at a given time step, and the equation (4.34) describes the error between the system's predicted and actual values at two different time points.

Referring to equation (3.1), we can make some substitutions to simplify our discussion. We'll replace variable  $x$  with  $e$ , and  $u$  with  $\delta t$ . Additionally, we'll denote the cycle index with  $k$ . With these substitutions in place, we arrive at equation (4.34).

#### 4.3.1 Cost Function

as equacoes precisam ser precedidas por um texto explicativo. falta tambem definir  $e[j]$  e  $N_p$

$$J = \left\| e[N_p] \right\|_{P_f}^2 + \sum_{j=0}^{N_p-1} \left\| e[j] \right\|_Q^2 + \left\| \delta t[j] \right\|_R^2 \quad (4.41)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.42)$$

where  $Q = Q^T > 0$ ,  $R = R^T > 0$

$$\delta t[j] = \left[ t_{j,1} - \bar{t}_{j,1}, t_{j,2} - \bar{t}_{j,2}, \dots, t_{j,N-1} - \bar{t}_{j,N-1} \right]^T \quad (4.43)$$

#### 4.3.2 Dwell-time Constraints

introduzir o indice  $j$

We want to enforce a constraint on the dwell times where the switching times will be greater than a minimum value

$$(t_i - t_{i-1}) \geq \Delta t_{i,min}, \quad i = 1, 2, \dots, N \quad (4.44)$$

we can write this as

$$\delta t_1 \geq -\Delta \bar{t}_1 + \Delta t_{1,min} \quad (4.45)$$

$$\delta t_i - \delta t_{i-1} \geq -\Delta \bar{t}_i + \Delta t_{i,min}, \quad i = 1, 2, \dots, N \quad (4.46)$$

$$\delta t_{N-1} \geq -\Delta \bar{t}_N + \Delta t_{N,min} \quad (4.47)$$

with

$$\Delta \bar{t}_i = \bar{t}_i - \bar{t}_{i-1} \quad (4.48)$$

Rearranging this to a matrix form we have

$$L\delta t \geq c \quad (4.49)$$

with

$$L = \begin{bmatrix} 1 & 0 & 0 & \cdots & 0 & 0 \\ -1 & 1 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \\ 0 & 0 & 0 & \cdots & -1 & 1 \\ 0 & 0 & 0 & \cdots & 0 & -1 \end{bmatrix} \quad (4.50)$$

$$\delta t = \begin{bmatrix} \delta t_1 \\ \delta t_2 \\ \vdots \\ \delta t_{N-1} \\ \delta t_N \end{bmatrix} \quad (4.51)$$

$$c = \begin{bmatrix} -\Delta \bar{t}_1 + \Delta t_{1,min} \\ -\Delta \bar{t}_2 + \Delta t_{2,min} \\ \vdots \\ -\Delta \bar{t}_{N-1} + \Delta t_{N-1,min} \\ -\Delta \bar{t}_N + \Delta t_{N,min} \end{bmatrix} \quad (4.52)$$

To use this with the constraints  $S\hat{u}[k] \leq b$ , this can be rearranged as

$$-L\delta t \leq -c$$

## 4.4 Application Examples

### 4.4.1 Double Integrator

#### 4.4.1.1 Parameters of the Simulation

This example describes the double integrator model used in Marcolino (2018) of the form

$$\dot{x}(t) = A_x x(t) + B_c u(t) \quad (4.53)$$

where

$$A_c = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}, B_c = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad (4.54)$$

and the associated input signal is

definir  $u_r$  e  $T_s$

$$u_r = \begin{bmatrix} 1 \\ 0 \\ -1 \\ 0 \end{bmatrix}, T_s = [0 \quad 2 \quad 3 \quad 5 \quad 6] \quad (4.55)$$

toda figura tem que ser cetada no texto

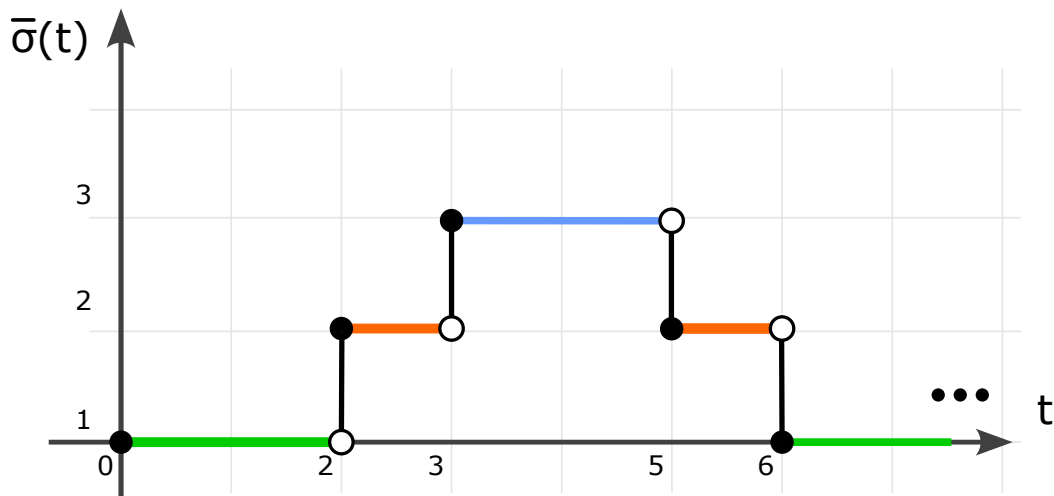


FIGURE 4.2 – Reference signal for Double Integrator

The original problem has the same dynamics during all operations, so we need to construct the associated  $A_i, b_i$  for each operation mode. One solution is to create 3 unique pairs

$$A_1 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \quad A_2 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \quad A_3 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$$

$$b_1 = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad b_2 = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad b_3 = \begin{bmatrix} 0 \\ -1 \end{bmatrix}$$

foram usados? foi feita uma otimizacao da trajetoria de referencia?

and the index for the operation mode  $\Omega = [1, 2, 3, 2]$ , with reference state vector for this trajectory is  $\bar{x}_{ref} = [2, -1]$ , the maximum value for the period of the trajectory cycle  $T_{pmax} = 1$  and initial state of the nominal target trajectory  $x_0 = [1.5, -1]$ .

#### 4.4.1.2 Prediction Matrices

From (4.32) and (4.33) we construct

$$\Phi = \begin{bmatrix} 1 & 6 \\ 0 & 1 \end{bmatrix} \quad (4.56)$$

$$\Gamma = \begin{bmatrix} 4 & 3 & -1 \\ 1 & 1 & -1 \end{bmatrix} \quad (4.57)$$

with the switching time constraints

$$c = \begin{bmatrix} -\Delta t_{r_1} + \Delta t_{r_1, min} \\ -\Delta t_{r_2} + \Delta t_{r_2, min} \\ \vdots \\ -\Delta t_{r_{N-1}} + \Delta t_{r_{N-1}, min} \\ -\Delta t_{r_N} + \Delta t_{r_N, min} \end{bmatrix} = \begin{bmatrix} -2 + 1.625 \\ -1 + 0.635 \\ -2 + 1.625 \\ -1 + 0.625 \end{bmatrix} = \begin{bmatrix} -0.375 \\ -0.365 \\ -0.375 \\ -0.365 \end{bmatrix} \quad (4.58)$$

#### 4.4.1.3 Results

- FALTA SIMULAR A REGIAO DE FACTIBILIDADE

The simulation uses the system (4.54) with the command signal (4.55) and with a initial condition  $x_0 = [1.5, -0.5]$ . Figure 4.3 shows the simulation without the MPC control being applied running for 5 cycles and we can see that the trajectory is diverging from the initial position of the target cyclic trajectory  $\bar{x}_0 = [-0.5, -1.0]$  position.

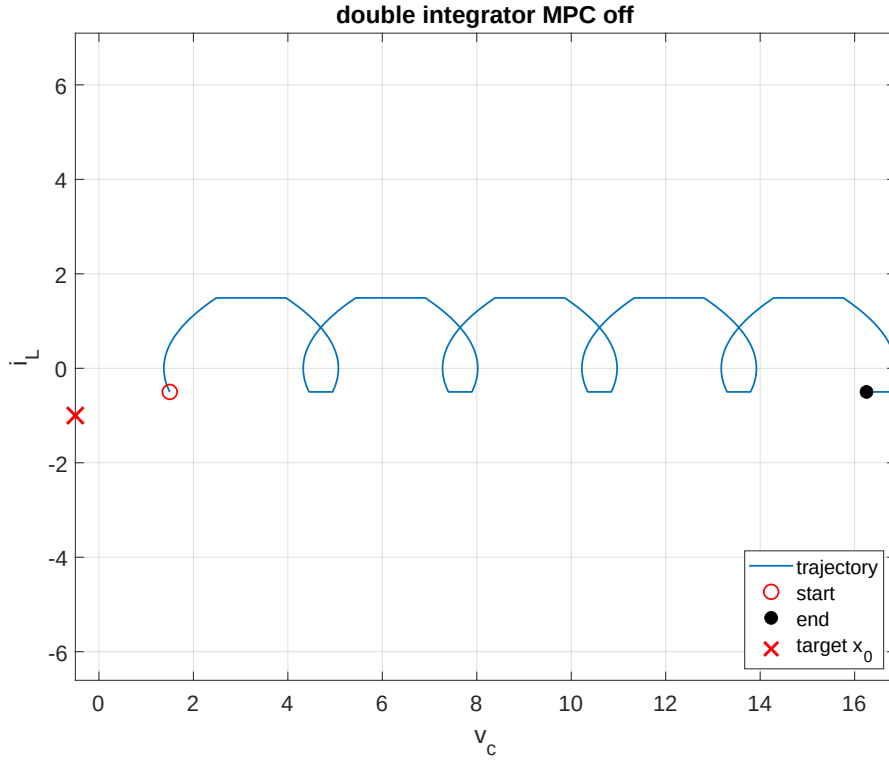


FIGURE 4.3 – State Trajectory MPC off, 4 cycles

Now, for the same condition, we can turn on the MPC controller and run the simulation for 50 cycles. Figure 4.4 shows the resulting trajectory and Figure 4.5 shows the associated command signal. We can see that the controller drives the trajectory of the system to the target cyclic trajectory, we also that the command signal get in sync with the reference command.



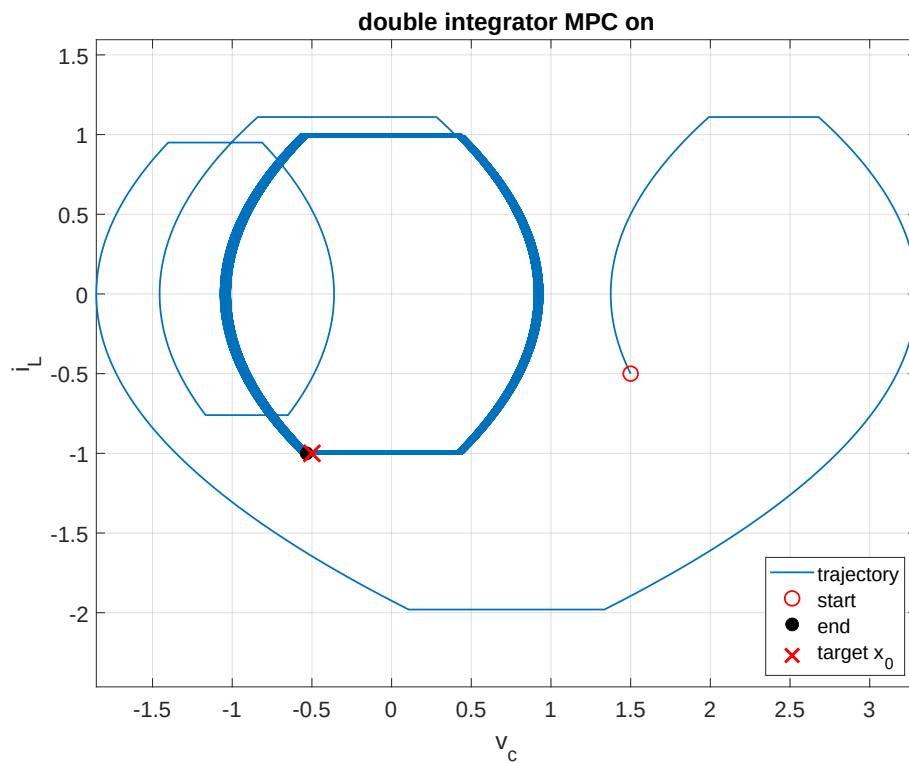


FIGURE 4.4 – State Trajectory MPC on, 50 cycles

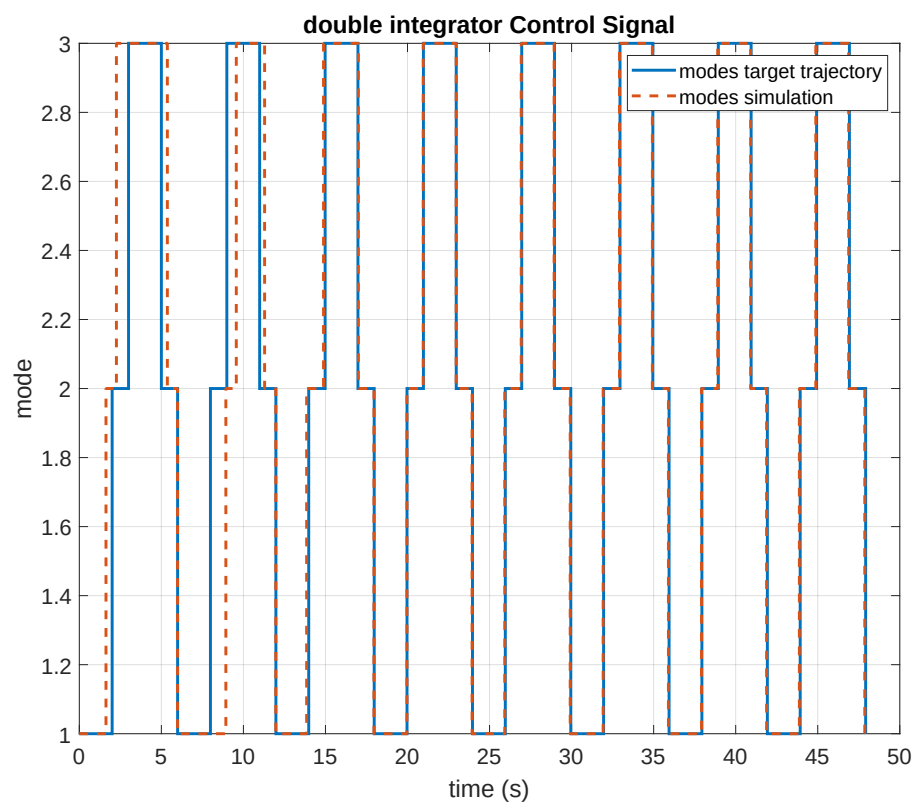


FIGURE 4.5 – Operation mode switch

## 4.4.2 Buck-boost converter

### 4.4.2.1 Parameters of the Simulation

This example describes the Buck-boost converter model described in session 2.3.1, the associated mode sequence for the target cyclic trajectory is shown in Figure 4.6

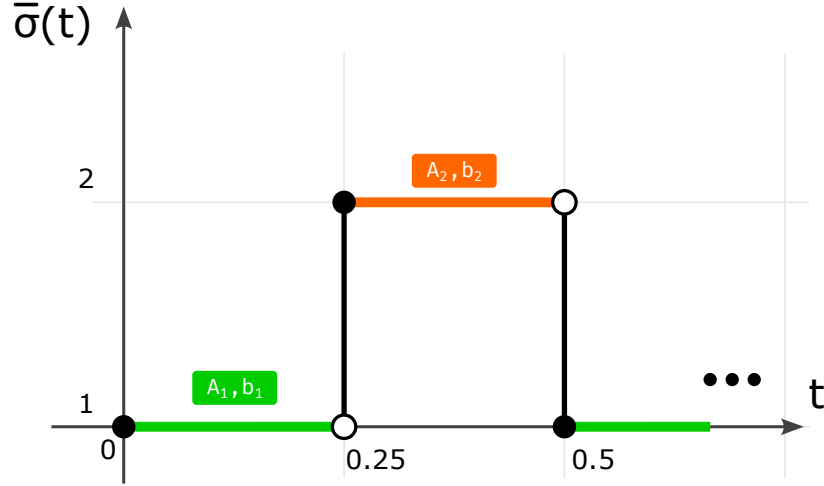


FIGURE 4.6 – Reference sequence for Buck-boost converter

where

$$A_1 = \begin{bmatrix} 0 & 0 \\ 0 & -1/(RC) \end{bmatrix}, \quad A_2 = \begin{bmatrix} 0 & 1/L \\ -1/C & -1/(RC) \end{bmatrix}$$

$$b_1 = \begin{bmatrix} E/L \\ 0 \end{bmatrix} \quad b_2 = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$$

and the operation mode is characterized by the index  $\Omega = [1, 2]$ . The time switch values are defined as  $\tau^\infty = [0, 0.2513, 0.5914]$ , and the reference state vector for this trajectory is denoted as  $x_{ref} = [2, -1]$ . Additionally, the maximum period value for the trajectory cycle is specified as  $T_{pmax} = 1$ , while the initial state of the nominal target trajectory is given by  $x_0 = [1.8708, -1.1198]$ . The time step of the simulation is  $t_{step} = 1 \times 10^{-5}$  and the weight matrix used in the computation of the trajectory is  $Q$  is a diagonal matrix of ones.

### 4.4.2.2 Prediction Matrices

The prediction matrices are constructed using (4.32) and (4.33), and the result is

$$\Phi = \begin{bmatrix} 0.9713 & 0.2192 \\ -0.1707 & 0.5857 \end{bmatrix} \quad (4.59)$$

$$\Gamma = \begin{bmatrix} 2.4556 \\ 0.9280 \end{bmatrix} \quad (4.60)$$

with the switching time constraints

$$c = \begin{bmatrix} -\Delta t_{r_1} + \Delta t_{r_1, \min} \\ -\Delta t_{r_2} + \Delta t_{r_2, \min} \\ \vdots \\ -\Delta t_{r_{N-1}} + \Delta t_{r_{N-1}, \min} \\ -\Delta t_{r_N} + \Delta t_{r_N, \min} \end{bmatrix} = \begin{bmatrix} -0.25 + 0.25 \\ -0.2504 + 0.25 \end{bmatrix} = \begin{bmatrix} 0 \\ -0.04 \end{bmatrix} \quad (4.61)$$

#### 4.4.2.3 Results

Figure 4.6 shows the simulation of the trajectory for the system, in blue we see the trajectory without using the MPC controller, and in orange we see the trajectory using the MPC controller. They are both starting from  $x_0 = [2.0493, -0.6108]$  and converge to the initial position of the target cyclic trajectory  $\bar{x}_0 = [1.8493, -1.1108]$ . Note that the trajectory with the MPC controller converges faster to the cyclic trajectory.

Figure 4.8 shows the control signal sequence, where we can see that the difference between the nominal target trajectory and the controlled trajectory decrease as they get in sync with each other.

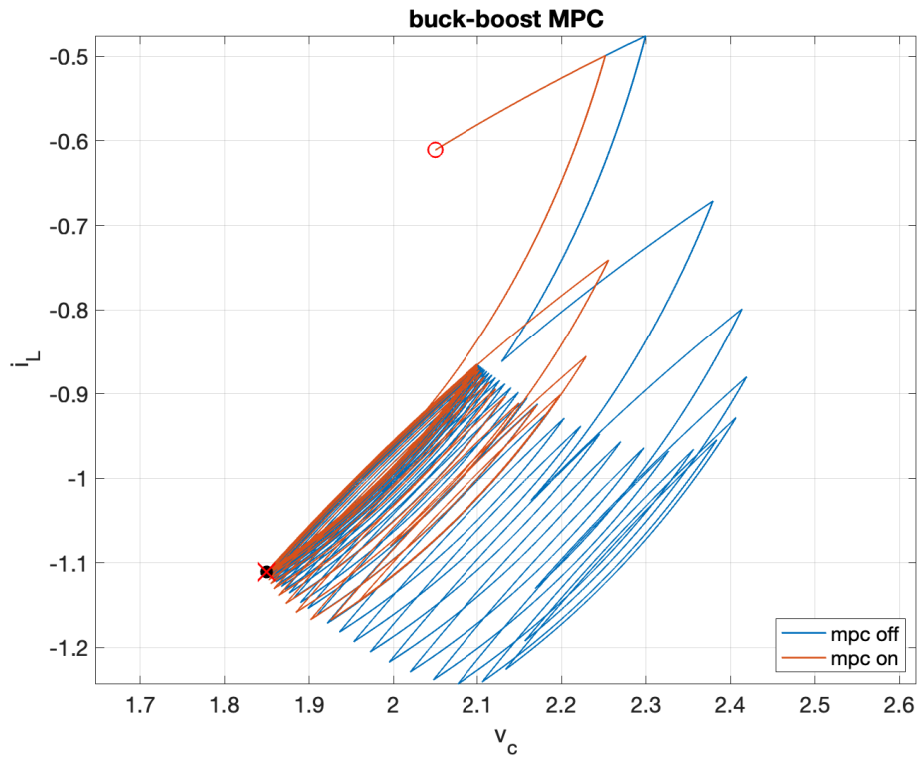


FIGURE 4.7 – State Trajectory for Buck-Boost converter

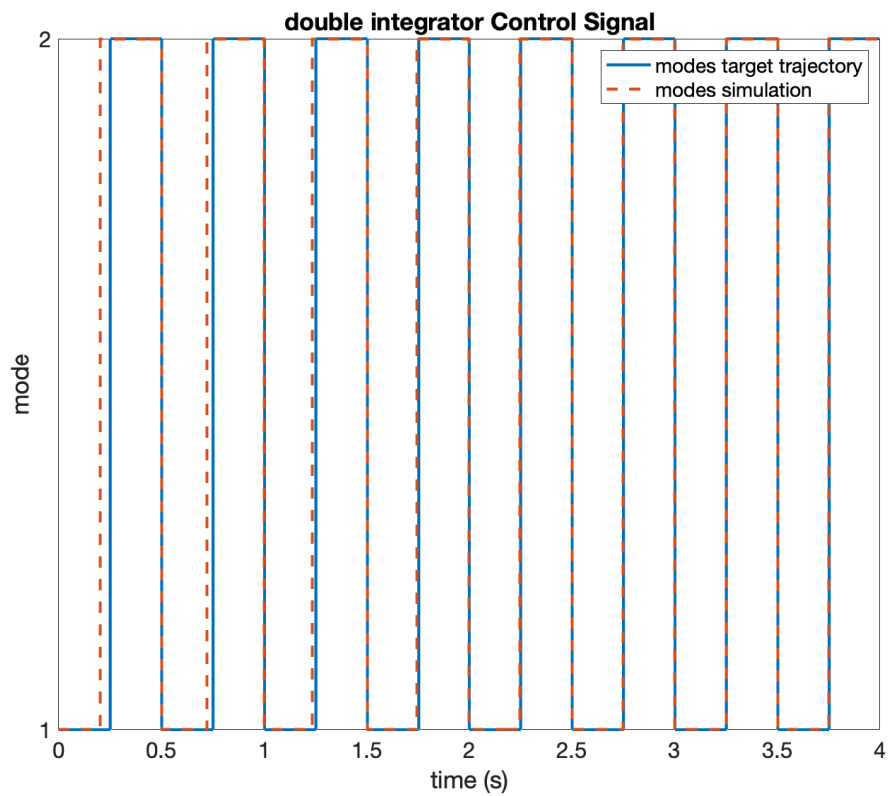


FIGURE 4.8 – Control Signal Sequence for Buck-Boost converter

### 4.4.3 Multilevel converter

#### 4.4.3.1 Parameters of the Simulation

This example describes the Multilevel converter model described in session 2.3.2, the associated mode sequence for the target cyclic trajectory is shown in Figure 4.9.

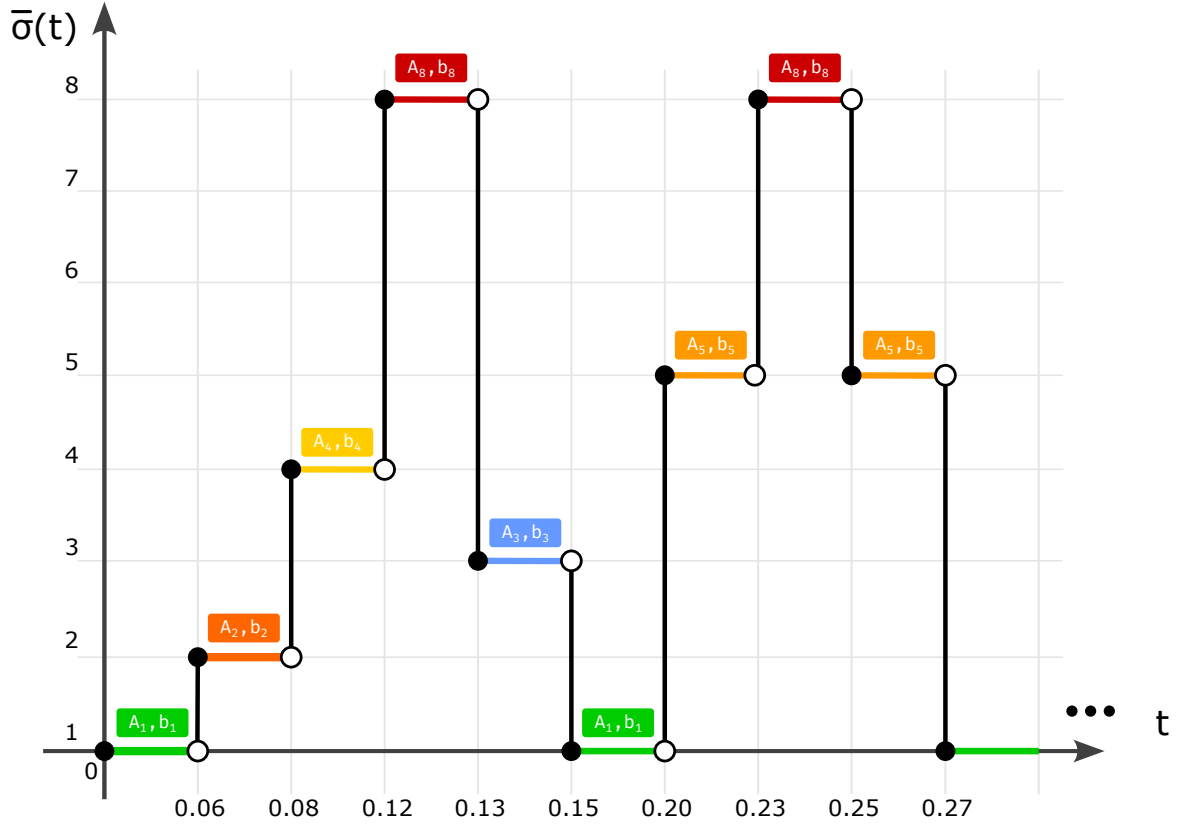


FIGURE 4.9 – Reference sequence for Multilevel converter

where

$$A_i = \begin{bmatrix} 0 & 0 & \begin{pmatrix} u_2(i) - u_1(i) \\ u_3(i) - u_2(i) \end{pmatrix} / C1 \\ 0 & 0 & \begin{pmatrix} u_2(i) - u_3(i) \\ -R/L \end{pmatrix} / L \end{bmatrix} \quad (4.62)$$

$$b_i = \begin{bmatrix} 0 \\ 0 \\ (E/L)u_3(i) \end{bmatrix}$$

with  $R = 10.0\Omega$ ,  $L = 10.0mH$ ,  $C_1 = 40.0\mu F$ ,  $C_2 = 40.0 \times 10^{-6}\mu F$ ,  $E = 30.0V$

and  $u(i)$  is

TABLE 4.1 – Values of  $u_i$  for the Multilevel converter

| mode (i) | $u_1$ | $u_2$ | $u_3$ |
|----------|-------|-------|-------|
| 1        | 0     | 0     | 0     |
| 2        | 0     | 0     | 1     |
| 3        | 0     | 1     | 0     |
| 4        | 0     | 1     | 1     |
| 5        | 1     | 0     | 0     |
| 6        | 1     | 0     | 1     |
| 7        | 1     | 1     | 0     |
| 8        | 1     | 1     | 1     |

and the operation mode is characterized by the index  $\Omega = [1, 2, 4, 8, 3, 1, 5, 8, 5]$ . The time switch values are defined as  $\tau^\infty = [0, 0.0639, 0.0878, 0.1119, 0.1344, 0.1567, 0.2065, 0.23, 0.2529, 0.2756]$ , and the reference state vector for this trajectory is denoted as  $x_{ref} = [10, 20, 1]$ . Additionally, the maximum period value for the trajectory cycle is specified as  $T_{p_{max}} = 4 \times 10^{-4}$ , while the initial state of the nominal target trajectory is given by  $x_0 = [9.5143, 19.8211, 1.0314]$ . The time step of the simulation is  $t_{step} = 1 \times 10^{-7}$  and the weight matrix used in the computation of the trajectory is  $Q = diag([10, 5, 20000])$ .

#### 4.4.3.2 Prediction Matrices

The prediction matrices are constructed using (4.32) and (4.33), and the result is

$$\Phi = \begin{bmatrix} 0.999539 & 0.001900 & -0.124610 \\ -0.002031 & 0.999915 & 0.000764 \\ -0.000461 & -0.000290 & 0.759578 \end{bmatrix} \quad (4.63)$$

$$\Gamma = \begin{bmatrix} 0.007784 & -2.578391 & -0.081618 \\ -2.400410 & 2.472097 & -0.079094 \\ 2.477894 & 0.042370 & -0.076050 \\ -2.602774 & 2.388977 & 0.171509 \\ 2.472432 & -2.594318 & 0.102211 \\ 2.703328 & 0 & -0.087828 \\ -2.354659 & 0 & -0.189865 \\ 2.354483 & 0 & 0.199932 \end{bmatrix}^T * \times 10^4 \quad (4.64)$$

with the switching time constraints

$$c = \begin{bmatrix} -\Delta t_{r_1} + \Delta t_{r_1, \min} \\ -\Delta t_{r_2} + \Delta t_{r_2, \min} \\ \vdots \\ -\Delta t_{r_{N-1}} + \Delta t_{r_{N-1}, \min} \\ -\Delta t_{r_N} + \Delta t_{r_N, \min} \end{bmatrix} = \begin{bmatrix} -0.638811 + 0.20 \\ -0.239318 + 0.20 \\ -0.240440 + 0.20 \\ -0.225094 + 0.20 \\ -0.223339 + 0.20 \\ -0.497696 + 0.20 \\ -0.235714 + 0.20 \\ -0.228086 + 0.20 \\ -0.227575 + 0.20 \end{bmatrix} \times 10^{-4} = \begin{bmatrix} -0.438811 \\ -0.039318 \\ -0.040440 \\ -0.025094 \\ -0.023339 \\ -0.297696 \\ -0.035714 \\ -0.028086 \\ -0.027575 \end{bmatrix} \times 10^{-4} \quad (4.65)$$

#### 4.4.3.3 Results

Figure 4.10 shows the trajectory for the Multilevel converter, in blue we see the trajectory without using the MPC controller, and in orange we see the trajectory using the MPC controller. They are starting from  $x_0 = [7.5143, 20.8211, 0.0314]$ , the trajectory with the MPC off goes to a point far from the targeted position  $\bar{x}_0 = [9.5143, 19.8211, 1.0314]$ , but the trajectory with the MPC on goes drives the system to the desired target.

Figure 4.15 displays the control signal sequence, we can see the difference between the open loop and the controlled signal decreasing and getting in sync.

adicionar texto para seguindo grafico de trajetoria

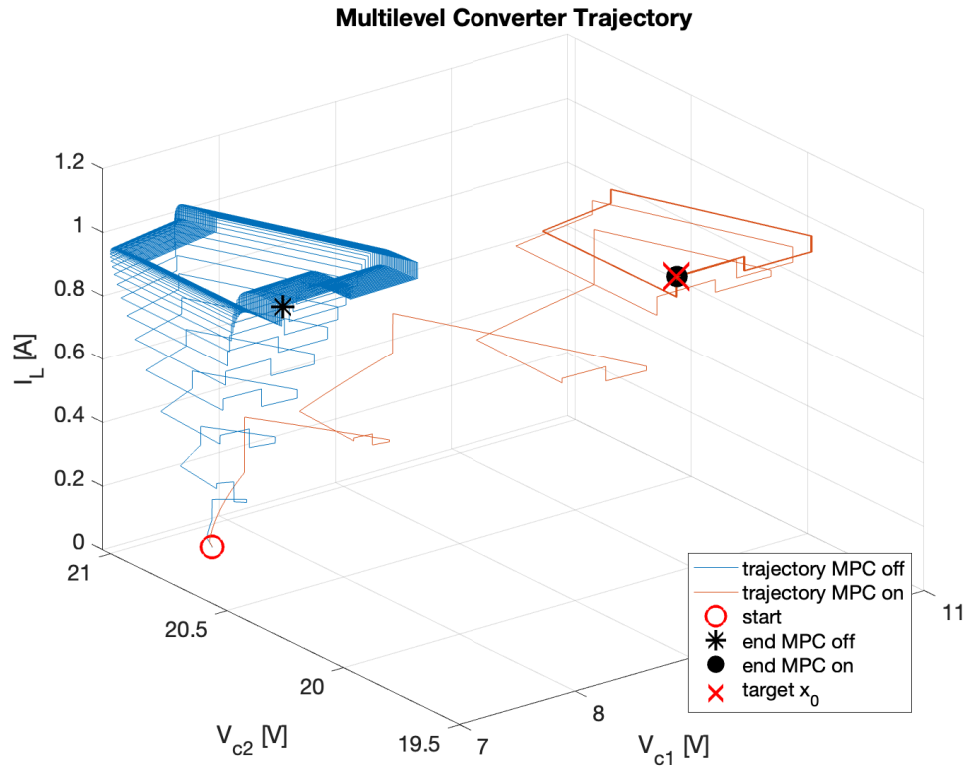


FIGURE 4.10 – Multilevel converter: State Trajectory,  $x_0 = [7.51, 20.82, 0.03]^T$

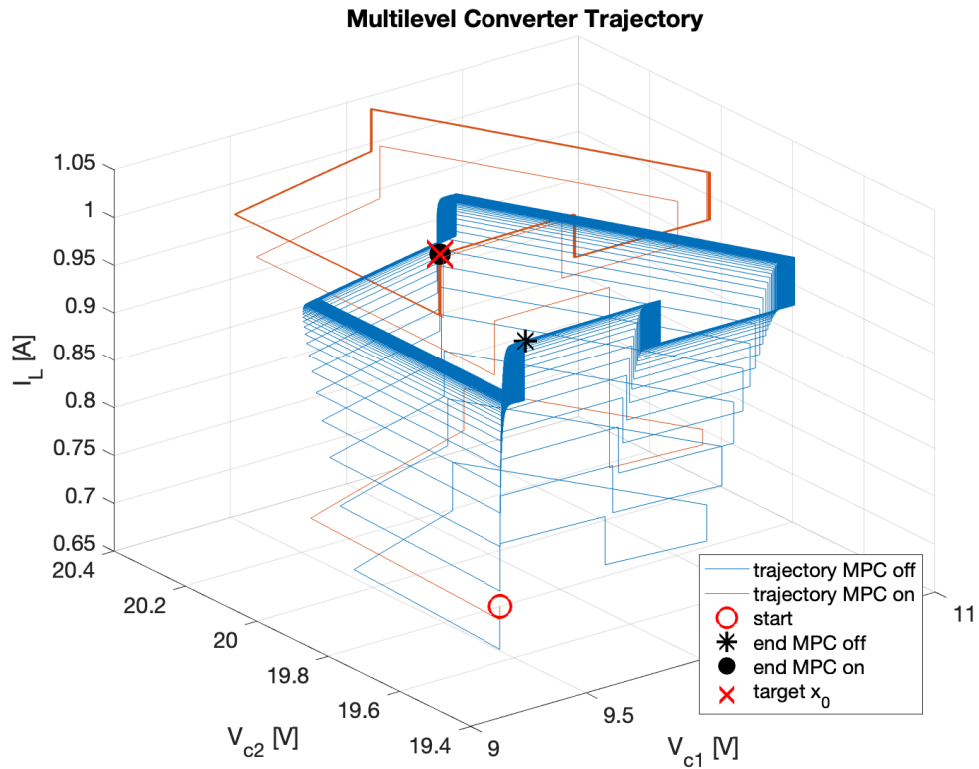


FIGURE 4.11 – Multilevel converter: State Trajectory,  $x_0 = [9.31, 19.52, 0.73]^T$



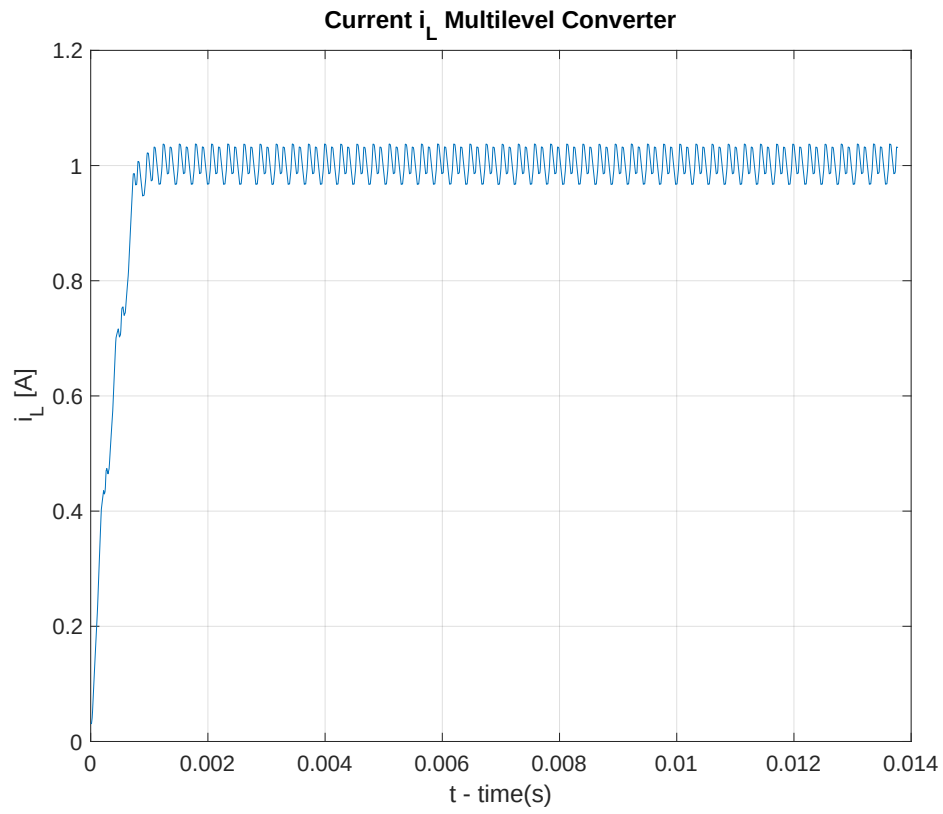


FIGURE 4.12 – Multilevel Converter: Current  $i_L$

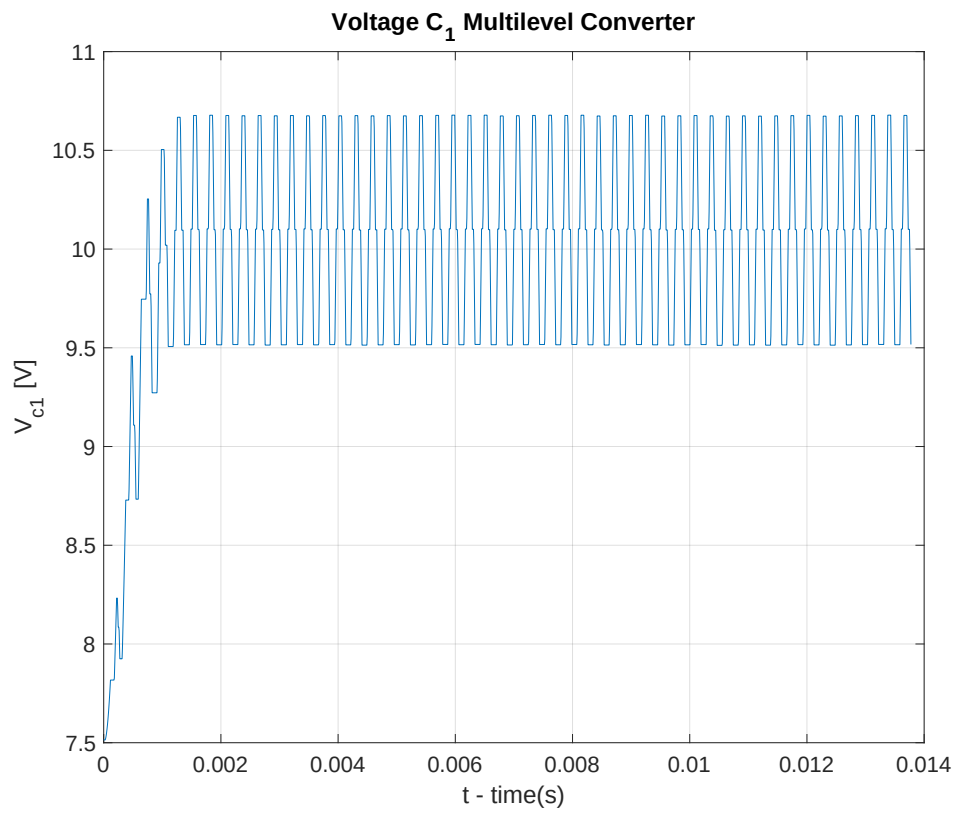


FIGURE 4.13 – Multilevel Converter: Voltage  $C_1$

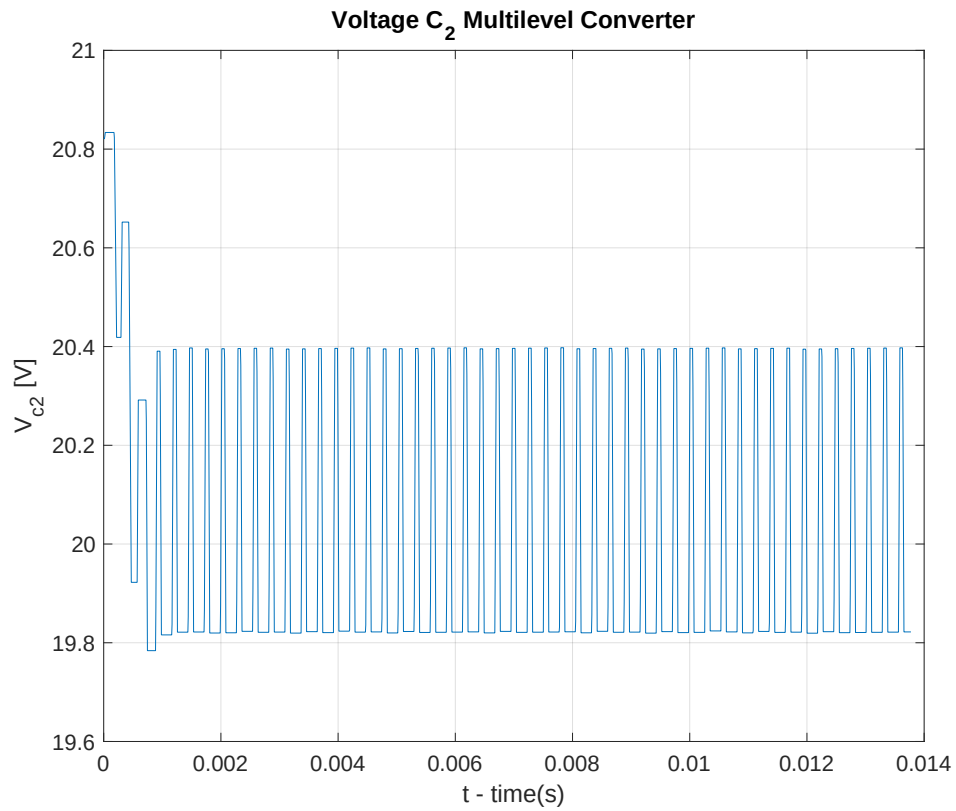


FIGURE 4.14 – Multilevel Converter: Voltage  $C_2$

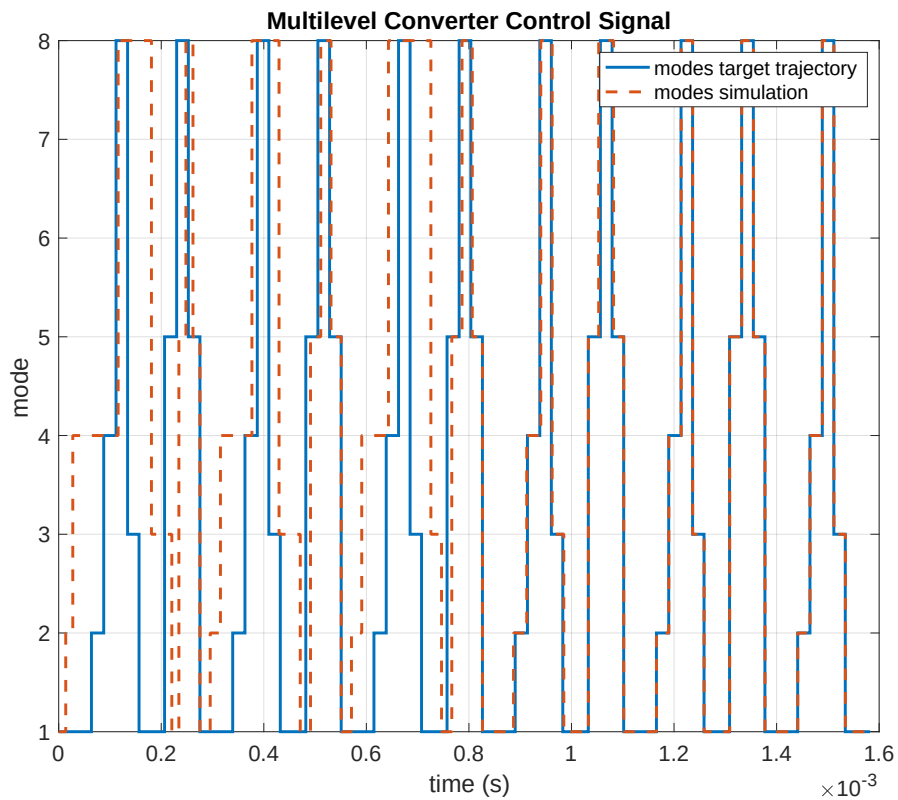


FIGURE 4.15 – Multilevel Converter: Control Signal

## **4.5 Conclusion**

## 5 Conclusão

- conclusões dos resultados apresentados
- plano de trabalho para conclusão do doutorado
- cronograma e atividades para conclusão do doutorado
- trabalhos finais: dedução alternativa do estado aumentado

# Bibliography

BENMILOUD, M.; BENALIA, A.; DJEMAI, M.; DEFOORT, M. On the local stabilization of hybrid limit cycles in switched affine systems. **IEEE Transactions on Automatic Control**, v. 64, n. 2, p. 841–846, 2019.

EGIDIO, L.; DEAECTO, G.; GEROMEL, J. Limit cycle global asymptotic stability of continuous-time switched affine systems. **IFAC-PapersOnLine**, v. 53, p. 6121–6126, 01 2020.

EGIDIO, L. N.; DAIHA, H. R.; DEAECTO, G. S. Global asymptotic stability of limit cycle and  $h_2/h_\infty$  performance of discrete-time switched affine systems. **Automatica**, v. 116, p. 108927, 2020. ISSN 0005-1098.

MARCOLINO, M. H. **Stabilization of Periodic trajectories through receding horizon optimization of switching times**. 2018. 79 f. Tese (Doutorado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2018.

MARCOLINO, M. H.; GALVÃO, R. K. H.; KIENITZ, K. H. Predictive control of linear systems with switched actuators subject to dwell-time constraints. **Journal of Control, Automation and Electrical Systems**, v. 32, n. 1, p. 1–17, 2021. Disponível em: <<https://doi.org/10.1007/s40313-020-00667-9>>.

NOCEDAL, J.; WRIGHT, S. J. **Numerical Optimization, Second Edition**. [S.l.]: Springer Verlag, 2006. (Springer Series in Operations Research).

PATINO, D.; RIEDINGER, P.; RUIZ, F. A predictive control approach for dc-dc power converters and cyclic switched systems. In: IEEE. **2010 IEEE International Conference on Industrial Technology**. [S.l.], 2010. p. 1259–1264.

VIEIRA, M. S. **Controle Preditivo de sistemas com atuadores sujeitos a restrições temporais de chaveamento**. 2013. 119 f. Dissertação (Mestrado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2013.

# Appendix A - Tópicos de Dilema Linear

## A.1 Modelo de simulação

```
+engine
├─ CORES.m
├─ fun_custo_patino.m
├─ get_config_sim_matheus.m
├─ get_config_sim_patino_1.m
├─ get_config_sim_patino_2.m
├─ get_config.m
├─ get_otmin_opt.m
├─ get_ts.m
├─ get_x0.m
├─ get_xr.m
├─ nonlincon_patino.m
├─ otmin.m
├─ sim_1.m
├─ sim_n.m
└─ +mpc
    ├─ construcao_modelo_instantes.m
    ├─ matrizes_ss_mpc_dualmode_switching.m
    └─ mpc_dualmode_switching.m
```

### A.1.1 get\_x0

funcao de calculo da condicao inicial

### A.1.2 get\_xf

Texto do modelo de simulação sendo colocado aqui.

# **Annex A - Exemplo de um Primeiro Anexo**

## **A.1 Uma Seção do Primeiro Anexo**

Algum texto na primeira seção do primeiro anexo.

## FOLHA DE REGISTRO DO DOCUMENTO

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                |                                         |                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------------|------------------------|
| 1. CLASSIFICAÇÃO/TIPO<br>TD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2. DATA<br>25 de março de 2015 | 3. DOCUMENTO Nº<br>DCTA/ITA/DM-018/2015 | 4. Nº DE PÁGINAS<br>71 |
| 5. TÍTULO E SUBTÍTULO:<br>Predictive control of switched affine systems subjected to dwell time constraints                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                |                                         |                        |
| 6. AUTOR(ES):<br><b>Daniel Vieira</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                         |                        |
| 7. INSTITUIÇÃO(ÕES)/ÓRGÃO(S) INTERNO(S)/DIVISÃO(ÕES):<br>Instituto Tecnológico de Aeronáutica – ITA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                |                                         |                        |
| 8. PALAVRAS-CHAVE SUGERIDAS PELO AUTOR:<br>Cupim; Cimento; Estruturas                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                         |                        |
| 9. PALAVRAS-CHAVE RESULTANTES DE INDEXAÇÃO:<br>Cupim; Dilema; Construção                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                |                                         |                        |
| 10. APRESENTAÇÃO: <span style="float: right;">(X) Nacional ( ) Internacional</span><br>ITA, São José dos Campos. Curso de Mestrado. Programa de Pós-Graduação em Engenharia Aeronáutica e Mecânica. Área de Sistemas Aeroespaciais e Mecatrônica. Orientador: Prof. Dr. Adalberto Santos Dupont. Coorientadora: Prof <sup>a</sup> . Dr <sup>a</sup> . Doralice Serra. Defesa em 05/03/2015. Publicada em 25/03/2015.                                                                                                                                                                                                                                                                                                                                                                                                   |                                |                                         |                        |
| 11. RESUMO:<br>Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o systema à trajetória cíclica alvo. |                                |                                         |                        |
| 12. GRAU DE SIGILO:<br>(X) OSTENSIVO ( ) RESERVADO ( ) SECRETO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                |                                         |                        |