

Thesis presented to the Instituto Tecnológico de Aeronáutica, in partial fulfillment of the requirements for the degree of Doctor of Science in the Graduate Program of Engenharia Aeronáutica e Mecânica, Field of Sistemas Aeroespaciais e Mecatrônica.

**Daniel Vieira**

**ROBUST CONTROL OF LINEAR SYSTEMS WITH  
SWITCHED ACTUATORS SUBJECTED TO  
DWEELL-TIME CONSTRAINTS**

Thesis approved in its final version by signatories below:

Prof. Dr. Roberto Kawakami Harrop Galvão  
Advisor

Prof<sup>a</sup>. Dr<sup>a</sup>. ZZZZZZZZZZZZZZZZZZZZZ  
Co-advisor

Prof. Dr. ZZZZZZZZZZZZZZZZZZZZZ  
Dean for Graduate Education and Research

Campo Montenegro  
São José dos Campos, SP - Brazil  
2020

**Cataloging-in Publication Data**  
**Documentation and Information Division**

Vieira, Daniel  
Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints  
/ Daniel Vieira.  
São José dos Campos, 2020.  
58f.

Thesis of Doctor of Science – Course of Engenharia Aeronáutica e Mecânica. Area of Sistemas Aeroespaciais e Mecatrônica – Instituto Tecnológico de Aeronáutica, 2020. Advisor: Prof. Dr. Roberto Kawakami Harrop Galvão. Co-advisor: Prof<sup>a</sup>. Dr<sup>a</sup>. ZZZZZZZZZZZZZZZZZZZ.

1. Cupim. 2. Dilema. 3. Construção. I. Instituto Tecnológico de Aeronáutica. II. Title.

**BIBLIOGRAPHIC REFERENCE**

VIEIRA, Daniel. **Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints**. 2020. 58f. Thesis of Doctor of Science – Instituto Tecnológico de Aeronáutica, São José dos Campos.

**CESSION OF RIGHTS**

AUTHOR'S NAME: Daniel Vieira

PUBLICATION TITLE: Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints.

PUBLICATION KIND/YEAR: Thesis / 2020

It is granted to Instituto Tecnológico de Aeronáutica permission to reproduce copies of this thesis and to only loan or to sell copies for academic and scientific purposes. The author reserves other publication rights and no part of this thesis can be reproduced without the authorization of the author.

---

Daniel Vieira  
Pca Romao Gomes, 98  
12.233-066 – São José dos Campos–SP

# ROBUST CONTROL OF LINEAR SYSTEMS WITH SWITCHED ACTUATORS SUBJECTED TO DWELL-TIME CONSTRAINTS

**Daniel Vieira**

Thesis Committee Composition:

|                                       |                                |            |   |        |
|---------------------------------------|--------------------------------|------------|---|--------|
| Prof. Dr.                             | Alan Turing                    | Presidente | - | ITA    |
| Prof. Dr.                             | Roberto Kawakami Harrop Galvão | Advisor    | - | ITA    |
| Prof <sup>a</sup> . Dr <sup>a</sup> . | ZZZZZZZZZZZZZZZZZZZZ           | Co-advisor | - | OVNI   |
| Prof. Dr.                             | Linus Torwald                  |            | - | UXXX   |
| Prof. Dr.                             | Richard Stallman               |            | - | UYYY   |
| Prof. Dr.                             | Donald Duck                    |            | - | DYSNEY |
| Prof. Dr.                             | Mickey Mouse                   |            | - | DISNEY |

**ITA**

Aos amigos da Graduação e Pós-Graduação do ITA por motivarem tanto a criação deste template pelo Fábio Fagundes Silveira quanto por motivarem a mim e outras pessoas a atualizarem e aprimorarem este excelente trabalho.

# Acknowledgments

Primeiramente, gostaria de agradecer ao Dr. Donald E. Knuth, por ter desenvolvido o T<sub>E</sub>X.

Ao Dr. Leslie Lamport, por ter criado o L<sup>A</sup>T<sub>E</sub>X, facilitando muito a utilização do T<sub>E</sub>X, e assim, eu não ter que usar o Word.

Ao Prof. Dr. Meu Orientador, pela orientação e confiança depositada na realização deste trabalho.

Ao Dr. Nelson D'Ávila, por emprestar seu nome a essa importante via de trânsito na cidade de São José dos Campos.

Ah, já estava esquecendo... agradeço também, mais uma vez ao T<sub>E</sub>X, por ele não possuir vírus de macro :-)

*"I am and always will be the optimist.  
The hoper of far-flung hopes, and the dreamer of improbable dreams."*  
— THE ELEVENTH DOCTOR

# Resumo

Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o sistema à trajetória cíclica alvo.

# Abstract

Switched actuators are difficult to handle because of some characteristic constraints of their nature. but they are efficient in numerous engineering applications, being applied, for example, in attitude control systems for space vehicles. Thus, knowing how to use this type of actuator is important and necessary. The main problem to be solved in this thesis is the design of a controller that guarantees the robustness of a system with switched actuators subjected to time constraints that limit the response window of their commands. In this approach, a limit cycle target trajectory search is performed and then the error of the states compared to the target trajectory is calculated. Then a predictive control technique is applied to correct the error and get the system to the cyclic target trajectory

# List of Figures

|                                                 |    |
|-------------------------------------------------|----|
| FIGURE 4.1 – Instantes de chaveamento . . . . . | 33 |
|-------------------------------------------------|----|

# List of Tables

# List of Abbreviations and Acronyms

|        |                                     |
|--------|-------------------------------------|
| CTq    | computed torque                     |
| DC     | direct current                      |
| EAR    | Equação Algébrica de Riccati        |
| GDL    | graus de liberdade                  |
| ISR    | interrupção de serviço e rotina     |
| LMI    | linear matrices inequalities        |
| MIMO   | multiple input multiple output      |
| PD     | proporcional derivativo             |
| PID    | proporcional integrativo derivativo |
| PTP    | point to point                      |
| UARMII | Underactuated Robot Manipulator II  |
| VSC    | variable structure control          |

# List of Symbols

|                  |                                                                        |
|------------------|------------------------------------------------------------------------|
| $a$              | Distância                                                              |
| $\mathbf{a}$     | Vetor de distâncias                                                    |
| $\mathbf{e}_j$   | Vetor unitário de dimensão $n$ e com o $j$ -ésimo componente igual a 1 |
| $\mathbf{K}$     | Matriz de rigidez                                                      |
| $m_1$            | Massa do cumpim                                                        |
| $\delta_{k-k_f}$ | Delta de Kronecker no instante $k_f$                                   |

# Contents

|       |                                                                         |    |
|-------|-------------------------------------------------------------------------|----|
| 1     | INTRODUCTION . . . . .                                                  | 15 |
| 1.1   | Motivation . . . . .                                                    | 15 |
| 1.2   | Contributions of the present work . . . . .                             | 16 |
| 1.3   | Outline of the remaining chapters . . . . .                             | 16 |
| 2     | DETERMINATION OF TARGET PERIODIC TRAJECTORIES . . . . .                 | 17 |
| 2.1   | Statement of the problem . . . . .                                      | 18 |
| 2.2   | Optimization . . . . .                                                  | 18 |
| 2.3   | Calculating $x_r$ . . . . .                                             | 18 |
| 2.4   | Application Examples . . . . .                                          | 20 |
| 2.4.1 | Variant Dynamic Circuit 1 . . . . .                                     | 20 |
| 2.4.2 | Variant Dynamic Circuit 2 . . . . .                                     | 20 |
| 3     | PREDICTIVE CONTROL: PRELIMINARIES AND NOTATION . . . . .                | 21 |
| 3.1   | Cost Function . . . . .                                                 | 21 |
| 3.2   | Restrictions . . . . .                                                  | 25 |
| 3.3   | Prediction Equation . . . . .                                           | 27 |
| 3.4   | Optimization Problem . . . . .                                          | 30 |
| 4     | PREDICTIVE CONTROL FOR STABILIZATION OF PERIODIC TRAJECTORIES . . . . . | 32 |
| 4.1   | Statement of the problem . . . . .                                      | 32 |
| 4.1.1 | Cost Function . . . . .                                                 | 32 |
| 4.1.2 | Dwell-time Constraints . . . . .                                        | 32 |
| 4.2   | Linearization procedure . . . . .                                       | 33 |

---

|            |                                                  |           |
|------------|--------------------------------------------------|-----------|
| 4.2.1      | Constraints . . . . .                            | 40        |
| 4.2.2      | Feasibility region . . . . .                     | 41        |
| <b>4.3</b> | <b>Application Examples . . . . .</b>            | <b>42</b> |
| 4.3.1      | Integrador duplo . . . . .                       | 42        |
| 4.3.2      | Patino 1 . . . . .                               | 42        |
| 4.3.3      | Patino 2 . . . . .                               | 42        |
| <b>4.4</b> | <b>Conclusion . . . . .</b>                      | <b>44</b> |
| <b>5</b>   | <b>CONCLUSÃO . . . . .</b>                       | <b>45</b> |
| <b>5.1</b> | <b>RASCUNHO . . . . .</b>                        | <b>45</b> |
| 5.1.1      | FIM . . . . .                                    | 55        |
|            | BIBLIOGRAPHY . . . . .                           | 56        |
|            | APPENDIX A – TÓPICOS DE DILEMA LINEAR . . . . .  | 57        |
| <b>A.1</b> | <b>Modelo de simulação . . . . .</b>             | <b>57</b> |
| A.1.1      | get_x0 . . . . .                                 | 57        |
| A.1.2      | get_xf . . . . .                                 | 57        |
|            | ANNEX A – EXEMPLO DE UM PRIMEIRO ANEXO . . . . . | 58        |
| <b>A.1</b> | <b>Uma Seção do Primeiro Anexo . . . . .</b>     | <b>58</b> |

# 1 Introduction

## 1.1 Motivation

The dynamics of switched affine systems can be described by a state equation of the form  $\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}, t \in \mathbb{R}_+$ . Where  $x(t) \in \mathbb{R}^n$  is the state vector and  $\sigma(t) \in \{1, 2, \dots, N\}$  is the switching state, which is associated to the matrix  $A_{\sigma(t)} \in \mathbb{R}^{n \times n}$  and the vector  $b_{\sigma(t)} \in \mathbb{R}^n$  at each time  $t$ .

The use of switched affine systems to solve problems in engineering can be seen in fields like biochemical reactions, where Parise *et al.* (2018) uses switched affine systems to represent the moments of evolution in a generic biochemical reaction network; urban traffic, where Hajiahmadi *et al.* (2016) approaches the urban traffic control; power converters, where Benmiloud *et al.* (2019) also uses this approach and other areas where the behavior of the system can be described as a switched affine system.

There is extensive research in this class of controllers, and most of them solve the problem by driving the system states to the neighborhood of the target states, not considering the trajectory behavior of the system. This can reduce the performance of the system when the system is affected by the trajectory of the limit cycle in steady operation.

This problem has been the target of many studies, Benmiloud *et al.* (2019) uses a hybrid Poincaré map approach to stabilize a switched affine system into the desired limit cycle and uses as an example a DC-DC converter. by Egidio *et al.* (2020b), which proposes a control design of a state-dependent switching function for discrete-time switched affine systems to drive the system to the desired limit cycle that is defined by design associated with the expected performance of the system. The solution was applied in an academic numerical example and a theoretical DC-DC converter. In Egidio *et al.* (2020a) the author expanded the work to continuous-time switched affine systems.

Some studies form the basis for the present work:

Vieira (2013) solved the problem for a particular class of affine systems. Here the controller drove the system to a target state using MILP (Mixed-Integer Linear Programming) and the cyclic trajectory was a consequence of the states as the system approached

the target.

Patino *et al.* (2010) defined the target trajectory using nonlinear programming and used this target trajectory in the predictive control in terms of errors.

Marcolino (2018) proposed a solution with a controller law that drives the switched affine system with dwell-time constraints to a target cyclic trajectory. In this work, the problem is addressed in two stages: first, the problem is interpreted as a convex optimization where the author can find a targeted cyclic trajectory that minimizes a cost function associated with the system performance; then a second part that uses the target trajectory as input and computes perturbation at the switching instants of the reference control signal using predictive control.

## 1.2 Contributions of the present work

This present work proposes to expand the solution from )matheus2018 and provide a broader solution that can be used for systems that have their dynamics changing over time.

In a system that can be represented by a switched affine system with the form

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}$$

there are cases in which the dynamic response of the system can change depending on the operation mode. This can be represented in switched affine systems with proper matrices  $A_{\sigma(t)}$  and  $b_{\sigma(t)}$  for each operation mode. With the current implementation of Marcolino (2018) considering an invariant system during its operation, there is a need for expanding the solution so it can represent more systems and solve more engineering problems that can be expressed as switched affine systems.

## 1.3 Outline of the remaining chapters

The remaining of this text is organized as follows. Chapter 2 describes the problem of finding a target periodic trajectory for the given switched affine system. Chapter 3 proposes then a predictive control law that drives the system to the target cyclic trajectory. Finally, chapter 4 brings some remarks and considerations of the work.

## 2 Determination of Target Periodic Trajectories

Devemos encontrar uma trajetória cíclica que respeite todos as restrições do sistema e minimize a distancia em torno do valor de referencia?

Função custo:

$$J(\tau^\infty, \Omega^\infty, s^\infty) = \min_{\tau, \Omega, s} \int_0^{T_p} [x(t) - \bar{x}^\infty]^T Q [x(t) - \bar{x}^\infty] dt \quad (2.1)$$

As entradas para a otimização são:

- Lista de modos de operação
- Lista de matriz A associada ao modo de operação
- Lista de matriz B associada ao modo de operação
- Matriz C
- Matriz D
- Lista de valores de controle em cada modo
- Valor de referência dos estados (xref)
- Tempo máximo de trajetória cíclica (Tpmax)
- Número máximo de estados
- Peso dos estados na função custo (Q)

Em que  $Q = Q^T > 0$  e  $T_p$  é o período do ciclo.

A condição inicial é determinada de forma que o último ponto é coincidente com o primeiro ponto (dada a sequência de modos e instantes de chaveamento)

$$x(0) = (I - F_N F_{N-1} \dots F_1)^{-1} c \quad (2.2)$$

$$c = F_N F_{N-1} \dots F_2 G_1 u_1 + F_N F_{N-1} \dots F_3 G_2 u_2 + \dots + F_N G_{N-1} + G_N u_N \quad (2.3)$$

O resultado da otimizacao é  $\tau^\infty$  e  $x_0$

Exemplos:

Integrador (Matheus): Nao há otimizacao aqui, usamos a mesma trajetoria do Matheus para que tivessemos uma comparacao entre os resultados das simulacoes.

Patino, aqui estou usando um otimizador para encontrar a trajetoria de referencia.

Resultados:

Descrever resultados trajetorias Patino 1 e 2

**TODO: FAZER SIMULACAO COMPLETA DE CADA CASO**

## 2.1 Statement of the problem

## 2.2 Optimization

description of the optimization for finding the target trajectory

## 2.3 Calculating $x_r$

$$x_0 \in \mathbb{R}$$

$$x(t) = e^{At} x(0) + \int_0^t e^{A(t-\tau)} B u(\tau) d\tau \quad (2.4)$$

Modos:

$$\begin{aligned} [0 - t_1] : \dot{x} &= A_1 x + B_1 u_1 \\ [t_1 - t_2] : \dot{x} &= A_2 x + B_2 u_2 \\ &\vdots \\ [t_{N-1} - t_N] : \dot{x} &= A_N x + B_N u_N \end{aligned} \quad (2.5)$$

$$\begin{aligned}
x(t_1) &= e^{A_1 t_1} x(0) + \int_0^{t_1} e^{A_1(t_1-\tau)} B_1 u_1 d\tau \\
x(t_1) &= e^{A_1 t_1} x(0) + \left[ \int_0^{t_1} e^{A_1(t_1-\tau)} B_1 d\tau \right] u_1 \\
x(t_1) &= F_1 x(0) + G_1 u_1
\end{aligned} \tag{2.6}$$

$$x(t_1) = F_1 x(0) + G_1 u_1 \tag{2.7}$$

$$x(t_2) = F_2 x(1) + G_2 u_2 \tag{2.8}$$

$$\vdots$$

$$x(t_N) = F_N x(N-1) + G_N u_N \tag{2.9}$$

$$\begin{aligned}
x(t_N) &= F_N F_{N-1} \dots F_1 x(0) + F_N F_{N-1} \dots F_2 G_1 x(1) + \\
&\quad F_N F_{N-1} \dots F_2 G_2 x(2) + \dots + F_N G_{N-1} x(N-1) + G_N x(N) \\
x(t_N) &= F_N F_{N-1} \dots F_1 x(0) + c
\end{aligned} \tag{2.10}$$

Queremos  $x(t_N) = x(0) = ?$

$$\begin{aligned}
x(0) &= F_N F_{N-1} \dots F_1 x(0) + c \\
\underbrace{(I - F_N F_{N-1} \dots F_1)}_{\text{suposta invertível}} x(0) &= c \\
x(0) &= (I - F_N F_{N-1} \dots F_1)^{-1} c
\end{aligned} \tag{2.11}$$

em que

$$\begin{aligned}
c &= F_N F_{N-1} \dots F_2 G_1 x(1) + \\
&\quad F_N F_{N-1} \dots F_2 G_2 x(2) + \dots + F_N G_{N-1} x(N-1) + G_N x(N)
\end{aligned} \tag{2.12}$$

## **2.4 Application Examples**

### **2.4.1 Variant Dynamic Circuit 1**

### **2.4.2 Variant Dynamic Circuit 2**

## 3 Predictive control: Preliminaries and notation

Consider a system with dynamics described by

$$\hat{x}(k) = Ax(k) + B\hat{u}(k) \quad (3.1)$$

$$x[k+1] = Ax[k] + Bu[k]$$

The objective is to drive the state  $x[k]$  to the origin from a given initial condition while respecting state and control constraints in the form

$$x[k] \in \mathcal{X} \quad (3.2)$$

$$u[k] \in \mathcal{U} \quad (3.3)$$

$$\mathcal{U} = \{u \in \mathbb{R}^p : S_u u \leq b_u\} \quad (3.4)$$

and

$$\mathcal{X} = \{x \in \mathbb{R}^n : S_x x \leq b_x\} \quad (3.5)$$

### 3.1 Cost Function

The solution, if it exists, will not be unique. Therefore, it is necessary to adopt a criterion that allows for choosing the best sequence of control actions to perform the task.

The control problem consists of bringing the states to the origin, so we will employ a cost in the form

$$J = \|\hat{x}[k + N|k]\|_{P_f}^2 + \sum_{i=0}^{N-1} \left[ \|\hat{x}[k + i|k]\|_Q^2 + \|\hat{u}[k + i|k]\|_R^2 \right] \quad (3.6)$$

The expression for  $J$  consists of a **terminal cost** term and a trajectory **cost term**.

With  $P_f$ ,  $Q$ ,  $R$  being symmetric and positive-definite, with  $P_f$  chosen so that the terminal cost term  $\|\hat{x}(k + N|k) - \bar{x}\|_{P_f}^2$  corresponds to the value function of the infinite horizon Discrete-Time Linear Quadratic Regulator (DLQR).

The cost function can be rewritten using the notation:

$$\begin{aligned} \hat{\mathbf{u}} &= \begin{bmatrix} \hat{u}(0) \\ \hat{u}(1) \\ \vdots \\ \hat{u}(N-1) \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}} = \begin{bmatrix} \hat{x}(1) \\ \hat{x}(2) \\ \vdots \\ \hat{x}(N) \end{bmatrix} \in \mathbb{R}^{nN} \\ \hat{\mathbf{u}}(k) &= \begin{bmatrix} \hat{u}(k|k) \\ \hat{u}(k+1|k) \\ \vdots \\ \hat{u}(k+N-1|k) \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}(k) = \begin{bmatrix} \hat{x}(k+1|k) \\ \hat{x}(k+2|k) \\ \vdots \\ \hat{x}(k+N|k) \end{bmatrix} \in \mathbb{R}^{nN} \end{aligned} \quad (3.7)$$

and then the sum equation

$$\sum_{k=0}^{N-1} \|\hat{u}(k)\|_R^2 = \hat{u}^T(0)R\hat{u}(0) + \hat{u}^T(1)R\hat{u}(1) + \cdots + \hat{u}^T(N-1)R\hat{u}(N-1) \quad (3.8)$$

$$\begin{aligned} \sum_{j=0}^{N-1} \|\hat{u}[j+k|k]\|_R^2 &= \hat{u}^T[k|k]R\hat{u}[k|k] + \hat{u}^T[k+1|k]R\hat{u}[k+1|k] + \cdots \\ &\quad + \hat{u}^T[k+N-1|k]R\hat{u}[k+N-1|k] \end{aligned}$$

becomes

$$\underbrace{\begin{bmatrix} \hat{u}^T(0) & \hat{u}^T(1) & \cdots & \hat{u}^T(N-1) \end{bmatrix}}_{\hat{\mathbf{u}}^T} \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} \underbrace{\begin{bmatrix} \hat{u}(0) \\ \hat{u}(1) \\ \vdots \\ \hat{u}(N-1) \end{bmatrix}}_{\hat{\mathbf{u}}} \quad (3.9)$$

$$\underbrace{\begin{bmatrix} \hat{u}^T(k|k) & \hat{u}^T(k+1|k) & \cdots & \hat{u}^T(k+N-1|k) \end{bmatrix}}_{\hat{\mathbf{u}}^T} \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} \underbrace{\begin{bmatrix} \hat{u}(k|k) \\ \hat{u}(k+1|k) \\ \vdots \\ \hat{u}(k+N-1|k) \end{bmatrix}}_{\hat{\mathbf{u}}}$$

Using the notation

$$\mathbf{R} = \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} = \text{diag}_N(R) \quad (3.10)$$

we get to

$$\sum_{k=0}^{N-1} \|\hat{u}(k)\|_R^2 = \|\hat{\mathbf{u}}\|_{\mathbf{R}}^2 \quad (3.11)$$

$$\sum_{j=0}^{N-1} \|\hat{u}[j]\|_R^2 = \|\hat{\mathbf{u}}\|_{\mathbf{R}}^2$$

Similarly, we can write

// NOTE: rever essa parte

$$\begin{aligned}
& \|\hat{x}(N)\|_{P_f}^2 + \sum_{k=0}^{N-1} \|\hat{x}(k)\|_Q^2 = x^T(0)Qx(0) \\
& + \hat{x}^T(1)Q\hat{x}(1) + \cdots + \hat{x}^T(N-1)Q\hat{x}(N-1) + \hat{x}^T(N)P_f\hat{x}(N) \\
& = \hat{x}^T(0)Qx(0) + \\
& \underbrace{\begin{bmatrix} \hat{x}^T(1) & \hat{x}^T(2) & \cdots & \hat{x}^T(N) \end{bmatrix}}_{\hat{\mathbf{x}}^T} \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} \underbrace{\begin{bmatrix} \hat{x}(1) \\ \hat{x}(2) \\ \vdots \\ \hat{x}(N) \end{bmatrix}}_{\hat{\mathbf{x}}} \quad (3.12)
\end{aligned}$$

$$\begin{aligned}
& \|\hat{x}[N]\|_{P_f}^2 + \sum_{j=0}^{N-1} \|\hat{x}[j]\|_Q^2 = x^T(k)Qx(k) \\
& + \hat{x}^T(k+1|k)Q\hat{x}(k+1|k) + \cdots + \hat{x}^T(k+N-1|k)Q\hat{x}(k+N-1|k) + \hat{x}^T[N]P_f\hat{x}[N] \\
& = \hat{x}^T(k|k)Q\hat{x}(k|k) + \\
& \underbrace{\begin{bmatrix} \hat{x}^T(k+1|k) & \hat{x}^T(k+2|k) & \cdots & \hat{x}^T(k+N|k) \end{bmatrix}}_{\hat{\mathbf{x}}^T} \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} \underbrace{\begin{bmatrix} \hat{x}(k+1|k) \\ \hat{x}(k+2|k) \\ \vdots \\ \hat{x}(k+N|k) \end{bmatrix}}_{\hat{\mathbf{x}}}
\end{aligned}$$

with the notation

$$Q = \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} = \begin{bmatrix} \text{diag}_{N-1}(Q) & 0 \\ 0 & P_f \end{bmatrix} \in \mathbb{R}^{nN \times nN} \quad (3.13)$$

as

$$\begin{aligned}
& \|\hat{x}(N)\|_f^2 + \sum_{k=0}^{N-1} \|\hat{x}(k)\|_Q^2 = \|x(0)\|_Q^2 + \|\hat{\mathbf{x}}\|_Q^2 \quad (3.14) \\
& \|\hat{x}(k+N|k)\|_P^2 + \sum_{j=0}^{N-1} \|\hat{x}(j)\|_Q^2 = \|x(k)\|_Q^2 + \|\hat{\mathbf{x}}\|_Q^2
\end{aligned}$$

So, the cost function can be written in the form

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \|x(0)\|_Q^2 + \|\hat{\mathbf{x}}\|_Q^2 + \|\hat{\mathbf{u}}\|_R^2 \quad (3.15)$$

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \|x(k)\|_Q^2 + \|\hat{\mathbf{x}}\|_Q^2 + \|\hat{\mathbf{u}}\|_R^2$$

## 3.2 Restrictions

The restrictions are introduced aiming to drive the states of the system to the origin while solving

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{nN}, \hat{\mathbf{u}} \in \mathbb{R}^{pN}} \mathbf{J}(\hat{\mathbf{x}}, \hat{\mathbf{u}}) \quad (3.16)$$

respecting constraints applied on

$$\hat{\mathbf{u}} = \begin{bmatrix} \hat{u}(0) \\ \hat{u}(1) \\ \vdots \\ \hat{u}(N-1) \end{bmatrix} \in \mathcal{U} \times \mathcal{U} \times \cdots \times \mathcal{U} = \mathcal{U}^N \quad (3.17)$$

$$\hat{\mathbf{x}} = \begin{bmatrix} \hat{x}(1) \\ \hat{x}(2) \\ \vdots \\ \hat{x}(N) \end{bmatrix} \in \mathcal{X} \times \mathcal{X} \times \cdots \times \mathcal{X}_f = \mathcal{X}^{N-1} \times \mathcal{X}_f \quad (3.18)$$

$$\hat{\mathbf{u}} = \begin{bmatrix} \hat{u}(k|k) \\ \hat{u}(k+1|k) \\ \vdots \\ \hat{u}(k+N-1|k) \end{bmatrix} \in \mathcal{U} \times \mathcal{U} \times \cdots \times \mathcal{U} = \mathcal{U}^N$$

$$\hat{\mathbf{x}} = \begin{bmatrix} \hat{x}(k+1|k) \\ \hat{x}(k+2|k) \\ \vdots \\ \hat{x}(k+N|k) \end{bmatrix} \in \mathcal{X} \times \mathcal{X} \times \cdots \times \mathcal{X}_f = \mathcal{X}^{N-1} \times \mathcal{X}_f$$

$\mathcal{X}_f$  is the maximum invariant and admissible set (MAS) with respect to the terminal state and control constraints under the action of a terminal control force.

$$\{\hat{x} \in \mathbb{R}^n : S_f \hat{x} \leq b_f\} \quad (3.19)$$

The constraint on  $\hat{\mathbf{u}}$  can be written as

$$\begin{bmatrix} S_u & 0 & \cdots & 0 \\ 0 & S_u & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_u \end{bmatrix} \begin{bmatrix} \hat{u}(0) \\ \hat{u}(1) \\ \vdots \\ \hat{u}(N-1) \end{bmatrix} \leq \begin{bmatrix} b_u \\ b_u \\ \vdots \\ b_u \end{bmatrix} \quad (3.20)$$

$$\begin{bmatrix} S_u & 0 & \cdots & 0 \\ 0 & S_u & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_u \end{bmatrix} \begin{bmatrix} \hat{u}(k|k) \\ \hat{u}(k+1|k) \\ \vdots \\ \hat{u}(k+N-1|k) \end{bmatrix} \leq \begin{bmatrix} b_u \\ b_u \\ \vdots \\ b_u \end{bmatrix}$$

or, in a shorter form

$$\mathbf{S}_u \hat{\mathbf{u}} \leq \mathbf{b}_u \quad (3.21)$$

with

$$\mathbf{S}_u = \text{diag}_N(S_u), \mathbf{b}_u = \text{col}_N(b_u) \quad (3.22)$$

Similarly, the constraints on  $\hat{\mathbf{x}}$  can be written as

$$\begin{bmatrix} S_x & 0 & \cdots & 0 \\ 0 & S_x & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_x \end{bmatrix} \begin{bmatrix} \hat{x}(1) \\ \hat{x}(2) \\ \vdots \\ \hat{x}(N) \end{bmatrix} \leq \begin{bmatrix} b_x \\ b_x \\ \vdots \\ b_x \end{bmatrix} \quad (3.23)$$

$$\begin{bmatrix} S_x & 0 & \cdots & 0 \\ 0 & S_x & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_x \end{bmatrix} \begin{bmatrix} \hat{x}(k+1|k) \\ \hat{x}(k+2|k) \\ \vdots \\ \hat{x}(k+N|k) \end{bmatrix} \leq \begin{bmatrix} b_x \\ b_x \\ \vdots \\ b_x \end{bmatrix}$$

or, in short

$$\mathbf{S}_x \hat{\mathbf{x}} \leq \mathbf{b}_x \quad (3.24)$$

with

$$\mathbf{S}_x = \begin{bmatrix} \text{diag}_{N-1}(S_x) & 0 \\ 0 & S_f \end{bmatrix}, \mathbf{b}_x = \begin{bmatrix} \text{col}_{N-1}(b_x) \\ b_f \end{bmatrix} \quad (3.25)$$

### 3.3 Prediction Equation

Let's express the relationship between the vectors

$$\hat{\mathbf{u}} = \begin{bmatrix} \hat{u}(0) \\ \hat{u}(1) \\ \vdots \\ \hat{u}(N-1) \end{bmatrix}, \hat{\mathbf{x}} = \begin{bmatrix} \hat{x}(1) \\ \hat{x}(2) \\ \vdots \\ \hat{x}(N) \end{bmatrix} \quad (3.26)$$

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix}$$

based on the state equation

$$\hat{x}[k+i+1|k] = A\hat{x}[k|k] + B\hat{u}[k|k] \quad (3.27)$$

and initial condition  $x(0)$ .

and initial condition  $x[0]$ .

// NOTE: colocar numero na equacao

and initial condition

$$\hat{x}[k|k] = x[k]$$

The solution for the state equation is:

$$\hat{x}[k+i|k] = A^i \hat{x}[k|k] + \sum_{j=0}^{i-1} A^{i-1-j} B \hat{u}[k+j|k] \quad (3.28)$$

and it can be written for  $k = 1, 2, \dots, N$  as

$$\hat{x}[k+1|k] = A\hat{x}[k|k] + B\hat{u}[k|k] \quad (3.29)$$

$$\hat{x}[k+2|k] = A^2\hat{x}[k|k] + AB\hat{u}[k|k] + B\hat{u}[k+1|k] \quad (3.30)$$

$$\vdots \quad (3.31)$$

$$\hat{x}[k+N|k] = A^N \hat{x}[k|k] + A^{N-1} B \hat{u}[k|k] + \dots + AB\hat{u}[k+N-2|k] + B\hat{u}[k+N-1|k] \quad (3.32)$$

or

// NOTE: mudar notacao

$$\begin{bmatrix} \hat{x}[1] \\ \hat{x}[2] \\ \vdots \\ \hat{x}[N] \end{bmatrix} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix} x(0) + \begin{bmatrix} B & 0 & \cdots & 0 \\ AB & B & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \cdots & B \end{bmatrix} \begin{bmatrix} \hat{u}[0] \\ \hat{u}[1] \\ \vdots \\ \hat{u}[N-1] \end{bmatrix} \quad (3.33)$$

This can be written in a shorter form as

$$\hat{\mathbf{x}} = \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \quad (3.34)$$

$$\hat{\mathbf{x}} = \mathbf{A}x[0] + \mathbf{B}\hat{\mathbf{u}} \quad (3.35)$$

with

$$\mathbf{A} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix}, \mathbf{B} = \begin{bmatrix} B & 0 & \cdots & 0 \\ AB & B & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \cdots & B \end{bmatrix} \quad (3.36)$$

The relation

$$\hat{\mathbf{x}} = \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \quad (3.37)$$

$$\hat{\mathbf{x}} = \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \quad (3.38)$$

can be rewritten as

$$J = \|x(0)\|_P^2 + \overbrace{\|\hat{\mathbf{x}}\|_Q^2}^{\square} + \|\hat{\mathbf{u}}\|_R^2 \quad (3.39)$$

$$\square = \|\hat{\mathbf{x}}\|_{\mathbf{Q}}^2 \quad (3.40)$$

$$= \left[ \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[ \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.41)$$

$$= \left[ \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[ \mathbf{A}x(0) + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.42)$$

$$= \|\mathbf{A}x(0)\|_{\mathbf{Q}}^2 + \left[ \mathbf{A}x(0) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A}x(0) + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.43)$$

replacing  $\square$  back in the cost equation and reordering the elements

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \|x(0)\|_P^2 + \|\mathbf{A}x(0)\|_{\mathbf{Q}}^2 \quad (3.44)$$

$$+ \left[ \mathbf{A}x(0) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A}x(0) \quad (3.45)$$

$$+ \hat{\mathbf{u}}^T \mathbf{R} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.46)$$

The **constant part** will be denoted by  $c_0$

Recalling that the matrix  $\mathbf{Q}$  is symmetric, we have:

$$\left[ \mathbf{A}x(0) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} = \left\{ \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A}x(0) \right\}^T \quad (3.47)$$

As these terms are scalars, it can be concluded that they are equal to each other, therefore:

$$\begin{aligned} & \left[ \mathbf{A}x(0) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A}x(0) \\ &= 2 \left[ \mathbf{A}x(0) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \end{aligned} \quad (3.48)$$

Finally, it can be written

$$J(\hat{\mathbf{u}}) = \hat{\mathbf{u}}^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \hat{\mathbf{u}} + 2 \left[ \mathbf{A}x(0) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + c_0 \quad (3.49)$$

with

$$c_0 = \|x(0)\|_P^2 + \|\mathbf{A}x(0)\|_{\mathbf{Q}}^2 \quad (3.50)$$

Note that we will now use the notation  $J(\hat{\mathbf{u}})$  instead of  $J(\hat{\mathbf{x}}, \hat{\mathbf{u}})$ , since  $\hat{\mathbf{x}}$  has been eliminated from the cost expression.

To complete the reformulation of the optimization problem in terms of  $\hat{\mathbf{u}}$ , the relation between  $\hat{\mathbf{x}}$  and  $\hat{\mathbf{u}}$  in the **restrictions** must be considered.

### 3.4 Optimization Problem

The optimization problem can be expressed as

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{nN}, \hat{\mathbf{u}} \in \mathbb{R}^{pN}} J(\hat{x}, \hat{u}) \quad (3.51)$$

where

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \|x(k)\|_P^2 + \|\hat{\mathbf{x}}\|_Q^2 + \|\hat{\mathbf{u}}\|_R^2 \quad (3.52)$$

with

$$\hat{\mathbf{u}}(k) = \begin{bmatrix} \hat{u}(k|k) \\ \hat{u}(k+1|k) \\ \vdots \\ \hat{u}(k+N-1|k) \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}(k) = \begin{bmatrix} \hat{x}(k+1|k) \\ \hat{x}(k+2|k) \\ \vdots \\ \hat{x}(k+N|k) \end{bmatrix} \in \mathbb{R}^{nN}, \quad (3.53)$$

subject to

$$\mathbf{S}_x \hat{\mathbf{x}}(k) \leq \mathbf{b}_x \quad (3.54)$$

$$\mathbf{S}_u \hat{\mathbf{u}}(k) \leq \mathbf{b}_u \quad (3.55)$$

The vectors  $\hat{\mathbf{x}}(k)$  and  $\hat{\mathbf{u}}(k)$  are linked by the following **prediction equation**:

$$\hat{\mathbf{x}}(k) = \mathbf{A}\hat{x}(k) + \mathbf{B}\hat{\mathbf{u}}(k) \quad (3.56)$$

Thus, the cost can be rewritten as

$$J(\hat{\mathbf{u}}(k)) = \hat{\mathbf{u}}(k)^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \hat{\mathbf{u}}(k) + 2 \left[ \mathbf{A}\hat{x}(k) \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}}(k) + c_0$$

with

$$c_0 = \|\hat{x}(k)\|_P^2 + \|\mathbf{A}\hat{x}(k)\|_Q^2$$

and the constraints can be expressed as

$$\mathbf{S}\hat{\mathbf{u}}(k) \leq \mathbf{b}$$

with

$$\mathbf{S} = \begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix}, \mathbf{b} = \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} \hat{x}(k) \\ \mathbf{b}_u \end{bmatrix}$$

Having obtained the solution  $\hat{\mathbf{u}}(k)$  for the problem  $\mathbb{P}(\hat{x}(k))$ , the control to be applied to the plant is given by

$$\hat{u}(k) = \hat{u}^*(k|k) \tag{3.57}$$

where  $\hat{u}^*(k|k)$  corresponds to the first  $p$  elements of  $\hat{\mathbf{u}}^*(k)$ .

# 4 Predictive Control for Stabilization of Periodic Trajectories

## 4.1 Statement of the problem

Considering a plant of an affine switched system described by:

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)} \quad (4.1)$$

The control action applied in the system is in the form of perturbations in each operation mode switching time. By allowing the control the a system using predictive control, we need to find a linear equation that relates the switching times and the resulting system at the end of one cycle.

### 4.1.1 Cost Function

$$J = \|e[N_p]\|_{P_f}^2 + \sum_{j=0}^{N_p-1} \|e[j]\|_Q^2 + \|\delta t[j]\|_R^2 \quad (4.2)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.3)$$

em que  $Q = Q^T > 0$ ,  $\rho > 0$

$$\delta t = [t_{j,1} - \bar{t}_{j,1}, t_{j,2} - \bar{t}_{j,2}, \dots]^T \quad (4.4)$$

### 4.1.2 Dwell-time Constraints

// TODO: colocar as Dwell-time Constraints (3.1.2), dwell time

## 4.2 Linearization procedure

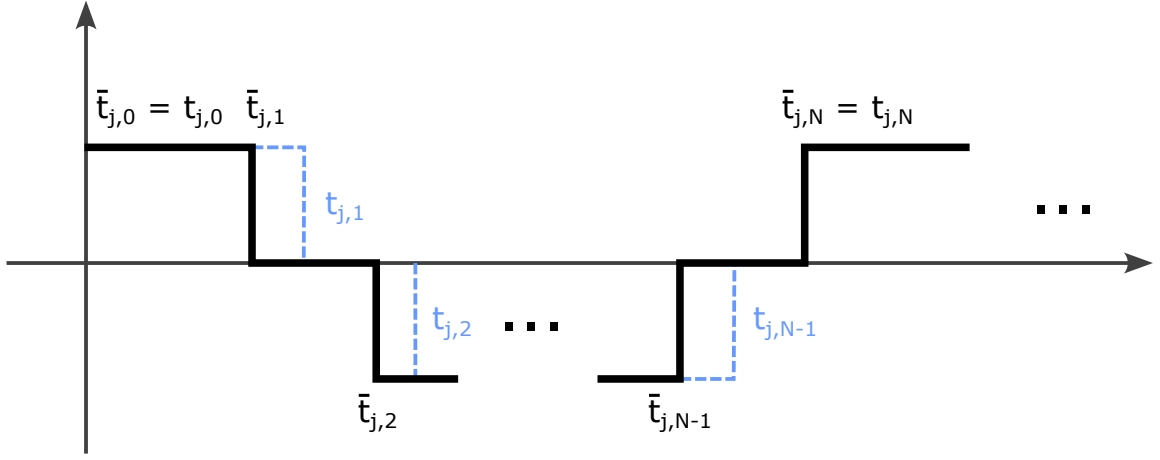


FIGURE 4.1 – Instantes de chaveamento

The solution for the state equation (4.1) at time  $t_1$ , starting from the initial condition  $x(t_0)$ , is of the form

$$x(t_1) = e^{A_0(t_1-t_0)}x(t_0) + \int_{t_0}^{t_1} e^{A_0(t_1-\tau)}B_0d\tau \quad (4.5)$$

$$\bar{x}(\bar{t}_1) = e^{A_0(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) + \int_{\bar{t}_0}^{\bar{t}_1} e^{A_0(\bar{t}_1-\tau)}B_0d\tau \quad (4.6)$$

subtracting (4.6) from (4.5) we get

$$\begin{aligned} x(t_1) - \bar{x}(\bar{t}_1) &= \overbrace{e^{A_0(t_1-t_0)}x(t_0) - e^{A_0(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0)}^{\square} \\ &+ \underbrace{\int_{t_0}^{t_1} e^{A_0(t_1-\tau)}B_0d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_0(\bar{t}_1-\tau)}B_0d\tau}_{\bigcirc} \end{aligned} \quad (4.7)$$

expanding (4.7) first in  $\square$ :

$$\begin{aligned} \square &= e^{A_0(t_1-t_0)}x(t_0) - e^{A_0(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_0(\bar{t}_1+\delta t_1-t_0)}x(t_0) - e^{A_0(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_0(\bar{t}_1-t_0)}e^{\delta t_1}x(t_0) - e^{A_0(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= \bar{F}_0 e^{\delta t_1}x(t_0) - \bar{F}_0\bar{x}(\bar{t}_0) \\ &= \bar{F}_0(I + A_0\delta t_1)x(t_0) - \bar{F}_0\bar{x}(\bar{t}_0) \\ &= \bar{F}_0[x(t_0) - \bar{x}(t_0)] + \bar{F}_0A_0\delta t_1 \end{aligned} \quad (4.8)$$

and then in  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_0}^{t_1} e^{A_0(t_1-\tau)} B_0 d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_0(\bar{t}_1-\tau)} B_0 d\tau \\
 &= \int_{t_0}^{\bar{t}_1+\delta t_1} e^{A_0(\bar{t}_1+\delta t_1-\tau)} B_0 d\tau - \int_{t_0}^{\bar{t}_1} e^{A_0(\bar{t}_1-\tau)} B_0 d\tau \\
 &= e^{A_0\delta t_1} \left[ \int_{t_0}^{\bar{t}_1} e^{A_0(\bar{t}_1-\tau)} B_0 d\tau + \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_0(\bar{t}_1-\tau)} B_0 d\tau \right] - \int_{t_0}^{\bar{t}_1} e^{A_0(\bar{t}_1-\tau)} B_0 d\tau \\
 &= e^{A_0\delta t_1} [\bar{G}_0 + B_0\delta t_1] - \bar{G}_0 \\
 &= (I + A_0\delta t_1)[\bar{G}_0 + B_0\delta t_1] - \bar{G}_0 \\
 &= \cancel{\bar{G}_0} + B_0\delta t_1 + A_0\bar{G}_0\delta t_1 + \cancel{A_0B_0\delta t_1\delta t_1} - \cancel{\bar{G}_0} \\
 &= A_0\bar{G}_0\delta t_1 + B_0\delta t_1
 \end{aligned} \tag{4.9}$$

the resulting equations (4.8) and (4.9) are replaced back in (4.7) to complete the difference equation

$$x(t_1) - \bar{x}(\bar{t}_1) = \bar{F}_0[x(t_0) - \bar{x}(\bar{t}_0)] + [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 + B_0] \delta t_1 \tag{4.10}$$

Repeating the steps for  $x(t_2)$  we have

$$x(t_2) = e^{A_1(t_2-t_1)} x(t_1) + \int_{t_1}^{t_2} e^{A_1(t_2-\tau)} B_1 d\tau \tag{4.11}$$

$$\bar{x}(\bar{t}_2) = e^{A_1(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1) + \int_{\bar{t}_1}^{\bar{t}_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau \int_a^b x^2 \phi \alpha dx \frac{1}{2} \tag{4.12}$$

subtracting (4.12) from (4.11)

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \overbrace{e^{A_1(t_2-t_1)} x(t_1) - e^{A_1(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1)}^{\square} \\
 &\quad + \underbrace{\int_{t_1}^{t_2} e^{A_1(t_2-\tau)} B_1 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau}_{\bigcirc}
 \end{aligned} \tag{4.13}$$

expanding  $\square$  in (4.13):

$$\begin{aligned}
 \square &= e^{A_1(\bar{t}_2+\delta t_2-\bar{t}_1-\delta t_1)} x(t_1) - e^{A_1(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1) \\
 &= e^{A_1(\bar{t}_2-\bar{t}_1)} e^{A_1(\delta t_2-\delta t_1)} x(t_1) - e^{A_1(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1) \\
 &= \bar{F}_1[I + A_1(\delta t_2 - \delta t_1)]x(t_1) - \bar{F}_1\bar{x}(\bar{t}_1) \\
 &= \bar{F}_1[x(t_1) - \bar{x}(\bar{t}_1)] + \bar{F}_1 A_1 x(t_1) \delta t_2 - \bar{F}_1 A_1 x(t_1) \delta t_1
 \end{aligned} \tag{4.14}$$

and expanding  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_1}^{t_2} e^{A_1(t_2-\tau)} B_1 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau \\
 &= \int_{\bar{t}_1+\delta t_1}^{\bar{t}_2+\delta t_2} e^{A_1(\bar{t}_2+\delta t_2-\tau)} B_1 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_2} \left[ \int_{\bar{t}_1}^{\bar{t}_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau \right] \\
 &\quad - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau \\
 &= (I + A_1\delta t_2) \left[ \bar{G}_1 - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_1(\bar{t}_2-\tau)} B_1 d\tau \right] - \bar{G}_1 \\
 &= (I + A_1\delta t_2) \left[ \bar{G}_1 - e^{A_1(\bar{t}_2-\bar{t}_1)} B_1 \delta t_1 + B_1 \delta t_2 \right] - \bar{G}_1 \\
 &= (I + A_1\delta t_2) \left[ \bar{G}_1 - \bar{F}_1 B_1 \delta t_1 + B_1 \delta t_2 \right] - \bar{G}_1 \\
 &= \cancel{\bar{G}_1} - \bar{F}_1 B_1 \delta t_1 + B_1 \delta t_2 + A_1 \bar{G}_1 \delta t_2 - \cancel{\bar{G}_1} \\
 &= A_1 \bar{G}_1 \delta t_2 + B_1 \delta t_2 - \bar{F}_1 B_1 \delta t_1
 \end{aligned} \tag{4.15}$$

and replacing (4.14) and (4.15) back into equation (4.13) we get to the difference equation for  $x(t_2) - \bar{x}(\bar{t}_2)$

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_1 [x(t_1) - \bar{x}_1(\bar{t}_1)] \\
 &\quad - \bar{F}_1 [A_1 x(t_1) + B_1] \delta t_1 \\
 &\quad + [\bar{F}_1 A_1 \underbrace{x(t_1)}_{\triangle} + A_1 \bar{G}_1 + B_1] \delta t_2
 \end{aligned} \tag{4.16}$$

from (4.16),  $\triangle$  can be expanded by replacing the resulting equation of (4.10)

$$\triangle = x(t_1) = \bar{x}(\bar{t}_1) + \bar{F}_0 [x(t_0) - \bar{x}(t_0)] + [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 + B_0] \delta t_1 \tag{4.17}$$

note that when  $\triangle$  is replaced in eq. (4.16) it will produce a product with  $\delta t_1$  and  $\delta t_2$  like

$$x(t_1) \delta t_1 = \bar{x}(\bar{t}_1) \delta t_1 + \bar{F}_0 \overbrace{[x(t_0) - \bar{x}(t_0)] \delta t_1}^{\square} + [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 + B_0] \overbrace{\delta t_1 \delta t_1}^{\bigcirc}$$

both  $\square$  and  $\bigcirc$  are products of differences that produces a smaller number and they will be neglected in the first order approximations

$$x(t_1) \delta t_1 \doteq \bar{x}(\bar{t}_1) \delta t_1 \tag{4.18}$$

replacing (4.10) and (4.17) in (4.16) it follows that

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_1 \{ \bar{F}_0 [x(t_0) - \bar{x}(t_0) + [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 + B_0] \delta t_1] \\
 &\quad - \bar{F}_1 [A_1 \bar{x}(t_1) + B_1] \delta t_1 \\
 &\quad + [\bar{F}_1 A_1 \bar{x}(t_1) + A_1 \bar{G}_1 + B_1] \delta t_2
 \end{aligned}$$

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_1 \bar{F}_0 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_1 [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1] \delta t_1 \\
 &\quad + [\bar{F}_1 A_1 \bar{x}(\bar{t}_1) + A_1 \bar{G}_1 + B_1] \delta t_2
 \end{aligned} \tag{4.19}$$

Repeating the procedure for  $x(t_3)$  we have

$$x(t_3) = e^{A_2(t_3-t_2)} x(t_2) + \int_{t_2}^{t_3} e^{A_2(t_3-\tau)} B_2 d\tau \tag{4.20}$$

$$\bar{x}(\bar{t}_3) = e^{A_2(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2) + \int_{\bar{t}_2}^{\bar{t}_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau \tag{4.21}$$

subtracting (4.20) from (4.21)

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \overbrace{e^{A_2(t_3-t_2)} x(t_2) - e^{A_2(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2)}^{\square} \\
 &\quad + \underbrace{\int_{t_2}^{t_3} e^{A_2(t_3-\tau)} B_2 d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau}_{\bigcirc}
 \end{aligned} \tag{4.22}$$

expanding  $\square$  in (4.22):

$$\begin{aligned}
 \square &= e^{A_2(\bar{t}_3+\delta t_3-\bar{t}_2-\delta t_2)} x(t_2) - e^{A_2(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2) \\
 &= e^{A_2(\bar{t}_3-\bar{t}_2)} e^{A_2(\delta t_3-\delta t_2)} x(t_2) - e^{A_2(\bar{t}_3-\bar{t}_2)} \bar{x}(\bar{t}_2) \\
 &= \bar{F}_2 [I + A_2(\delta t_3 - \delta t_2)] x(t_2) - \bar{F}_2 \bar{x}(\bar{t}_2) \\
 &= \bar{F}_2 [x(t_2) - \bar{x}(\bar{t}_2)] + \bar{F}_2 A_2 x(t_2) \delta t_3 - \bar{F}_2 A_2 x(t_2) \delta t_2
 \end{aligned} \tag{4.23}$$

and expanding  $\bigcirc$ :

$$\begin{aligned}
 \bigcirc &= \int_{t_2}^{t_3} e^{A_2(t_3-\tau)} B_2 d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau \\
 &= \int_{\bar{t}_2+\delta t_2}^{\bar{t}_3+\delta t_3} e^{A_2(\bar{t}_3+\delta t_3-\tau)} B_2 d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau \\
 &= e^{A_2\delta t_3} \left[ \int_{\bar{t}_2}^{\bar{t}_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau \right] \\
 &\quad - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau \\
 &= (I + A_2\delta t_3) \left[ \bar{G}_2 - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_2(\bar{t}_3-\tau)} B_2 d\tau \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_3) \left[ \bar{G}_2 - e^{A_2(\bar{t}_3-\bar{t}_2)} B_2 \delta t_2 + B_2 \delta t_3 \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_3) \left[ \bar{G}_2 - \bar{F}_2 B_2 \delta t_2 + B_2 \delta t_3 \right] - \bar{G}_2 \\
 &= \cancel{\bar{G}_2} - \bar{F}_2 B_2 \delta t_2 + B_2 \delta t_3 + A_2 \bar{G}_2 \delta t_3 - \cancel{\bar{G}_2} \\
 &= A_2 \bar{G}_2 \delta t_3 + B_2 \delta t_3 - \bar{F}_2 B_2 \delta t_2
 \end{aligned} \tag{4.24}$$

and then replacing (4.23) in (4.24) back in eq. (4.22) we get to the difference equation for  $x(t_3) - \bar{x}(\bar{t}_3)$

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \bar{F}_2 [x(t_2) - \bar{x}_2(\bar{t}_2)] \\
 &\quad - \bar{F}_2 [A_2 x(t_2) + B_2] \delta t_2 \\
 &\quad + [\bar{F}_2 A_2 x(t_2) + A_2 \bar{G}_2 + B_2] \delta t_3
 \end{aligned} \tag{4.25}$$

from (4.19),  $\triangle$  can be expanded the same way as in the past iteration and  $x(t_2) - \bar{x}(\bar{t}_2)$  can be replaced in (4.25)

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \bar{F}_2 \{ \bar{F}_1 \bar{F}_0 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_1 [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1] \delta t_1 \\
 &\quad + [\bar{F}_1 A_1 \bar{x}(t_1) + A_1 \bar{G}_1 + B_1] \delta t_2 \} \\
 &\quad - \bar{F}_2 [A_2 \bar{x}(t_2) + B_2] \delta t_2 \\
 &\quad + [\bar{F}_2 A_2 \bar{x}(t_2) + A_2 \bar{G}_2 + B_2] \delta t_3
 \end{aligned}$$

after rearranging the terms, one arrives at

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) = & \bar{F}_2 \bar{F}_1 \bar{F}_0 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_2 \bar{F}_1 [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1] \delta t_1 \\
 & + \bar{F}_2 [\bar{F}_1 A_1 \bar{x}(t_1) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_2) + B_1 - B_2] \delta t_2 \\
 & + [\bar{F}_2 A_2 \bar{x}(t_2) + A_2 \bar{G}_2 + B_2] \delta t_3
 \end{aligned} \tag{4.26}$$

Now, there are enough iterations to deduce a pattern on each increment of the equation, so the equation for  $x(t_i)$  can be deduced as

$$\begin{aligned}
 x(t_i) - \bar{x}(\bar{t}_i) = & \bar{F}_{i-1} \bar{F}_{i-2} \dots \bar{F}_0 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_{i-1} \bar{F}_{i-2} \dots \bar{F}_1 [\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1] \delta t_1 \\
 & + \bar{F}_{i-1} \bar{F}_{i-2} \dots \bar{F}_2 [\bar{F}_1 A_1 x(t_1) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_2) + B_1 - B_2] \delta t_2 \\
 & \vdots \\
 & + \bar{F}_{i-1} [\bar{F}_{i-2} A_{i-2} \bar{x}(t_{i-2}) + A_{i-2} \bar{G}_{i-2} - A_{i-1} \bar{x}(\bar{t}_{i-1}) + B_{i-2} - B_{i-1}] \delta t_{i-1} \\
 & + [\bar{F}_{i-1} A_{i-1} \bar{x}(t_{i-1}) + A_{i-1} \bar{G}_{i-1} + B_{i-1}] \delta t_i
 \end{aligned}$$

(4.27)

and then, for  $x(t_N)$  the equation is as follows

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) = & \bar{F}_{N-1} \bar{F}_{N-2} \dots \bar{F}_0 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_{N-1} \bar{F}_{N-2} \dots \bar{F}_1 \overbrace{[\bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1]}^{\square} \delta t_1 \\
 & + \bar{F}_{N-1} \bar{F}_{N-2} \dots \bar{F}_2 [\bar{F}_1 A_1 x(t_1) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_2) + B_1 - B_2] \delta t_2 \\
 & \vdots \\
 & + \bar{F}_{N-1} [\bar{F}_{N-2} A_{N-2} \bar{x}(t_{N-2}) + A_{N-2} \bar{G}_{N-2} - A_{N-1} \bar{x}(\bar{t}_{N-1}) \\
 & \quad + B_{N-2} - B_{N-1}] \delta t_{N-1} \\
 & + \underbrace{[\bar{F}_{N-1} A_{N-1} \bar{x}(t_{N-1}) + A_{N-1} \bar{G}_{N-1} + B_{N-1}]}_{\circ} \delta t_N
 \end{aligned} \tag{4.28}$$

The equation (4.28) can be developed further to remove the dependencies on the

intermediary states  $x(t_0), x(t_1), \dots, x(t_{N-2})$ . By expanding  $\square$  and  $\bigcirc$ , the following identity holds

$$\begin{aligned}
 \square &= \bar{F}_0 A_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1 \\
 &= A_0 \bar{F}_0 x(t_0) + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1 \\
 &= A_0 [\bar{x}(\bar{t}_1) - \bar{G}_0] + A_0 \bar{G}_0 - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1 \\
 &= A_0 \bar{x}(\bar{t}_1) - \cancel{A_0 \bar{G}_0} + \cancel{A_0 \bar{G}_0} - A_1 \bar{x}(\bar{t}_1) + B_0 - B_1 \\
 &= (A_0 - A_1) \bar{x}(\bar{t}_1) + B_0 - B_1
 \end{aligned} \tag{4.29}$$

$$\begin{aligned}
 \bigcirc &= \bar{F}_{N-1} A_{N-1} \bar{x}(t_{N-1}) + A_{N-1} \bar{G}_{N-1} + B_{N-1} \\
 &= A_{N-1} \bar{F}_{N-1} \bar{x}(t_{N-1}) + A_{N-1} \bar{G}_{N-1} + B_{N-1} \\
 &= A_{N-1} [\bar{x}(\bar{t}_N) - \bar{G}_{N-1}] + A_{N-1} \bar{G}_{N-1} + B_{N-1} \\
 &= A_{N-1} \bar{x}(\bar{t}_N) - \cancel{A_{N-1} \bar{G}_{N-1}} + \cancel{A_{N-1} \bar{G}_{N-1}} + B_{N-1} \\
 &= A_{N-1} \bar{x}(\bar{t}_N) + B_{N-1}
 \end{aligned} \tag{4.30}$$

replacing (4.29) and (4.30) in (4.28)

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) &= \bar{F}_{N-1} \bar{F}_{N-2} \dots \bar{F}_0 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_{N-1} \bar{F}_{N-2} \dots \bar{F}_1 [(A_0 - A_1) \bar{x}(\bar{t}_1) + B_0 - B_1] \delta t_1 \\
 &\quad + \bar{F}_{N-1} \bar{F}_{N-2} \dots \bar{F}_2 [(A_1 - A_2) \bar{x}(\bar{t}_2) + B_1 - B_2] \delta t_2 \\
 &\quad \vdots \\
 &\quad + \bar{F}_{N-1} [(A_{N-2} - A_{N-1}) \bar{x}(\bar{t}_{N-1}) + B_{N-2} - B_{N-1}] \delta t_{N-1} \\
 &\quad + [A_{N-1} \bar{x}(\bar{t}_N) + B_{N-1}] \delta t_N
 \end{aligned}$$

(4.31)

and renaming the terms of (4.31) to

$$e(t) = x(t) - \bar{x}(\bar{t}) \quad (4.32)$$

$$\Phi = \bar{F}_{N-1}\bar{F}_{N-2}\dots\bar{F}_0 \quad (4.33)$$

$$\begin{aligned} \Gamma = & \begin{bmatrix} \bar{F}_{N-1}\bar{F}_{N-2}\dots\bar{F}_1[(A_0 - A_1)\bar{x}(\bar{t}_1) + B_0 - B_1], \\ \bar{F}_{N-1}\bar{F}_{N-2}\dots\bar{F}_2[(A_1 - A_2)\bar{x}(\bar{t}_2) + B_1 - B_2], \\ \vdots \\ \bar{F}_{N-1}[(A_{N-2} - A_{N-1})\bar{x}(\bar{t}_{N-1}) + B_{N-2} - B_{N-1}] \end{bmatrix} \end{aligned} \quad (4.34)$$

$$\delta t = [\delta t_1, \delta t_2, \dots, \delta t_N]^T \quad (4.35)$$

we get to the affine equation

$$e(t_N) = \Phi e(t_0) + \Gamma \delta t \quad (4.36)$$

falar que chegamos no final

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.37)$$

TODO: voltar para o problema inicial em que queríamos encontrar os  $t_{j,n}$

where  $\bar{x}$  is calculated as

$$\bar{x}(\bar{t}_1) = F_0\bar{x}(\bar{t}_0) + G_0 \quad (4.38)$$

$$\bar{x}(\bar{t}_2) = F_1\bar{x}(\bar{t}_1) + G_1 \quad (4.39)$$

$\vdots$

$$\bar{x}(\bar{t}_N) = F_{N-1}\bar{x}(\bar{t}_{N-1}) + G_{N-1} \quad (4.40)$$

and  $F_i$  and  $G_i$  are calculated as

$$[F_i, G_i] = c2dm(Ai, Bi, [], [], dti, 'zoh') \quad (4.41)$$

### 4.2.1 Constraints

As restricoes do controlador devem descrever os limites de operacao da dinamica do modelo e ainda encontrar uma solucao que leve o sistema para mais proximo da referencia.

### ESCREVER EQUACOES DE RESTRICAO

descrever que a trajetoria deve ser admissivel e forma com que o sistema calcula o controle tambem deve ser admissivel

fazer um rapido comentario sobre a forma que essa restricao é trabalhada no capitulo 2

#### 4.2.2 Feasibility region

nao aplicavel ????

como calcular ??? restricoes do problem de prog quad

sobre o controle

variacoes do instante de chaveadmento

mas envolvem o estado inicial do ciclo

sea dependencia das restricoes com respeito ao estao inicial for linear

entao podemos encarar o  $x_0$  como uma variavel junto com as variaveis de controle

com isso as restricoes descrevem um polietro aumenta do de controle e estado inicial

geometria computacional mpttoolbox

projeta a geometria no subespaco

pode haver melhoria com o ponto final livre

interessante para avaliar o desempenho do controlador na regioao de factibilidade

#### APPLICATION EXAMPLES

- Integrador duplo( matheus )
- Patino 1
- Patino 2

## 4.3 Application Examples

### 4.3.1 Integrador duplo

### 4.3.2 Patino 1

### 4.3.3 Patino 2

Matrizes do artigo patino exemplo 2:

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} -\frac{x_3(t)}{C_1} & \frac{x_3(t)}{C_1} & 0 \\ 0 & -\frac{x_3(t)}{C_2} & \frac{x_3(t)}{C_2} \\ \frac{x_1(t)}{L} & -\frac{x_2(t)-x_1(t)}{L} & \frac{E-x_2(t)}{L} \end{bmatrix} \begin{bmatrix} u_1(t) \\ u_2(t) \\ u_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}x_3(t) \end{bmatrix} \quad (4.42)$$

$$A = \begin{bmatrix} -\frac{x_3(t)}{C_1} & \frac{x_3(t)}{C_1} & 0 \\ 0 & -\frac{x_3(t)}{C_2} & \frac{x_3(t)}{C_2} \\ \frac{x_1(t)}{L} & \frac{x_2(t)-x_1(t)}{L} & \frac{E-x_2(t)}{L} \end{bmatrix} \quad (4.43)$$

$$\begin{aligned} \mathbf{u}_0 &= \begin{bmatrix} 0 & 0 & 0 \end{bmatrix}^T \\ \mathbf{u}_1 &= \begin{bmatrix} 0 & 0 & 1 \end{bmatrix}^T \\ \mathbf{u}_2 &= \begin{bmatrix} 0 & 1 & 0 \end{bmatrix}^T \\ \mathbf{u}_3 &= \begin{bmatrix} 0 & 1 & 1 \end{bmatrix}^T \\ \mathbf{u}_4 &= \begin{bmatrix} 1 & 0 & 0 \end{bmatrix}^T \\ \mathbf{u}_5 &= \begin{bmatrix} 1 & 0 & 1 \end{bmatrix}^T \\ \mathbf{u}_6 &= \begin{bmatrix} 1 & 1 & 0 \end{bmatrix}^T \\ \mathbf{u}_7 &= \begin{bmatrix} 1 & 1 & 1 \end{bmatrix}^T \end{aligned} \quad (4.44)$$

$$A_{u_0} = A\mathbf{u}_0 = \begin{bmatrix} 0 \\ 0 \\ -\frac{Rx_3(t)}{L} \end{bmatrix} \quad (4.45)$$

$$A_{u_1} = A\mathbf{u}_1 = \begin{bmatrix} 0 \\ \frac{x_3(t)}{C_2} \\ \frac{E-x_2(t)-Rx_3(t)}{L} \end{bmatrix} \quad (4.46)$$

$$A_{u_2} = A\mathbf{u}_2 = \begin{bmatrix} \frac{x_3(t)}{C_1} \\ -\frac{x_3(t)}{C_2} \\ \frac{x_2(t)-x_1(t)-Rx_3(t)}{L} \end{bmatrix} \quad (4.47)$$

$$A_{u_3} = A\mathbf{u}_3 = \begin{bmatrix} \frac{x_3(t)}{C_1} \\ 0 \\ \frac{E-x_1(t)-Rx_3(t)}{L} \end{bmatrix} \quad (4.48)$$

$$A_{u_4} = A\mathbf{u}_4 = \begin{bmatrix} -\frac{x_3(t)}{C_1} \\ 0 \\ \frac{x_1(t)-Rx_3(t)}{L} \end{bmatrix} \quad (4.49)$$

$$A_{u_5} = A\mathbf{u}_5 = \begin{bmatrix} -\frac{x_3(t)}{C_1} \\ \frac{x_3(t)}{C_2} \\ \frac{E-x_1(t)-x_2(t)-Rx_3(t)}{L} \end{bmatrix} \quad (4.50)$$

$$A_{u_6} = A\mathbf{u}_6 = \begin{bmatrix} 0 \\ -\frac{x_3(t)}{C_2} \\ \frac{x_2(t)-Rx_3(t)}{L} \end{bmatrix} \quad (4.51)$$

$$A_{u_7} = A\mathbf{u}_7 = \begin{bmatrix} 0 \\ 0 \\ \frac{E-Rx_3(t)}{L} \end{bmatrix} \quad (4.52)$$

$$\dot{X} = A_{u_0}X + B_0u = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} u \quad (4.53)$$

$$\dot{X} = A_{u_1}X + B_1u = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{1}{C_2} \\ 0 & -\frac{1}{L} & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} u \quad (4.54)$$

$$\dot{X} = A_{u_2}X + B_2u = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & -\frac{1}{C_2} \\ -\frac{1}{L} & \frac{1}{L} & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} u \quad (4.55)$$

$$\dot{X} = A_{u3}X + B_3u = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & \frac{1}{C_2} \\ -\frac{1}{L} & 0 & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} u \quad (4.56)$$

$$\dot{X} = A_{u4}X + B_4u = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & 0 \\ -\frac{1}{L} & 0 & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} u \quad (4.57)$$

$$\dot{X} = A_{u5}X + B_5u = \begin{bmatrix} 0 & 0 & -\frac{1}{C_1} \\ 0 & 0 & \frac{1}{C_2} \\ \frac{1}{L} & -\frac{1}{L} & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} u \quad (4.58)$$

$$\dot{X} = A_{u6}X + B_6u = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{1}{C_2} \\ 0 & -\frac{1}{L} & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} u \quad (4.59)$$

$$\dot{X} = A_{u7}X + B_7u = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & -\frac{R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} u \quad (4.60)$$

## 4.4 Conclusion

mostrar o modelo em malha aberta indo para a sua trajetoria ciclica estavel junto com o modelo com controle ativo mostrando a convergencia mais rapida

## 5 Conclusão

### 5.1 RASCUNHO

INICIO escrevendo aula7

=====

dinamica a tempo discreto

$$x(k+1) = Ax(k) + Bu(k) \quad (5.1)$$

com entrada  $u(k) \in \mathbb{R}^p$  e estado  $x(k) \in \mathbb{R}$  sujeitos aas seguintes restricoes:

$$u(k) \in \mathcal{U}, x(k) \in \mathcal{X}, \forall k \geq 0 \quad (5.2)$$

$$\mathcal{U} = \{u \in \mathbb{R}^p : S_u u \leq b_u\}, \mathcal{X} = \{x \in \mathbb{R}^n : S_x x \leq b_x\} \quad (5.3)$$

deseja-se conduzir o estado para um ponto de equilibrio  $\bar{x} \in \text{int}(\mathcal{X})$ , associado a um valor de equilibrio  $\bar{u} \in \text{int}(\mathcal{U})$ .

Suponha que, sob a acao de uma dada lei de controle estabilizante da forma

$$u(k) = -K[x(k) - \bar{x}] + \bar{u} \quad (5.4)$$

o maximo conjunto admissivel quanto aas restricoes de estado e controle seja descrito por

$$\mathcal{X}_f = \{x \in \mathbb{R}^n : S_f x \leq b_f\} \quad (5.5)$$

Se o estado inicial  $x(0)$  estiver em  $\mathcal{X}_f$ , a lei de controle (\*) podera ser aplicada a partir de  $k = 0$  e o estado sera conduzido ao ponto de equilibrio desejado, sem que as restricoes sejam violadas

O que fazer se  $x(0) \notin \mathcal{X}_f$  ?

### ROTEIRO

- Conducao do estado a um conjunto alvo  $\mathcal{X}_f$
- Custo terminal e custo de trajetoria
- Expressao do custoe das restricoes emprgando notacao mais concisa
- Formulacao do problema de otimizacao na forma de programacao quadratica
- Programacao quadratica: Existencia de solucao otima. Convexidade
- Solucao de problemas de programacao quadratica no Matlab

### CONDUCAO DO ESTADO AO CONJUNTO $\mathcal{X}_f$

Dado um estado inicial  $x(0) \notin \mathcal{X}_f$  gostaríamos de obter uma sequencia de  $N$  acoes de controle de modo que

$$\begin{aligned} u(0) &\in \mathcal{U} \\ u(1) &\in \mathcal{U} \\ &\vdots \\ u(N-1) &\in \mathcal{U} \end{aligned} \tag{5.6}$$

de modo que

$$\begin{aligned} u(1) &\in \mathcal{X} \\ u(2) &\in \mathcal{X} \\ &\vdots \\ u(N-1) &\in \mathcal{X} \\ u(N) &\in \mathcal{X} \end{aligned} \tag{5.7}$$

de maneira geral, a solucao (se existir) nao sera unica. portanto, eh necessario adotar um criterio que permita escolher a melhor sequencia de acoes de controle para realizar a tarefa

para isso, empregaremos um custo da forma

$$J = \|x(N) - \bar{x}\|_{P_f}^2 + \sum_{k=0}^{N-1} \left[ \|x(k) - \bar{x}\|_Q^2 + \|u(k) - \bar{u}\|_R^2 \right] \quad (5.8)$$

sendo  $P_f$ ,  $Q$ ,  $R$  matrizes de peso simétricas e positivo-definidas

A expressão de  $J$  envolve uma parcela de **custo terminal** e outra de **custo de trajetória**

Consideremos inicialmente  $\bar{x} = 0$  e  $\bar{u} = 0$ .

$$J = \|x(N)\|_{P_f}^2 + \sum_{k=0}^{N-1} \left[ \|x(k)\|_Q^2 + \|u(k)\|_R^2 \right] \quad (5.9)$$

a expressão para o custo pode ser reescrita empregando a seguinte notação:

$$\mathbf{u} = \begin{bmatrix} u(0) \\ u(1) \\ \vdots \\ u(N-1) \end{bmatrix} \in \mathbb{R}^{pN}, \mathbf{x} = \begin{bmatrix} x(1) \\ x(2) \\ \vdots \\ x(N) \end{bmatrix} \in \mathbb{R}^{nN} \quad (5.10)$$

lembrando que o estado inicial  $x(0)$  foi fixado na formulação do problema.

com isso, a somatória

$$\sum_{k=0}^{N-1} \|u(k)\|_R^2 = u^T(0)Ru(0) + u^T(1)Ru(1) + \cdots + u^T(N-1)Ru(N-1) \quad (5.11)$$

fica na forma

$$\underbrace{\begin{bmatrix} u^T(0) & u^T(1) & \cdots & u^T(N-1) \end{bmatrix}}_{\mathbf{u}^T} \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} \underbrace{\begin{bmatrix} u(0) \\ u(1) \\ \vdots \\ u(N-1) \end{bmatrix}}_{\mathbf{u}} \quad (5.12)$$

tendo-se omitido a dimensão ( $p \times p$ ) das submatrizes de zeros, por brevidade.

Conventionando ainda a notação

$$\mathbf{R} = \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} \quad (5.13)$$

ou, de forma abreviada:

$$\mathbf{R} = \text{diag}_N(R) \quad (5.14)$$

pode-se escrever

$$\sum_{k=0}^{N-1} \|u(k)\|_R^2 = \|\mathbf{u}\|_{\mathbf{R}}^2 \quad (5.15)$$

De forma similar, pode-se escrever

$$\begin{aligned} \|x(N)\|_{P_f}^2 + \sum_{k=0}^{N-1} \|x(k)\|_Q^2 &= x^T(0)Qx(0) \\ &+ x^T(1)Qx(1) + \cdots + x^T(N-1)Qx(N-1) + x^T(N)P_fx(N) \\ &= x^T(0)Qx(0) + \\ &\underbrace{\begin{bmatrix} x^T(1) & x^T(2) & \cdots & x^T(N) \end{bmatrix}}_{\mathbf{x}^T} \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} \underbrace{\begin{bmatrix} x(1) \\ x(2) \\ \vdots \\ x(N) \end{bmatrix}}_{\mathbf{x}} \end{aligned} \quad (5.16)$$

Adotando a notação

$$Q = \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} \in \mathbb{R}^{nN \times nN} \quad (5.17)$$

ou, de forma abreviada:

$$Q = \begin{bmatrix} \text{diag}_{N-1}(Q) & 0 \\ 0 & P_f \end{bmatrix} \quad (5.18)$$

pode-se escrever

$$\|x(N)\|_{P_f}^2 + \sum_{k=0}^{N-1} \|x(k)\|_Q^2 + \|\mathbf{x}\|_Q^2 \quad (5.19)$$

Em resumo, o custo pode ser reescrito como

$$J(\mathbf{x}, \mathbf{u}) = \|x(0)\|_Q^2 + \|\mathbf{x}\|_Q^2 + \|\mathbf{u}\|_R^2 \quad (5.20)$$

Vamos agora expressar as restrições em termos de  $\mathbf{x}$ ,  $\mathbf{u}$ .

As restrições podem ser escritas como

$$\mathbf{u} = \begin{bmatrix} u(0) \\ u(1) \\ \vdots \\ u(N-1) \end{bmatrix} \in \mathcal{U} \times \mathcal{U} \times \cdots \times \mathcal{U} = \mathcal{U}^N \quad (5.21)$$

$$\mathbf{x} = \begin{bmatrix} x(1) \\ x(2) \\ \vdots \\ x(N) \end{bmatrix} \in \mathcal{X} \times \mathcal{X} \times \cdots \times \mathcal{X} = \mathcal{X}^{N-1} \times \mathcal{X}_f \quad (5.22)$$

Lembrando que

$$\mathcal{U} = \{\mathbf{u} \in \mathbb{R}^p : S_u \mathbf{u} \leq b_u\} \quad (5.23)$$

a restrição sobre  $\mathbf{u}$  pode ser expressa como

$$\begin{bmatrix} S_u & 0 & \cdots & 0 \\ 0 & S_u & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_u \end{bmatrix} \begin{bmatrix} u(0) \\ u(1) \\ \vdots \\ u(N-1) \end{bmatrix} \leq \begin{bmatrix} b_u \\ b_u \\ \vdots \\ b_u \end{bmatrix} \quad (5.24)$$

ou, de forma mais concisa:

$$\mathbf{S}_u \mathbf{u} \leq \mathbf{b}_u \quad (5.25)$$

sendo

$$\mathbf{S}_u = \text{diag}_N(S_u), \mathbf{b}_u = \text{col}_N(b_u) \quad (5.26)$$

De forma similar, lembrando que

$$\mathcal{X} = \{x \in \mathbb{R}^n : S_x x \leq b_x\}, \mathcal{X}_f = \{x \in \mathbb{R}^n : S_f x \leq b_f\} \quad (5.27)$$

ou, de forma mais concisa

$$\mathbf{S}_x \mathbf{x} \leq \mathbf{b}_x \quad (5.28)$$

sendo

$$\mathbf{S}_x = \begin{bmatrix} \text{diag}_{N-1}(S_x) & 0 \\ 0 & S_f \end{bmatrix}, \mathbf{b}_x = \begin{bmatrix} \text{col}_{N-1}(b_x) \\ b_f \end{bmatrix} \quad (5.29)$$

No caso geral em que  $\bar{x} \neq 0, \bar{u} \neq 0$

$$J = \|x(N) - \bar{x}\|_{P_f}^2 + \sum_{k=0}^{N-1} \left[ \|x(k) - \bar{x}\|_Q^2 + \|u(k) - \bar{u}\|_R^2 \right] \quad (5.30)$$

torna-se

$$J(\mathbf{x}, \mathbf{u}) = \|x(0) - \bar{x}\|_{P_f}^2 + \|\mathbf{x} - \text{col}_N(\bar{x})\|_{\mathbf{Q}}^2 + \|\mathbf{u} - \text{col}_N(\bar{u})\|_{\mathbf{R}}^2 \quad (5.31)$$

O problema de otimização a ser resolvido pode ser expresso como

$$\min_{\mathbf{x} \in \mathbb{R}^{nN}, \mathbf{u} \in \mathbb{R}^{pN}} J(x, u) \quad (5.32)$$

sendo

$$J(\mathbf{x}, \mathbf{u}) = \|x(0) - \bar{x}\|_Q^2 + \|\mathbf{x} - \text{col}_N(\bar{x})\|_{\mathbf{Q}}^2 + \|\mathbf{u} - \text{col}_N(\bar{u})\|_{\mathbf{R}}^2 \quad (5.33)$$

com  $\mathbf{u}, \mathbf{u}$  sujeitas a

$$\mathbf{S}_x \mathbf{x} \leq \mathbf{b}_x \quad (5.34)$$

$$\mathbf{S}_u \mathbf{u} \leq \mathbf{b}_u \quad (5.35)$$

Vamos expressar o vínculo entre os vetores

$$\mathbf{u} = \begin{bmatrix} u(0) \\ u(1) \\ \vdots \\ u(N-1) \end{bmatrix}, \mathbf{x} = \begin{bmatrix} x(1) \\ x(2) \\ \vdots \\ x(N) \end{bmatrix} \quad (5.36)$$

com base na equação de estado

$$x(k+1) = Ax(k) + Bu(k) \quad (5.37)$$

e na condição inicial  $x(0)$ .

Neste ponto, vale lembrar a solução da equação de estado:

$$x(k) = A^k x(0) + \sum_{i=0}^{k-1} A^{k-1-i} Bu(i) \quad (5.38)$$

que pode ser escrita para  $k = 1, 2, \dots, N$  como

$$x(1) = Ax(0) + Bu(0) \quad (5.39)$$

$$x(2) = A^2x(0) + ABu(0) + Bu(1) \quad (5.40)$$

$$\vdots \quad (5.41)$$

$$x(N) = A^N x(0) + A^{N-1}Bu(0) + \dots + ABu(N-2) + Bu(N-1) \quad (5.42)$$

ou ainda

$$\begin{bmatrix} x(1) \\ x(2) \\ \vdots \\ x(N) \end{bmatrix} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix} x(0) + \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \begin{bmatrix} u(0) \\ u(1) \\ \vdots \\ u(N-1) \end{bmatrix} \quad (5.43)$$

De forma mais concisa, vamos escrever

$$\mathbf{x} = \mathbf{A}x(0) + \mathbf{B}\mathbf{u} \quad (5.44)$$

com

$$\mathbf{A} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix}, \mathbf{B} = \begin{bmatrix} B & 0 & \cdots & 0 \\ AB & B & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \cdots & B \end{bmatrix} \quad (5.45)$$

Tendo em vista o vínculo

$$\mathbf{x} = \mathbf{A}x(0) + \mathbf{B}\mathbf{u} \quad (5.46)$$

pode-se reescrever a função de custo como

$$\begin{aligned} J(\mathbf{x}, \mathbf{u}) &= \|x(0) - \bar{x}\|_Q^2 + \|\mathbf{x} - \text{col}_N(\bar{x})\|_Q^2 + \|\mathbf{u} - \text{col}_N(\bar{u})\|_R^2 \\ &= \|x(0) - \bar{x}\|_Q^2 \\ &\quad + [\mathbf{A}x(0) + \mathbf{B}\mathbf{u} - \text{col}_N(\bar{x})]^T \mathbf{Q} [\mathbf{A}x(0) + \mathbf{B}\mathbf{u} - \text{col}_N(\bar{x})] \\ &\quad + [\mathbf{u} - \text{col}_N(\bar{u})]^T \mathbf{R} [\mathbf{u} - \text{col}_N(\bar{u})] \end{aligned} \quad (5.47)$$

$$\begin{aligned} J(\mathbf{x}, \mathbf{u}) &= \|x(0) - \bar{x}\|_Q^2 \\ &\quad + [\mathbf{A}x(0) - \text{col}_N(\bar{x})\mathbf{B}\mathbf{u}]^T \mathbf{Q} [\mathbf{A}x(0) - \text{col}_N(\bar{x})\mathbf{B}\mathbf{u}] \\ &\quad + \mathbf{u}^T \mathbf{R} \mathbf{u} - \mathbf{u}^T \mathbf{R} [\text{col}_N(\bar{u})] - [\text{col}_N(\bar{u})]^T \mathbf{R} \mathbf{u} + \|\text{col}_N(\bar{u})\|_R^2 \\ J(\mathbf{x}, \mathbf{u}) &= \|x(0) - \bar{x}\|_Q^2 + \|\text{col}_N(\bar{u})\|_R^2 \\ &\quad + [\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} \mathbf{u} + y \\ &\quad - \mathbf{u}^T \mathbf{R} [\text{col}_N(\bar{u})] - [\text{col}_N(\bar{u})]^T \mathbf{R} \mathbf{u} + \mathbf{u}^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \mathbf{u} \end{aligned} \quad (5.48)$$

Observacoes:

O termo constante será denotado por  $c_0$

Lembrando que a matriz  $\mathbf{Q}$  é simétrica, tem-se

$$[\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} \mathbf{u} = \{\mathbf{u}^T \mathbf{B}^T \mathbf{Q} [\mathbf{A}x(0) - \text{col}_N(\bar{x})]\}^T \quad (5.49)$$

Como esses termos são escalares, conclui-se que são iguais entre si. Logo:

$$\begin{aligned} &[\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} \mathbf{u} + \mathbf{u}^T \mathbf{B}^T \mathbf{Q} [\mathbf{A}x(0) - \text{col}_N(\bar{x})] \\ &= 2 [\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} \mathbf{u} \end{aligned} \quad (5.50)$$

De forma similar:

$$-\mathbf{u}^T \mathbf{R} [\text{col}_N(\bar{\mathbf{u}})] - [\text{col}_N(\bar{\mathbf{u}})]^T \mathbf{R} \mathbf{u} = -2 [\text{col}_N(\bar{\mathbf{u}})]^T \mathbf{R} \mathbf{u} \quad (5.51)$$

Finalmente, pode-se escrever

$$\begin{aligned} J(\mathbf{u}) &= \mathbf{u}^T (\mathbf{B}^T \mathbf{Q} \mathbf{B} + \mathbf{R}) \mathbf{u} \\ &+ 2 \left\{ [\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} - [\text{col}_N(\bar{\mathbf{u}})]^T \mathbf{R} \right\} \mathbf{u} = c_0 \end{aligned} \quad (5.52)$$

com

$$c_0 = \|x(0) - \bar{x}\|_Q^2 + \|\mathbf{A}x(0) - \text{col}_N(\bar{x})\|_{\mathbf{R}}^2 + \|\text{col}_N(\bar{\mathbf{u}})\|_{\mathbf{R}}^2 \quad (5.53)$$

Note-se que passaremos a usar a notação  $J(\mathbf{u})$  em lugar de  $J(\mathbf{x}, \mathbf{u})$ , uma vez que  $\mathbf{x}$  foi eliminada da expressão do custo.

Para terminar a reformulação do problema de otimização em termos de  $\mathbf{u}$ , deve-se considerar o vínculo entre  $\mathbf{x}$  e  $\mathbf{u}$  nas **restrições**

Considerando novamente o vínculo

$$\mathbf{x} = \mathbf{A}x(0) + \mathbf{B}\mathbf{u} \quad (5.54)$$

a restrição

$$\mathbf{S}_x \mathbf{x} \leq \mathbf{b}_x \quad (5.55)$$

pode ser reformulada como

$$\mathbf{S}_x \mathbf{B} \mathbf{u} \leq \mathbf{b}_x - \mathbf{S}_x \mathbf{A}x(0) \quad (5.56)$$

Em conjunto com  $\mathbf{S}_u \mathbf{u} \leq \mathbf{b}_u$ , pode-se então expressar as restrições na forma

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix} \mathbf{u} \leq \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A}x(0) \\ \mathbf{b}_u \end{bmatrix} \quad (5.57)$$

ou, de maneira mais sucinta:

$$\mathbf{S} \mathbf{u} \leq \mathbf{b} \quad (5.58)$$

com

$$\mathbf{S} = \begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix}, \mathbf{b} = \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A}x(0) \\ \mathbf{b}_u \end{bmatrix} \quad (5.59)$$

Em resumo, o problema de otimização passa a ser expresso como

$$\min_{\mathbf{u} \in \mathbb{R}^N} J(\mathbf{u}) \text{ s.t. } \mathbf{S}\mathbf{u} \leq \mathbf{b} \quad (5.60)$$

sendo

$$\begin{aligned} J(\mathbf{u}) &= \mathbf{u}^T (\mathbf{B}^T \mathbf{Q} \mathbf{B} + \mathbf{R}) \mathbf{u} \\ &+ 2 \left\{ [\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} - [\text{col}_N(\bar{u})]^T \mathbf{R} \right\} \mathbf{u} + c_0 \end{aligned} \quad (5.61)$$

Trata-se da minimização de um **custo quadrático** sujeito a **restrições lineares**:

### PROBLEMA DE PROGRAMACAO QUADATICA

Para facilitar a análise do problema de programação quadrática, passaremos a escrever o custo

$$\begin{aligned} J(\mathbf{u}) &= \mathbf{u}^T (\mathbf{B}^T \mathbf{Q} \mathbf{B} + \mathbf{R}) \mathbf{u} + \\ &+ 2 \left\{ [\mathbf{A}x(0) - \text{col}_N(\bar{x})]^T \mathbf{Q} \mathbf{B} - [\text{col}_N(\bar{u})]^T \mathbf{R} \right\} \mathbf{u} + c_0 \end{aligned} \quad (5.62)$$

nesta forma padronizada:

$$J(\mathbf{u}) = \frac{1}{2} \mathbf{u}^T J_{uu} \mathbf{u} + f^T \mathbf{u} + c_0 \quad (5.63)$$

com

$$J(\mathbf{u}) = 2(\mathbf{B}^T \mathbf{Q} \mathbf{B} + \mathbf{R}), f = 2 \left\{ \mathbf{B}^T \mathbf{Q} [\mathbf{A}x(0) - \text{col}_N(\bar{x})] - \mathbf{R} \text{col}_N(\bar{u}) \right\} \quad (5.64)$$

lembrando que  $\mathbf{Q}$  e  $\mathbf{R}$  são simétricas.

### TERMINOLOGIA E NOTACAO

$$J(\mathbf{u}) = \frac{1}{2} \mathbf{u}^T J_{uu} \mathbf{u} + f^T \mathbf{u} + c_0 \quad (5.65)$$

1) A matriz  $J_{uu}$  corresponde à chamada **Hessiana** do custo, que é definida como

$$J_{\mathbf{uu}} = \begin{bmatrix} \frac{\partial^2 J}{\partial u_1^2} & \frac{\partial^2 J}{\partial u_1 \partial u_2} & \cdots & \frac{\partial^2 J}{\partial u_1 \partial u_N} \\ \frac{\partial^2 J}{\partial u_2 \partial u_1} & \frac{\partial^2 J}{\partial u_2^2} & \cdots & \frac{\partial^2 J}{\partial u_2 \partial u_N} \\ \vdots & \vdots & \ddots & \vdots \\ \frac{\partial^2 J}{\partial u_N \partial u_1} & \frac{\partial^2 J}{\partial u_N \partial u_2} & \cdots & \frac{\partial^2 J}{\partial u_N^2} \end{bmatrix} \quad (5.66)$$

sendo  $u_1, u_2, \dots, u_N$  como componentes de  $\mathbf{u}$ . Vide **material suplementar 1** ao final dos slides para mais detalhes.

Vale notar que  $J_{\mathbf{uu}} = 2(\mathbf{B}^T \mathbf{Q} \mathbf{B} + \mathbf{R})$  é simétrica e positivo definida, pois  $\mathbf{Q}$  e  $\mathbf{R}$  são simétricas e positivo definidas.

### 5.1.1 FIM

// PAGINA 31/78 // tese pag 31

# Bibliography

BENMILOUD, M.; BENALIA, A.; DJEMAI, M.; DEFOORT, M. On the local stabilization of hybrid limit cycles in switched affine systems. **IEEE Transactions on Automatic Control**, v. 64, n. 2, p. 841–846, 2019.

EGIDIO, L.; DEAECTO, G.; GEROMEL, J. Limit cycle global asymptotic stability of continuous-time switched affine systems. **IFAC-PapersOnLine**, v. 53, p. 6121–6126, 01 2020.

EGIDIO, L. N.; DAIHA, H. R.; DEAECTO, G. S. Global asymptotic stability of limit cycle and  $h_2/h_\infty$  performance of discrete-time switched affine systems. **Automatica**, v. 116, p. 108927, 2020. ISSN 0005-1098.

HAJIAHMADI, M.; SCHUTTER, B. D.; HELLENDORRN, H. Robust  $h_\infty$  switching control techniques for switched nonlinear systems with application to urban traffic control. **International Journal of Robust and Nonlinear Control**, Wiley Online Library, v. 26, n. 6, p. 1286–1306, 2016.

MARCOLINO, M. H. **Stabilization of Periodic trajectories through receding horizon optimization of switching times**. 2018. 79 f. Tese (Doutorado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2018.

PARISE, F.; VALCHER, M. E.; LYGEROS, J. Computing the projected reachable set of stochastic biochemical reaction networks modeled by switched affine systems. **IEEE Transactions on Automatic Control**, v. 63, n. 11, p. 3719–3734, 2018.

PATINO, D.; RIEDINGER, P.; RUIZ, F. A predictive control approach for dc-dc power converters and cyclic switched systems. In: IEEE. **2010 IEEE International Conference on Industrial Technology**. [S.l.], 2010. p. 1259–1264.

VIEIRA, M. S. **Controle Preditivo de sistemas com atuadores sujeitos a restrições temporais de chaveamento**. 2013. 119 f. Dissertação (Mestrado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2013.

# Appendix A - Tópicos de Dilema Linear

## A.1 Modelo de simulação

```
+engine
├─ CORES.m
├─ fun_custo_patino.m
├─ get_config_sim_matheus.m
├─ get_config_sim_patino_1.m
├─ get_config_sim_patino_2.m
├─ get_config.m
├─ get_otmin_opt.m
├─ get_ts.m
├─ get_x0.m
├─ get_xr.m
├─ nonlincon_patino.m
├─ otmin.m
├─ sim_1.m
├─ sim_n.m
└─ +mpc
    ├─ construcao_modelo_instantes.m
    ├─ matrizes_ss_mpc_dualmode_switching.m
    └─ mpc_dualmode_switching.m
```

### A.1.1 get\_x0

funcao de calculo da condicao inicial

### A.1.2 get\_xf

Texto do modelo de simulação sendo colocado aqui.

# **Annex A - Exemplo de um Primeiro Anexo**

## **A.1 Uma Seção do Primeiro Anexo**

Algum texto na primeira seção do primeiro anexo.

## FOLHA DE REGISTRO DO DOCUMENTO

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                |                                         |                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------------|------------------------|
| 1. CLASSIFICAÇÃO/TIPO<br>TD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2. DATA<br>25 de março de 2015 | 3. DOCUMENTO Nº<br>DCTA/ITA/DM-018/2015 | 4. Nº DE PÁGINAS<br>58 |
| 5. TÍTULO E SUBTÍTULO:<br>Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                |                                         |                        |
| 6. AUTOR(ES):<br><b>Daniel Vieira</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                         |                        |
| 7. INSTITUIÇÃO(ÕES)/ÓRGÃO(S) INTERNO(S)/DIVISÃO(ÕES):<br>Instituto Tecnológico de Aeronáutica – ITA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                |                                         |                        |
| 8. PALAVRAS-CHAVE SUGERIDAS PELO AUTOR:<br>Cupim; Cimento; Estruturas                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                |                                         |                        |
| 9. PALAVRAS-CHAVE RESULTANTES DE INDEXAÇÃO:<br>Cupim; Dilema; Construção                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                |                                         |                        |
| 10. APRESENTAÇÃO: (X) Nacional ( ) Internacional<br>ITA, São José dos Campos. Curso de Mestrado. Programa de Pós-Graduação em Engenharia Aeronáutica e Mecânica. Área de Sistemas Aeroespaciais e Mecatrônica. Orientador: Prof. Dr. Adalberto Santos Dupont. Coorientadora: Prof <sup>a</sup> . Dr <sup>a</sup> . Doralice Serra. Defesa em 05/03/2015. Publicada em 25/03/2015.                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                |                                         |                        |
| 11. RESUMO:<br>Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o systema à trajetória cíclica alvo. |                                |                                         |                        |
| 12. GRAU DE SIGILO:<br>(X) OSTENSIVO ( ) RESERVADO ( ) SECRETO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                |                                         |                        |