

Thesis presented to the Instituto Tecnológico de Aeronáutica, in partial fulfillment of the requirements for the degree of Doctor of Science in the Graduate Program of Engenharia Aeronáutica e Mecânica, Field of Sistemas Aeroespaciais e Mecatrônica.

Daniel Vieira

**ROBUST CONTROL OF LINEAR SYSTEMS WITH
SWITCHED ACTUATORS SUBJECTED TO
DWEELL-TIME CONSTRAINTS**

Thesis approved in its final version by signatories below:

Prof. Dr. Roberto Kawakami Harrop Galvão
Advisor

Prof^a. Dr^a. ZZZZZZZZZZZZZZZZZZZZZ
Co-advisor

Prof. Dr. ZZZZZZZZZZZZZZZZZZZZZ
Dean for Graduate Education and Research

Campo Montenegro
São José dos Campos, SP - Brazil
2020

Cataloging-in Publication Data
Documentation and Information Division

Vieira, Daniel
Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints
/ Daniel Vieira.
São José dos Campos, 2020.
63f.

Thesis of Doctor of Science – Course of Engenharia Aeronáutica e Mecânica. Area of Sistemas Aeroespaciais e Mecatrônica – Instituto Tecnológico de Aeronáutica, 2020. Advisor: Prof. Dr. Roberto Kawakami Harrop Galvão. Co-advisor: Prof^a. Dr^a. ZZZZZZZZZZZZZZZZZZZ.

1. Cupim. 2. Dilema. 3. Construção. I. Instituto Tecnológico de Aeronáutica. II. Title.

BIBLIOGRAPHIC REFERENCE

VIEIRA, Daniel. **Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints**. 2020. 63f. Thesis of Doctor of Science – Instituto Tecnológico de Aeronáutica, São José dos Campos.

CESSION OF RIGHTS

AUTHOR'S NAME: Daniel Vieira

PUBLICATION TITLE: Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints.

PUBLICATION KIND/YEAR: Thesis / 2020

It is granted to Instituto Tecnológico de Aeronáutica permission to reproduce copies of this thesis and to only loan or to sell copies for academic and scientific purposes. The author reserves other publication rights and no part of this thesis can be reproduced without the authorization of the author.

Daniel Vieira
Pca Romao Gomes, 98
12.233-066 – São José dos Campos–SP

ROBUST CONTROL OF LINEAR SYSTEMS WITH SWITCHED ACTUATORS SUBJECTED TO DWELL-TIME CONSTRAINTS

Daniel Vieira

Thesis Committee Composition:

Prof. Dr.	Alan Turing	Presidente	-	ITA
Prof. Dr.	Roberto Kawakami Harrop Galvão	Advisor	-	ITA
Prof ^a . Dr ^a .	ZZZZZZZZZZZZZZZZZZZZ	Co-advisor	-	OVNI
Prof. Dr.	Linus Torwald		-	UXXX
Prof. Dr.	Richard Stallman		-	UYYY
Prof. Dr.	Donald Duck		-	DYSNEY
Prof. Dr.	Mickey Mouse		-	DISNEY

ITA

Aos amigos da Graduação e Pós-Graduação do ITA por motivarem tanto a criação deste template pelo Fábio Fagundes Silveira quanto por motivarem a mim e outras pessoas a atualizarem e aprimorarem este excelente trabalho.

Acknowledgments

Primeiramente, gostaria de agradecer ao Dr. Donald E. Knuth, por ter desenvolvido o T_EX.

Ao Dr. Leslie Lamport, por ter criado o L^AT_EX, facilitando muito a utilização do T_EX, e assim, eu não ter que usar o Word.

Ao Prof. Dr. Meu Orientador, pela orientação e confiança depositada na realização deste trabalho.

Ao Dr. Nelson D'Ávila, por emprestar seu nome a essa importante via de trânsito na cidade de São José dos Campos.

Ah, já estava esquecendo... agradeço também, mais uma vez ao T_EX, por ele não possuir vírus de macro :-)

*"I am and always will be the optimist.
The hoper of far-flung hopes, and the dreamer of improbable dreams."*
— THE ELEVENTH DOCTOR

Resumo

Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o sistema à trajetória cíclica alvo.

Abstract

Switched actuators are difficult to handle because of some characteristic constraints of their nature. but they are efficient in numerous engineering applications, being applied, for example, in attitude control systems for space vehicles. Thus, knowing how to use this type of actuator is important and necessary. The main problem to be solved in this thesis is the design of a controller that guarantees the robustness of a system with switched actuators subjected to time constraints that limit the response window of their commands. In this approach, a limit cycle target trajectory search is performed and then the error of the states compared to the target trajectory is calculated. Then a predictive control technique is applied to correct the error and get the system to the cyclic target trajectory

List of Figures

FIGURE 2.1 – Change in dynamics over trajectory time	18
FIGURE 2.2 – Buck-Boost converter	22
FIGURE 2.3 – Buck-Boost converter: State trajectory	24
FIGURE 2.4 – Buck-Boost converter: Command signal	24
FIGURE 2.5 – Four-level three-cell converter	25
FIGURE 2.6 – Variant Dynamic Circuit 2: Voltage C_1	27
FIGURE 2.7 – Variant Dynamic Circuit 2: Voltage C_2	28
FIGURE 2.8 – Variant Dynamic Circuit 2: Current L	28
FIGURE 2.9 – Variant Dynamic Circuit 2: State Trajectory	29
FIGURE 3.1 – Ilustracao para $n = 1$ estado, $p = 1$ entrada e $N = 1$ passo	39
FIGURE 4.1 – Switching signals	41
FIGURE 4.2 – fig 1	54
FIGURE 4.3 – fig 2	55
FIGURE 4.4 – fig 1	55
FIGURE 4.5 – fig 2	56
FIGURE 4.6 – fig 3	56
FIGURE 4.7 – fig 4	57
FIGURE 4.8 – Variant Dynamic Circuit 2: State Trajectory	57
FIGURE 5.1 – Instantes de chaveamento	58

List of Tables

List of Abbreviations and Acronyms

CTq	computed torque
DC	direct current
EAR	Equação Algébrica de Riccati
GDL	graus de liberdade
ISR	interrupção de serviço e rotina
LMI	linear matrices inequalities
MIMO	multiple input multiple output
PD	proporcional derivativo
PID	proporcional integrativo derivativo
PTP	point to point
UARMII	Underactuated Robot Manipulator II
VSC	variable structure control

List of Symbols

a	Distância
$\mathbf{a}$	Vetor de distâncias
$\mathbf{e}_j$	Vetor unitário de dimensão n e com o j -ésimo componente igual a 1
$\mathbf{K}$	Matriz de rigidez
m_1	Massa do cumpim
δ_{k-k_f}	Delta de Kronecker no instante k_f

Contents

1	INTRODUCTION	15
1.1	Motivation	15
1.2	Contributions of the present work	16
1.3	Outline of the remaining chapters	16
2	DETERMINATION OF TARGET PERIODIC TRAJECTORIES	17
2.1	Optimization	17
2.1.1	System Dynamics and Sequence	17
2.1.2	Constraints Definition	18
2.1.3	Optimization with FMINCON	18
2.1.4	Cost Function and Trajectory Simulation	19
2.1.5	Cost Computation	19
2.2	Calculating x_0	19
2.3	Application Examples	21
2.3.1	Buck-boost converter	22
2.3.2	Multilevel converter	25
3	PREDICTIVE CONTROL: PRELIMINARIES AND NOTATION	30
3.1	Cost Function	30
3.2	Restrictions	33
3.3	Prediction Equation	34
3.4	Optimization Problem	35
3.5	Feasibility Region	38

4	PREDICTIVE CONTROL FOR STABILIZATION OF PERIODIC TRAJECTORIES	41
4.1	Statement of the problem	41
4.2	Linearization procedure	42
4.3	MPC Problem	50
4.3.1	Cost Function	50
4.3.2	Dwell-time Constraints	50
4.4	Application Examples	51
4.4.1	Integrador duplo	52
4.4.2	Buck-boost converter	54
4.4.3	Patino 2	54
4.5	Conclusion	54
5	CONCLUSÃO	58
5.1	RASCUNHO	58
	BIBLIOGRAPHY	61
	APPENDIX A – TÓPICOS DE DILEMA LINEAR	62
A.1	Modelo de simulação	62
A.1.1	get_x0	62
A.1.2	get_xf	62
	ANNEX A – EXEMPLO DE UM PRIMEIRO ANEXO	63
A.1	Uma Seção do Primeiro Anexo	63

1 Introduction

1.1 Motivation

The dynamics of switched affine systems can be described by a state equation of the form $\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}, t \in \mathbb{R}_+$. Where $x(t) \in \mathbb{R}^n$ is the state vector and $\sigma(t) \in \{1, 2, \dots, M\}$ is the switching state, which is associated to the matrix $A_{\sigma(t)} \in \mathbb{R}^{n \times n}$ and the vector $b_{\sigma(t)} \in \mathbb{R}^n$ at each time t .

The use of switched affine systems to solve problems in engineering can be seen in fields like biochemical reactions, where Parise *et al.* (2018) uses switched affine systems to represent the moments of evolution in a generic biochemical reaction network; urban traffic, where Hajiahmadi *et al.* (2016) approaches the urban traffic control; power converters, where Benmiloud *et al.* (2019) also uses this approach and other areas where the behavior of the system can be described as a switched affine system.

There is extensive research in this class of controllers, and most of them solve the problem by driving the system states to the neighborhood of the target states, not considering the trajectory behavior of the system. This can reduce the performance of the system when the system is affected by the trajectory of the limit cycle in steady operation.

This problem has been the target of many studies, Benmiloud *et al.* (2019) uses a hybrid Poincaré map approach to stabilize a switched affine system into the desired limit cycle and uses as an example a DC-DC converter. by Egidio *et al.* (2020b), which proposes a control design of a state-dependent switching function for discrete-time switched affine systems to drive the system to the desired limit cycle that is defined by design associated with the expected performance of the system. The solution was applied in an academic numerical example and a theoretical DC-DC converter. In Egidio *et al.* (2020a) the author expanded the work to continuous-time switched affine systems.

Some studies form the basis for the present work:

Vieira (2013) solved the problem for a particular class of affine systems. Here the controller drove the system to a target state using MILP (Mixed-Integer Linear Programming) and the cyclic trajectory was a consequence of the states as the system approached

the target.

Patino *et al.* (2010) defined the target trajectory using nonlinear programming and used this target trajectory in the predictive control in terms of errors.

Marcolino (2018) proposed a solution with a controller law that drives the switched affine system with dwell-time constraints to a target cyclic trajectory. In this work, the problem is addressed in two stages: first, the problem is interpreted as a convex optimization where the author can find a targeted cyclic trajectory that minimizes a cost function associated with the system performance; then a second part that uses the target trajectory as input and computes perturbation at the switching instants of the reference control signal using predictive control.

1.2 Contributions of the present work

This present work proposes to expand the solution from Marcolino (2018) and provide a broader solution that can be used for systems that have their dynamics changing over time.

In a system that can be represented by a switched affine system with the form

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)}$$

there are cases in which the dynamic response of the system can change depending on the operation mode. This can be represented in switched affine systems with proper matrices $A_{\sigma(t)}$ and $b_{\sigma(t)}$ for each operation mode. With the current implementation of Marcolino (2018) considering an invariant system during its operation, there is a need for expanding the solution so it can represent more systems and solve more engineering problems that can be expressed as switched affine systems.

1.3 Outline of the remaining chapters

The remaining of this text is organized as follows. Chapter 2 describes the problem of finding a target periodic trajectory for the given switched affine system. Chapter 3 proposes then a predictive control law that drives the system to the target cyclic trajectory. Finally, chapter 4 brings some remarks and considerations of the work.

2 Determination of Target Periodic Trajectories

The goal is to drive a system defined by an affine dynamic equation (eq. 2.1) to an optimal periodic trajectory, so the first step is to generate this trajectory. This trajectory is submitted to restrictions imposed by the dynamic of the system and also switching time restrictions.

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)} \quad (2.1)$$

Following the approach from Patino *et al.* (2010) we must establish a trajectory that yields the optimal time sequence τ^∞ , the modes sequence Ω^∞ , and its length s^∞ ($1 < s^\infty < s_{max}$). To reduce the oscillations around a desired operation point, we choose an integral quadratic criterion centered on the average reference value $\bar{x}^\infty$:

$$J(\tau^\infty, \Omega^\infty, s^\infty) = \min_{\tau, \Omega, s} \int_0^{T_p} \left[x(t) - \bar{x}^\infty \right]^T Q \left[x(t) - \bar{x}^\infty \right] dt \quad (2.2)$$

where $Q = Q^T > 0$ and T_p is the period of the cycle.

Since the trajectory is cyclic we can impose the constraint:

$$x(0) = x(T_p) \quad (2.3)$$

2.1 Optimization

2.1.1 System Dynamics and Sequence

To begin, we create a list where each of its elements signifies the dynamics of the system. This is exemplified by the matrices A, B, C, and D. The order in which the elements appear in this list is defined by the sequence of modes. In simpler terms, the

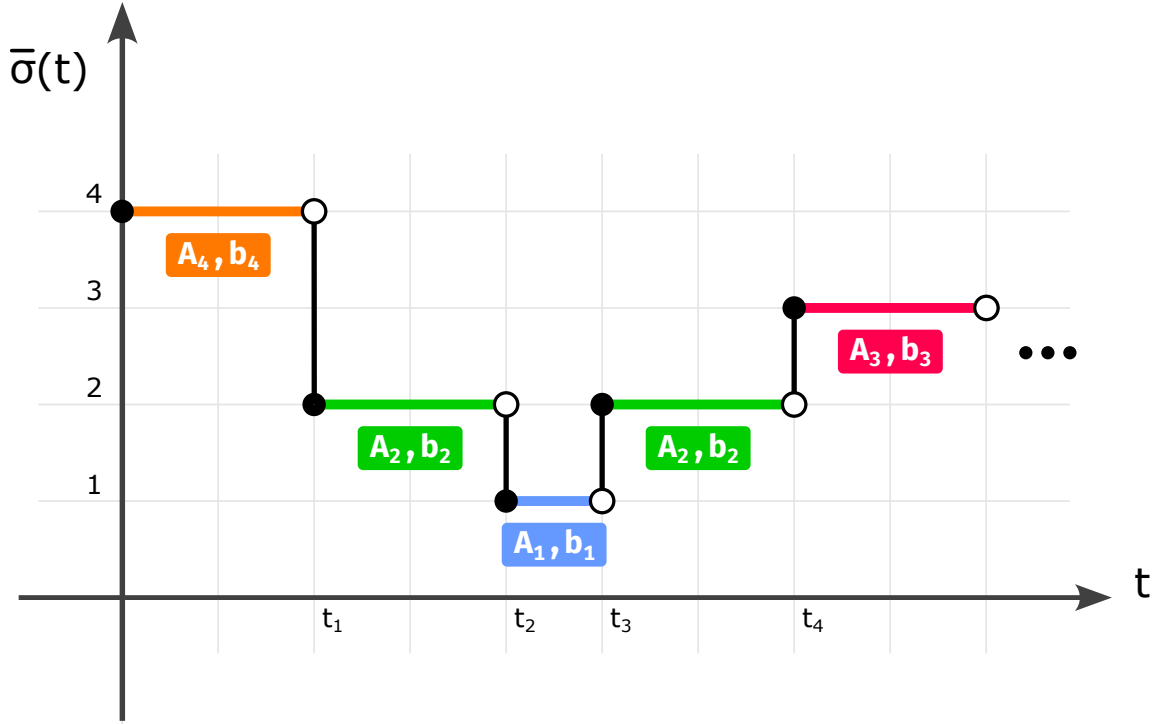


FIGURE 2.1 – Change in dynamics over trajectory time

positioning of these elements signifies the order they will be executed.

In Figure 2.1, we see a trajectory example. For this illustration, the system's list of dynamics is $\{[A_1, b_1], [A_2, b_2], [A_3, b_3], [A_4, b_4]\}$, and the sequence of modes is $[4, 2, 1, 2, 3]$. It's worth noting that a particular system dynamic can be employed multiple times or might not be used at all, depending on the desired target trajectory. The sequence of modes and the maximum period for the cycle are predetermined for this problem and the goal is to achieve the best trajectory that minimizes the cost function.

2.1.2 Constraints Definition

Once the list and sequence have been established, we need to apply the constraints. These constraints dictate the cycle's maximum duration, as well as the minimum and the maximum time permitted between switches in modes.

2.1.3 Optimization with FMINCON

For optimization purposes, the function FMINCON is employed. This function works in conjunction with a cost function. The cost function is designed to accept switching times generated from the optimization process. Its primary goal is to evaluate and discern the most cost-effective result that respects the imposed constraints.

FMINCON is a method of optimization in MATLAB's libraries that implements the method SQP (Sequential Quadratic Programming). The basic SQP algorithm is described in Chapter 18 of Nocedal e Wright (2006).

2.1.4 Cost Function and Trajectory Simulation

Taking a closer look at the cost function, its role is to simulate the trajectory using the dynamics taken from the previously defined list, all in line with the mode sequence. This trajectory is cyclic and to enforce this cyclic nature, the initial state's condition is calculated in such a way that the end product is a cyclic trajectory.

2.1.5 Cost Computation

The method of determining the cost is by computing the integral of the trajectory, centered around the average reference value, denoted as $\bar{x}^\infty$. The result is compliant with the system's dynamic constraints and also matches the properties of the final trajectory.

2.2 Calculating x_0

We need to compute the initial condition for the system for each evaluation of the cost function so that we have a periodic trajectory, meaning that the last states of the trajectory we the same as the initial condition.

We can have different dynamics for each switching instant, so the system behaves as

$$\begin{aligned}
 [0 \rightarrow t_1] : \dot{x} &= A_{\sigma(0)}x + b_{\sigma(0)} \\
 [t_1 \rightarrow t_2] : \dot{x} &= A_{\sigma(t_1)}x + b_{\sigma(t_1)} \\
 &\vdots \\
 [t_{N-1} \rightarrow t_N] : \dot{x} &= A_{\sigma(t_{N-1})}x + b_{\sigma(t_{N-1})}
 \end{aligned} \tag{2.4}$$

We can rewrite the solution for the first region as

$$\begin{aligned}
x(t_1) &= e^{A_{\sigma(0)}t_1}x(0) + \int_0^{t_1} e^{A_{\sigma(0)}(t_1-\tau)}b_{\sigma(0)}d\tau \\
x(t_1) &= e^{\textcolor{teal}{A}_{\sigma(0)}t_1}x(0) + \int_0^{\textcolor{teal}{t}_1} \textcolor{teal}{e}^{\textcolor{teal}{A}_{\sigma(0)}(t_1-\tau)}\textcolor{teal}{b}_{\sigma(0)}d\tau \\
x(t_1) &= \textcolor{teal}{F}_0x(0) + \textcolor{teal}{g}_0
\end{aligned} \tag{2.5}$$

then the behavior of the other regions of the system is

$$\begin{aligned}
x(t_1) &= F_0x(0) + g_0 \\
x(t_2) &= F_1x(1) + g_1 \\
&\vdots \\
x(t_N) &= F_{N-1}x(N-1) + g_{N-1}
\end{aligned} \tag{2.6}$$

with

$$F_i = e^{A_{\sigma(t_i)}(t_{i+1}-t_i)} \tag{2.7}$$

$$g_i = \int_{t_i}^{t_{i+1}} e^{A_{\sigma(t_i)}(t_{i+1}-\tau)}b_{\sigma(t_i)}d\tau = \int_0^{t_{i+1}-t_i} e^{A_{\sigma(t_i)}\tau}b_{\sigma(t_i)}d\tau \tag{2.8}$$

From (2.6) we can establish the relation between $x(t_N)$ and $x(0)$

$$\begin{aligned}
x(t_N) &= F_{N-1}F_{N-2}\dots F_0x(0) + \\
&\quad \textcolor{teal}{F}_{N-1}\textcolor{teal}{F}_{N-2}\dots \textcolor{teal}{F}_1g_0 + \textcolor{teal}{F}_{N-1}\textcolor{teal}{F}_{N-2}\dots \textcolor{teal}{F}_2g_1 + \dots + \textcolor{teal}{F}_{N-1}g_{N-2} + g_{N-1} \\
x(t_N) &= F_NF_{N-1}\dots F_1x(0) + c
\end{aligned} \tag{2.9}$$

We know that $x(t_N) = x(0)$, so the solution for $x(0)$ is

$$\begin{aligned}
x(0) &= F_{N-1}F_{N-2}\dots F_0x(0) + c \\
(I - F_{N-1}F_{N-2}\dots F_0)x(0) &= c \\
x(0) &= (I - F_{N-1}F_{N-2}\dots F_0)^{-1}c
\end{aligned} \tag{2.10}$$

where

$$c = F_{N-1}F_{N-2}\dots F_1g_0 + F_{N-1}F_{N-2}\dots F_2g_1 + \dots + F_{N-1}g_{N-2} + g_{N-1} \tag{2.11}$$

assuming that the inverse indicated in (2.10) exists.

2.3 Application Examples

2.3.1 Buck-boost converter

Considering a Buck-Boost converter in a Continuous Conduction Mode (CCM) whose topology is shown in Figure 2.2.

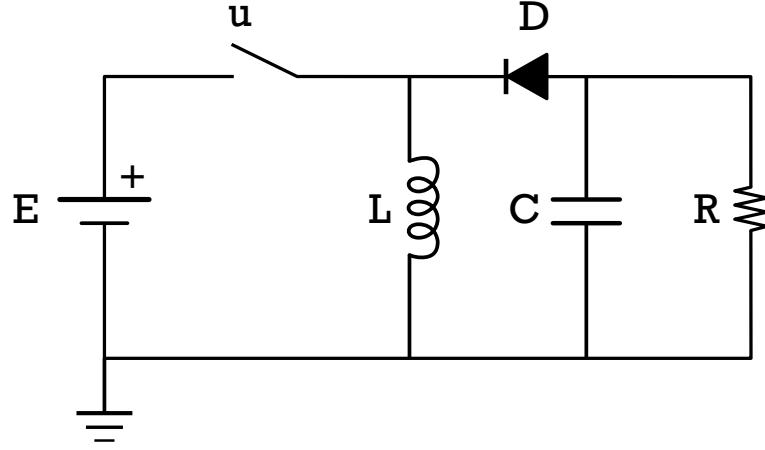


FIGURE 2.2 – Buck-Boost converter

The state variables are the capacitor voltage v_c and the inductor current i_L . Its dynamics are given by the equation:

$$\dot{x} = \begin{cases} A_1 x + b_1, & \text{for } u = 1 \text{ (closed switch - Mode 1)} \\ A_2 x + b_2, & \text{for } u = 0 \text{ (open switch - Mode 2)} \end{cases} \quad (2.12)$$

where

$$\begin{aligned} A_1 &= \begin{bmatrix} 0 & 0 \\ 0 & -\frac{1}{RC} \end{bmatrix} & A_2 &= \begin{bmatrix} 0 & \frac{1}{L_1} \\ -\frac{1}{C} & -\frac{1}{RC} \end{bmatrix} \\ b_1 &= \begin{bmatrix} \frac{E}{L} & 0 \end{bmatrix}^T & b_2 &= \begin{bmatrix} 0 & 0 \end{bmatrix}^T \end{aligned} \quad (2.13)$$

where $R = L = C = E = 1$.

The list of dynamics for this example is

$$\left\{ [A_1, b_1], [A_2, b_2] \right\} \quad (2.14)$$

where

$$A_1 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix}, b_1 = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad (2.15)$$

$$A_2 = \begin{bmatrix} 0 & 1 \\ -1 & -1 \end{bmatrix}, b_2 = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (2.16)$$

The criteria for the optimization is to compute the trajectory to minimize oscillation around the average value $[2, -1]$ with the weight matrix $Q = \text{diag}[1, 1]$, the maximum cycle period of $T_{p,max} = 1s$ and minimum dwell time of $t_{min} = 0.25s$.

The cost function takes a vector representing the dt for each switching moment as its input. For instance, with two switching instances, the vector could be $[0.25, 0.35]$. This implies the signal begins at time 0.0, transitions to the next dynamic at $0.0 + 0.25 = 0.25$, and then switches again at $0.25 + 0.35 = 0.6$. This gives us the signal sequence $[0.0, 0.25, 0.6]$.

In the Buck-Boost converter example, the initial values for the switching vector are represented by $[0.25, 0.25]$. The lower bounds are defined as $[0.25, 0.25]$ and the upper bounds are set to $[1.5, 1.5]$. The solution provided by the FMINCON optimization yields $\tau^\infty = \{0, 0.2509, 0.5\}$ and $\Omega^\infty = \{1, 2\}$.

The outcome under this condition is displayed in Figure (2.2), showcasing the cyclic trajectory around the average value $[2, -1]$. The corresponding command signal can be seen in Figure (2.4).

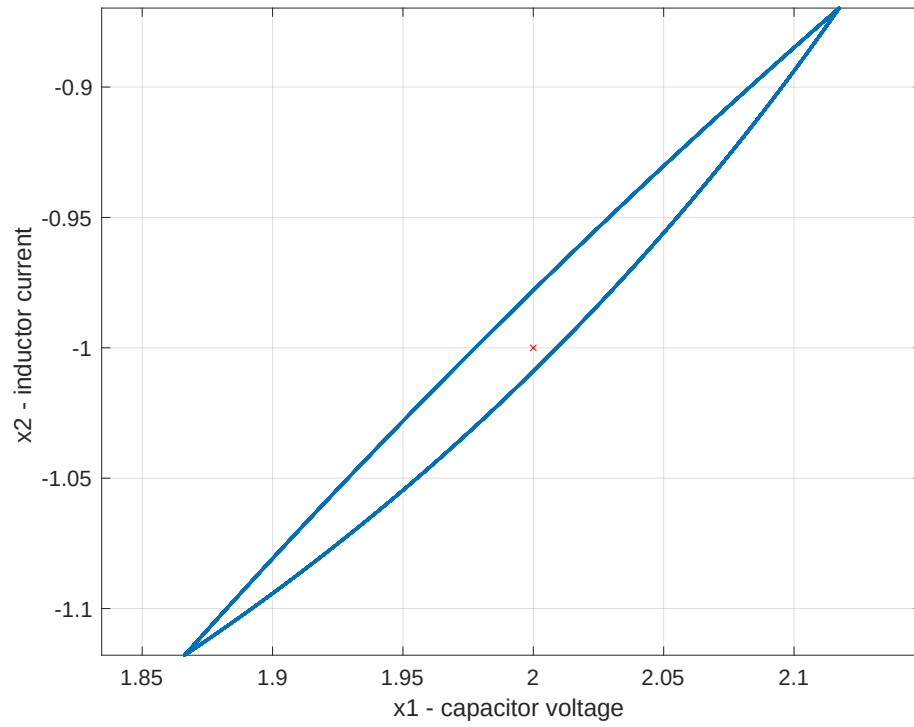


FIGURE 2.3 – Buck-Boost converter: State trajectory

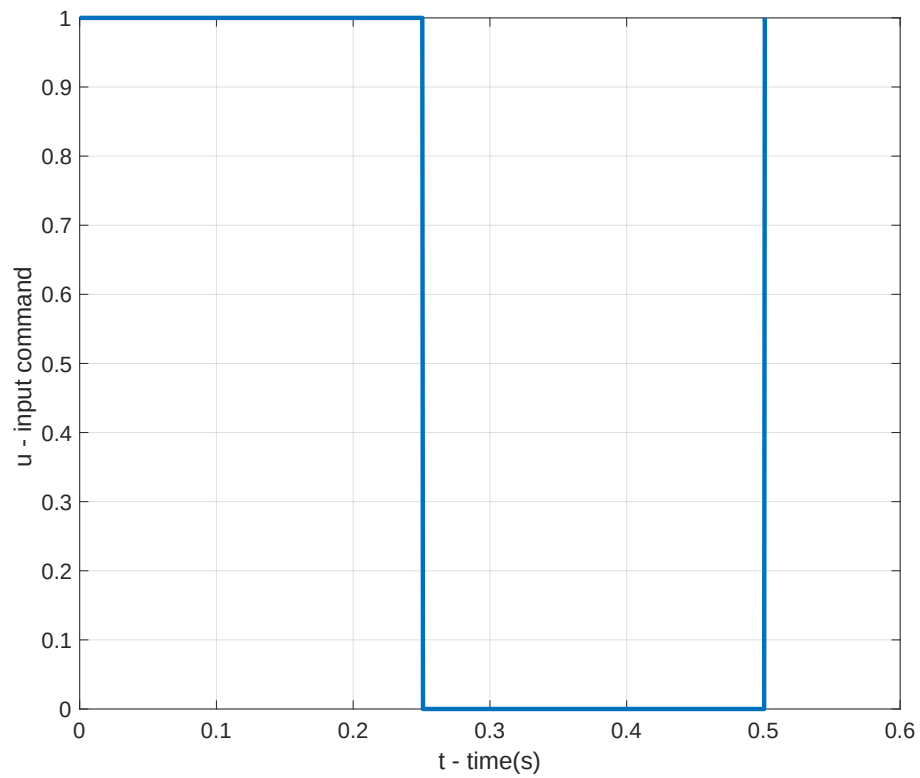


FIGURE 2.4 – Buck-Boost converter: Command signal

2.3.2 Multilevel converter

Considering a Multilevel converter whose topology is shown in Figure 2.5.

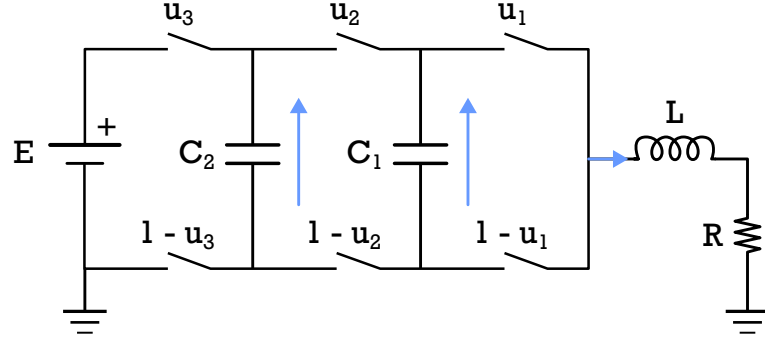


FIGURE 2.5 – Four-level three-cell converter

The state variables are the voltage on the capacitors $x(t) = [v_{c_1}(t), v_{c_2}(t), i_L(t)]$. Where v_{c_1} , v_{c_2} are the voltages in each capacitor and i_L is the load current.

The dynamic of this system can be described as

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} -\frac{x_3(t)}{C_1} & \frac{x_3(t)}{C_1} & 0 \\ 0 & -\frac{x_3(t)}{C_2} & \frac{x_3(t)}{C_2} \\ \frac{x_1(t)}{L} & \frac{x_2(t)-x_1(t)}{L} & \frac{E-x_2(t)}{L} \end{bmatrix} \begin{bmatrix} u_1(t) \\ u_2(t) \\ u_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}x_3(t) \end{bmatrix} \quad (2.17)$$

rearranging the terms we have

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \\ \dot{x}_3(t) \end{bmatrix} = \begin{bmatrix} 0 & 0 & \frac{u_2-u_1}{C_1} \\ 0 & 0 & \frac{u_3-u_2}{C_2} \\ \frac{u_1-u_2}{L} & \frac{u_2-u_3}{L} & \frac{-R}{L} \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ -\frac{R}{L}u_3 \end{bmatrix} \quad (2.18)$$

Each combination of the switches determines a different behavior

$$\mathbf{u}_1 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}, A_1 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{-R}{L} \end{bmatrix}, b_1 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.19)$$

$$\mathbf{u}_2 = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}, A_2 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{1}{C_1} \\ 0 & \frac{-1}{L} & \frac{-R}{L} \end{bmatrix}, b_2 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.20)$$

$$\mathbf{u}_3 = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}, A_3 = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & \frac{-1}{C_2} \\ \frac{-1}{L} & \frac{1}{L} & \frac{-R}{L} \end{bmatrix}, b_3 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.21)$$

$$\mathbf{u}_4 = \begin{bmatrix} 0 \\ 1 \\ 1 \end{bmatrix}, A_4 = \begin{bmatrix} 0 & 0 & \frac{1}{C_1} \\ 0 & 0 & 0 \\ \frac{-1}{L} & 0 & \frac{-R}{L} \end{bmatrix}, b_4 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.22)$$

$$\mathbf{u}_5 = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}, A_5 = \begin{bmatrix} 0 & 0 & \frac{-1}{C_1} \\ 0 & 0 & 0 \\ \frac{1}{L} & 0 & \frac{-R}{L} \end{bmatrix}, b_5 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.23)$$

$$\mathbf{u}_6 = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix}, A_6 = \begin{bmatrix} 0 & 0 & \frac{-1}{C_1} \\ 0 & 0 & \frac{1}{C_2} \\ \frac{1}{L} & \frac{-1}{L} & \frac{-R}{L} \end{bmatrix}, b_6 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.24)$$

$$\mathbf{u}_7 = \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix}, A_7 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{-1}{C_1} \\ 0 & \frac{1}{L} & \frac{-R}{L} \end{bmatrix}, b_7 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.25)$$

$$\mathbf{u}_8 = \begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}, A_8 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{-R}{L} \end{bmatrix}, b_8 = \begin{bmatrix} 0 \\ 0 \\ \frac{E}{L} \end{bmatrix} \quad (2.26)$$

With the detailed dynamic for each switching positions we can define the list of elements for the multilevel converter as $\{A_1, A_2, A_3, A_4, A_5, A_6, A_7\}$ and $\{b_1, b_2, b_3, b_4, b_5, b_6, b_7\}$ with

The criteria for the optimization is to compute the trajectory around the average value $\left[\frac{2}{3}E, \frac{1}{3}E, 1\right]$ with $E = 30V$. The maximum cycle period is $T_{p,max} = 0.4ms$ and minimum tweek time of $t_{min} = 0.022ms$.

The simulation parameters are $C_1 = 40\mu F$, $C_2 = 40\mu F$, $L = 10mH$ and $R = 10\Omega$ with the weight matrix $Q = diag[10, 5, 20000]$.

Using the optimal switching sequence

$$\Omega^\infty = \{0, 1, 3, 7, 2, 0, 4, 7, 4\} \quad (2.27)$$

The optimal switching instant is

$$\tau^\infty = \{0, 0.088, 0.110, 0.132, 0.154, 0.176, 0.198, 0.220, 0.242, 0.264\} \quad (2.28)$$

with the initial condition $x(0) = [21.71, 3.29, 1.08]^T$.

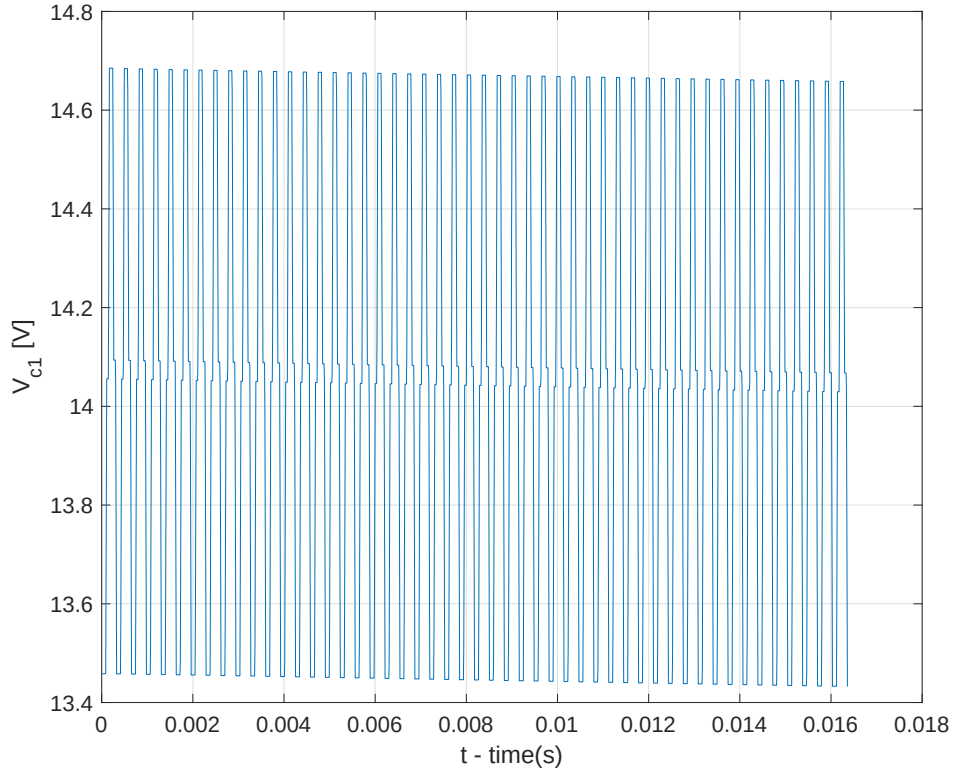
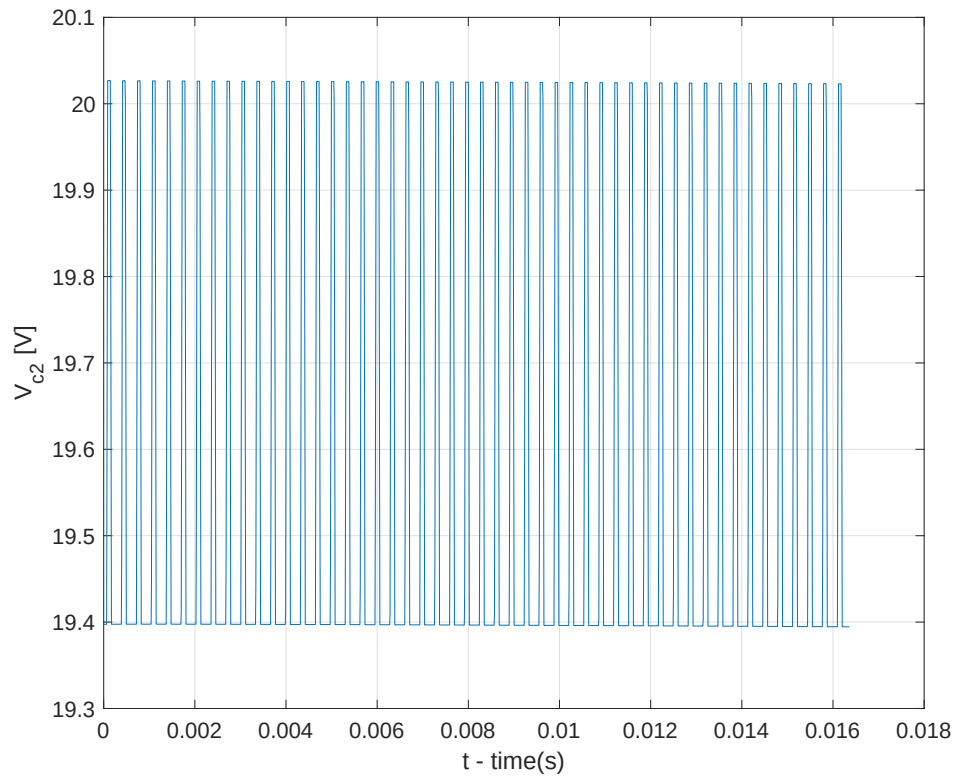
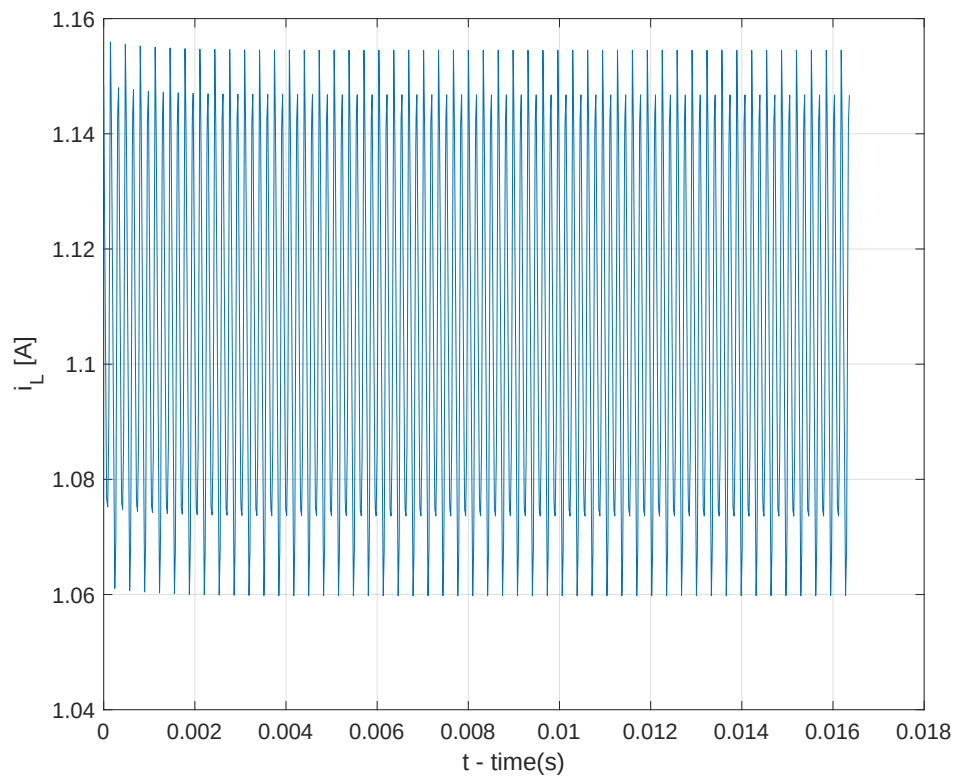


FIGURE 2.6 – Variant Dynamic Circuit 2: Voltage C_1

FIGURE 2.7 – Variant Dynamic Circuit 2: Voltage C_2 FIGURE 2.8 – Variant Dynamic Circuit 2: Current L

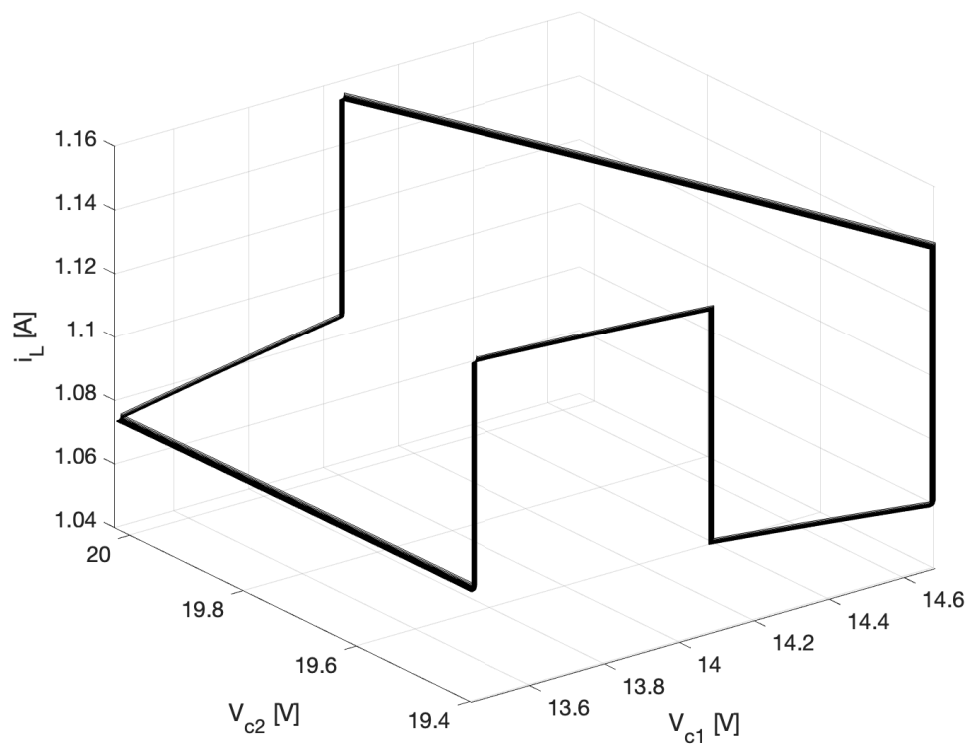


FIGURE 2.9 – Variant Dynamic Circuit 2: State Trajectory

3 Predictive control: Preliminaries and notation

Consider a system with dynamics described by

$$x[k+1] = Ax[k] + Bu[k] \quad (3.1)$$

The objective is to drive the state $x[k]$ to the origin from a given initial condition while respecting state and control constraints in the form

$$x[k] \in \mathcal{X} \quad (3.2)$$

$$u[k] \in \mathcal{U} \quad (3.3)$$

$$\mathcal{U} = \{u \in \mathbb{R}^p : S_u u \leq b_u\} \quad (3.4)$$

and

$$\mathcal{X} = \{x \in \mathbb{R}^n : S_x x \leq b_x\} \quad (3.5)$$

3.1 Cost Function

The solution, if it exists, will not be unique. Therefore, it is necessary to adopt a criterion that allows for choosing the best sequence of control actions to perform the task.

The control problem consists of bringing the states to the origin, so we will employ a cost in the form

$$J = \left\| \hat{x}[k+N|k] \right\|_{P_f}^2 + \sum_{i=0}^{N-1} \left[\left\| \hat{x}[k+i|k] \right\|_Q^2 + \left\| \hat{u}[k+i|k] \right\|_R^2 \right] \quad (3.6)$$

and initial condition

$$\hat{x}[k|k] = x[k] \quad (3.7)$$

The expression for J consists of a **terminal cost** term and a trajectory **cost term**.

With P_f , Q , R being symmetric and positive-definite, with P_f chosen so that the terminal cost term $\left\| \hat{x}(k+N|k) - \bar{x} \right\|_{P_f}^2$ corresponds to the value function of the infinite horizon Discrete-Time Linear Quadratic Regulator (DLQR).

The cost function can be rewritten using the notation:

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathbb{R}^{nN} \quad (3.8)$$

and then the sum equation

$$\begin{aligned} \sum_{j=0}^{N-1} \left\| \hat{u}[j+k|k] \right\|_R^2 &= \hat{u}^T[k|k] R \hat{u}[k|k] + \hat{u}^T[k+1|k] R \hat{u}[k+1|k] + \cdots \\ &\quad + \hat{u}^T[k+N-1|k] R \hat{u}[k+N-1|k] \end{aligned} \quad (3.9)$$

becomes

$$\underbrace{\begin{bmatrix} \hat{u}^T[k|k] & \hat{u}^T[k+1|k] & \cdots & \hat{u}^T[k+N-1|k] \end{bmatrix}}_{\hat{\mathbf{u}}^T} \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} \underbrace{\begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix}}_{\hat{\mathbf{u}}} \quad (3.10)$$

Using the notation

$$\mathbf{R} = \begin{bmatrix} R & 0 & \cdots & 0 \\ 0 & R & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & R \end{bmatrix} = \text{diag}_N(R) \quad (3.11)$$

we get to

$$\sum_{j=0}^{N-1} \left\| \hat{u}[j] \right\|_R^2 = \left\| \hat{\mathbf{u}} \right\|_{\mathbf{R}}^2 \quad (3.12)$$

Similarly, we can write

$$\begin{aligned} & \left\| \hat{x}[k+N|k] \right\|_{P_f}^2 + \sum_{j=0}^{N-1} \left\| \hat{x}[k+j|k] \right\|_Q^2 = x^T[k|k]Qx[k|k] \\ & + \hat{x}^T[k+1|k]Q\hat{x}[k+1|k] + \cdots + \hat{x}^T[k+N-1|k]Q\hat{x}[k+N-1|k] + \hat{x}^T[k+N|k]P_f\hat{x}[k+N|k] \\ & = \hat{x}^T[k|k]Q\hat{x}[k|k] + \\ & \underbrace{\begin{bmatrix} \hat{x}^T[k+1|k] & \hat{x}^T[k+2|k] & \cdots & \hat{x}^T[k+N|k] \end{bmatrix}}_{\hat{\mathbf{x}}[k]^T} \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} \underbrace{\begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix}}_{\hat{\mathbf{x}}[k]} \end{aligned} \quad (3.13)$$

with the notation

$$Q = \begin{bmatrix} Q & 0 & \cdots & 0 \\ 0 & Q & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & P_f \end{bmatrix} = \begin{bmatrix} \text{diag}_{N-1}(Q) & 0 \\ 0 & P_f \end{bmatrix} \in \mathbb{R}^{nN \times nN} \quad (3.14)$$

as

$$\left\| \hat{x}[k+N|k] \right\|_P^2 + \sum_{j=0}^{N-1} \left\| \hat{x}[k+j|k] \right\|_Q^2 = \left\| x[k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_Q^2 \quad (3.15)$$

So, the cost function can be written in the form

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_Q^2 + \left\| \hat{\mathbf{u}} \right\|_{\mathbf{R}}^2 \quad (3.16)$$

3.2 Restrictions

The restrictions are introduced aiming to drive the states of the system to the origin while solving

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{nN}, \hat{\mathbf{u}} \in \mathbb{R}^{pN}} \mathbf{J}(\hat{\mathbf{x}}, \hat{\mathbf{u}}) \quad (3.17)$$

respecting constraints applied on

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathcal{U} \times \mathcal{U} \times \cdots \times \mathcal{U} = \mathcal{U}^N \quad (3.18)$$

$$\hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathcal{X} \times \mathcal{X} \times \cdots \times \mathcal{X}_f = \mathcal{X}^{N-1} \times \mathcal{X}_f \quad (3.19)$$

$\mathcal{X}_f$ is the maximum invariant and admissible set (MAS) with respect to the terminal state and control constraints under the action of a terminal control force.

$$\{\hat{x} \in \mathbb{R}^n : S_f \hat{x} \leq b_f\} \quad (3.20)$$

The constraint on $\hat{\mathbf{u}}$ can be written as

$$\begin{bmatrix} S_u & 0 & \cdots & 0 \\ 0 & S_u & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_u \end{bmatrix} \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \leq \begin{bmatrix} b_u \\ b_u \\ \vdots \\ b_u \end{bmatrix} \quad (3.21)$$

or, in a shorter form

$$\mathbf{S}_u \hat{\mathbf{u}} \leq \mathbf{b}_u \quad (3.22)$$

with

$$\mathbf{S}_u = \text{diag}_N(S_u), \mathbf{b}_u = \text{col}_N(b_u) \quad (3.23)$$

Similarly, the constraints on $\hat{\mathbf{x}}$ can be written as

$$\begin{bmatrix} S_x & 0 & \cdots & 0 \\ 0 & S_x & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & S_x \end{bmatrix} \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \leq \begin{bmatrix} b_x \\ b_x \\ \vdots \\ b_x \end{bmatrix} \quad (3.24)$$

or, in short

$$\mathbf{S}_x \hat{\mathbf{x}} \leq \mathbf{b}_x \quad (3.25)$$

with

$$\mathbf{S}_x = \begin{bmatrix} \text{diag}_{N-1}(S_x) & 0 \\ 0 & S_f \end{bmatrix}, \mathbf{b}_x = \begin{bmatrix} \text{col}_{N-1}(b_x) \\ b_f \end{bmatrix} \quad (3.26)$$

3.3 Prediction Equation

Let's express the relationship between the vectors

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \quad (3.27)$$

based on the state equation

$$\hat{x}[k+i+1|k] = A\hat{x}[k|k] + B\hat{u}[k|k] \quad (3.28)$$

and initial condition $x[k]$.

The solution for the state equation is:

$$\hat{x}[k+i|k] = A^i \hat{x}[k|k] + \sum_{j=0}^{i-1} A^{i-1-j} B \hat{u}[k+j|k] \quad (3.29)$$

and it can be written for $k = 1, 2, \dots, N$ as

$$\hat{x}[k+1|k] = Ax[k] + B\hat{u}[k|k] \quad (3.30)$$

$$\hat{x}[k+2|k] = A^2x[k] + AB\hat{u}[k|k] + B\hat{u}[k+1|k] \quad (3.31)$$

$$\vdots \quad (3.32)$$

$$\hat{x}[k+N|k] = A^Nx[k] + A^{N-1}B\hat{u}[k|k] + \dots + AB\hat{u}[k+N-2|k] + B\hat{u}[k+N-1|k] \quad (3.33)$$

or

$$\begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix} x(0) + \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \quad (3.34)$$

This can be written in a shorter form as

$$\hat{\mathbf{x}} = \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \quad (3.35)$$

with

$$\mathbf{A} = \begin{bmatrix} A \\ A^2 \\ \vdots \\ A^N \end{bmatrix}, \mathbf{B} = \begin{bmatrix} B & 0 & \dots & 0 \\ AB & B & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ A^{N-1}B & A^{N-2}B & \dots & B \end{bmatrix} \quad (3.36)$$

The relation

$$\hat{\mathbf{x}} = \mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \quad (3.37)$$

FAZER A JUNCAO

3.4 Optimization Problem

we can rewrite the cost function as

$$J = \left\| x[k|k] \right\|_P^2 + \overbrace{\left\| \hat{\mathbf{x}} \right\|_Q^2}^{\square} + \left\| \hat{\mathbf{u}} \right\|_R^2 \quad (3.38)$$

$$\square = \left\| \hat{\mathbf{x}} \right\|_Q^2 \quad (3.39)$$

$$= \left[\mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[\mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.40)$$

$$= \left[\mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right]^T \mathbf{Q} \left[\mathbf{A}x[k|k] + \mathbf{B}\hat{\mathbf{u}} \right] \quad (3.41)$$

$$\begin{aligned} &= \left\| \mathbf{A}x[k|k] \right\|_Q^2 + \left[\mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \\ &\quad + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \end{aligned} \quad (3.42)$$

replacing $\square$ back in the cost equation and reordering the elements

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k|k] \right\|_P^2 + \left\| \mathbf{A}x[k|k] \right\|_Q^2 \quad (3.43)$$

$$+ \left[\mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \quad (3.44)$$

$$+ \hat{\mathbf{u}}^T \mathbf{R} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \quad (3.45)$$

The constant part will be denoted by c_0

Recalling that the matrix $\mathbf{Q}$ is symmetric, we have:

$$\left[\mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} = \left\{ \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x[k|k] \right\}^T \quad (3.46)$$

As these terms are scalars, it can be concluded that they are equal to each other, therefore:

$$\begin{aligned} &\left[\mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + \hat{\mathbf{u}}^T \mathbf{B}^T \mathbf{Q} \mathbf{A} x(0) \\ &= 2 \left[\mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} \end{aligned} \quad (3.47)$$

Finally, it can be written

$$J(\hat{\mathbf{u}}) = \hat{\mathbf{u}}^T \left(\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B} \right) \hat{\mathbf{u}} + 2 \left[\mathbf{A}x[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}} + c_0 \quad (3.48)$$

with

$$c_0 = \left\| x(0) \right\|_P^2 + \left\| \mathbf{A}x(0) \right\|_Q^2 \quad (3.49)$$

$$c_0 = \left\| x[k|k] \right\|_P^2 + \left\| \mathbf{A}x[k|k] \right\|_Q^2$$

Note that we will now use the notation $J(\hat{\mathbf{u}})$ instead of $J(\hat{\mathbf{x}}, \hat{\mathbf{u}})$, since $\hat{\mathbf{x}}$ has been eliminated from the cost expression.

To complete the reformulation of the optimization problem in terms of $\hat{\mathbf{u}}$, the relation between $\hat{\mathbf{x}}$ and $\hat{\mathbf{u}}$ in the **restrictions** must be considered.

The optimization problem can be expressed as

$$\min_{\hat{\mathbf{x}} \in \mathbb{R}^{nN}, \hat{\mathbf{u}} \in \mathbb{R}^{pN}} J(\hat{x}, \hat{u}) \quad (3.50)$$

where

$$J(\hat{\mathbf{x}}, \hat{\mathbf{u}}) = \left\| x[k|k] \right\|_P^2 + \left\| \hat{\mathbf{x}} \right\|_Q^2 + \left\| \hat{\mathbf{u}} \right\|_R^2 \quad (3.51)$$

with

$$\hat{\mathbf{u}}[k] = \begin{bmatrix} \hat{u}[k|k] \\ \hat{u}[k+1|k] \\ \vdots \\ \hat{u}[k+N-1|k] \end{bmatrix} \in \mathbb{R}^{pN}, \hat{\mathbf{x}}[k] = \begin{bmatrix} \hat{x}[k+1|k] \\ \hat{x}[k+2|k] \\ \vdots \\ \hat{x}[k+N|k] \end{bmatrix} \in \mathbb{R}^{nN}, \quad (3.52)$$

subject to

$$\mathbf{S}_x \hat{\mathbf{x}}[k] \leq \mathbf{b}_x \quad (3.53)$$

$$\mathbf{S}_u \hat{\mathbf{u}}[k] \leq \mathbf{b}_u \quad (3.54)$$

The vectors $\hat{\mathbf{x}}[k|k]$ and $\hat{\mathbf{u}}[k|k]$ are linked by the following **prediction equation**:

$$\hat{\mathbf{x}}[k+1|k] = \mathbf{A}\hat{x}[k|k] + \mathbf{B}\hat{\mathbf{u}}[k|k] \quad (3.55)$$

Thus, the cost can be rewritten as

$$J(\hat{\mathbf{u}}[k]) = \hat{\mathbf{u}}[k]^T (\mathbf{R} + \mathbf{B}^T \mathbf{Q} \mathbf{B}) \hat{\mathbf{u}}[k] + 2 \left[\mathbf{A} \hat{x}[k|k] \right]^T \mathbf{Q} \mathbf{B} \hat{\mathbf{u}}[k] + c_0$$

with

$$c_0 = \left\| \hat{x}[k|k] \right\|_P^2 + \left\| \mathbf{A} \hat{x}[k|k] \right\|_Q^2$$

and the constraints can be expressed as

$$\mathbf{S} \hat{\mathbf{u}}[k] \leq \mathbf{b} \quad (3.56)$$

with

$$\mathbf{S} = \begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix}, \mathbf{b} = \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} \hat{x}[k|k] \\ \mathbf{b}_u \end{bmatrix} \quad (3.57)$$

Having obtained the solution $\hat{\mathbf{u}}[k|k]$ for the problem $\mathbb{P}(\hat{x}[k|k])$, the control to be applied to the plant is given by

$$\hat{u}[k|k] = \hat{u}^*[k|k]$$

where $\hat{u}^*[k|k]$ corresponds to the first p elements of $\hat{\mathbf{u}}^*[k|k]$.

3.5 Feasibility Region

slide: aula 8 slide 30

Pergunta: Para m dado N , como determinar o conjunto $\mathcal{D} \subset \mathcal{X}$ de condições iniciais $x(0)$ a partir das quais o conjunto alvo $\mathcal{X}_f$ pode ser atingido repetindo as restricoes sobre o estado e o controle ?

Alternativamente: Como determinar o conjunto $\mathcal{D}$ de condicoes iniciais $x(0)$ para as quais o problema de otimizacao e factivel

$\mathcal{D}$ é o conjunto (ou regioao) de pontos $x(0) \in \mathcal{X}$ para os quais exist $\mathbf{u} \in \mathbb{R}^{pN}$ que satisfaz as seguintes restricoes:

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} \\ \mathbf{S}_u \end{bmatrix} \mathbf{u} \leq \begin{bmatrix} \mathbf{b}_x - \mathbf{S}_x \mathbf{A} x(0) \\ \mathbf{b}_u \end{bmatrix} \quad (3.58)$$

Essas restricoes podem ser reescritas como

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \end{bmatrix} \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix} \leq \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \end{bmatrix} \quad (3.59)$$

ou ainda, acrescentando-se a restricao $S_x x(0) \leq b_x$,

$$\begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \\ 0 & S_x \end{bmatrix} \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix} \leq \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \\ b_x \end{bmatrix} \quad (3.60)$$

De forma resumida, pode-se escrever

$$S_w w \leq b_w \quad (3.61)$$

com

$$w = \begin{bmatrix} \mathbf{u} \\ x(0) \end{bmatrix}, S_w = \begin{bmatrix} \mathbf{S}_x \mathbf{B} & \mathbf{S}_x \mathbf{A} \\ \mathbf{S}_u & 0 \\ 0 & S_x \end{bmatrix}, b_w = \begin{bmatrix} \mathbf{b}_x \\ \mathbf{b}_u \\ b_x \end{bmatrix} \quad (3.62)$$

A restricao $S_w w \leq b_w$ define um poliedro $\mathcal{P}_w$ no espaco $\mathbb{R}^{(pN+n)}$ correspondente as variaveis $\mathbf{u}, x(0)$.

O conjunto $\mathcal{D}$ e obtido **projetando-se** $\mathcal{P}_w$ sobre o subespaco de suas ultimas n componentes.

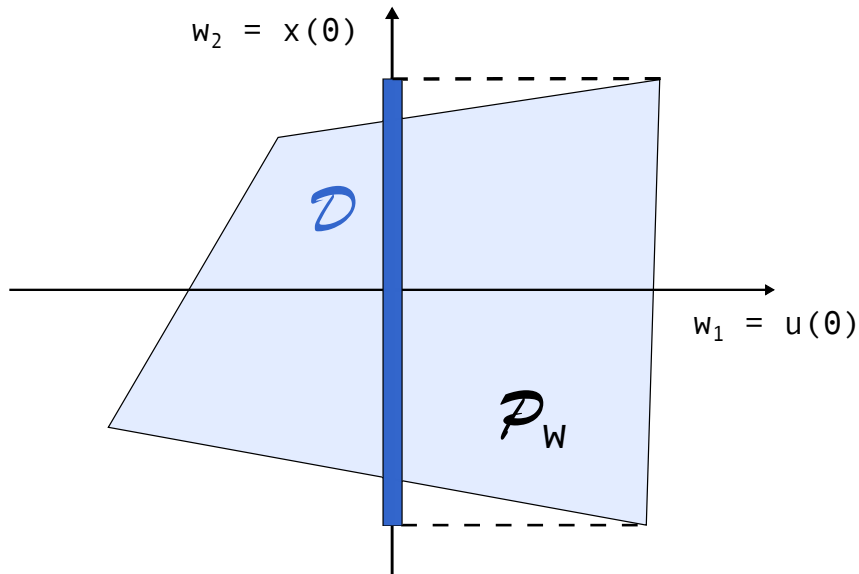


FIGURE 3.1 – Ilustracao para $n = 1$ estado, $p = 1$ entrada e $N = 1$ passo

A **projecao** pose ser realizada empregando a funcao projection do MPT Toolbox:

$$Sw = [Sxn * Bn]...$$

4 Predictive Control for Stabilization of Periodic Trajectories

4.1 Statement of the problem

Considering a plant of an affine switched system described by:

$$\dot{x}(t) = A_{\sigma(t)}x(t) + b_{\sigma(t)} \quad (4.1)$$

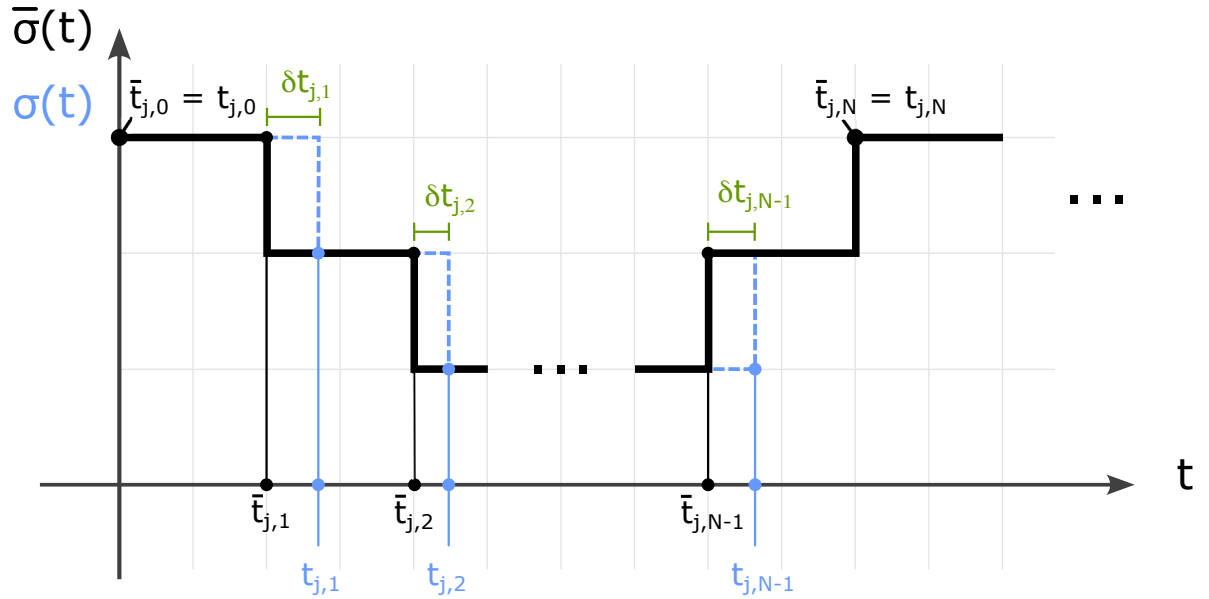


FIGURE 4.1 – Switching signals

We assume the existence of a periodic switching signal $\bar{\sigma}(t)$ associated with a periodic trajectory $\bar{x}(t)$, as obtained in Chapter 2. Our objective is to introduce perturbations in the switching instants such that the trajectory $x(t)$ converges to the reference trajectory $\bar{x}(t)$.

Figure 4.1 displays the j th cycle of the switching signals $\bar{\sigma}(t)$ and $\sigma(t)$, which comprise N switching actions. Within this cycle, the i th switching times of $\bar{\sigma}(t)$ and $\sigma(t)$ are denoted by $\bar{t}_{j,i}$ and $t_{j,i}$, respectively. The relation between $\bar{t}_{j,i}$ and $t_{j,i}$ is given by

$$t_{j,i} = \bar{t}_{j,i} + \delta t_{j,i} \quad (4.2)$$

To do this using predictive control, we need to find a linear equation that relates the switching times and the resulting system at the end of one cycle.

4.2 Linearization procedure

The solution for the state equation (4.1) at time t_1 , starting from the initial condition $x(t_0)$, is of the form

$$x(t_1) = e^{A_1(t_1-t_0)}x(t_0) + \int_{t_0}^{t_1} e^{A_1(t_1-\tau)}B_1d\tau \quad (4.3)$$

$$\bar{x}(\bar{t}_1) = e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) + \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)}B_1d\tau \quad (4.4)$$

subtracting (4.4) from (4.3) we get

$$\begin{aligned} x(t_1) - \bar{x}(\bar{t}_1) &= \overbrace{e^{A_1(t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0)}^{\square} \\ &+ \underbrace{\int_{t_0}^{t_1} e^{A_1(t_1-\tau)}B_1d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)}B_1d\tau}_{\bigcirc} \end{aligned} \quad (4.5)$$

expanding (4.5) first in $\square$:

$$\begin{aligned} \square &= e^{A_1(t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_1(\bar{t}_1+\delta t_1-t_0)}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= e^{A_1(\bar{t}_1-t_0)}e^{\delta t_1}x(t_0) - e^{A_1(\bar{t}_1-\bar{t}_0)}\bar{x}(\bar{t}_0) \\ &= \bar{F}_1 e^{\delta t_1}x(t_0) - \bar{F}_1 \bar{x}(\bar{t}_0) \\ &= \bar{F}_1 (I + A_1 \delta t_1)x(t_0) - \bar{F}_1 \bar{x}(\bar{t}_0) \\ &= \bar{F}_1 [x(t_0) - \bar{x}(\bar{t}_0)] + \bar{F}_1 A_1 \delta t_1 \end{aligned} \quad (4.6)$$

and then in $\bigcirc$:

$$\begin{aligned}
 \bigcirc &= \int_{t_0}^{t_1} e^{A_1(t_1-\tau)} B_1 d\tau - \int_{\bar{t}_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= \int_{t_0}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_1+\delta t_1-\tau)} B_1 d\tau - \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_1} \left[\int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau + \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \right] - \int_{t_0}^{\bar{t}_1} e^{A_1(\bar{t}_1-\tau)} B_1 d\tau \\
 &= e^{A_1\delta t_1} [\bar{G}_1 + B_1\delta t_1] - \bar{G}_1 \\
 &= (I + A_1\delta t_1)[\bar{G}_1 + B_1\delta t_1] - \bar{G}_1 \\
 &= \cancel{\bar{G}_1} + B_0\delta t_1 + A_1\bar{G}_1\delta t_1 + \cancel{A_1B_1\delta t_1\delta t_1} - \cancel{\bar{G}_1} \\
 &= A_1\bar{G}_1\delta t_1 + B_1\delta t_1
 \end{aligned} \tag{4.7}$$

the resulting equations (4.6) and (4.7) are replaced back in (4.5) to complete the difference equation

$$x(t_1) - \bar{x}(\bar{t}_1) = \bar{F}_1[x(t_0) - \bar{x}(\bar{t}_0)] + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \delta t_1 \tag{4.8}$$

Repeating the steps for $x(t_2)$ we have

$$x(t_2) = e^{A_2(t_2-t_1)} x(t_1) + \int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau \tag{4.9}$$

$$\bar{x}(\bar{t}_2) = e^{A_2(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1) + \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau \tag{4.10}$$

subtracting (4.10) from (4.9)

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \overbrace{e^{A_2(t_2-t_1)} x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)} \bar{x}(\bar{t}_1)}^{\square} \\
 &\quad + \underbrace{\int_{t_1}^{t_2} e^{A_2(t_2-\tau)} B_2 d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)} B_2 d\tau}_{\bigcirc}
 \end{aligned} \tag{4.11}$$

expanding $\square$ in (4.11):

$$\begin{aligned}
 \square &= e^{A_2(\bar{t}_2+\delta t_2-\bar{t}_1-\delta t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) \\
 &= e^{A_2(\bar{t}_2-\bar{t}_1)}e^{A_2(\delta t_2-\delta t_1)}x(t_1) - e^{A_2(\bar{t}_2-\bar{t}_1)}\bar{x}(\bar{t}_1) \\
 &= \bar{F}_2[I + A_2(\delta t_2 - \delta t_1)]x(t_1) - \bar{F}_2\bar{x}(\bar{t}_1) \\
 &= \bar{F}_2[x(t_1) - \bar{x}(\bar{t}_1)] + \bar{F}_2A_2x(t_1)\delta t_2 - \bar{F}_2A_2x(t_1)\delta t_1
 \end{aligned} \tag{4.12}$$

and expanding $\bigcirc$:

$$\begin{aligned}
 \bigcirc &= \int_{t_1}^{t_2} e^{A_2(t_2-\tau)}B_2d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \\
 &= \int_{\bar{t}_1+\delta t_1}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2+\delta t_2-\tau)}B_2d\tau - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \\
 &= e^{A_2\delta t_2} \left[\int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_2(\bar{t}_2-\tau)}B_2d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \right] \\
 &\quad - \int_{\bar{t}_1}^{\bar{t}_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \\
 &= (I + A_2\delta t_2) \left[\bar{G}_2 - \int_{\bar{t}_1}^{\bar{t}_1+\delta t_1} e^{A_2(\bar{t}_2-\tau)}B_2d\tau + \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_2(\bar{t}_2-\tau)}B_2d\tau \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_2) \left[\bar{G}_2 - e^{A_2(\bar{t}_2-\bar{t}_1)}B_2\delta t_1 + B_2\delta t_2 \right] - \bar{G}_2 \\
 &= (I + A_2\delta t_2) \left[\bar{G}_2 - \bar{F}_2B_2\delta t_1 + B_2\delta t_2 \right] - \bar{G}_2 \\
 &= \cancel{\bar{G}_2} - \bar{F}_2B_2\delta t_1 + B_2\delta t_2 + A_2\bar{G}_2\delta t_2 - \cancel{\bar{G}_2} \\
 &= A_2\bar{G}_2\delta t_2 + B_2\delta t_2 - \bar{F}_2B_2\delta t_1
 \end{aligned} \tag{4.13}$$

and replacing (4.12) and (4.13) back into equation (4.11) we get to the difference equation for $x(t_2) - \bar{x}(\bar{t}_2)$

$$\begin{aligned}
 x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2[x(t_1) - \bar{x}_1(\bar{t}_1)] \\
 &\quad - \bar{F}_2[A_2x(t_1) + B_2]\delta t_1 \\
 &\quad + [\bar{F}_2A_2\underbrace{x(t_1)}_{\triangle} + A_2\bar{G}_2 + B_2]\delta t_2
 \end{aligned} \tag{4.14}$$

from (4.14), $\triangle$ can be expanded by replacing the resulting equation of (4.8)

$$\triangle = x(t_1) = \bar{x}(\bar{t}_1) + \bar{F}_1[x(t_0) - \bar{x}(t_0)] + [\bar{F}_1A_1x(t_0) + A_1\bar{G}_1 + B_1]\delta t_1 \tag{4.15}$$

note that when $\triangle$ is replaced in eq. (4.14) it will produce a product with δt_1 and δt_2 like

$$x(t_1)\delta t_1 = \bar{x}(\bar{t}_1)\delta t_1 + \bar{F}_1 \overbrace{[x(t_0) - \bar{x}(t_0)]\delta t_1}^{\square} + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \overbrace{\delta t_1 \delta t_1}^{\circ}$$

both $\square$ and $\circ$ are products of differences that produces a smaller number and they will be neglected in the first order approximations

$$x(t_1)\delta t_1 \doteq \bar{x}(\bar{t}_1)\delta t_1 \quad (4.16)$$

replacing (4.8) and (4.15) in (4.14) it follows that

$$\begin{aligned} x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 \{ \bar{F}_1 [x(t_0) - \bar{x}(t_0) + [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 + B_1] \delta t_1] \} \\ &\quad - \bar{F}_2 [A_2 \bar{x}(t_1) + B_2] \delta t_1 \\ &\quad + [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \end{aligned}$$

$$\begin{aligned} x(t_2) - \bar{x}(\bar{t}_2) &= \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\ &\quad + \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\ &\quad + [\bar{F}_2 A_2 \bar{x}(\bar{t}_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \end{aligned}$$

(4.17)

Repeating the procedure for $x(t_3)$ we have

$$x(t_3) = e^{A_3(t_3-t_2)}x(t_2) + \int_{t_2}^{t_3} e^{A_3(t_3-\tau)}B_3d\tau \quad (4.18)$$

$$\bar{x}(\bar{t}_3) = e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2) + \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \quad (4.19)$$

subtracting (4.18) from (4.19)

$$\begin{aligned} x(t_3) - \bar{x}(\bar{t}_3) &= \overbrace{e^{A_3(t_3-t_2)}x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2)}^{\square} \\ &\quad + \underbrace{\int_{t_2}^{t_3} e^{A_3(t_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau}_{\circ} \end{aligned} \quad (4.20)$$

expanding $\square$ in (4.20):

$$\begin{aligned}
 \square &= e^{A_3(\bar{t}_3+\delta t_3-\bar{t}_2-\delta t_2)}x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2) \\
 &= e^{A_3(\bar{t}_3-\bar{t}_2)}e^{A_3(\delta t_3-\delta t_2)}x(t_2) - e^{A_3(\bar{t}_3-\bar{t}_2)}\bar{x}(\bar{t}_2) \\
 &= \bar{F}_3[I + A_3(\delta t_3 - \delta t_2)]x(t_2) - \bar{F}_3\bar{x}(\bar{t}_2) \\
 &= \bar{F}_3[x(t_2) - \bar{x}(\bar{t}_2)] + \bar{F}_3A_3x(t_2)\delta t_3 - \bar{F}_3A_3x(t_2)\delta t_2
 \end{aligned} \tag{4.21}$$

and expanding $\bigcirc$:

$$\begin{aligned}
 \bigcirc &= \int_{t_2}^{t_3} e^{A_3(t_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \\
 &= \int_{\bar{t}_2+\delta t_2}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3+\delta t_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \\
 &= e^{A_3\delta t_3} \left[\int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_3(\bar{t}_3-\tau)}B_3d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \right] \\
 &\quad - \int_{\bar{t}_2}^{\bar{t}_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \\
 &= (I + A_3\delta t_3) \left[\bar{G}_3 - \int_{\bar{t}_2}^{\bar{t}_2+\delta t_2} e^{A_3(\bar{t}_3-\tau)}B_3d\tau + \int_{\bar{t}_3}^{\bar{t}_3+\delta t_3} e^{A_3(\bar{t}_3-\tau)}B_3d\tau \right] - \bar{G}_3 \\
 &= (I + A_3\delta t_3) \left[\bar{G}_3 - e^{A_3(\bar{t}_3-\bar{t}_2)}B_3\delta t_2 + B_3\delta t_3 \right] - \bar{G}_3 \\
 &= (I + A_3\delta t_3) \left[\bar{G}_3 - \bar{F}_3B_3\delta t_2 + B_3\delta t_3 \right] - \bar{G}_3 \\
 &= \cancel{\bar{G}_3} - \bar{F}_3B_3\delta t_2 + B_3\delta t_3 + A_3\bar{G}_3\delta t_3 - \cancel{\bar{G}_3} \\
 &= A_3\bar{G}_3\delta t_3 + B_3\delta t_3 - \bar{F}_3B_3\delta t_2
 \end{aligned} \tag{4.22}$$

and then replacing (4.21) in (4.22) back in eq. (4.20) we get to the difference equation for $x(t_3) - \bar{x}(\bar{t}_3)$

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) &= \bar{F}_3[x(t_2) - \bar{x}(\bar{t}_2)] \\
 &\quad - \bar{F}_3[A_3x(t_2) + B_3]\delta t_2 \\
 &\quad + [\bar{F}_3A_3x(t_2) + A_3\bar{G}_3 + B_3]\delta t_3
 \end{aligned} \tag{4.23}$$

from (4.17), $\triangle$ can be expanded the same way as in the past iteration and $x(t_2) - \bar{x}(\bar{t}_2)$ can be replaced in (4.23)

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) = & \bar{F}_3 \{ \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 + B_2] \delta t_2 \} \\
 & - \bar{F}_3 [A_3 \bar{x}(t_2) + B_3] \delta t_2 \\
 & + [\bar{F}_3 A_3 \bar{x}(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned}$$

after rearranging the terms, one arrives at

$$\begin{aligned}
 x(t_3) - \bar{x}(\bar{t}_3) = & \bar{F}_3 \bar{F}_2 \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_3 \bar{F}_2 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + \bar{F}_3 [\bar{F}_2 A_2 \bar{x}(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & + [\bar{F}_3 A_3 \bar{x}(t_2) + A_3 \bar{G}_3 + B_3] \delta t_3
 \end{aligned} \tag{4.24}$$

Now, there are enough iterations to deduce a pattern on each increment of the equation, so the equation for $x(t_i)$ can be deduced as

$$\begin{aligned}
 x(t_i) - \bar{x}(\bar{t}_i) = & \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 & + \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_1 [\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 & + \bar{F}_i \bar{F}_{i-1} \dots \bar{F}_2 [\bar{F}_2 A_2 x(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 & \vdots \\
 & + \bar{F}_i [\bar{F}_{i-1} A_{i-1} \bar{x}(t_{i-2}) + A_{i-1} \bar{G}_{i-1} - A_i \bar{x}(\bar{t}_{i-1}) + B_{i-1} - B_i] \delta t_{i-1} \\
 & + [\bar{F}_i A_i \bar{x}(t_i) + A_i \bar{G}_i + B_i] \delta t_i
 \end{aligned}$$

(4.25)

and then, for $x(t_N)$ the equation is as follows

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) &= \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 \overbrace{[\bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2]}^{\square} \delta t_1 \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [\bar{F}_2 A_2 x(t_1) + A_2 \bar{G}_2 - A_3 \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 &\quad \vdots \\
 &\quad + \bar{F}_N [\bar{F}_{N-1} A_{N-1} \bar{x}(t_{N-2}) + A_{N-1} \bar{G}_{N-1} - A_N \bar{x}(\bar{t}_{N-1}) \\
 &\quad \quad + B_{N-1} - B_N] \delta t_{N-1} \\
 &\quad + \underbrace{[\bar{F}_N A_{N-1} \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N]}_{\bigcirc} \delta t_N
 \end{aligned} \tag{4.26}$$

The equation (4.26) can be developed further to remove the dependencies on the intermediary states $x(t_0), x(t_1), \dots, x(t_{N-2})$. By expanding $\square$ and $\bigcirc$, the following identity holds

$$\begin{aligned}
 \square &= \bar{F}_1 A_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 \bar{F}_1 x(t_0) + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 [\bar{x}(\bar{t}_1) - \bar{G}_1] + A_1 \bar{G}_1 - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= A_1 \bar{x}(\bar{t}_1) - \cancel{A_1 \bar{G}_1} + \cancel{A_1 \bar{G}_1} - A_2 \bar{x}(\bar{t}_1) + B_1 - B_2 \\
 &= (A_1 - A_2) \bar{x}(\bar{t}_1) + B_1 - B_2
 \end{aligned} \tag{4.27}$$

$$\begin{aligned}
 \bigcirc &= \bar{F}_N A_N \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N \\
 &= A_N \bar{F}_N \bar{x}(t_{N-1}) + A_N \bar{G}_N + B_N \\
 &= A_N [\bar{x}(\bar{t}_N) - \bar{G}_N] + A_N \bar{G}_N + B_N \\
 &= A_N \bar{x}(\bar{t}_N) - \cancel{A_N \bar{G}_N} + \cancel{A_N \bar{G}_N} + B_N \\
 &= A_N \bar{x}(\bar{t}_N) + B_N
 \end{aligned} \tag{4.28}$$

replacing (4.27) and (4.28) in (4.26)

$$\begin{aligned}
 x(t_N) - \bar{x}(\bar{t}_N) &= \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 [x(t_0) - \bar{x}(t_0)] \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 [(A_1 - A_2) \bar{x}(\bar{t}_1) + B_1 - B_2] \delta t_1 \\
 &\quad + \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [(A_2 - A_3) \bar{x}(\bar{t}_2) + B_2 - B_3] \delta t_2 \\
 &\quad \vdots \\
 &\quad + \bar{F}_N [(A_{N-1} - A_N) \bar{x}(\bar{t}_{N-1}) + B_{N-1} - B_N] \delta t_{N-1} \\
 &\quad + [A_N \bar{x}(\bar{t}_N) + B_N] \delta t_N
 \end{aligned} \tag{4.29}$$

and renaming the terms of (4.29) to

$$e(t) = x(t) - \bar{x}(\bar{t}) \quad (4.30)$$

$$\Phi = \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_1 \quad (4.31)$$

$$\begin{aligned} \Gamma = & \begin{bmatrix} \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_2 [(A_1 - A_2)\bar{x}(\bar{t}_1) + B_1 - B_2], \\ \bar{F}_N \bar{F}_{N-1} \dots \bar{F}_3 [(A_2 - A_3)\bar{x}(\bar{t}_2) + B_2 - B_3], \\ \vdots \\ \bar{F}_N [(A_{N-1} - A_N)\bar{x}(\bar{t}_{N-1}) + B_{N-1} - B_N], \\ A_N \bar{x}(\bar{t}_N) + B_N \end{bmatrix} \end{aligned} \quad (4.32)$$

$$\delta t = [\delta t_1, \delta t_2, \dots, \delta t_N]^T \quad (4.33)$$

we get to the affine equation

$$\boxed{e(t_N) = \Phi e(t_0) + \Gamma \delta t} \quad (4.34)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.35)$$

where $\bar{x}$ is calculated as

$$\bar{x}(\bar{t}_1) = F_1 \bar{x}(\bar{t}_0) + G_1 \quad (4.36)$$

$$\bar{x}(\bar{t}_2) = F_2 \bar{x}(\bar{t}_1) + G_2 \quad (4.37)$$

$$\vdots$$

$$\bar{x}(\bar{t}_N) = F_N \bar{x}(\bar{t}_{N-1}) + G_N \quad (4.38)$$

and F_i and G_i are calculated as

$$[F_i, G_i] = c2dm(Ai, Bi, [], [], dti, 'zoh') \quad (4.39)$$

4.3 MPC Problem

Note that the equation (4.34) relates to the equation (3.1) as both describe the evolution of a system over time. The equation (3.1) represents the system's state and input at a given time step, and the equation (4.34) describes the error between the system's predicted and actual values at two different time points.

Referring to equation (3.1), we can make some substitutions to simplify our discussion. We'll replace variable x with e , and u with δt . Additionally, we'll denote the cycle index with k . With these substitutions in place, we arrive at equation (4.34).

4.3.1 Cost Function

$$J = \|e[N_p]\|_{P_f}^2 + \sum_{j=0}^{N_p-1} \|e[j]\|_Q^2 + \|\delta t[j]\|_R^2 \quad (4.40)$$

$$e(t_{j,N}) = \Phi e(t_{j,0}) + \Gamma \delta t[j] \quad (4.41)$$

where $Q = Q^T > 0$, $\rho > 0$

$$\delta t[j] = \left[t_{j,1} - \bar{t}_{j,1}, t_{j,2} - \bar{t}_{j,2}, \dots, t_{j,N-1} - \bar{t}_{j,N-1} \right]^T \quad (4.42)$$

4.3.2 Dwell-time Constraints

We want to enforce a constraint on the dwell times where the switching times will be subject to the constraints:

$$(t_i - t_{i-1}) \geq \Delta t_{i,min} , \quad i = 1, 2, \dots, N \quad (4.43)$$

then we can write the restriction as

$$\delta t_1 \geq -\Delta \bar{t}_1 + \Delta t_{1,min} \quad (4.44)$$

$$\delta t_i - \delta t_{i-1} \geq -\Delta \bar{t}_i + \Delta t_{i,min} , \quad i = 1, 2, \dots, N \quad (4.45)$$

$$\delta t_{N-1} \geq -\Delta \bar{t}_N + \Delta t_{N,min} \quad (4.46)$$

$$\Delta \bar{t}_i = \bar{t}_i - \bar{t}_{i-1} \quad (4.47)$$

to match the constraint from (3.56)

$$\mathbf{S}\hat{\mathbf{u}}[k] \leq b$$

the equations can be written as

$$-\delta t_1 \leq +\Delta \bar{t}_1 - \Delta t_{1,min} \quad (4.48)$$

$$-\delta t_i + \delta t_{i-1} \leq +\Delta \bar{t}_i - \Delta t_{i,min} , \quad i = 1, 2, \dots, N \quad (4.49)$$

$$-\delta t_{N-1} \leq +\Delta \bar{t}_N - \Delta t_{N,min} \quad (4.50)$$

with

$$\mathbf{L} = \begin{bmatrix} -1 & 0 & 0 & \cdots & 0 & 0 \\ 1 & -1 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & 0 & \cdots & 1 & -1 \\ 0 & 0 & 0 & \cdots & 0 & 1 \end{bmatrix} \quad (4.51)$$

$$c = \begin{bmatrix} \Delta t_{r_1} - \Delta t_{r_1,min} \\ \Delta t_{r_2} - \Delta t_{r_2,min} \\ \vdots \\ \Delta t_{r_{N-1}} - \Delta t_{r_{N-1},min} \\ \Delta t_{r_N} - \Delta t_{r_N,min} \end{bmatrix} \quad (4.52)$$

4.4 Application Examples

4.4.1 Integrador duplo

4.4.1.1 init - configuracoes da simulacao

dynamics of the problem

Omega: $\begin{bmatrix} 1, 2 \end{bmatrix}$

Time step of 0.01 second.

Xref: $\begin{bmatrix} 2, -1 \end{bmatrix}$

Tmin: 0.25

$$Q = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \quad (4.53)$$

Tpmax: 1

smax: 2

r: 1

$$Ts = \begin{bmatrix} 0 & 2 & 3 & 5 & 6 \end{bmatrix} \quad (4.54)$$

X_0 : $\begin{bmatrix} -0.5, -1 \end{bmatrix}$

The double integrator is a simple example where the matrices A and b define the state-space representation of a system.

$$\begin{aligned} A_1 &= \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} & A_2 &= \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \\ b_1 &= \begin{bmatrix} 0 \\ 1 \end{bmatrix} & b_2 &= \begin{bmatrix} 0 \\ 0 \end{bmatrix} \end{aligned} \quad (4.55)$$

The minimum switching time is set to 0.25.

The reference state vector is $\begin{bmatrix} 2, -1 \end{bmatrix}$, and the states can be interpreted as position and velocity of the system.

The variables Tpmax and smax are set to 1 and 2 respectively, but their specific roles are not clear from this context.

The variable r is set to 1, but its role is also not clear from this context.

The config structure seems to be a configuration for different operating modes of the

system. It includes fields for operation mode (Ω), associated control (u_r), state-space matrices (A , b , C , D), time step (t_{step}), reference state (x_{ref}), minimum time step (t_{min}), state weighting matrix (Q), maximum time period (T_{pmax}), maximum value for s (s_{max}), a variable r , time sequence (T_s), and initial state (x_0).

4.4.1.2 calculo da trajetoria (otimizacao)

4.4.1.3 construindo MPC (matrizes PHI e GAMMA)

4.4.1.4 rodando simulacao

4.4.1.5 resultados

4.4.2 Buck-boost converter

This example

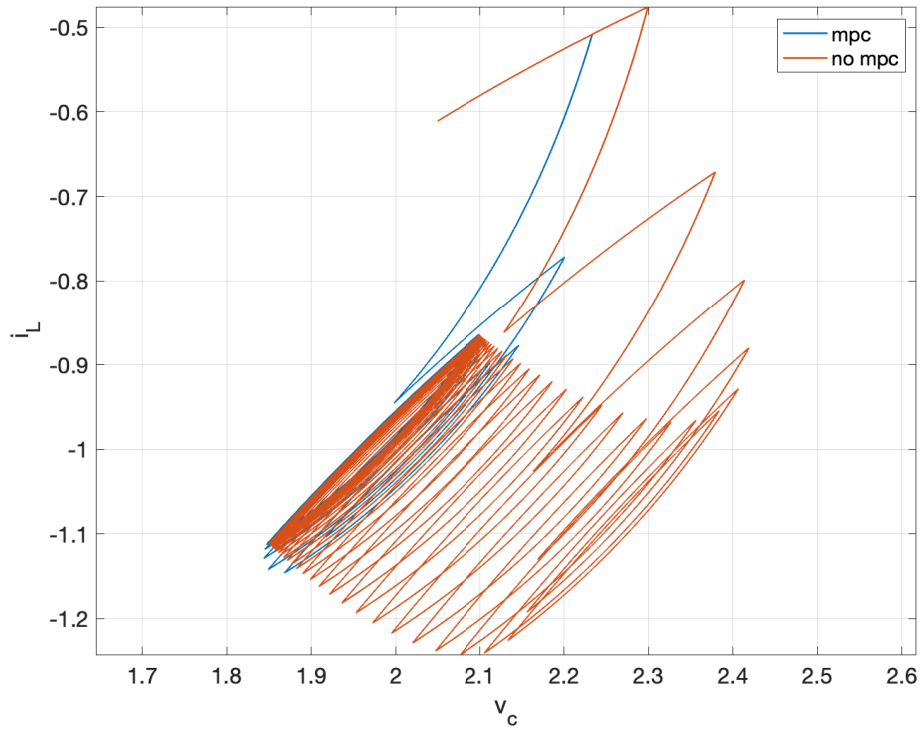


FIGURE 4.2 – fig 1

4.4.3 Patino 2

4.5 Conclusion

mostrar o modelo em malha aberta indo para a sua trajetoria ciclica estavel junto com o modelo com controle ativo mostrando a convergencia mais rapida

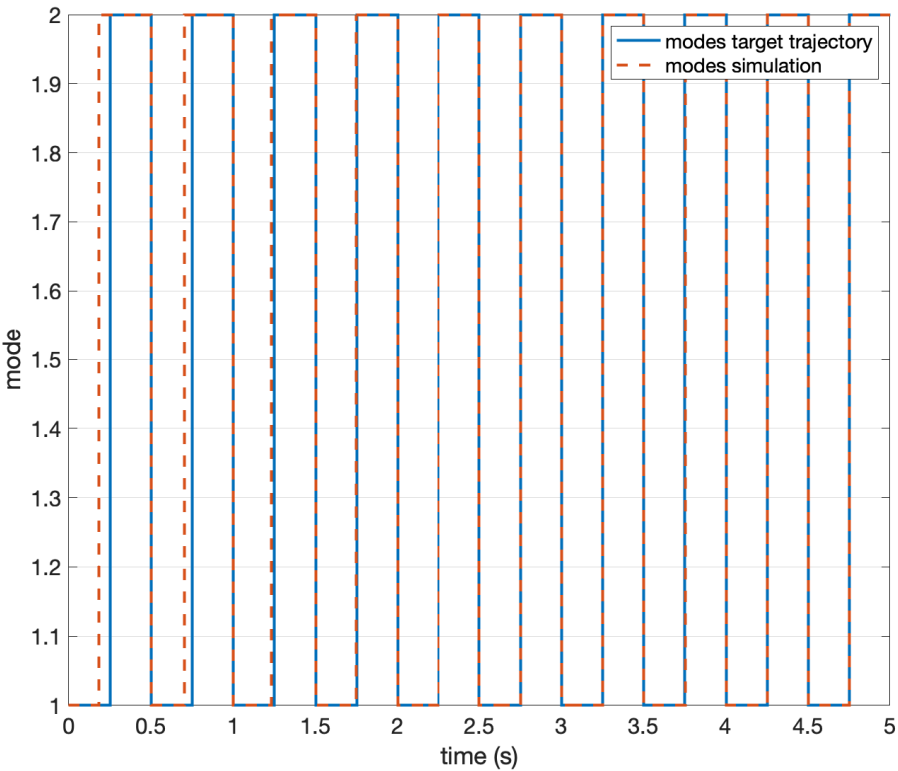


FIGURE 4.3 – fig 2

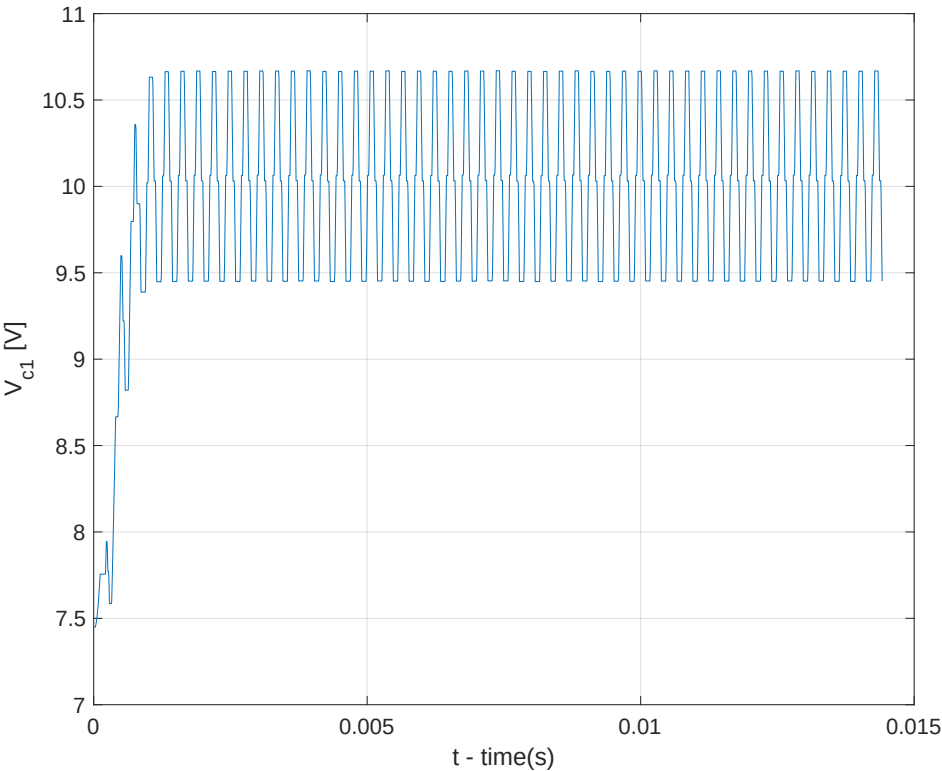


FIGURE 4.4 – fig 1

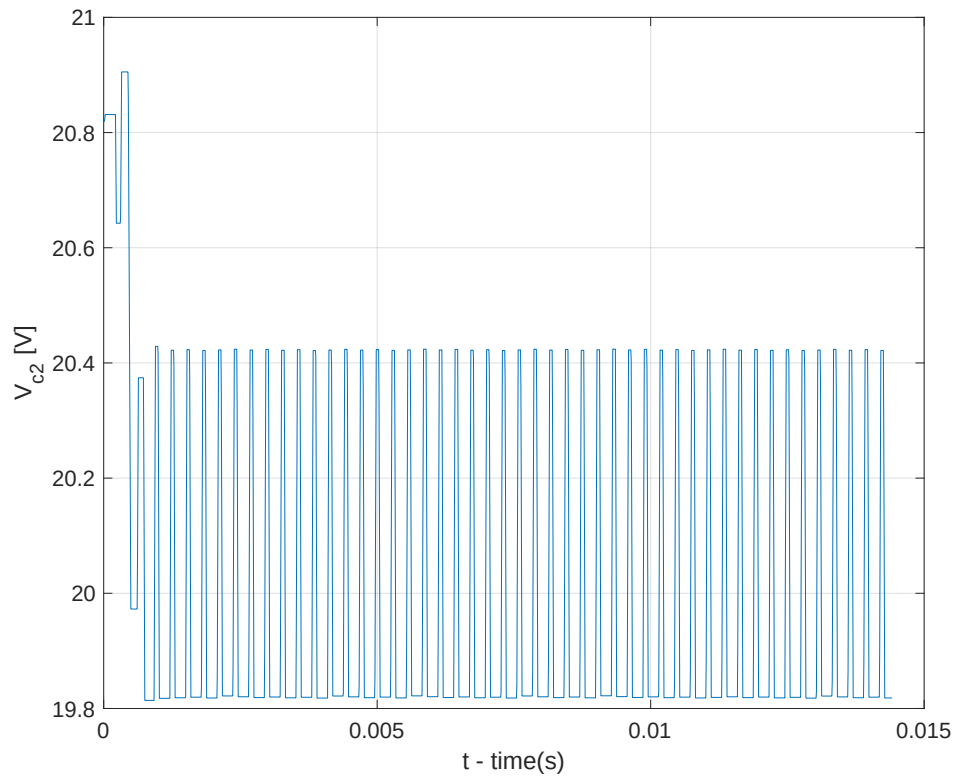


FIGURE 4.5 – fig 2

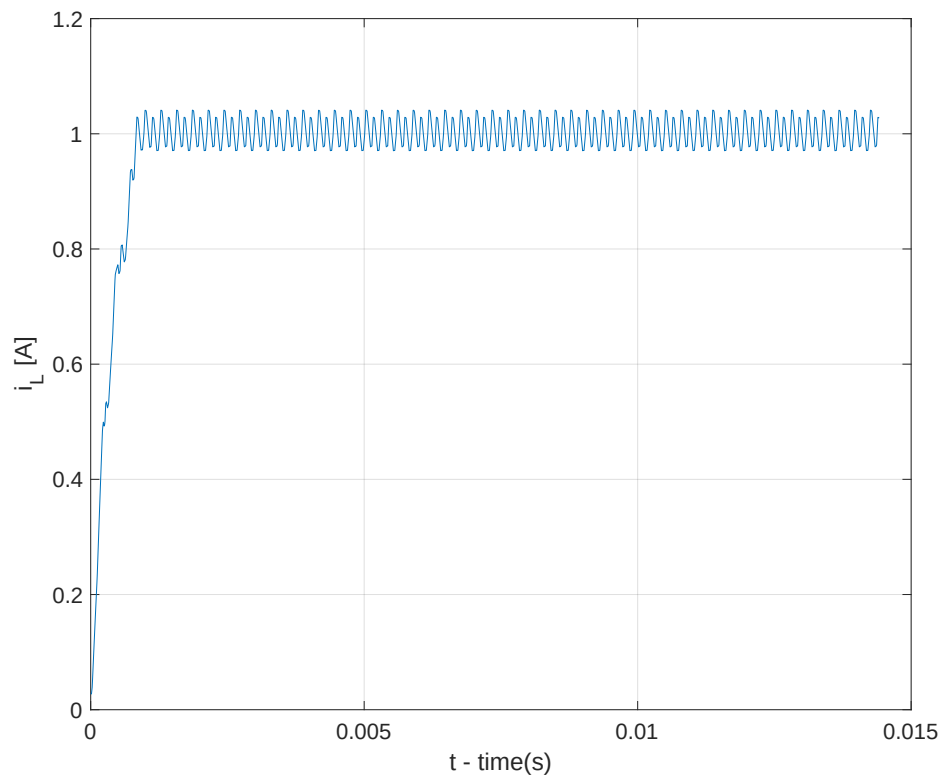


FIGURE 4.6 – fig 3

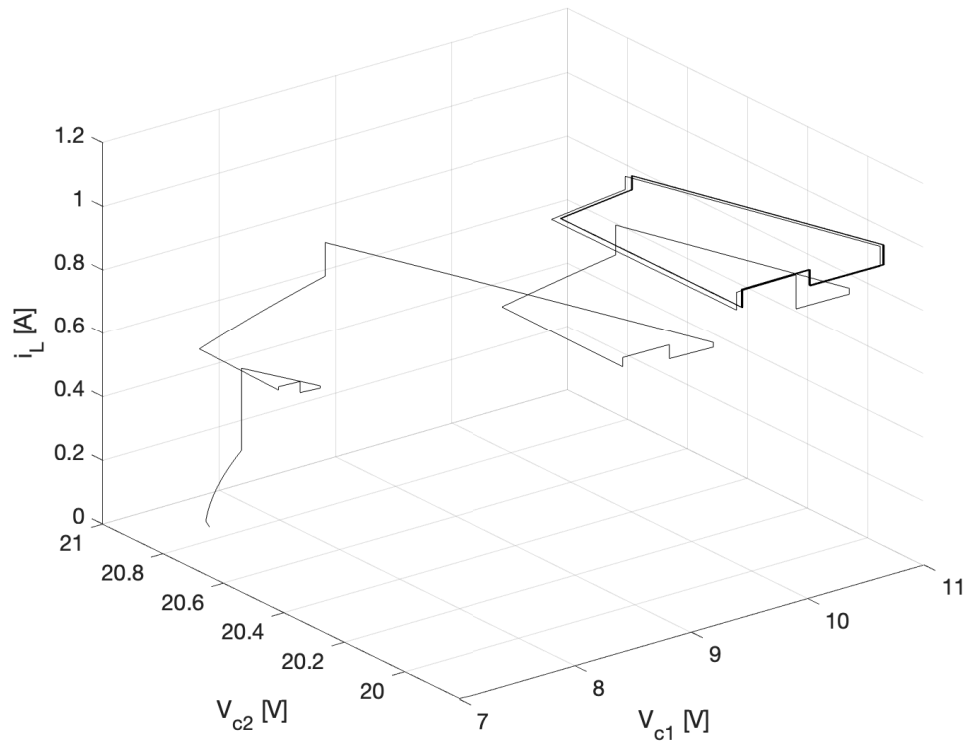


FIGURE 4.7 – fig 4

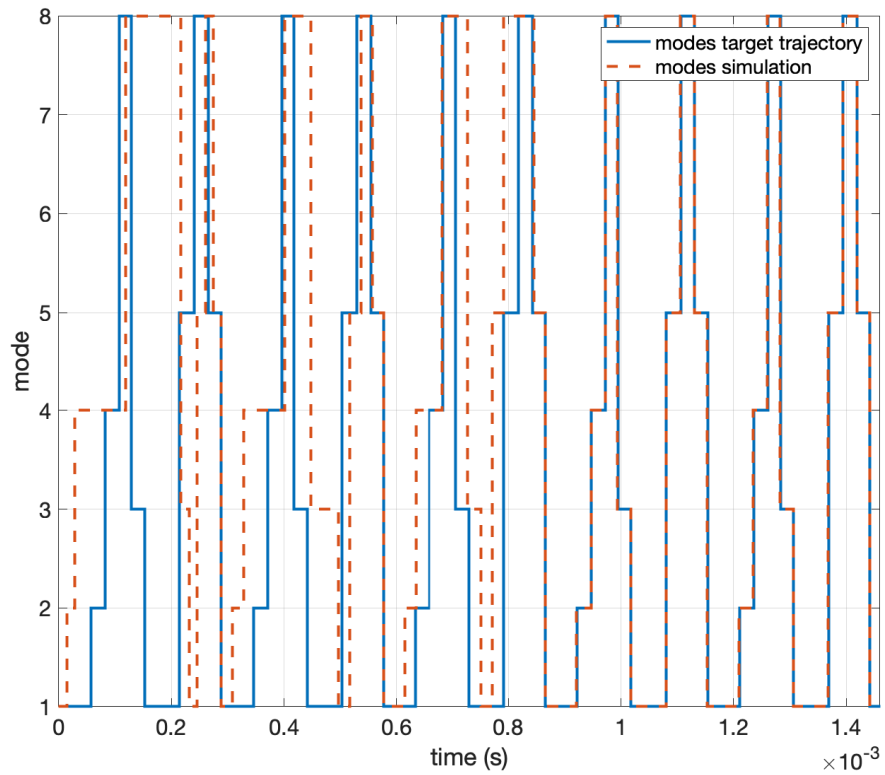


FIGURE 4.8 – Variant Dynamic Circuit 2: State Trajectory

5 Conclusão

5.1 RASCUNHO

- > artigo mateus: sessao 4 (38)
- > usar como referencia para escrever as restricoes de dwell time
- > usando a restricao da 3.4, $S_u = -L$, $B_u = -c$

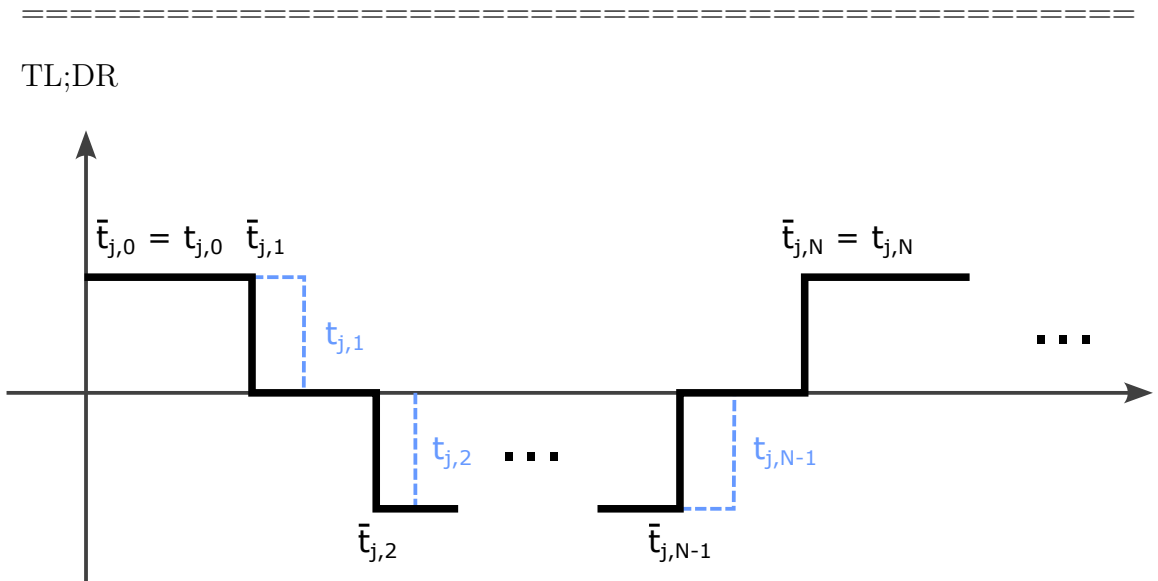


FIGURE 5.1 – Instantes de chaveamento

a restricao que queremos impor é:

$$(t_i - t_{i-1}) \geq \Delta t_{i,min} , \quad i = 1, 2, \dots, N \quad (5.1)$$

como

$$\Delta \bar{t}_i = \bar{t}_i - \bar{t}_{i-1} \quad (5.2)$$

então podemos escrever a restricao da seguinte maneira

$$\delta t_1 \geq -\Delta \bar{t}_1 + \Delta t_{1,min} \quad (5.3)$$

$$\delta t_i - \delta t_{i-1} \geq -\Delta \bar{t}_i + \Delta t_{i,min} , \quad i = 1, 2, \dots, N \quad (5.4)$$

$$\delta t_{N-1} \geq -\Delta \bar{t}_N + \Delta t_{N,min} \quad (5.5)$$

que pode ser representado na forma matricial como

$$\mathbf{L} = \begin{bmatrix} 1 & 0 & 0 & \cdots & 0 & 0 \\ -1 & 1 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & 0 & \cdots & -1 & 1 \\ 0 & 0 & 0 & \cdots & 0 & -1 \end{bmatrix} \quad (5.6)$$

$$c = \begin{bmatrix} -\Delta t_{r_1} + -\Delta t_{r_1,min} \\ -\Delta t_{r_2} + -\Delta t_{r_2,min} \\ \vdots \\ -\Delta t_{r_{N-1}} + -\Delta t_{r_{N-1},min} \\ -\Delta t_{r_N} + -\Delta t_{r_N,min} \end{bmatrix} \quad (5.7)$$

=====

4 Predictive Control Formulation

The problem addressed herein consists in determining suitable perturbations in the switching times of the input signal to drive the state deviation $e[k]$ to zero asymptotically. As a result, the state $x[k]$ will be driven to the target point $x_r(t_0) = x_r(t_N)$.

For this purpose, the discrete-time model (28) derived in the previous section is employed within a predictive control framework. The cost function to be minimized at the beginning of the k th oscillation cycle is chosen as

$$J = \left\| \hat{e} \left[k = N_p[k] \right] \right\|_{P_f}^2 + \sum_{j=1}^{N_p} \left\| \hat{e} \left[k + j|k \right] \right\|_Q^2 + \left\| \hat{\delta}_t \left[k + j - 1|k \right] \right\|_R^2 \quad (5.8)$$

where $Q = Q_T \in \mathbb{R}^{n \times n}$, $R = R_T \in \mathbb{R}^{(N-1) \times (N-1)}$, $P_f = P_f^T \in \mathbb{R}^{n \times n}$ are positive-definite weight matrices. Following standard predictive control notation, the hat and $[k]$ symbols are used to indicate that $\hat{\delta}t[k|k]$, $\hat{\delta}t[k+1|k]$, $\hat{\delta}t[k+N_p|k]$ is a sequence of manipulated vectors which are to be optimized over a prediction horizon spanning N_p oscillation cycles. The relation between these manipulated vectors and the predicted state deviations is given by.

$$\begin{aligned}
\hat{e}[k|k] &= e[k] \\
\hat{e}[k+j|k] &= \Phi \hat{e}[k+j-1|k] + \Gamma \hat{\delta}t[k+j-1|k], \\
j &= 1, 2, \dots, N_p
\end{aligned} \tag{5.9}$$

In order to enforce (8) - (10) at each oscillation cycle, the following constraints will be imposed:

$$\mathbf{L} \hat{\delta}t[k+j-1|k] \geq c, j = 1, 2, \dots, N_p \tag{5.10}$$

with $\mathbf{L} \in \mathbb{R}^{N \times (N-1)}$ and $c \in \mathbb{R}^{N \times (N-1)}$ and $c \in \mathbb{R}^N$ given by

$$\mathbf{L} = \begin{bmatrix} 1 & 0 & 0 & \cdots & 0 & 0 \\ -1 & 1 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & 0 & \cdots & -1 & 1 \\ 0 & 0 & 0 & \cdots & 0 & -1 \end{bmatrix} \tag{5.11}$$

$$c = \begin{bmatrix} -\Delta t_{r_1} + -\Delta t_{r_1, min} \\ -\Delta t_{r_2} + -\Delta t_{r_2, min} \\ \vdots \\ -\Delta t_{r_{N-1}} + -\Delta t_{r_{N-1}, min} \\ -\Delta t_{r_N} + -\Delta t_{r_N, min} \end{bmatrix} \tag{5.12}$$

Moreover, nominal stability for the closed-loop system can be obtained by imposing a constraint on the form

$$\hat{e}[k+N_p|k] \in \mathbb{E}_f \tag{5.13}$$

Bibliography

BENMILOUD, M.; BENALIA, A.; DJEMAI, M.; DEFOORT, M. On the local stabilization of hybrid limit cycles in switched affine systems. **IEEE Transactions on Automatic Control**, v. 64, n. 2, p. 841–846, 2019.

EGIDIO, L.; DEAECTO, G.; GEROMEL, J. Limit cycle global asymptotic stability of continuous-time switched affine systems. **IFAC-PapersOnLine**, v. 53, p. 6121–6126, 01 2020.

EGIDIO, L. N.; DAIHA, H. R.; DEAECTO, G. S. Global asymptotic stability of limit cycle and h_2/h_∞ performance of discrete-time switched affine systems. **Automatica**, v. 116, p. 108927, 2020. ISSN 0005-1098.

HAJIAHMADI, M.; SCHUTTER, B. D.; HELLENDORRN, H. Robust h_∞ switching control techniques for switched nonlinear systems with application to urban traffic control. **International Journal of Robust and Nonlinear Control**, Wiley Online Library, v. 26, n. 6, p. 1286–1306, 2016.

MARCOLINO, M. H. **Stabilization of Periodic trajectories through receding horizon optimization of switching times**. 2018. 79 f. Tese (Doutorado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2018.

NOCEDAL, J.; WRIGHT, S. J. **Numerical Optimization, Second Edition**. [S.l.]: Springer Verlag, 2006. (Springer Series in Operations Research).

PARISE, F.; VALCHER, M. E.; LYGEROS, J. Computing the projected reachable set of stochastic biochemical reaction networks modeled by switched affine systems. **IEEE Transactions on Automatic Control**, v. 63, n. 11, p. 3719–3734, 2018.

PATINO, D.; RIEDINGER, P.; RUIZ, F. A predictive control approach for dc-dc power converters and cyclic switched systems. In: IEEE. **2010 IEEE International Conference on Industrial Technology**. [S.l.], 2010. p. 1259–1264.

VIEIRA, M. S. **Controle Preditivo de sistemas com atuadores sujeitos a restorções temporais de chaveamento**. 2013. 119 f. Dissertação (Mestrado em Sistemas de Controle) — Instituto Tecnológico de Aeronáutica, São José dos Campos, 2013.

Appendix A - Tópicos de Dilema Linear

A.1 Modelo de simulação

```
+engine
├─ CORES.m
├─ fun_custo_patino.m
├─ get_config_sim_matheus.m
├─ get_config_sim_patino_1.m
├─ get_config_sim_patino_2.m
├─ get_config.m
├─ get_otmin_opt.m
├─ get_ts.m
├─ get_x0.m
├─ get_xr.m
├─ nonlincon_patino.m
├─ otmin.m
├─ sim_1.m
├─ sim_n.m
└─ +mpc
    ├─ construcao_modelo_instantes.m
    ├─ matrizes_ss_mpc_dualmode_switching.m
    └─ mpc_dualmode_switching.m
```

A.1.1 get_x0

funcao de calculo da condicao inicial

A.1.2 get_xf

Texto do modelo de simulação sendo colocado aqui.

Annex A - Exemplo de um Primeiro Anexo

A.1 Uma Seção do Primeiro Anexo

Algum texto na primeira seção do primeiro anexo.

FOLHA DE REGISTRO DO DOCUMENTO

1. CLASSIFICAÇÃO/TIPO TD	2. DATA 25 de março de 2015	3. DOCUMENTO Nº DCTA/ITA/DM-018/2015	4. Nº DE PÁGINAS 63
5. TÍTULO E SUBTÍTULO: Robust control of linear systems with Switched Actuators Subjected to Dwell-Time Constraints			
6. AUTOR(ES): Daniel Vieira			
7. INSTITUIÇÃO(ÕES)/ÓRGÃO(S) INTERNO(S)/DIVISÃO(ÕES): Instituto Tecnológico de Aeronáutica – ITA			
8. PALAVRAS-CHAVE SUGERIDAS PELO AUTOR: Cupim; Cimento; Estruturas			
9. PALAVRAS-CHAVE RESULTANTES DE INDEXAÇÃO: Cupim; Dilema; Construção			
10. APRESENTAÇÃO: (X) Nacional () Internacional ITA, São José dos Campos. Curso de Mestrado. Programa de Pós-Graduação em Engenharia Aeronáutica e Mecânica. Área de Sistemas Aeroespaciais e Mecatrônica. Orientador: Prof. Dr. Adalberto Santos Dupont. Coorientadora: Prof ^a . Dr ^a . Doralice Serra. Defesa em 05/03/2015. Publicada em 25/03/2015.			
11. RESUMO: Atuadores chaveados são difíceis de lidar por conta de algumas restrições características de sua natureza, porém eles são eficientes em inúmeras aplicações da engenharia, sendo aplicado, por exemplo, em sistemas de controle de atitude de veículos espaciais. Assim, saber utilizar desse tipo de atuador se faz importante e necessário. O principal problema a ser resolvido nessa tese é o projeto de um controlador que garanta a robustez de sistema com atuadores chaveados submetidos a restrições temporais que limitam a janela de resposta de seus comandos. Nessa abordagem, é feita uma busca de trajetória alvo de ciclo limite e, então, é calculado o erro dos estados e aplicada a técnica de controle preditivo para correção do erro e levar o systema à trajetória cíclica alvo.			
12. GRAU DE SIGILO: (X) OSTENSIVO () RESERVADO () SECRETO			