This procedure is applicable to below models:

V810 STD	☐	S1	☐	S2
V810 XXL	☐	S1	☐	S2
V810 S2EX	☑	Optical	☐	Mechanical
V810 Mini	☐			

REVISION HISTORY

Rev	Effective Date	Description	Doc Originator
00	16 Mar 2017	First Release	MUHAMMED SHAMEEM

Content

Appendix A:

1. Locate identical Optical PIP Sensor from Figure 1.

   Remarks: Loading sequence: Left to Right.

2. Below is the list and the part number for each of the Optical PIP Kit:

   4XASP-A150 / 2000-0015 : S2EX Left Stop PIP Cable Kit (Sensor 1 Emitter and Receiver)

   4XASP-A151 / 2000-0016 : S2EX Left Slow PIP Cable Kit (Sensor 2 Emitter and Receiver)

   4XASP-A153 / 2000-0017 : S2EX Right Slow PIP Cable Kit (Sensor 3 Emitter and Receiver)

   4XASP-A152 / 2000-0018 : S2EX Right Stop PIP Cable Kit (Sensor 4 Emitter and Receiver)

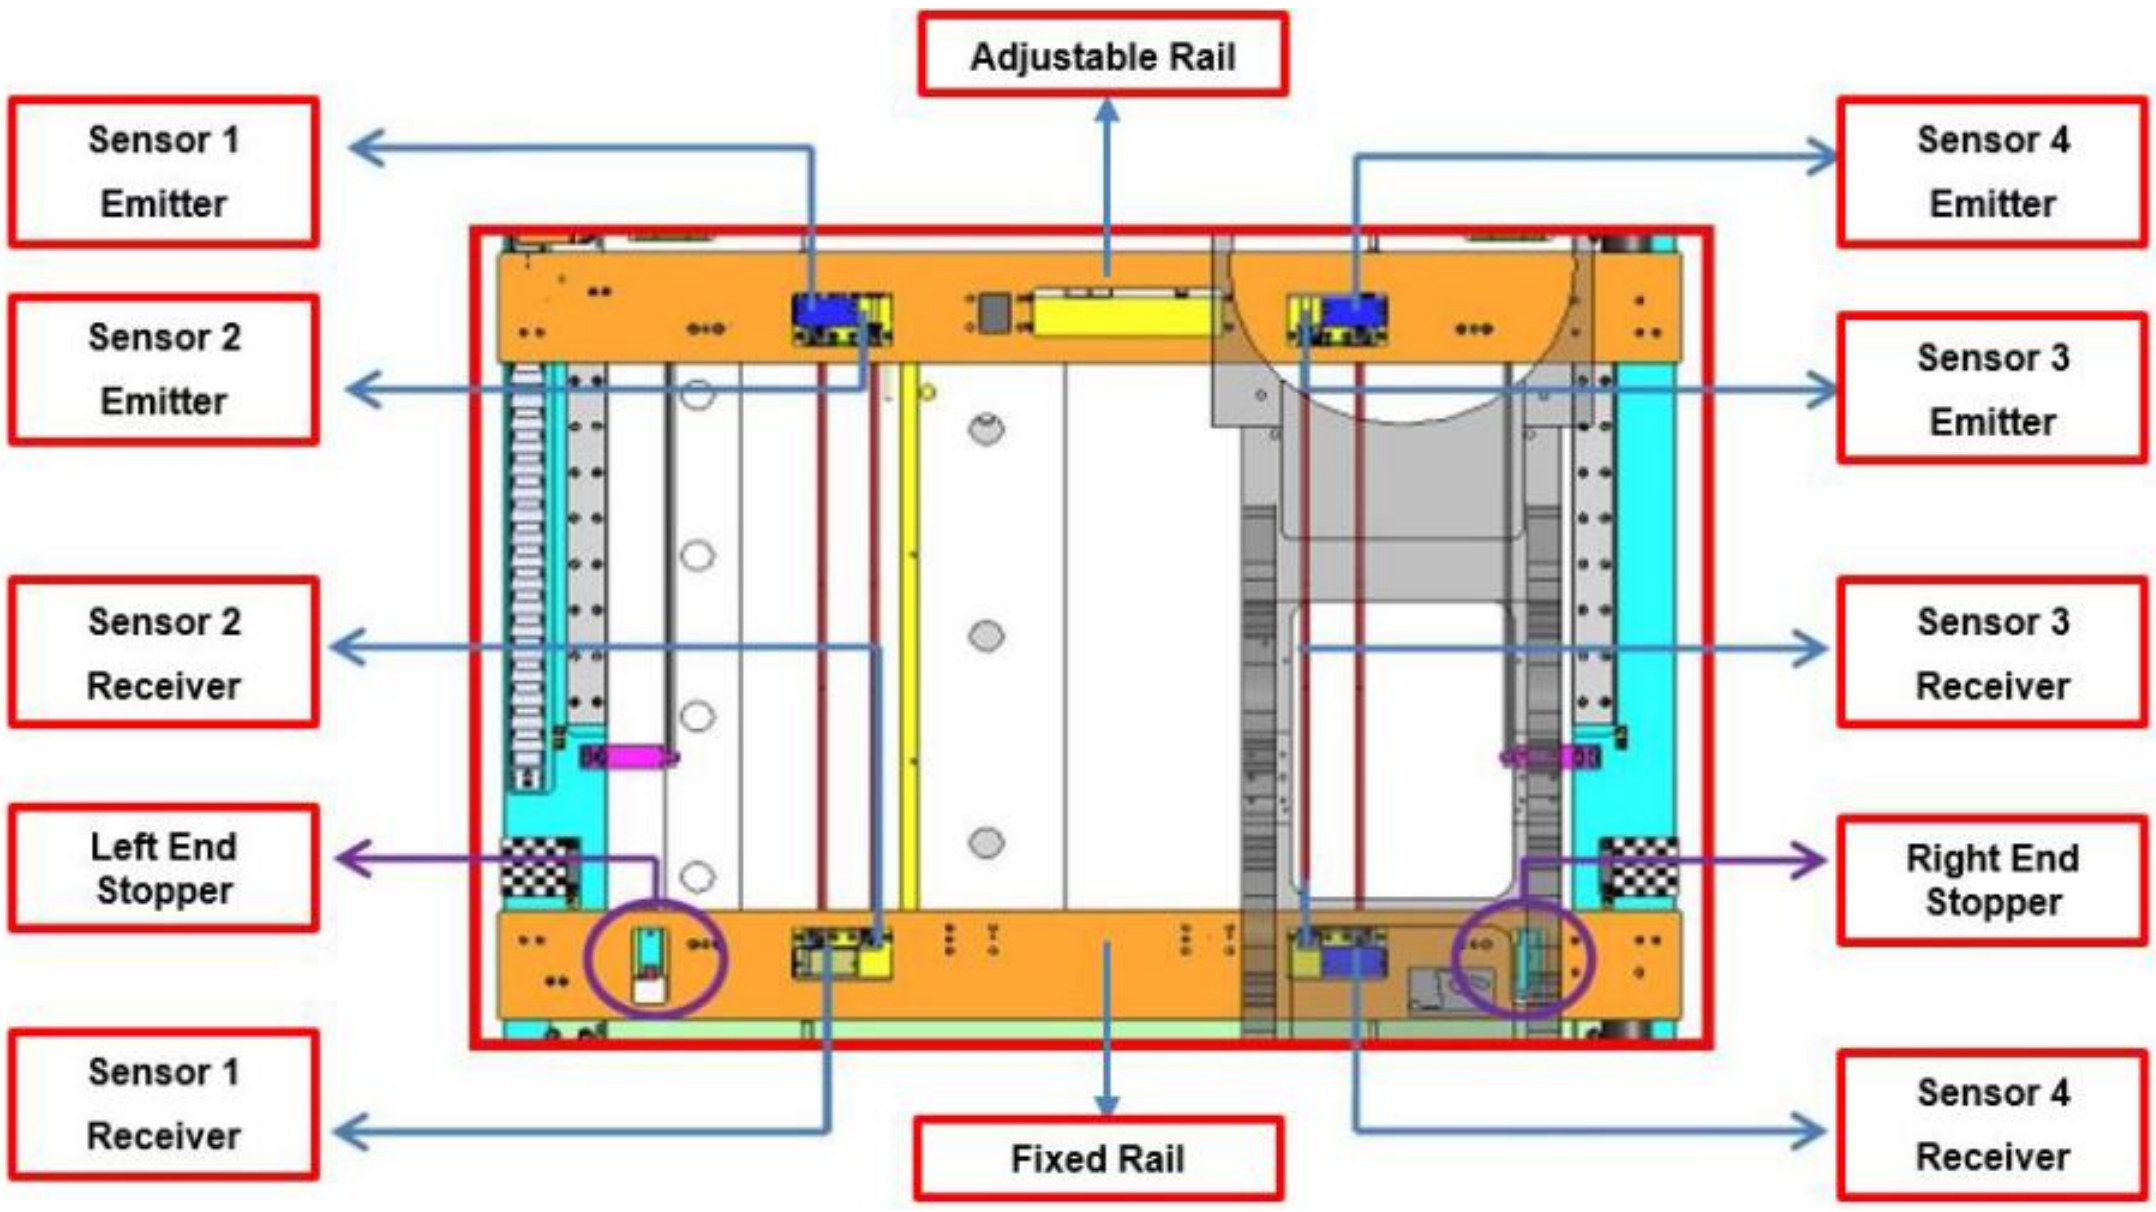

Figure 1 Optical PIP Sensor Location (Graphic)

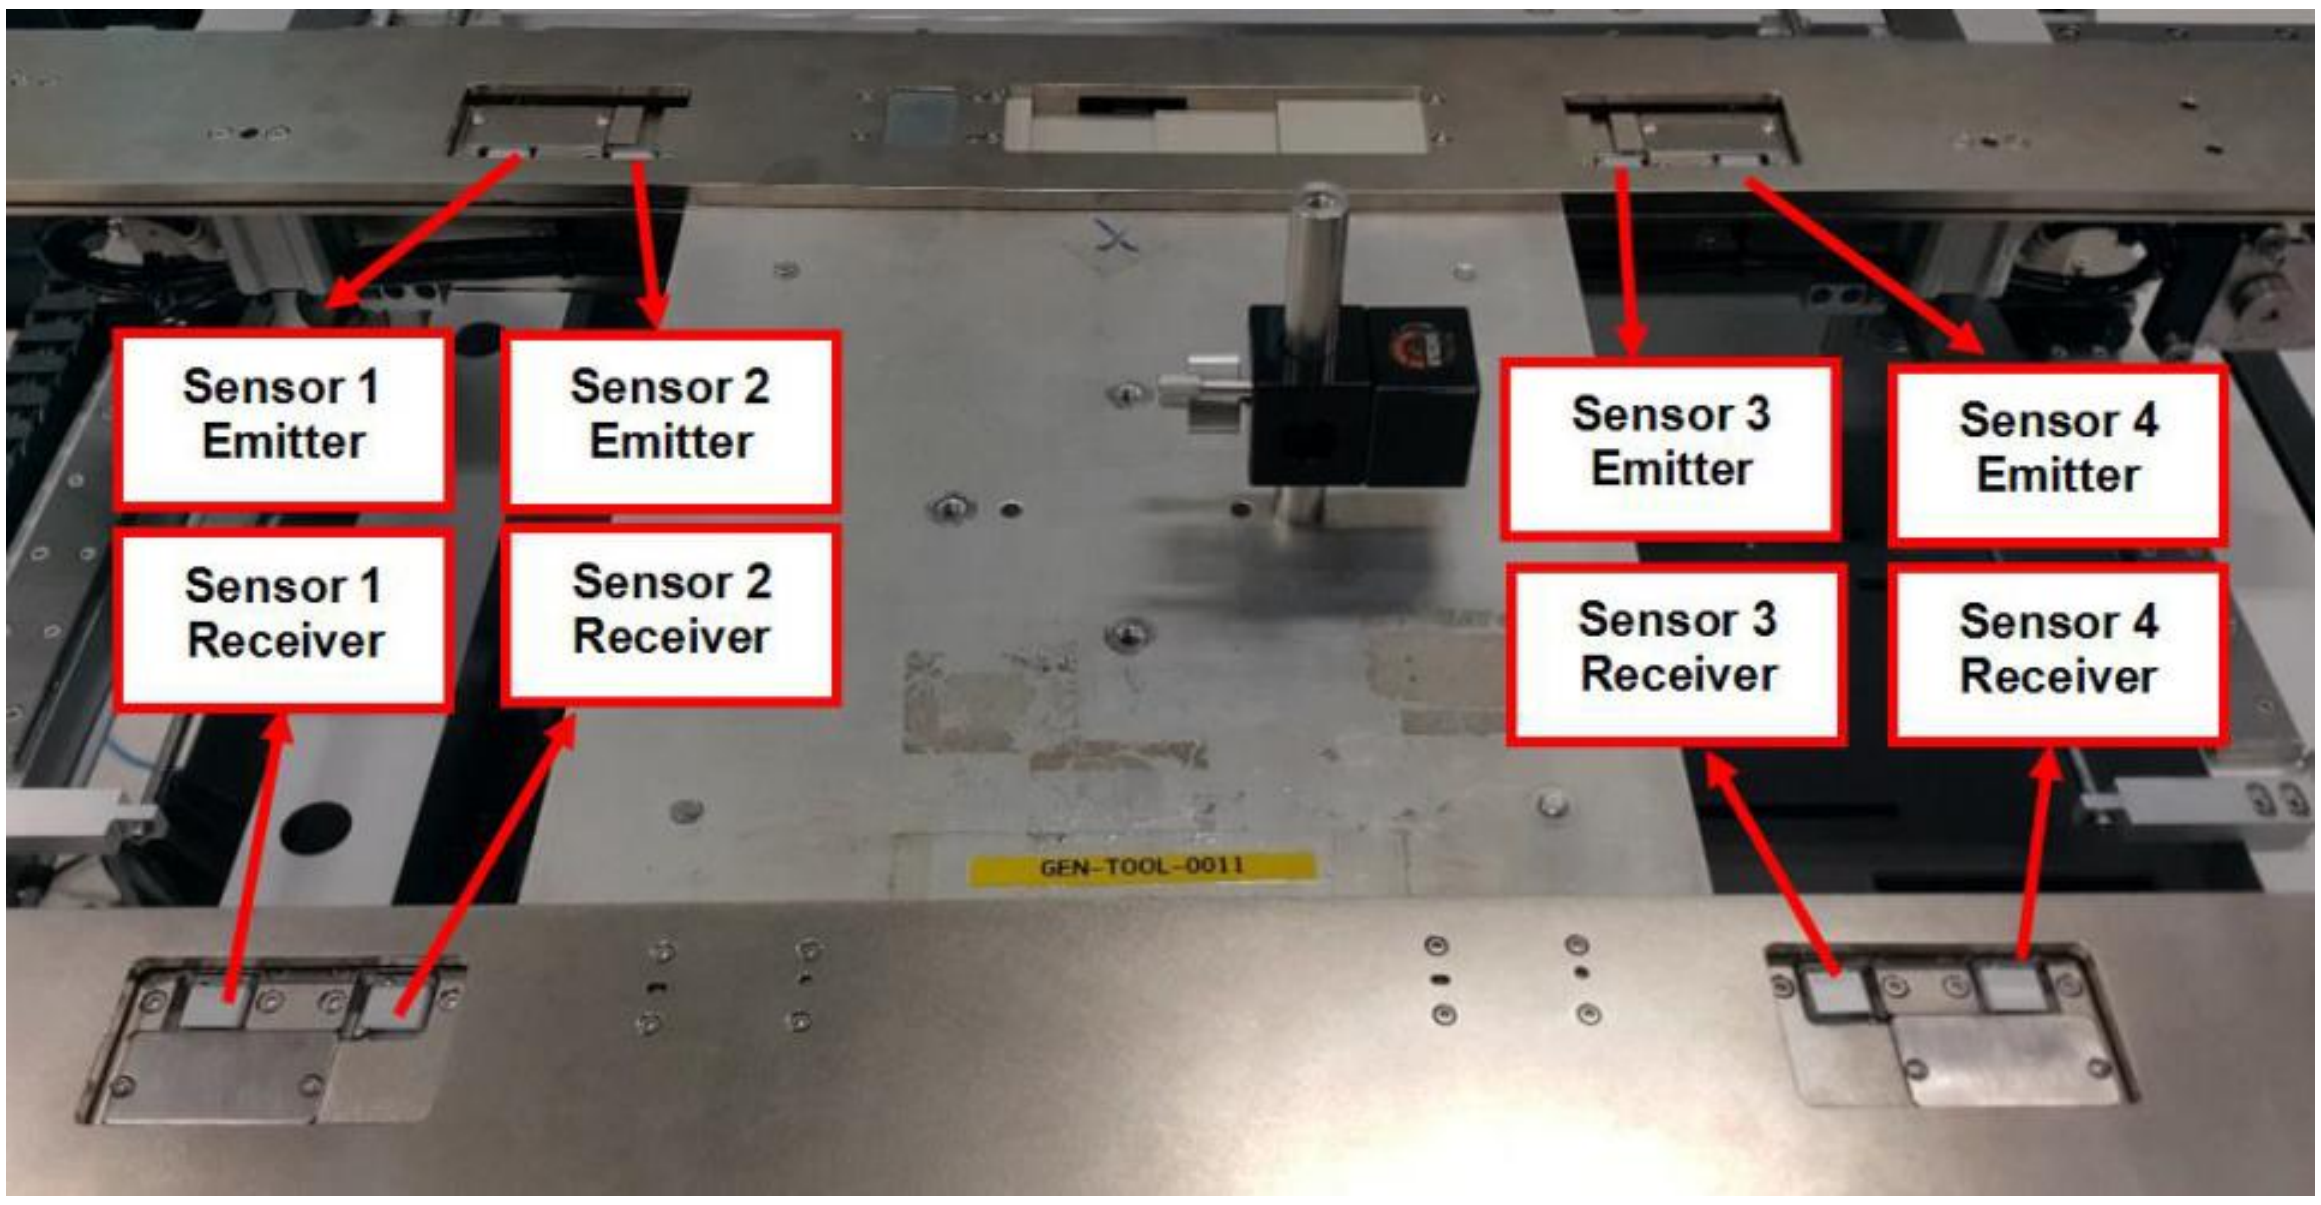

Figure 2 Optical PIP Sensor Location (Physical)

A. Optical PIP Sensor 1 Removal

I. Optical PIP Sensor 1 Emitter Removal

1. Open rear access door as Figure 3.

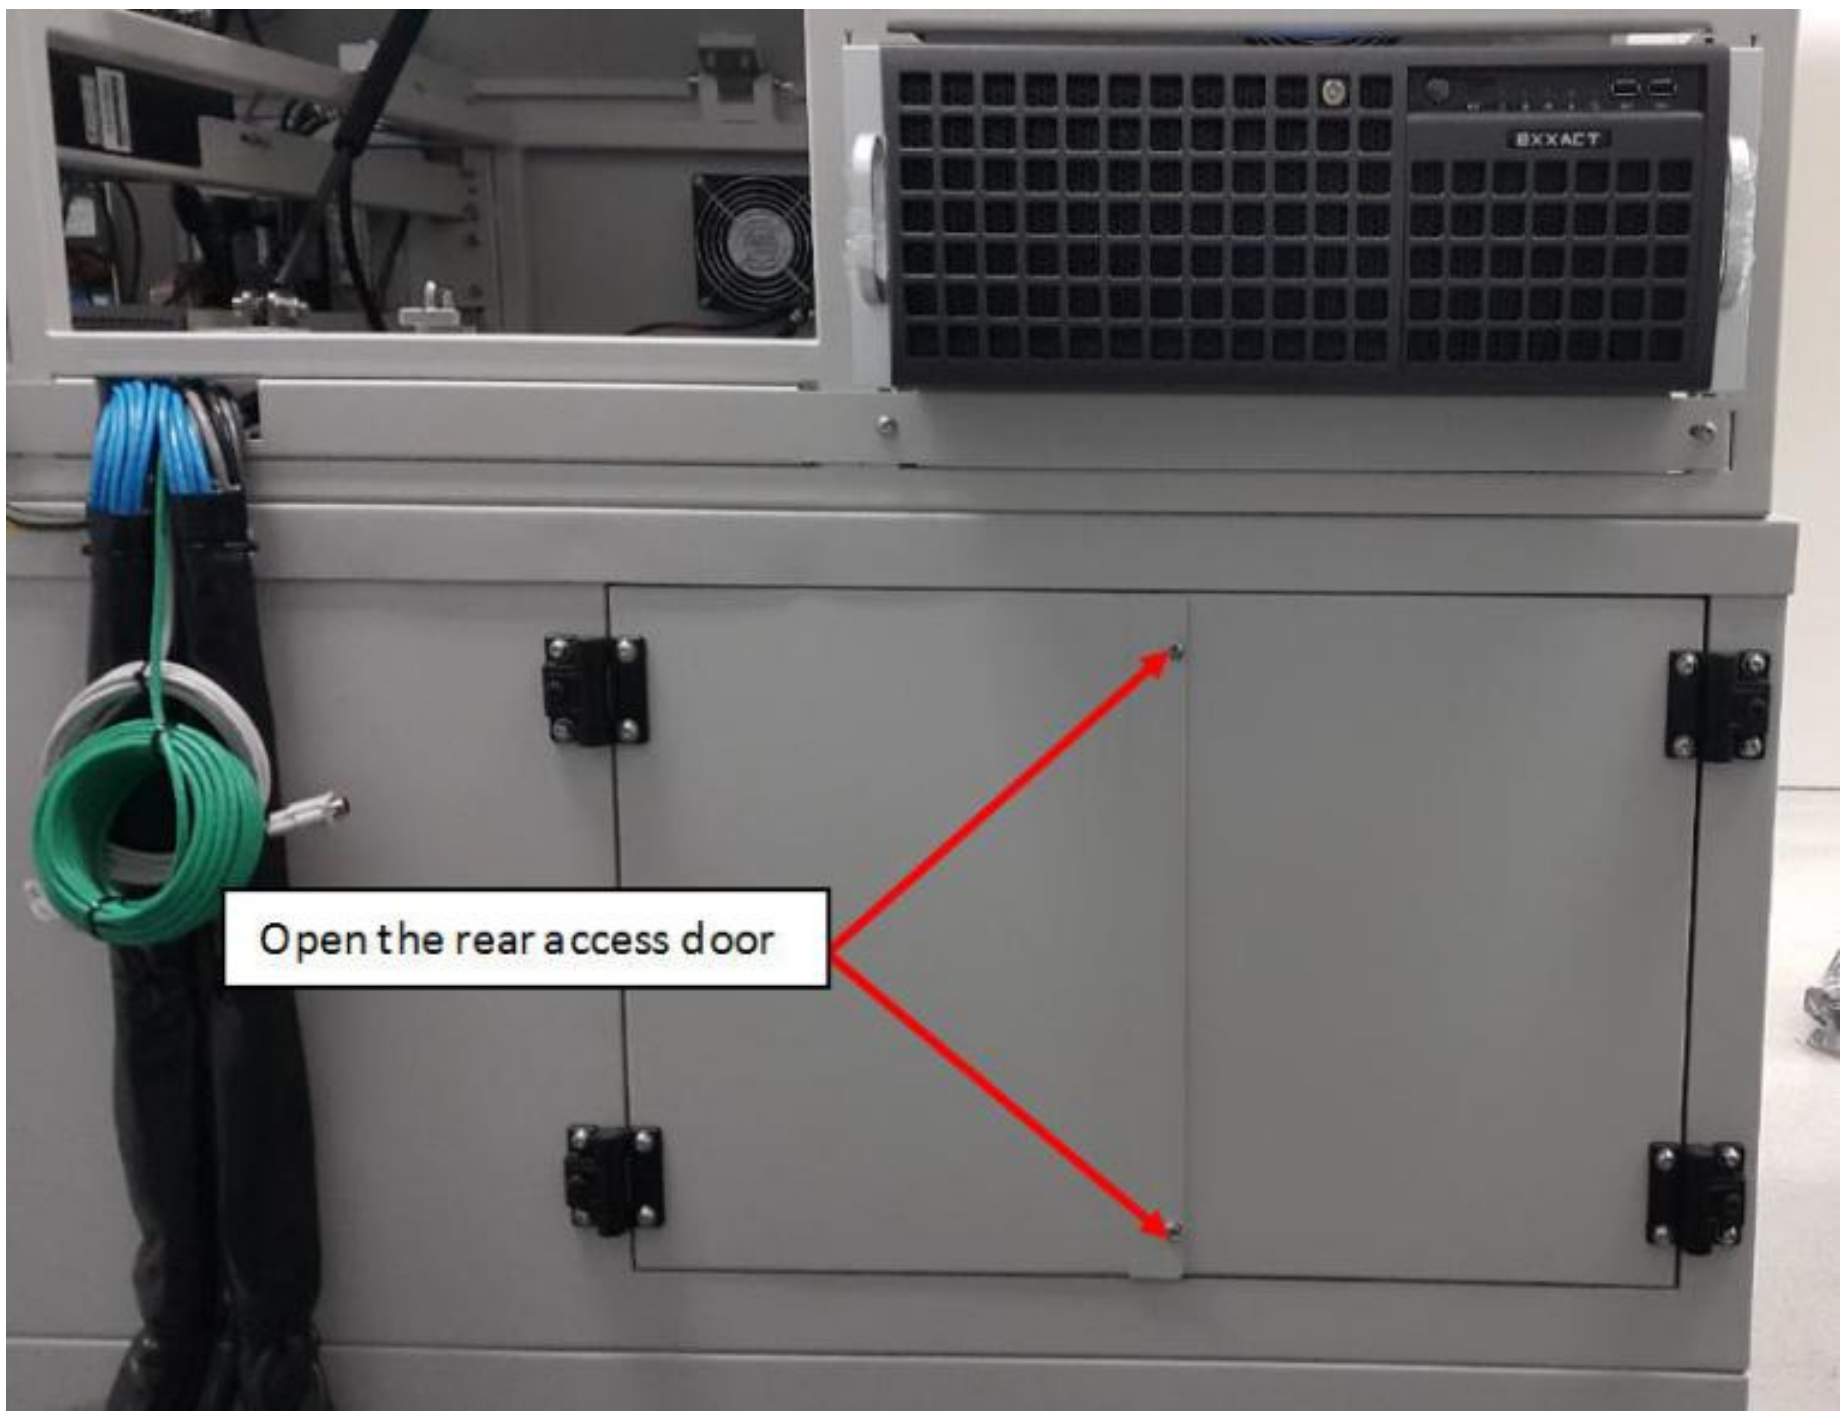

Figure 3 S2EX Rear Door

2. Open BHCS M3×6 (2x) as shown in Figure 4 at adjustable rail (Near to left outer barrier)

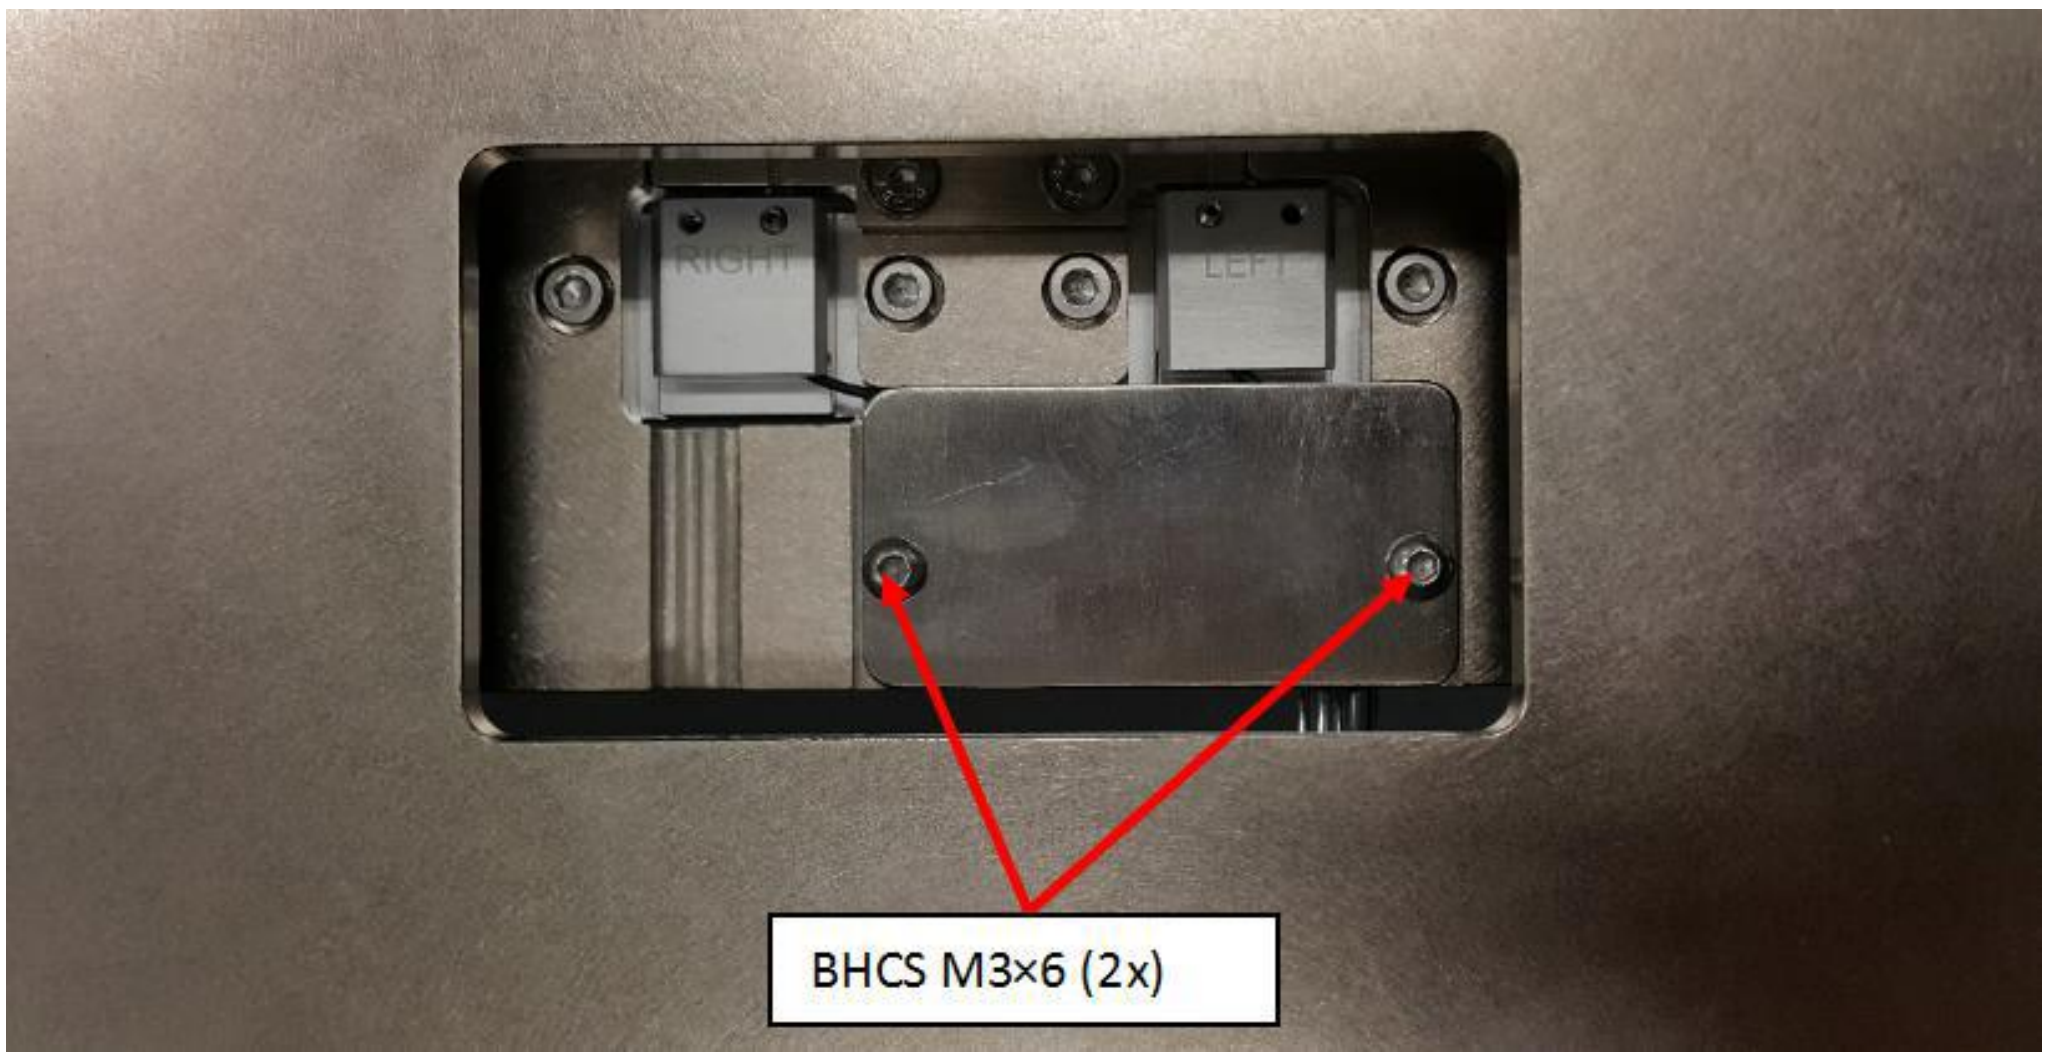

Figure 4 Sensor 1 Emitter

3. Open SHCS M3×6 (2x) from Sensor 1 Emitter as shown in Figure 5. Then loosen SHCS M2.5×3. Remove the Optical Sensor 1 Emitter Head from pip sensor mounting plate as shown in Figure 6

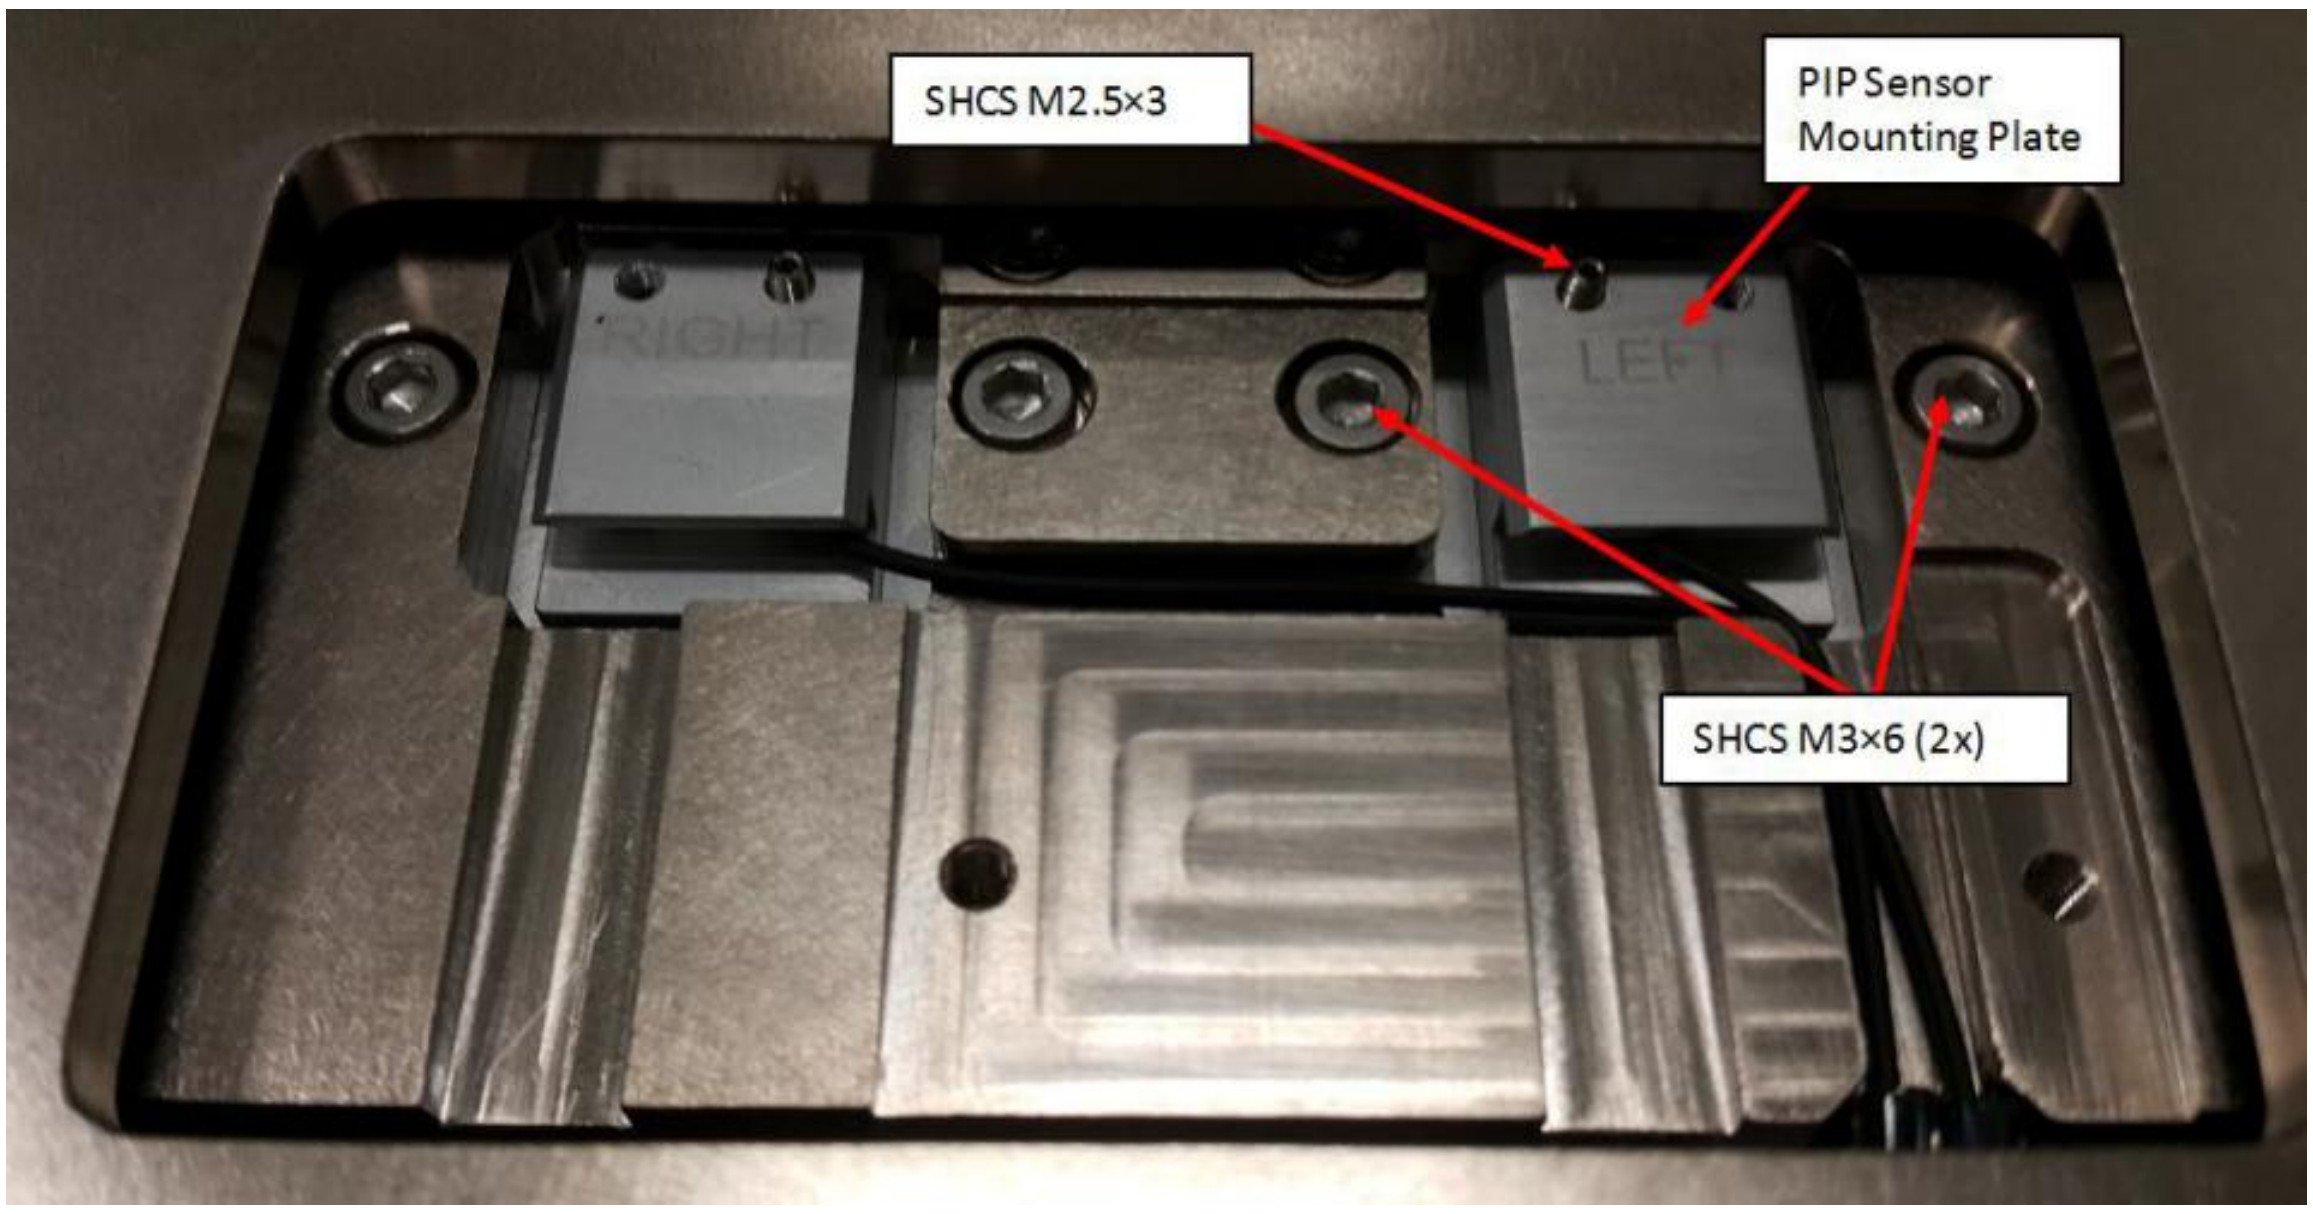

Figure 5 Sensor 1 Emitter

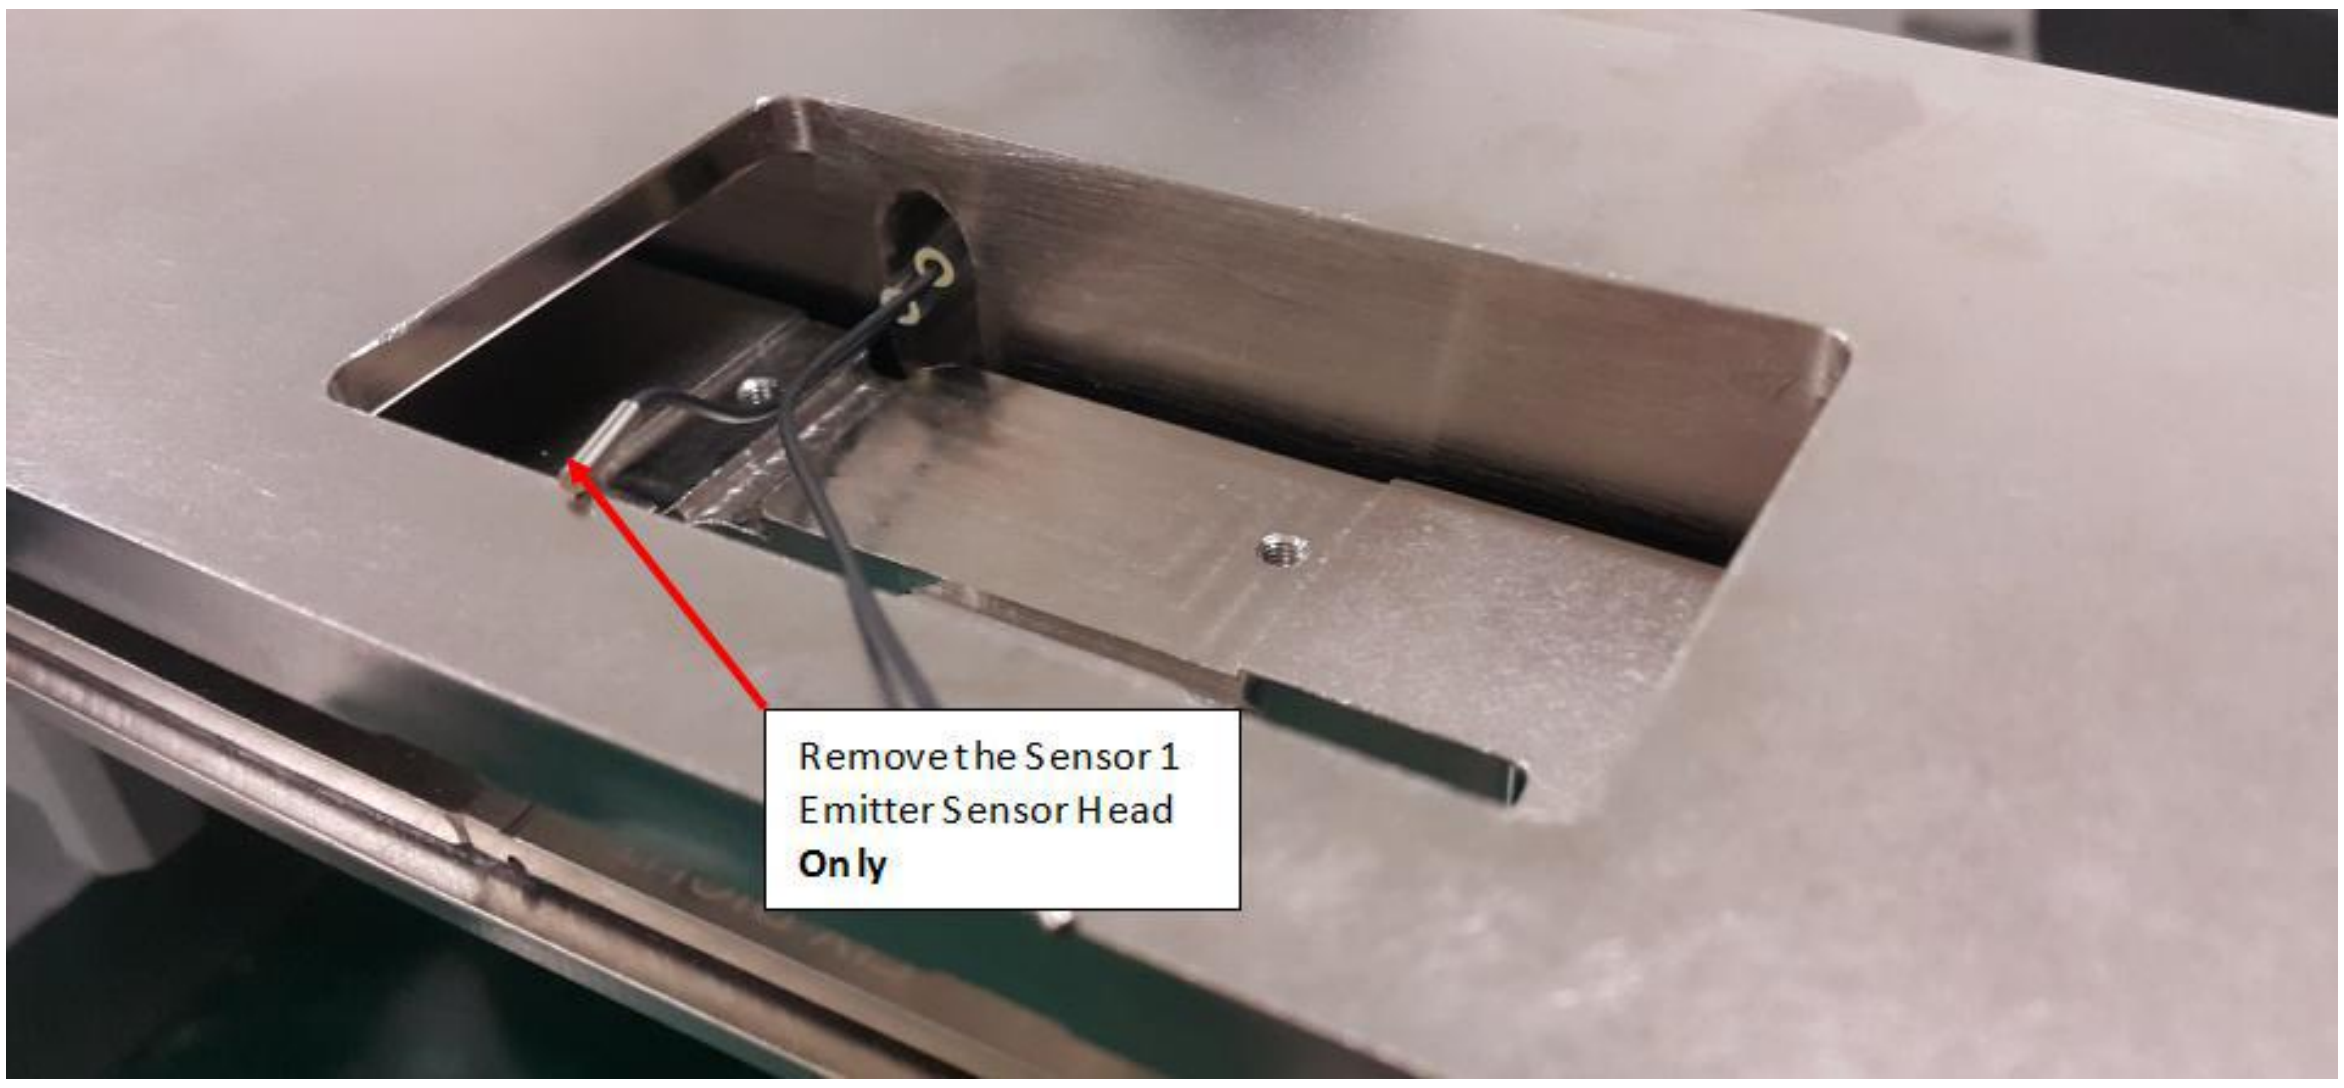

Figure 6 Sensor 1 Emitter (Sensor Head)

4. Remove SHCS M4×12 (2x) and cable clamp as shown below in Figure 7. Remove entire Sensor 1 Emitter as shown from Figure 7 to Figure 13.

   Remarks:Do remove any cable ties which are necessary in Sensor 1 Emitter removal

Figure 7 SHCS M4x12

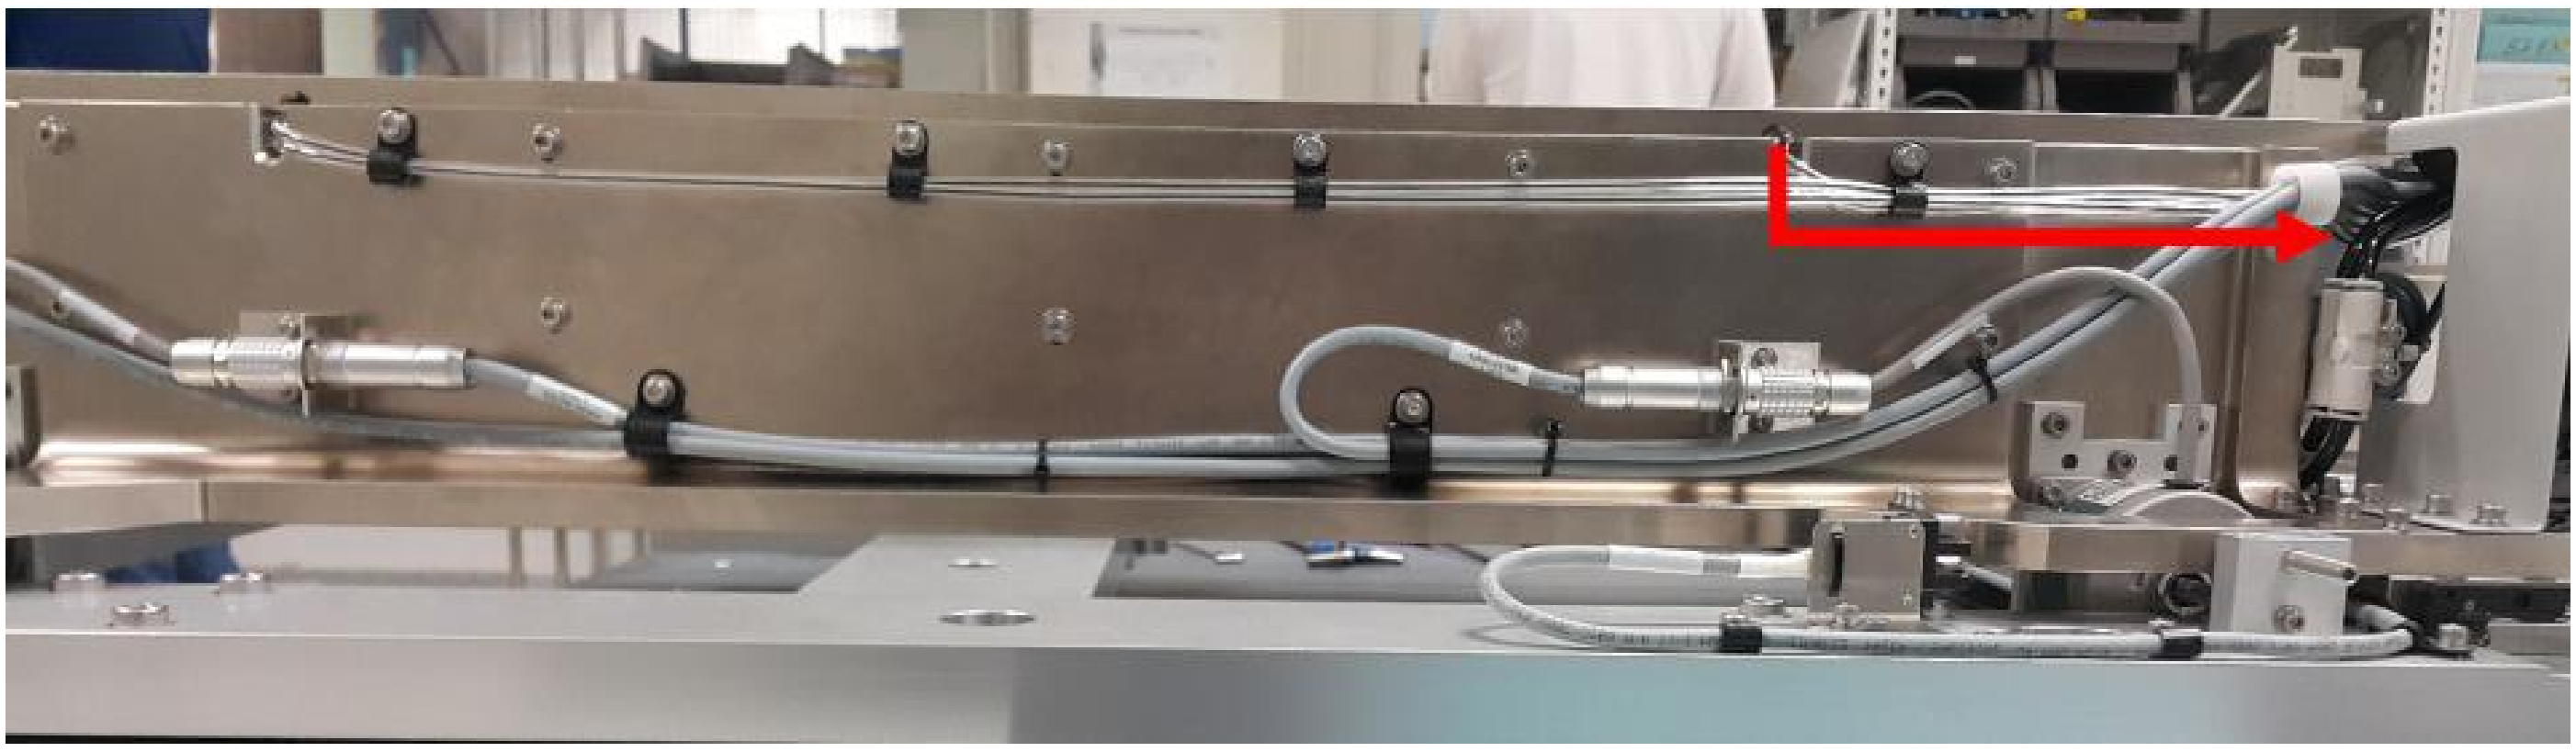

Figure 8 Sensor 1 Emitter Cable Routing

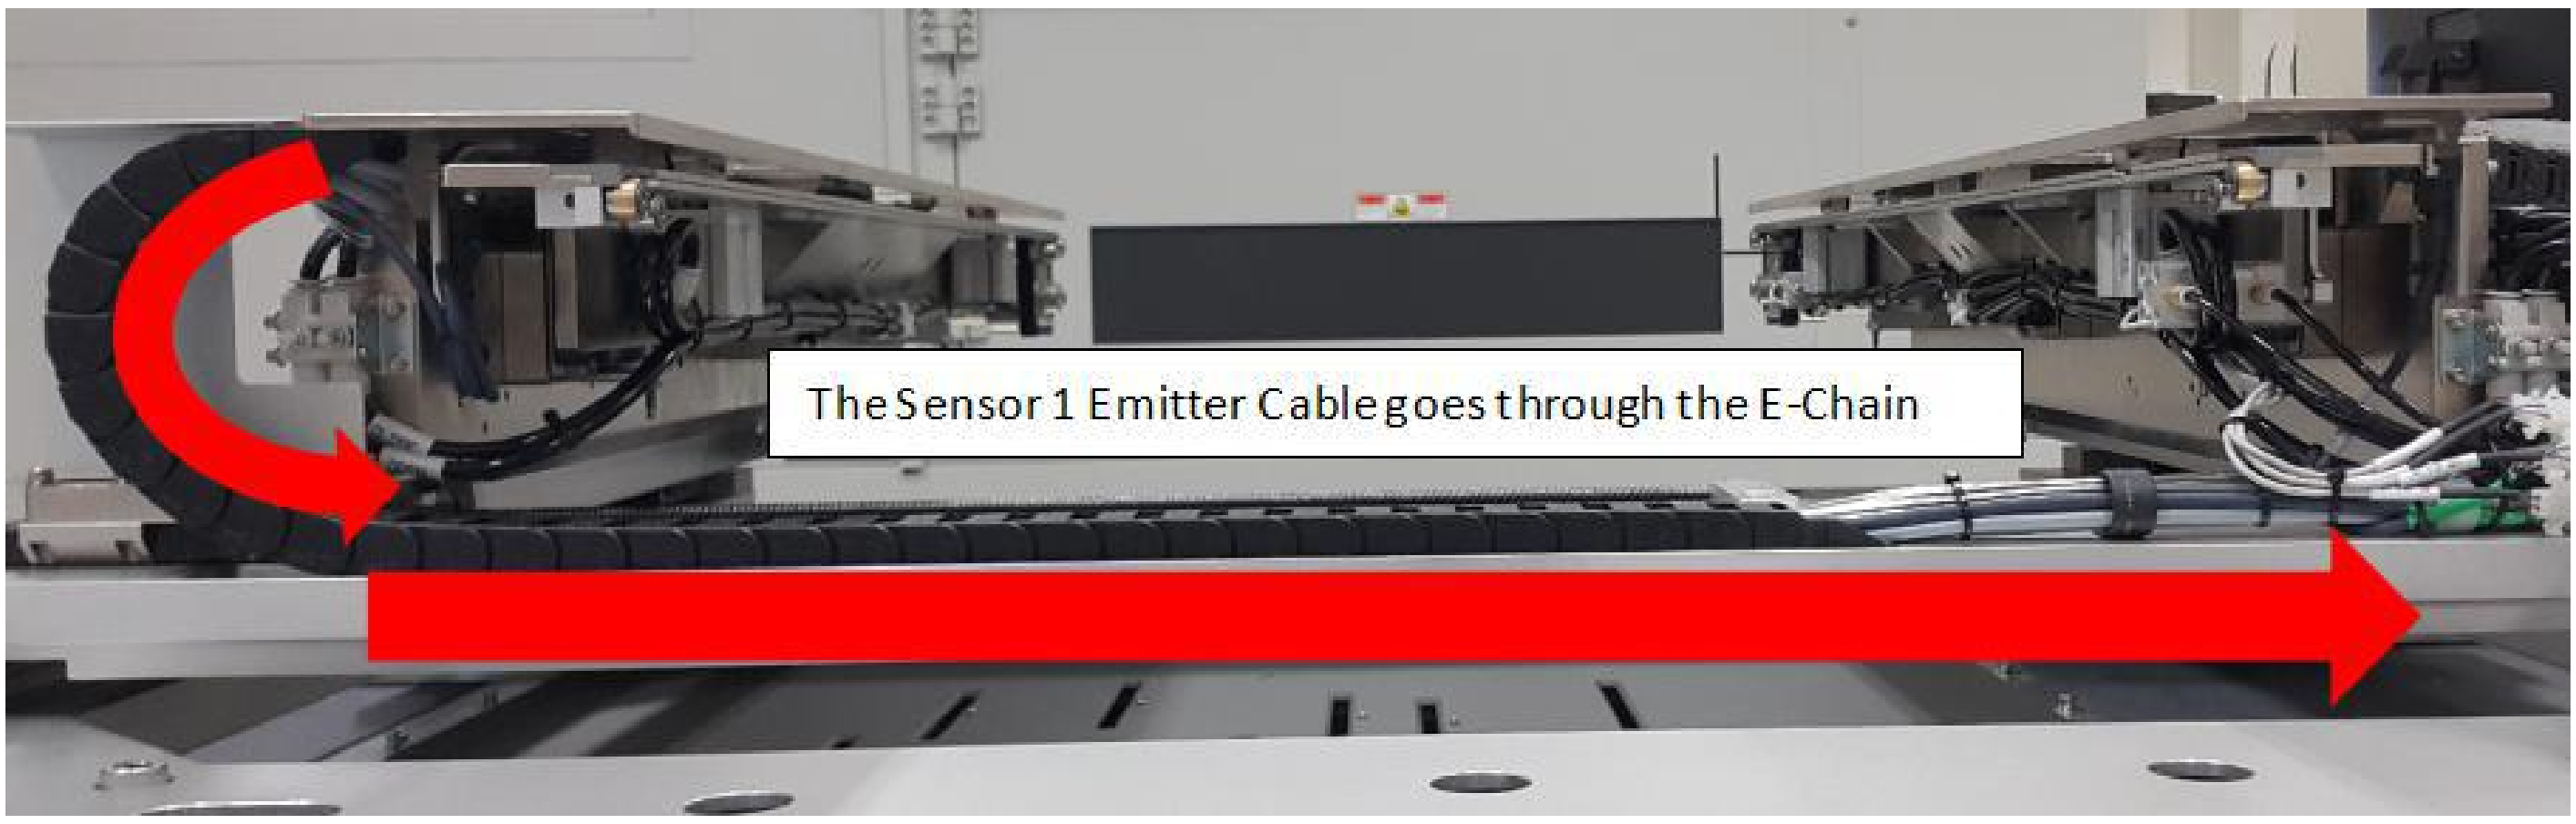

Figure 9 Sensor 1 Emitter (AWA E-Chain)

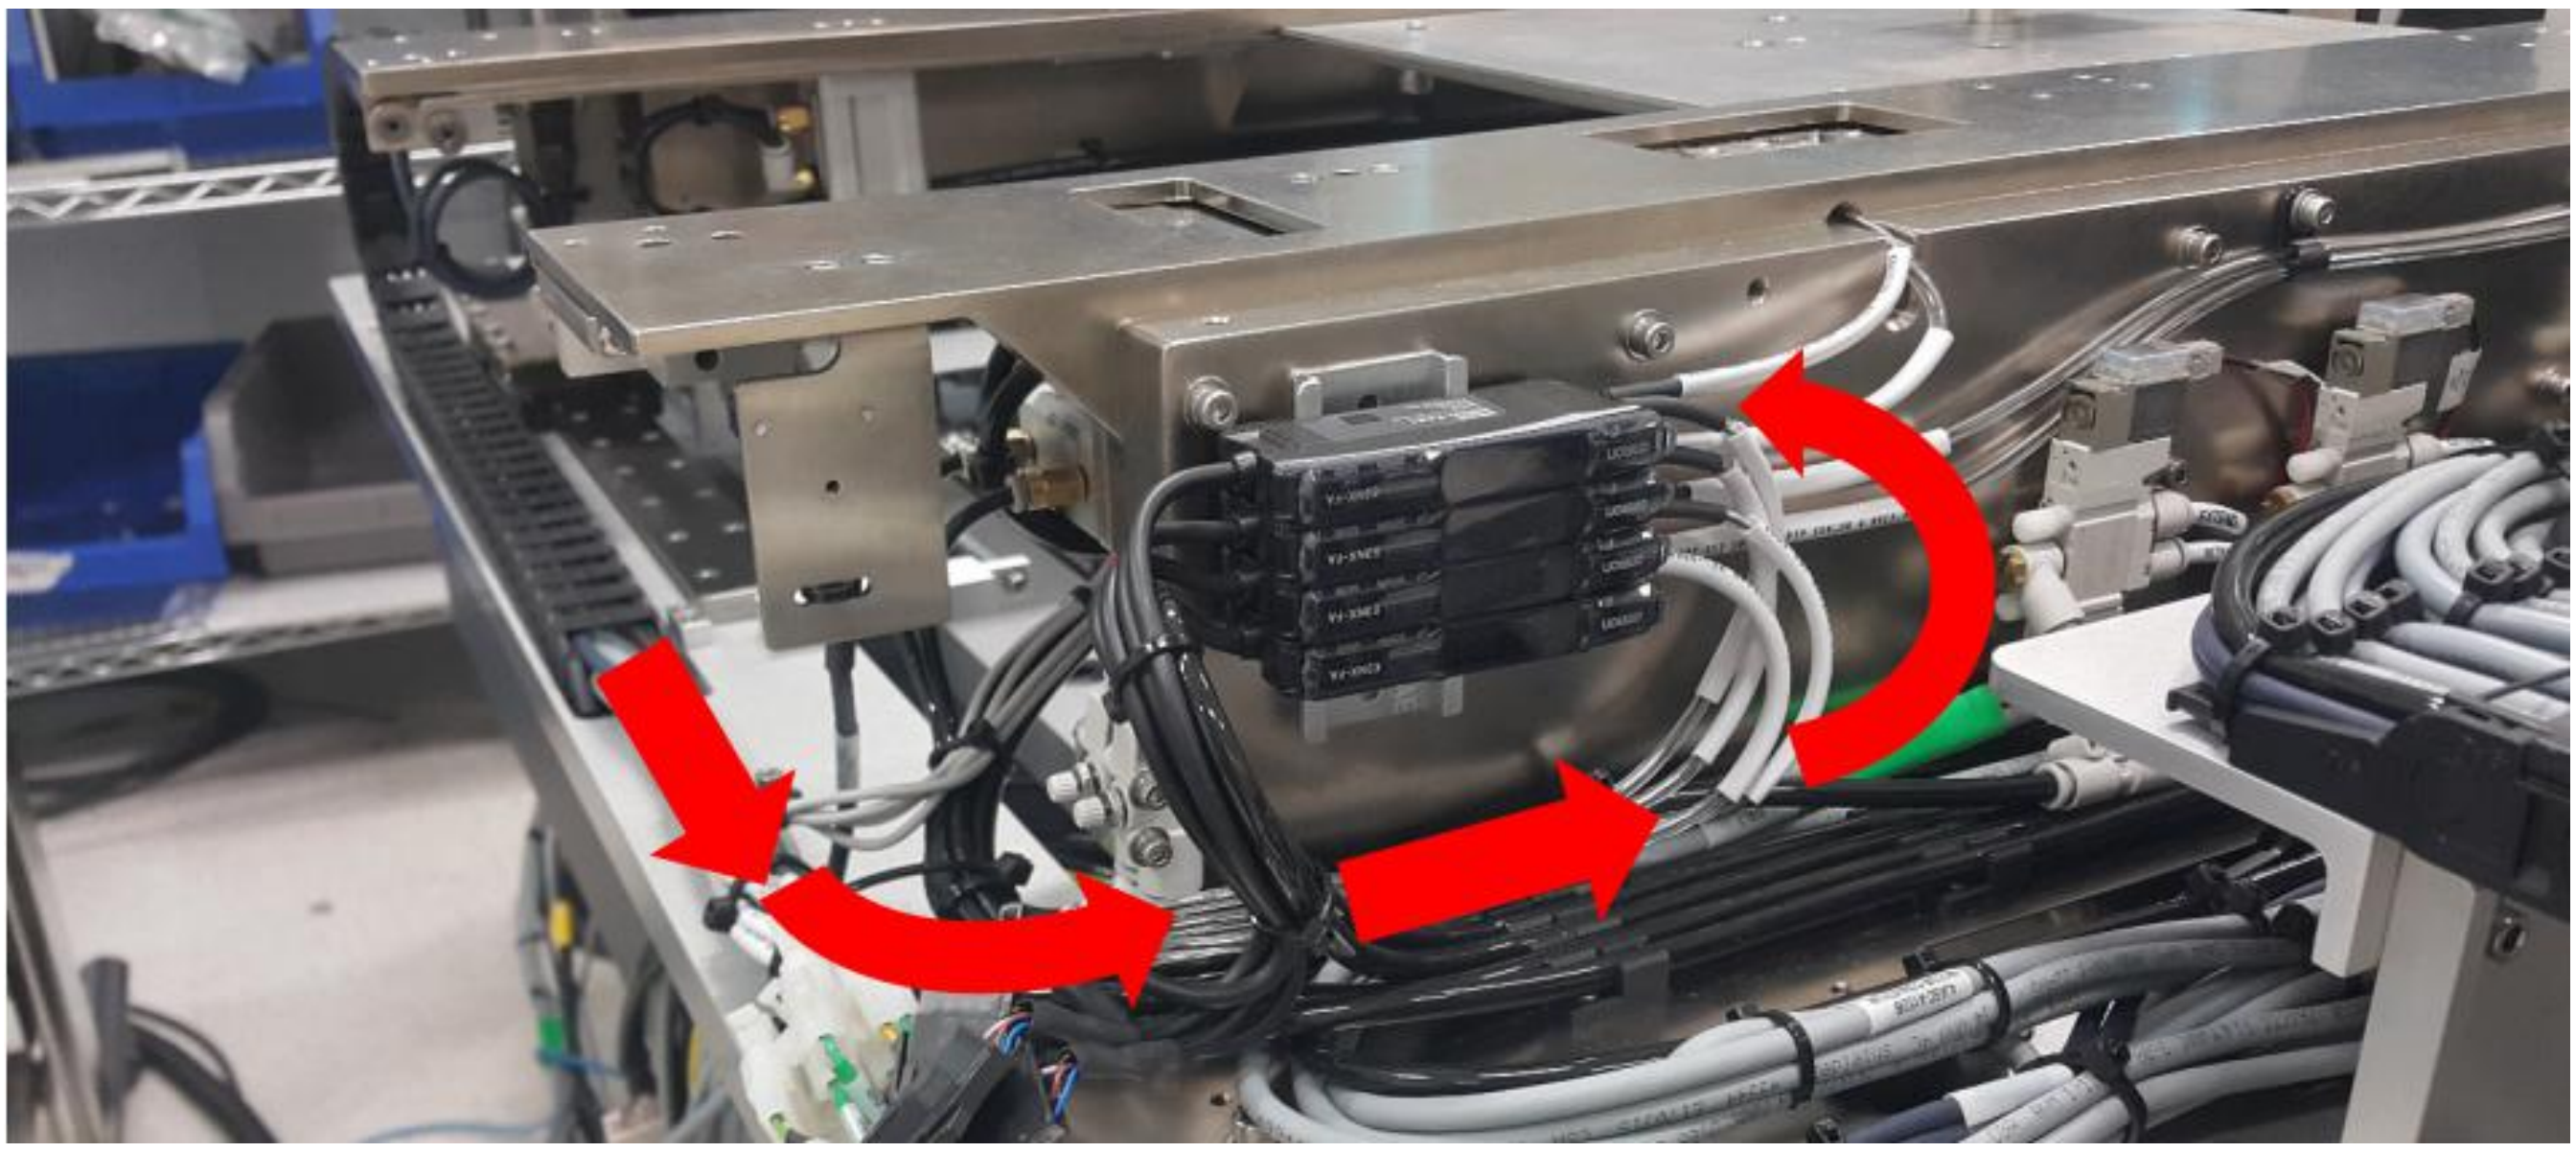

Figure 10 Sensor 1 Emitter (Sensor Amplifier)

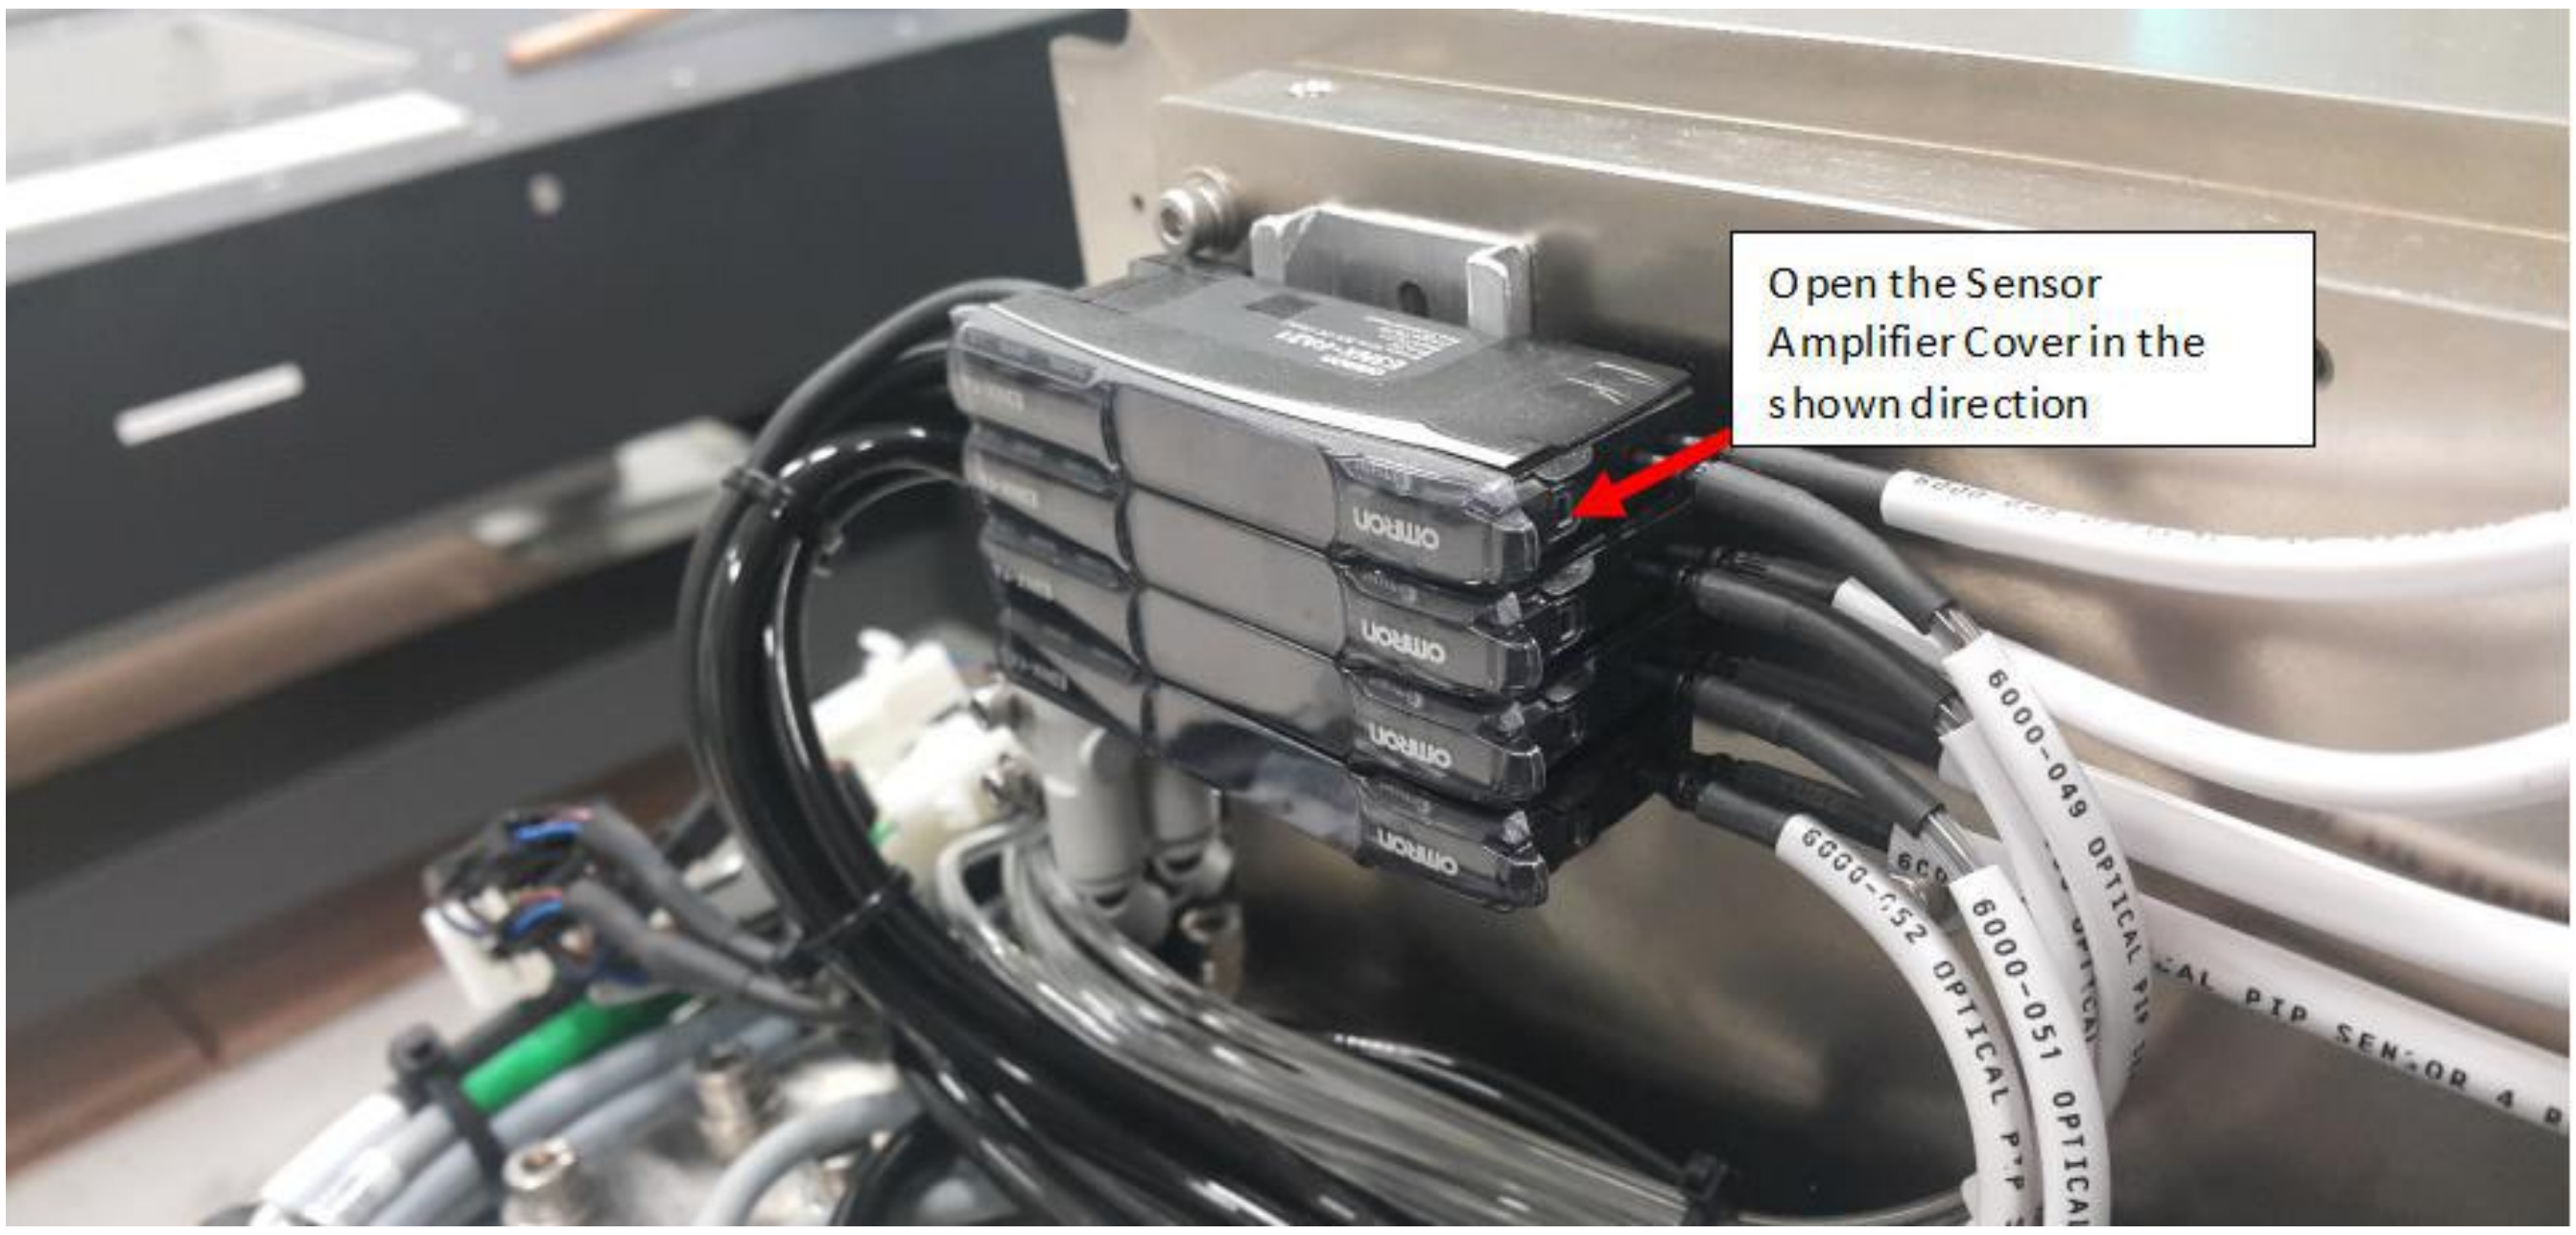

Figure 11 Sensor Amplifier Cover

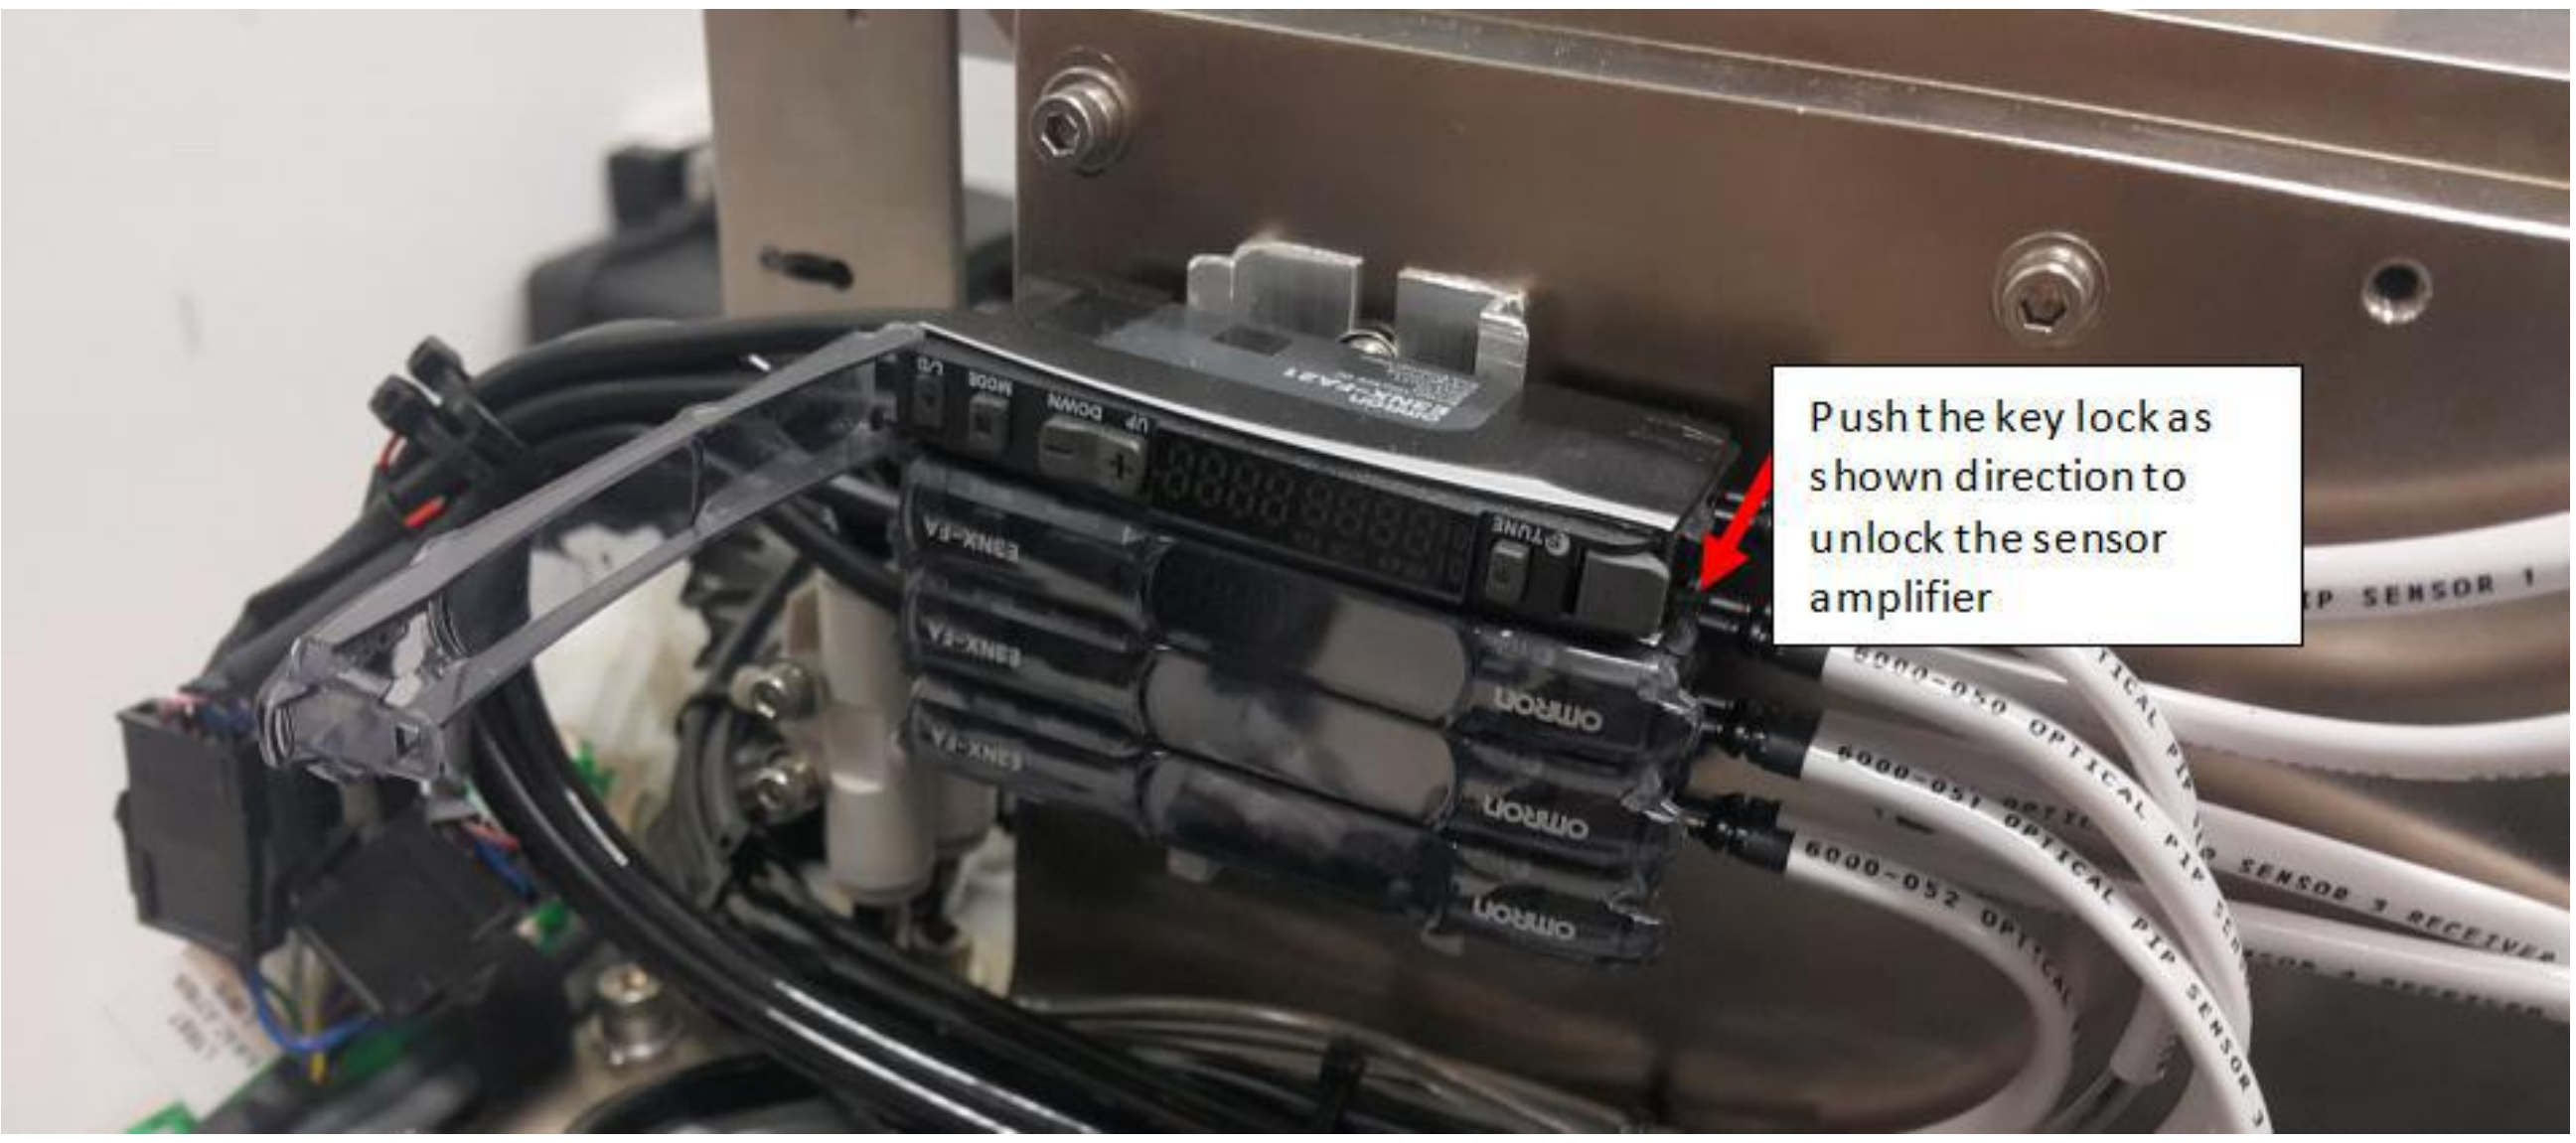

Figure 12 Sensor Amplifier

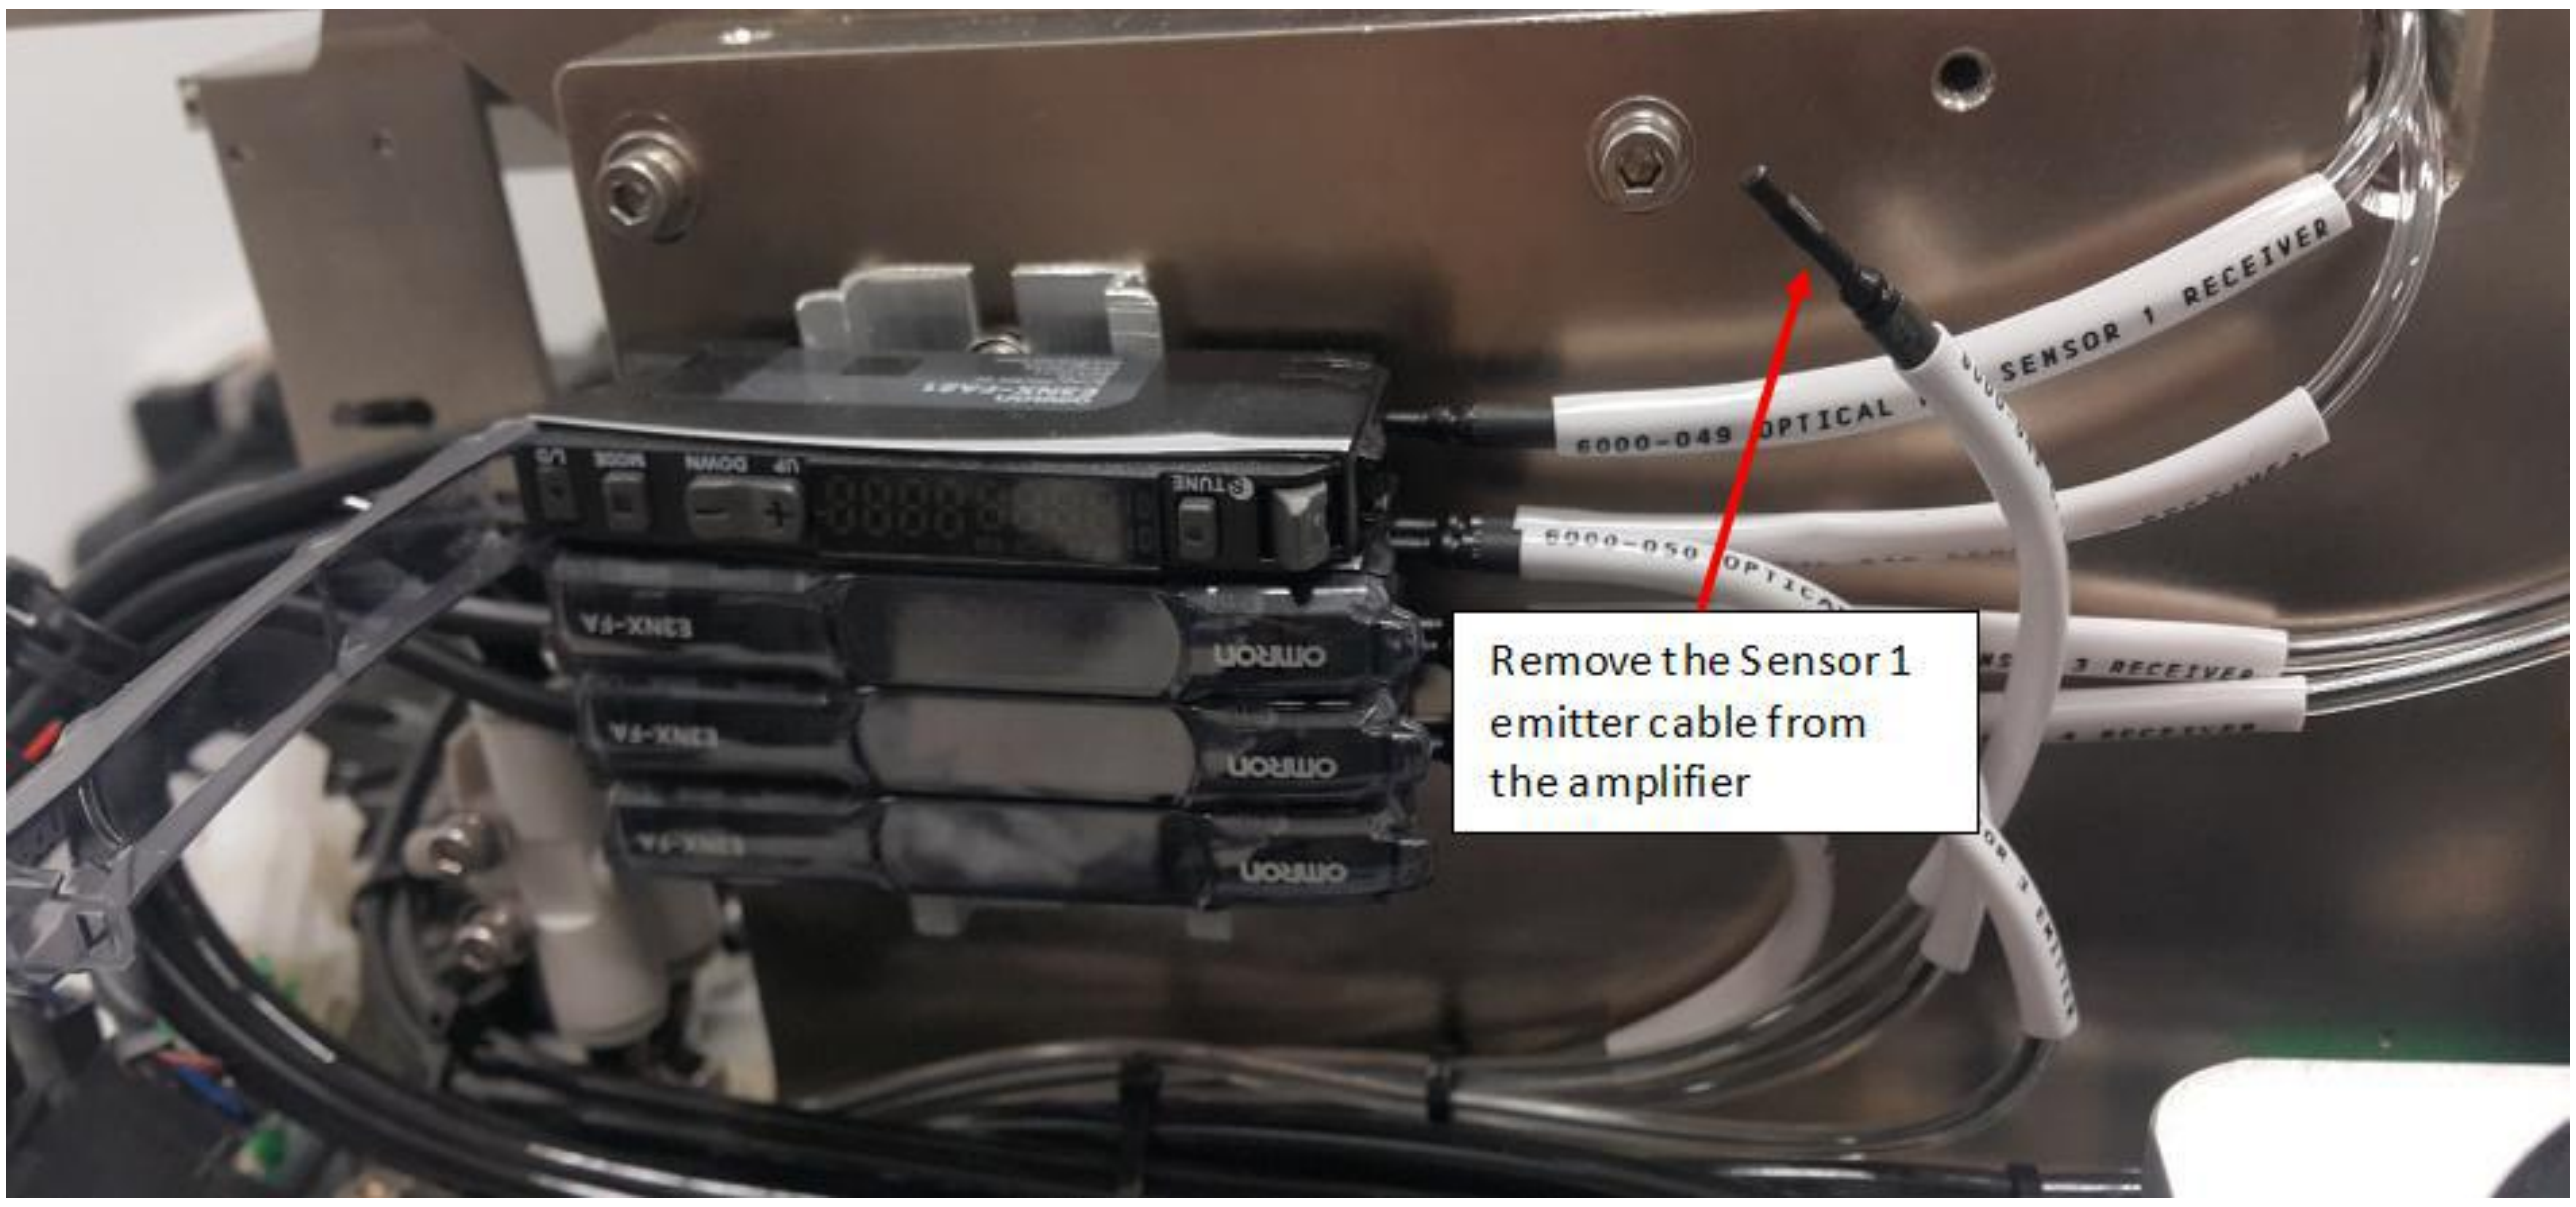

Figure 13 Sensor 1 Emitter Cable

II. Optical PIP Sensor 1 Receiver Removal

1. For Sensor 1 Receiver, remove BHCS M3×6 (2x) as shown in Figure 14.

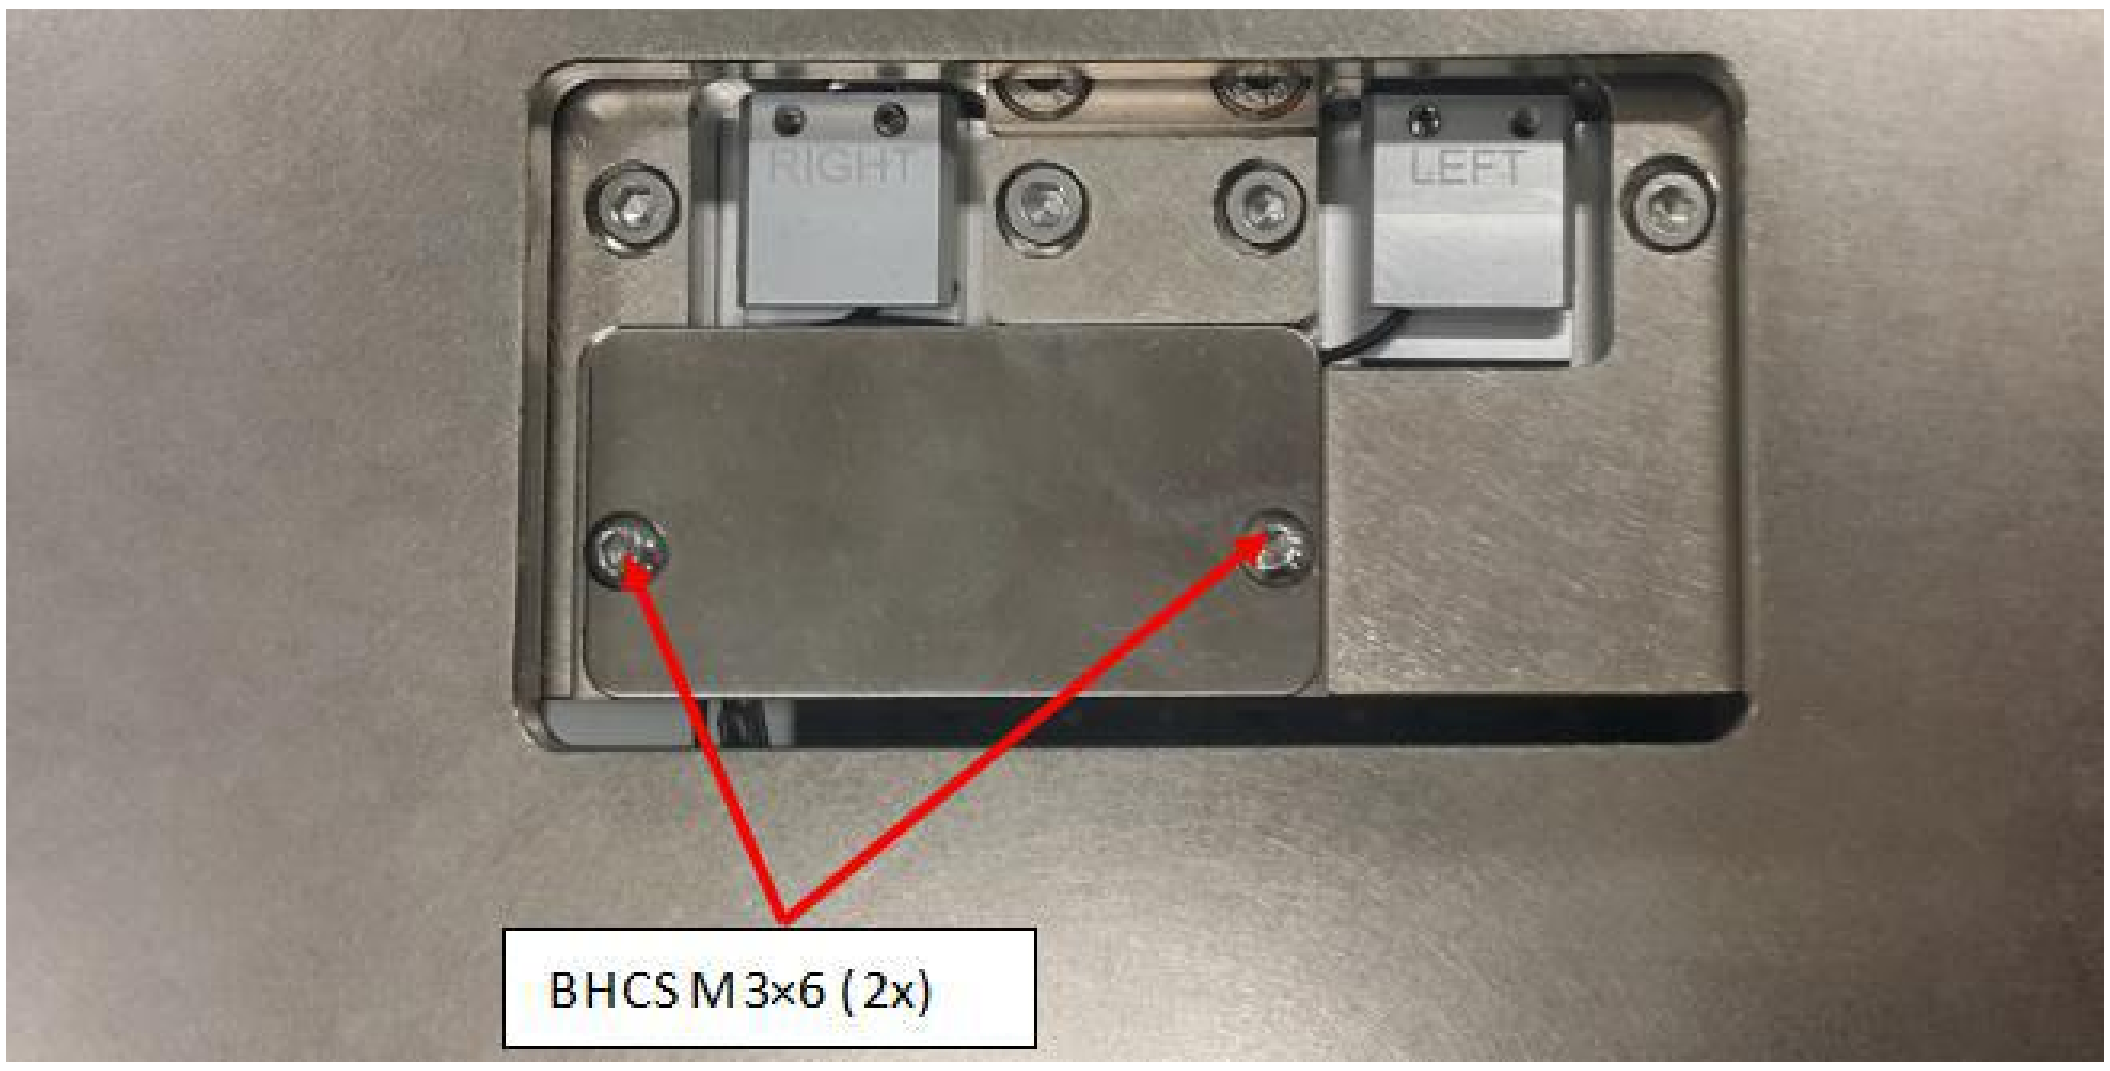

Figure 14 Sensor 1 Receiver

2. Remove SHCS M3×6 (2x) from Sensor 1 Receiver as shown in Figure 15. Loosen SHCS M2.5×3 as shown in Figure 15. Remove the optical sensor 1 receiver head from pip sensor mounting plate as shown in Figure 16

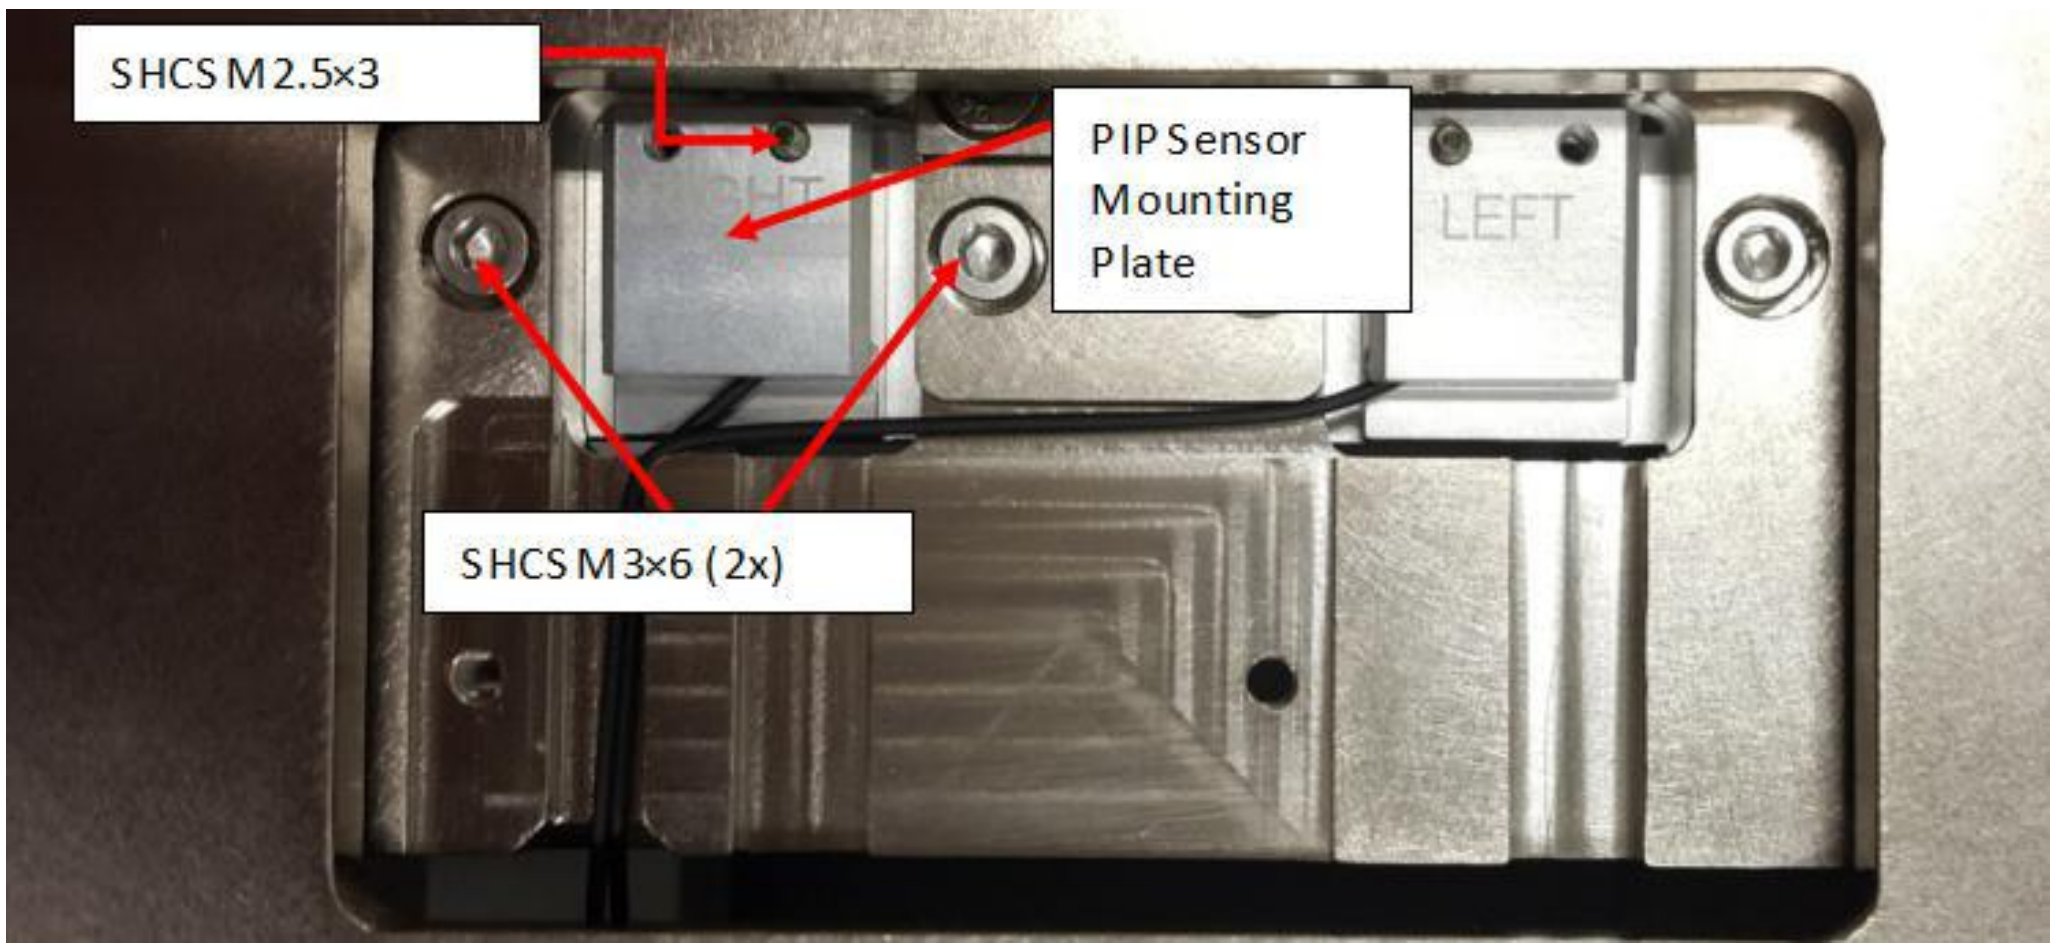

Figure 15 Sensor 1 Receiver

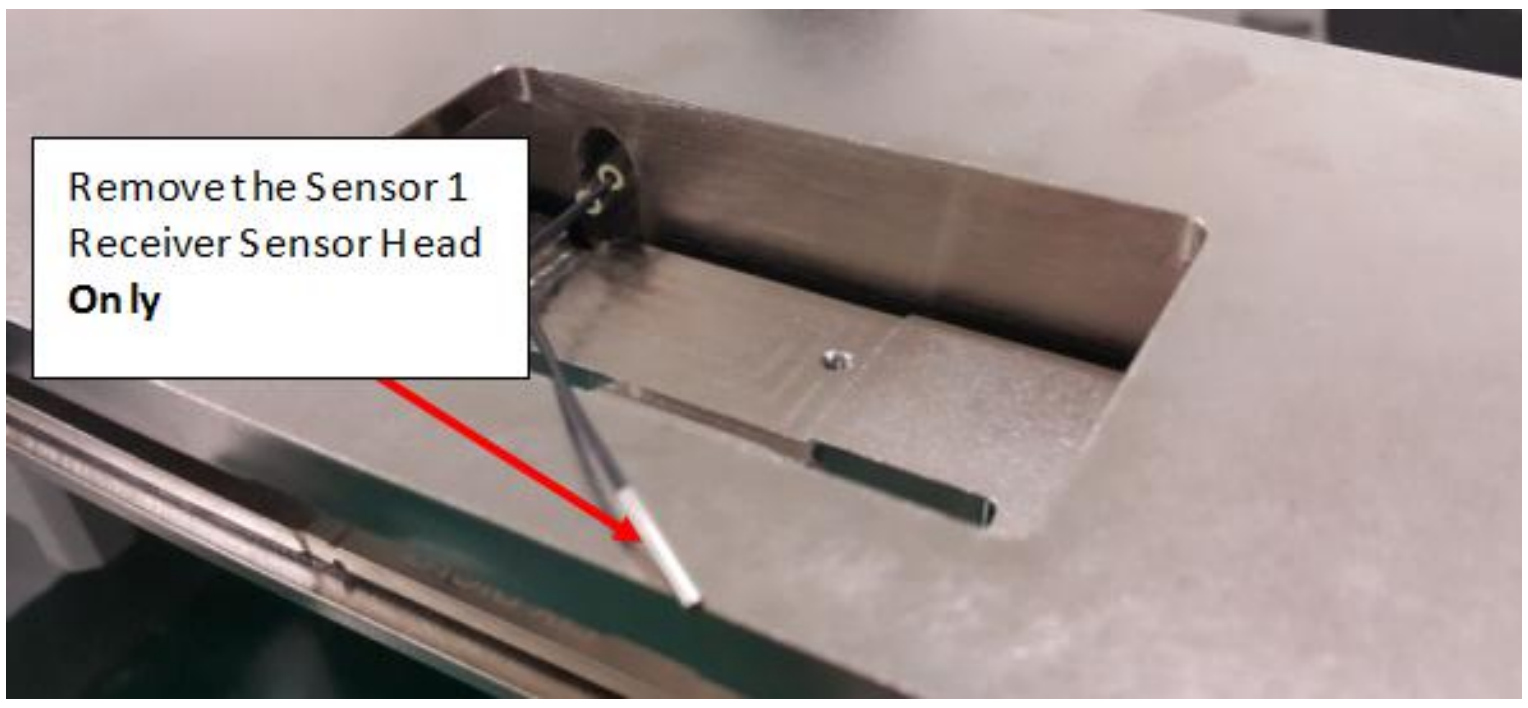

Figure 16 Sensor 1 Receiver

3. Remove Sensor 1 receiver & refer the route from Figure 17 to Figure 20.

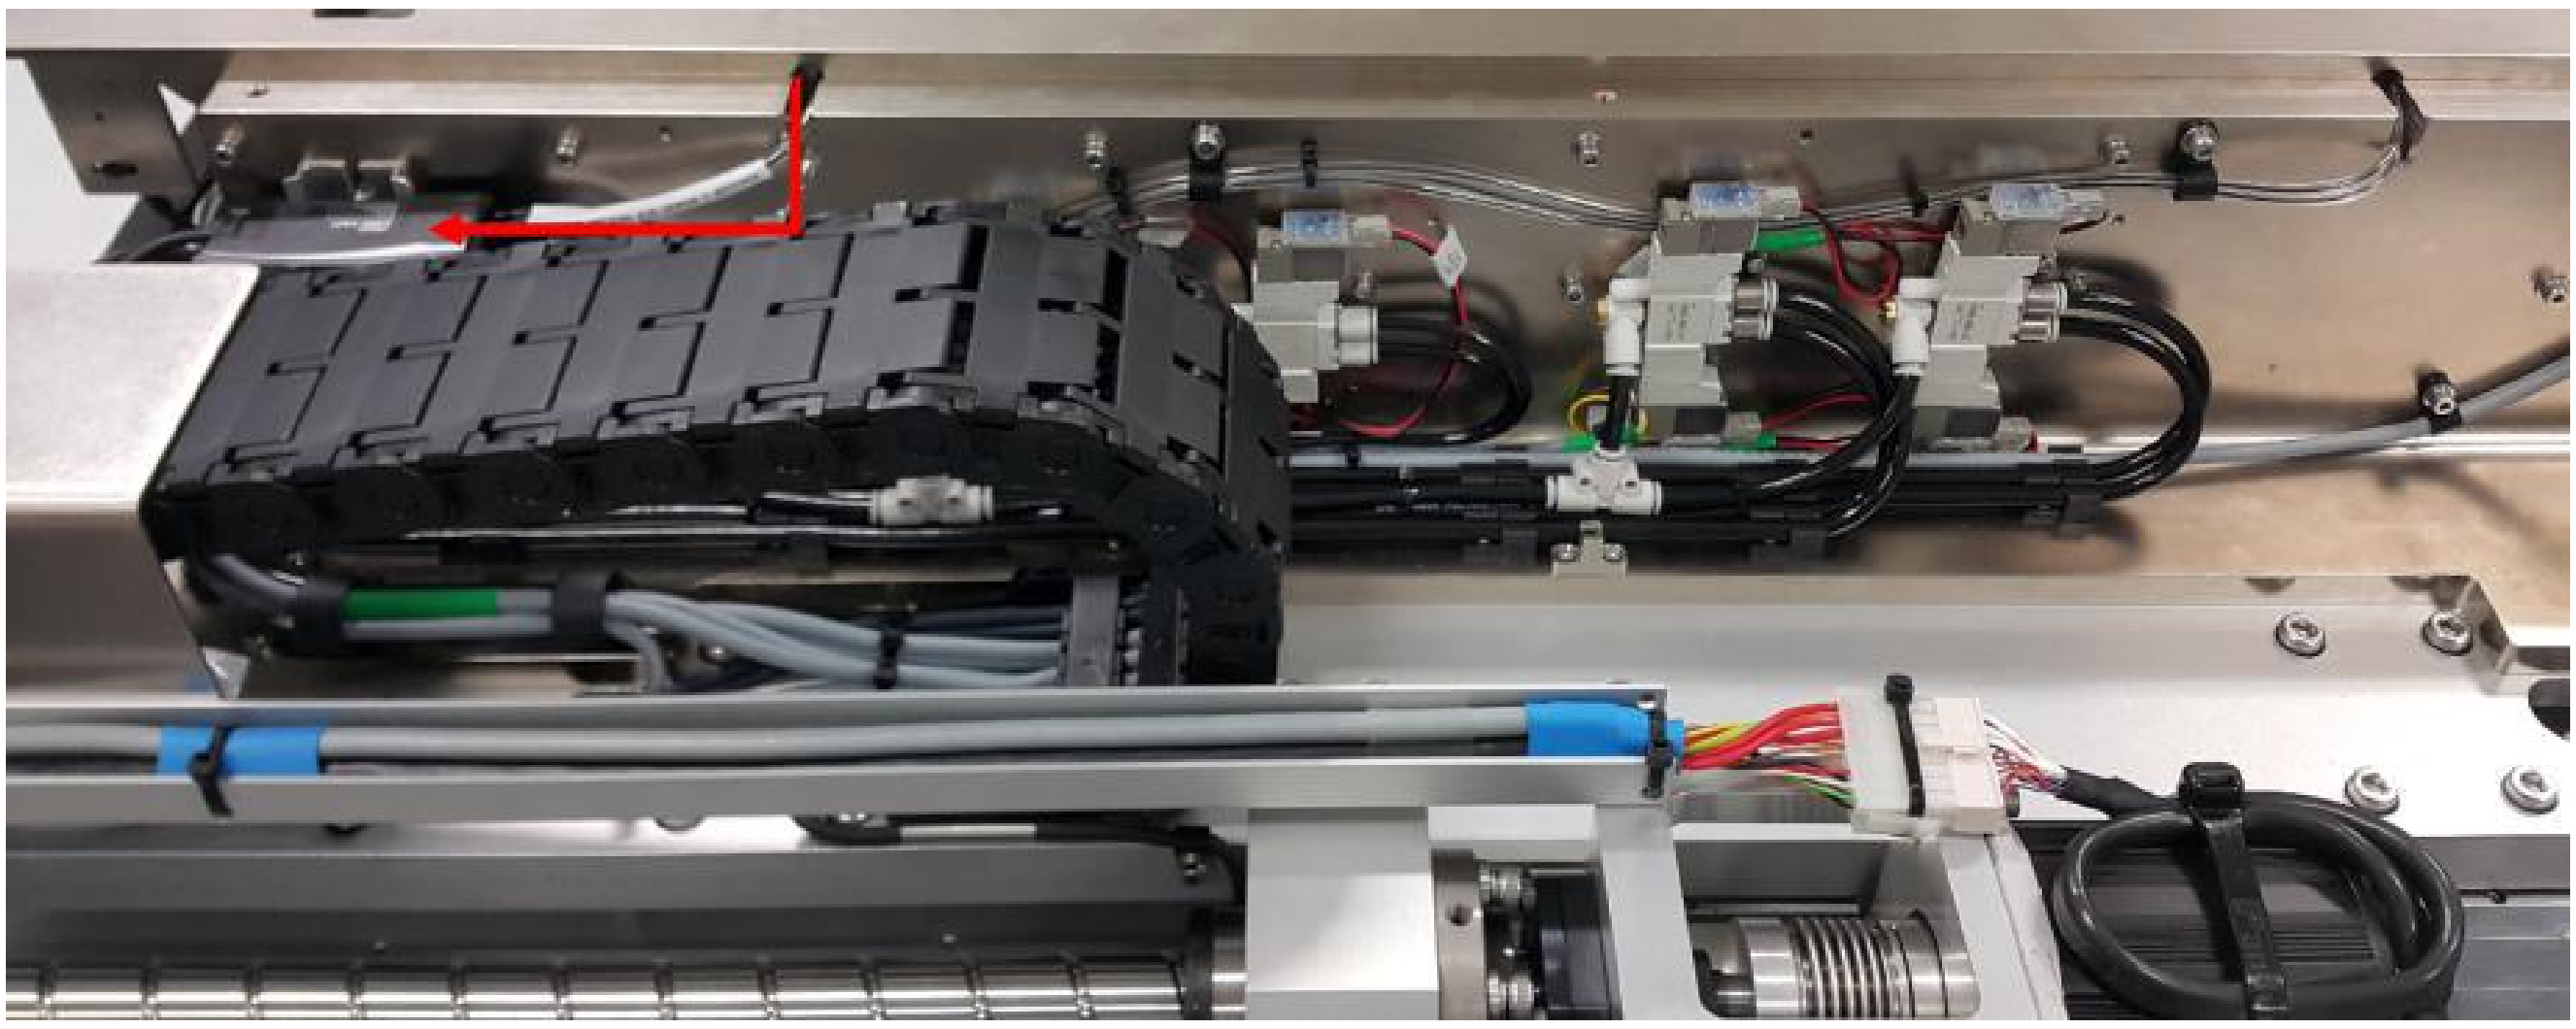

Figure 17 Sensor 1 Receiver Cable Routing

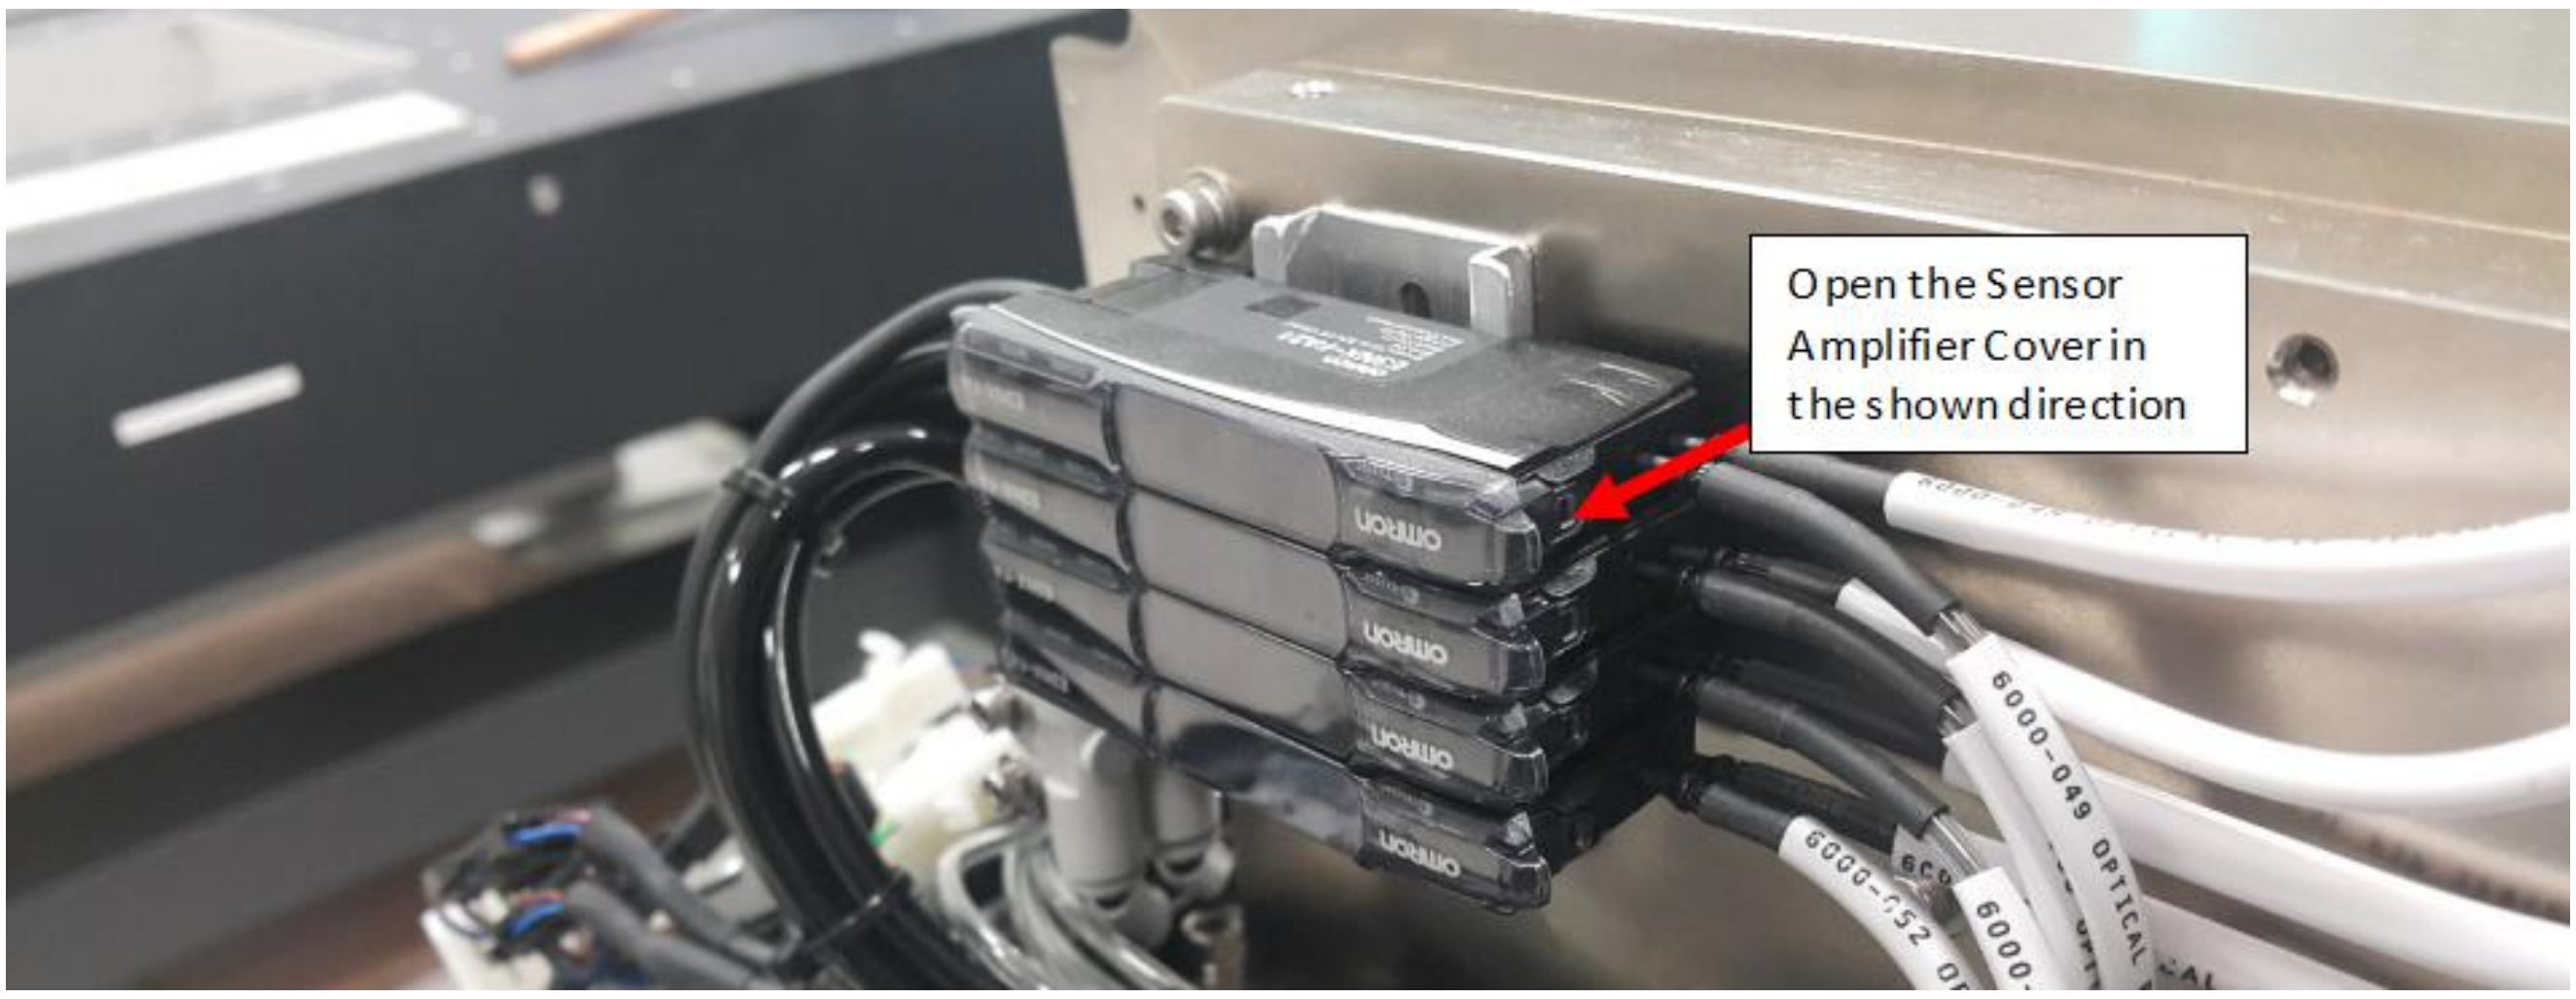

Figure 18 Sensor Amplifier Cover

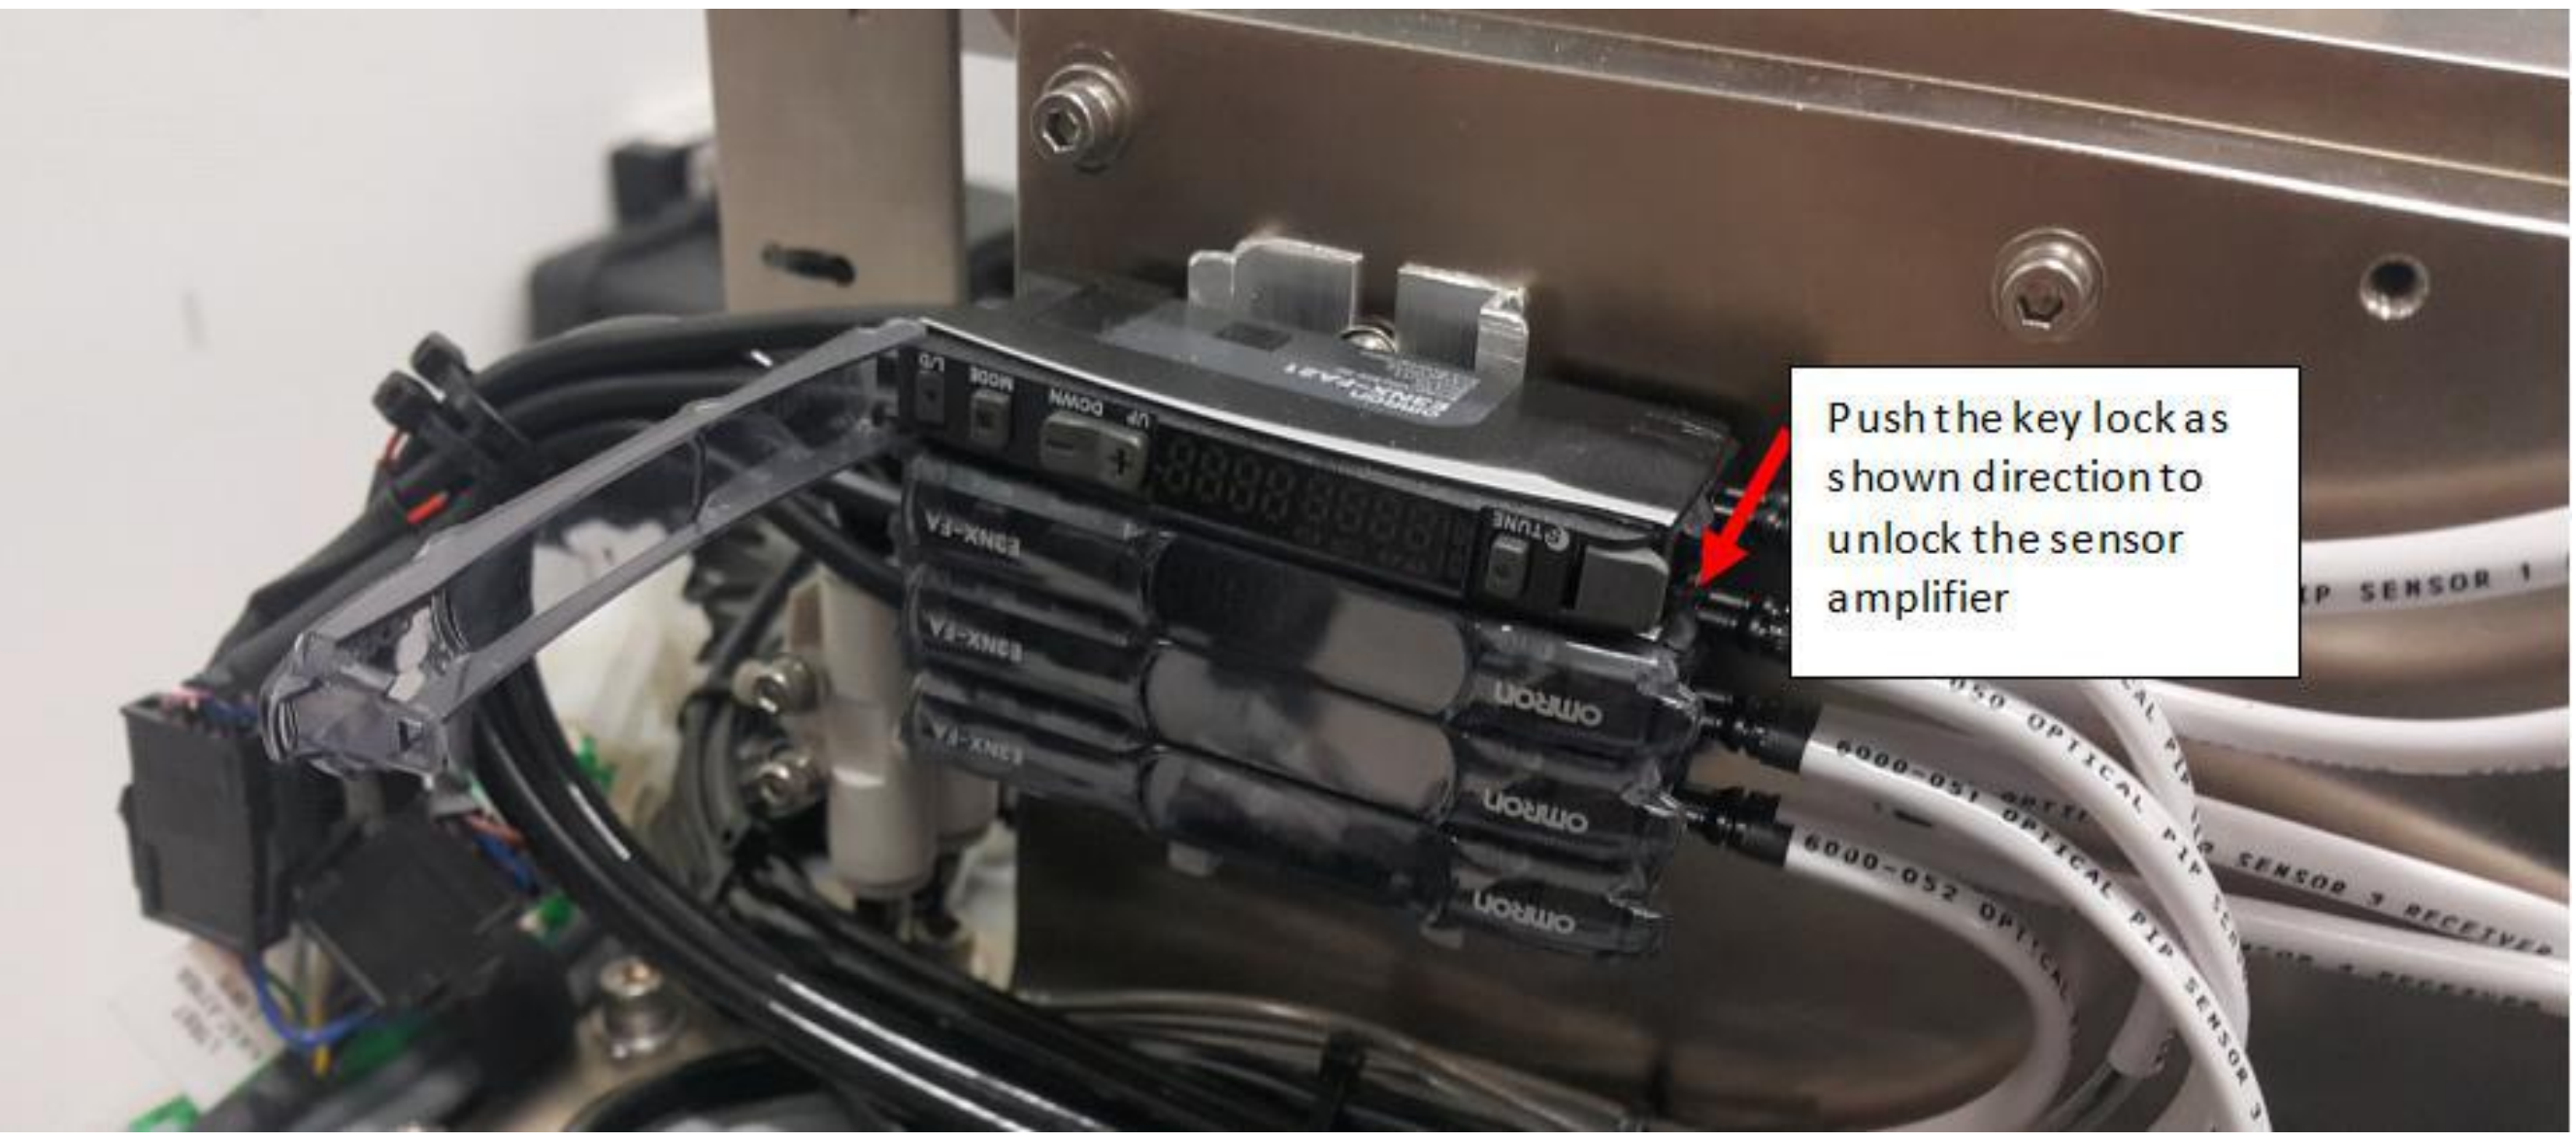

Figure 19 Sensor Amplifier

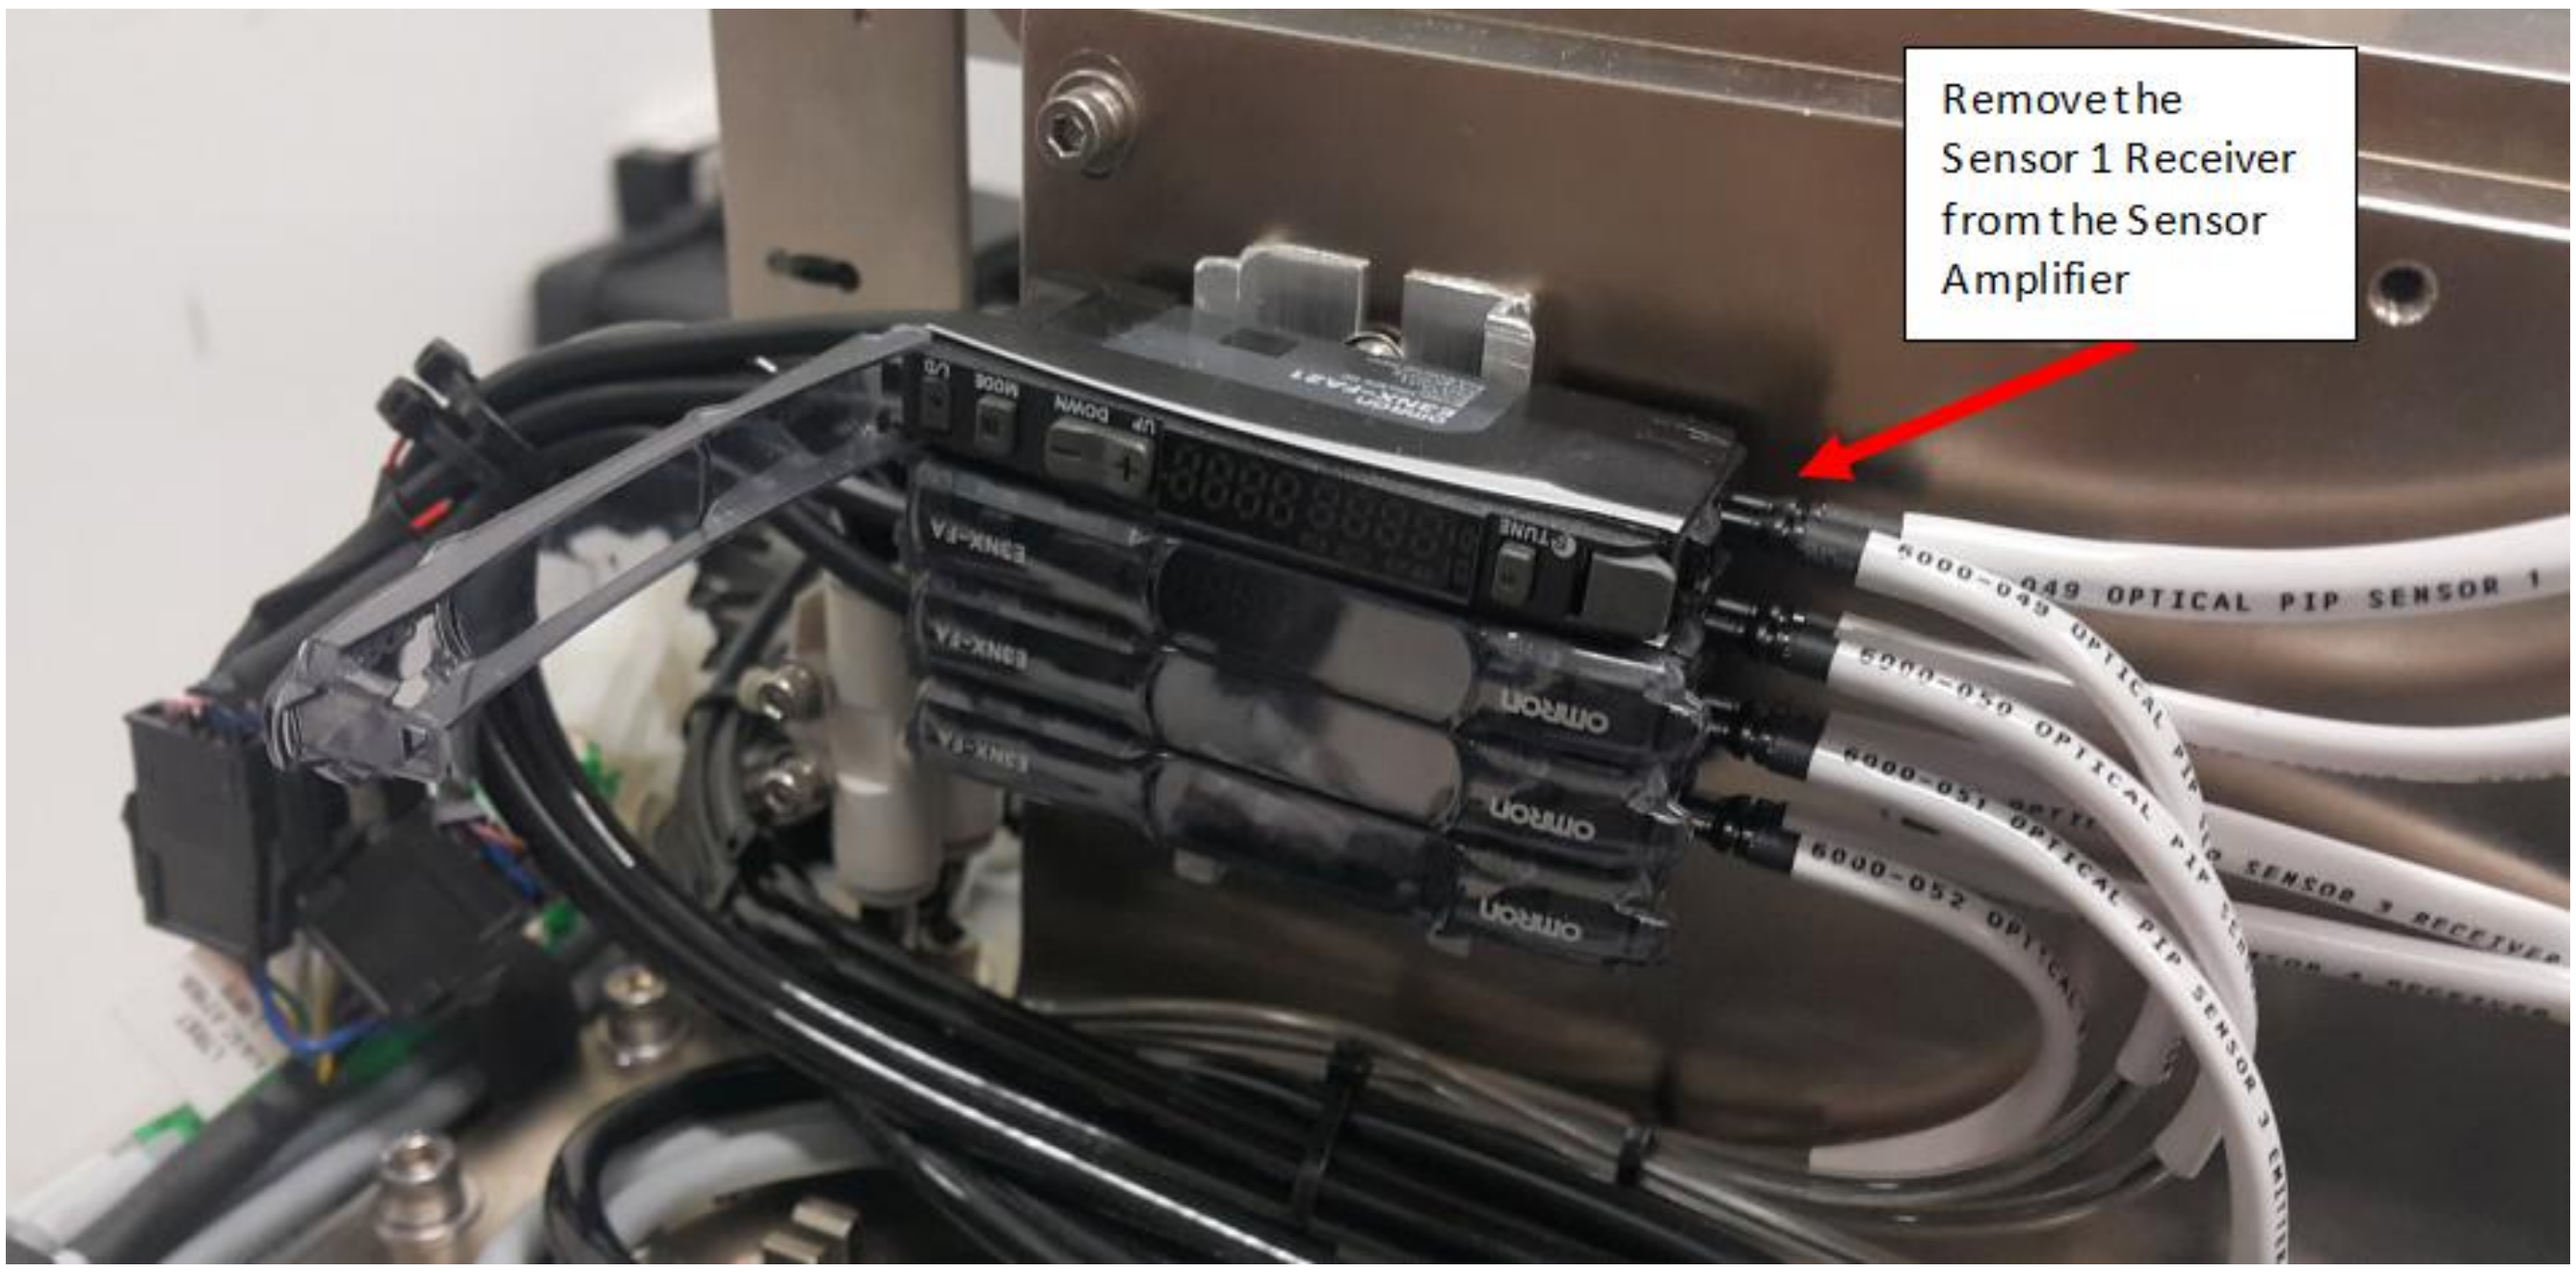

Figure 20 Sensor 1 Receiver (Amplifier)

B. Installation of the Optical PIP Sensor 1 (Part ID: 4XASP-A150 / 2000-0015)

I. Installation of the Sensor 1 Emitter

1. Install the new (4XASP-A150 / 2000-0015) S2EX Left Stop PIP Cable as shown below in Figure 21.

   Remarks :Emitter and Receiver are labeled accordingly.

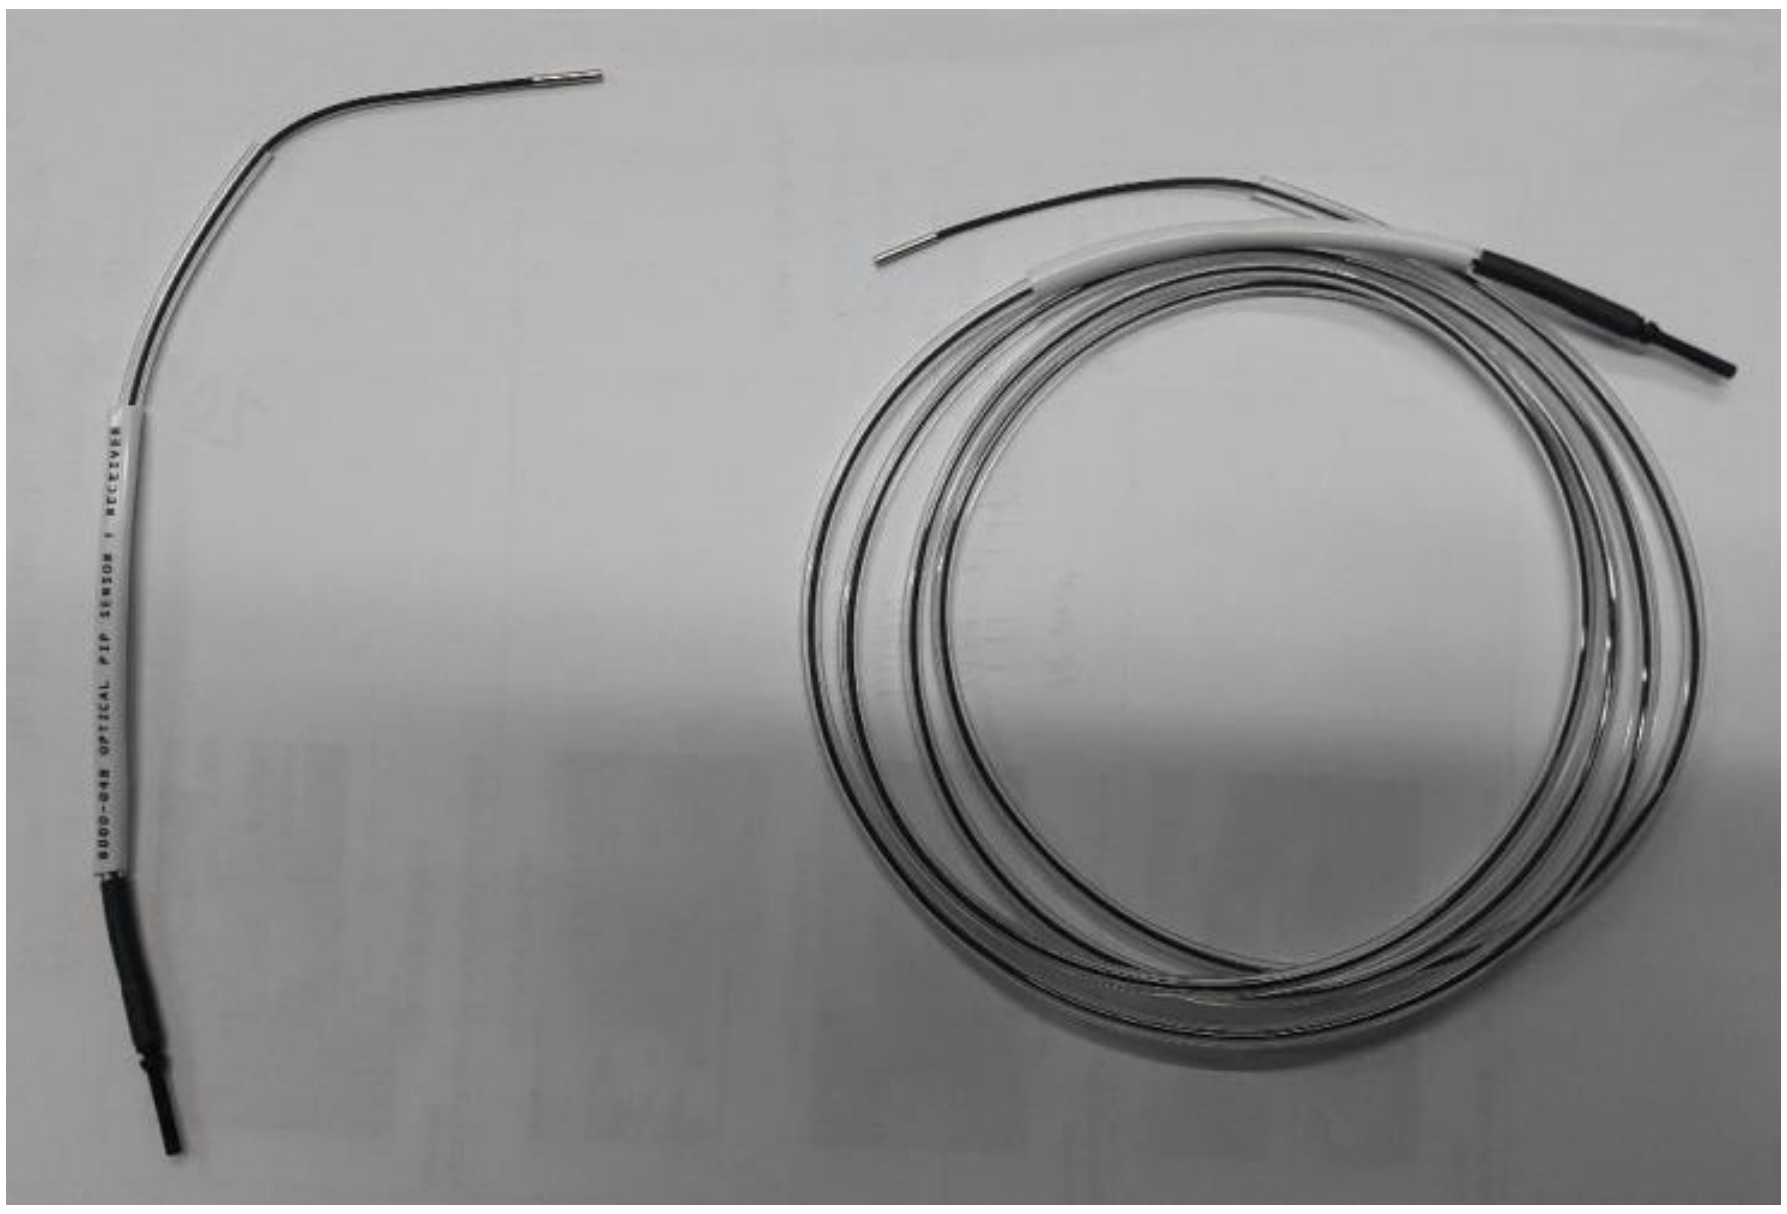

Figure 21 4XASP-A150 / 2000-0015 Left Stop PIP Cable

2. For emitter installation, Gently insert emitter sensor head into 4JAXY-058 (PIP Sensor Mounting Plate 2) as shown from Figure 22 to Figure 25

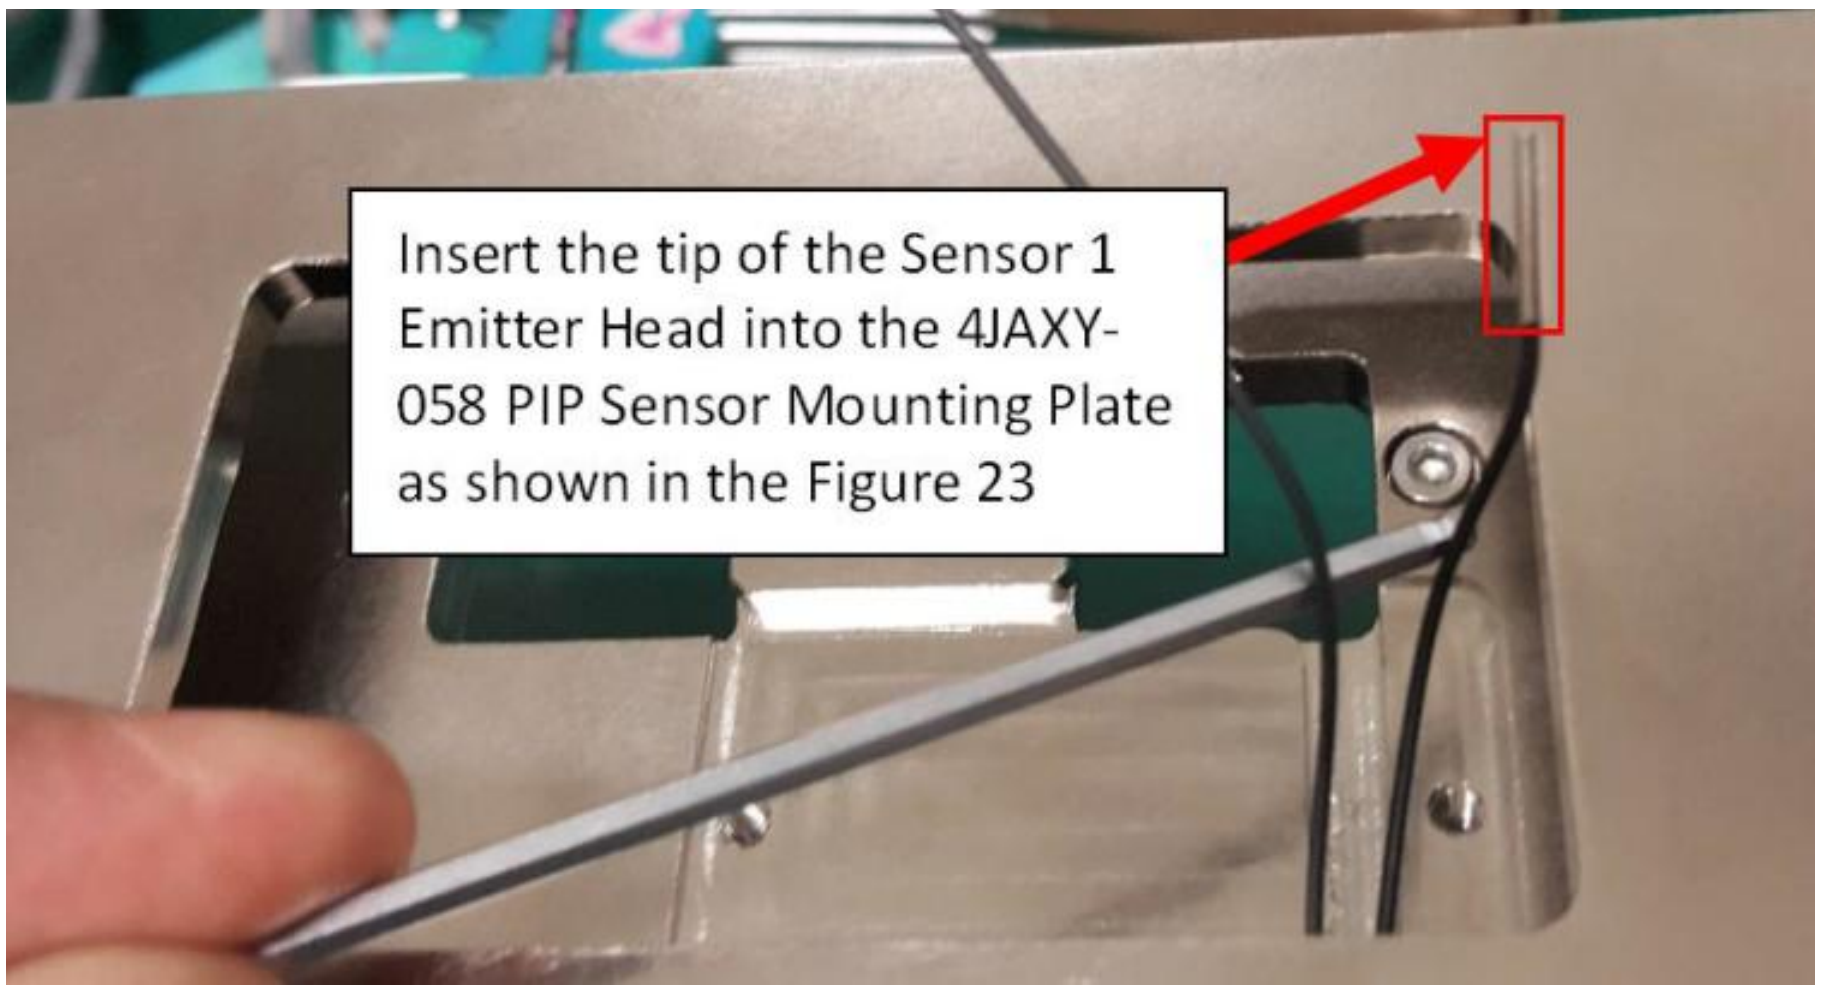

Figure 22 Sensor Emitter Head

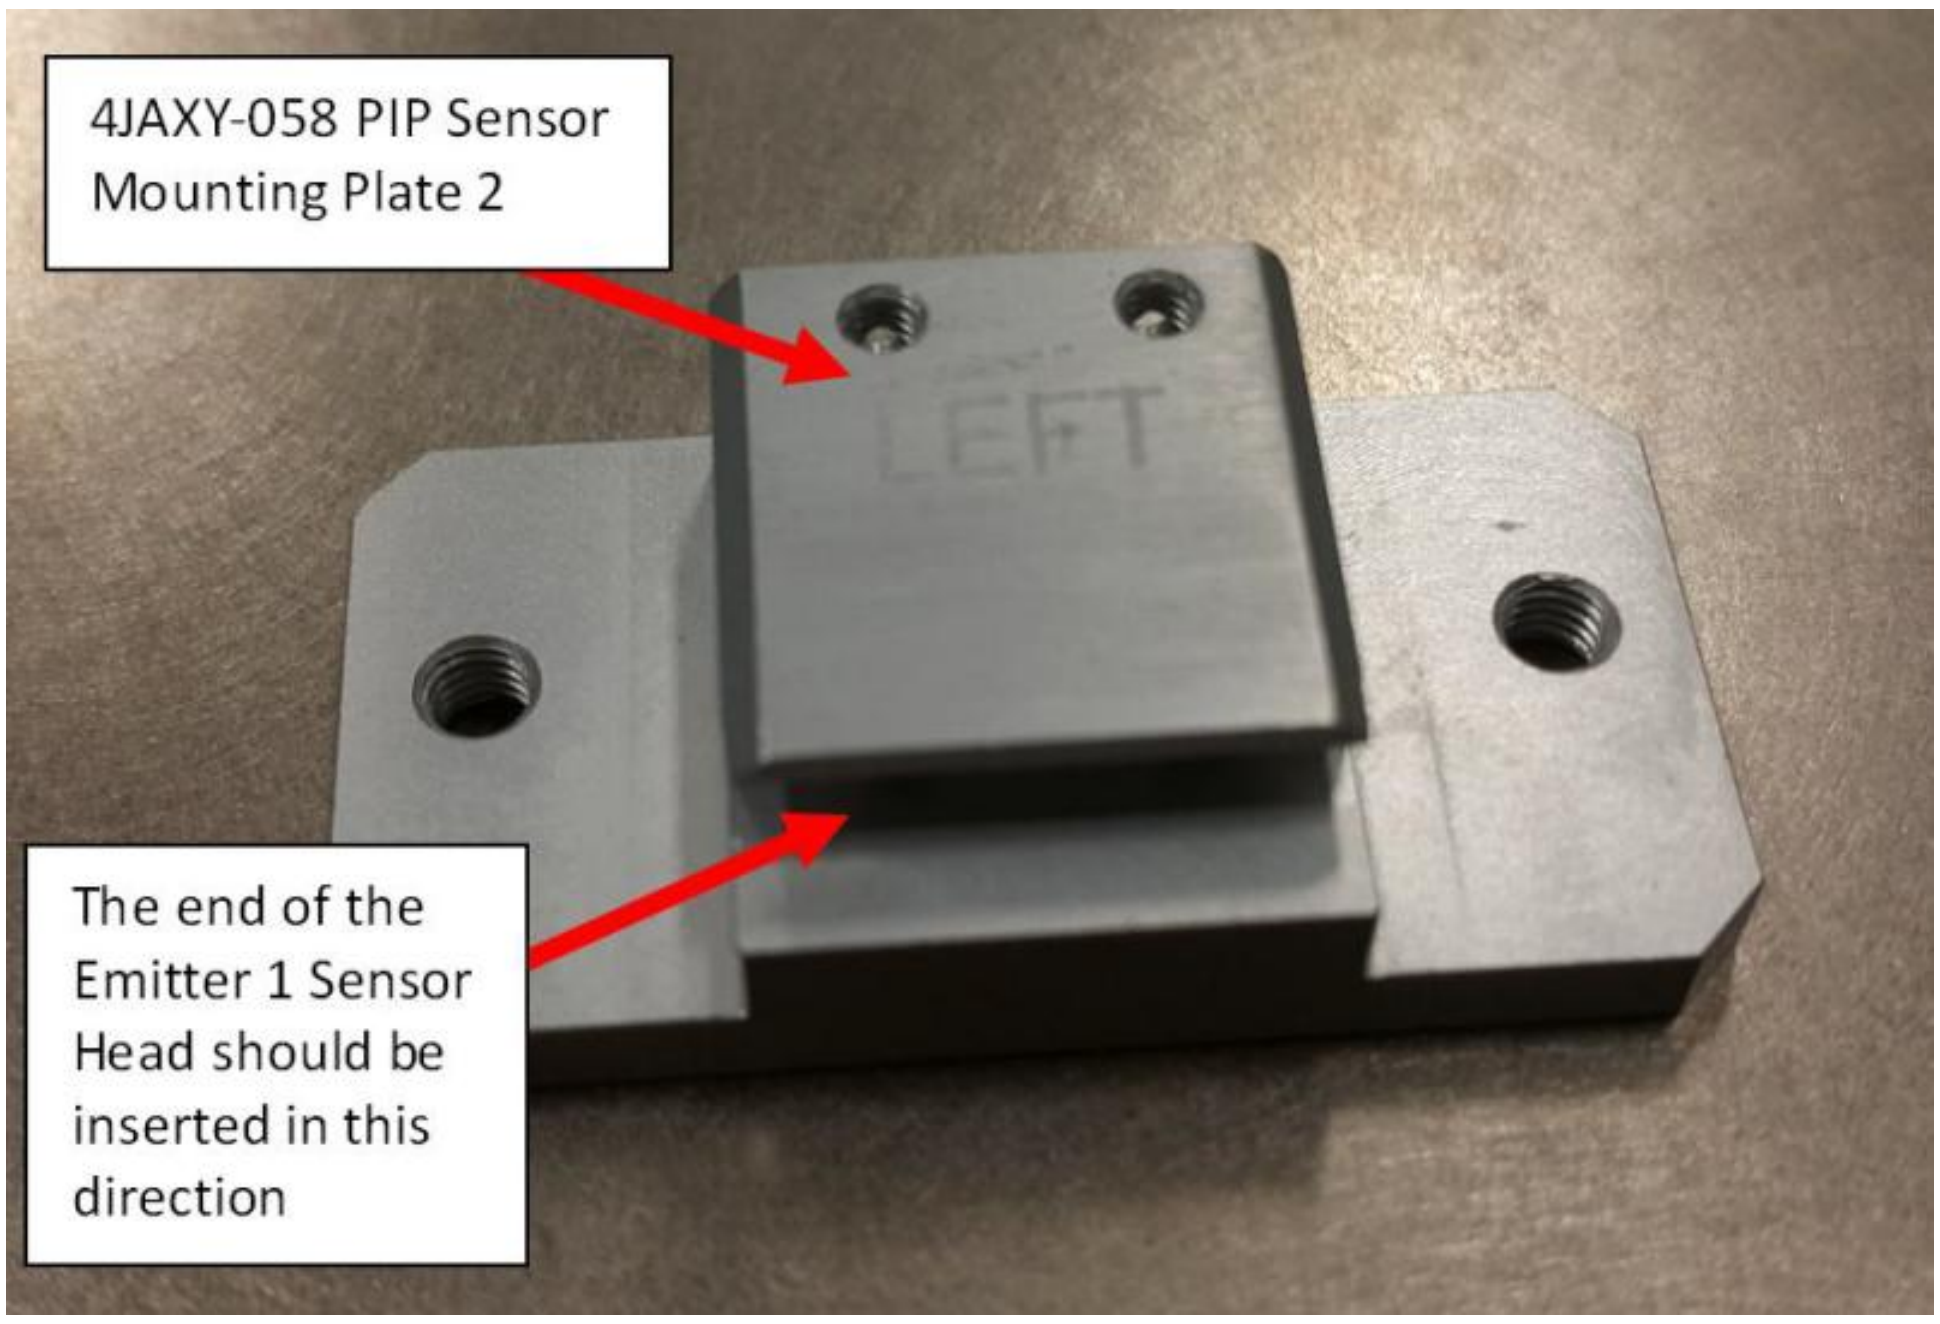

Figure 23 4JAXY-058 PIP Sensor Mounting Plate

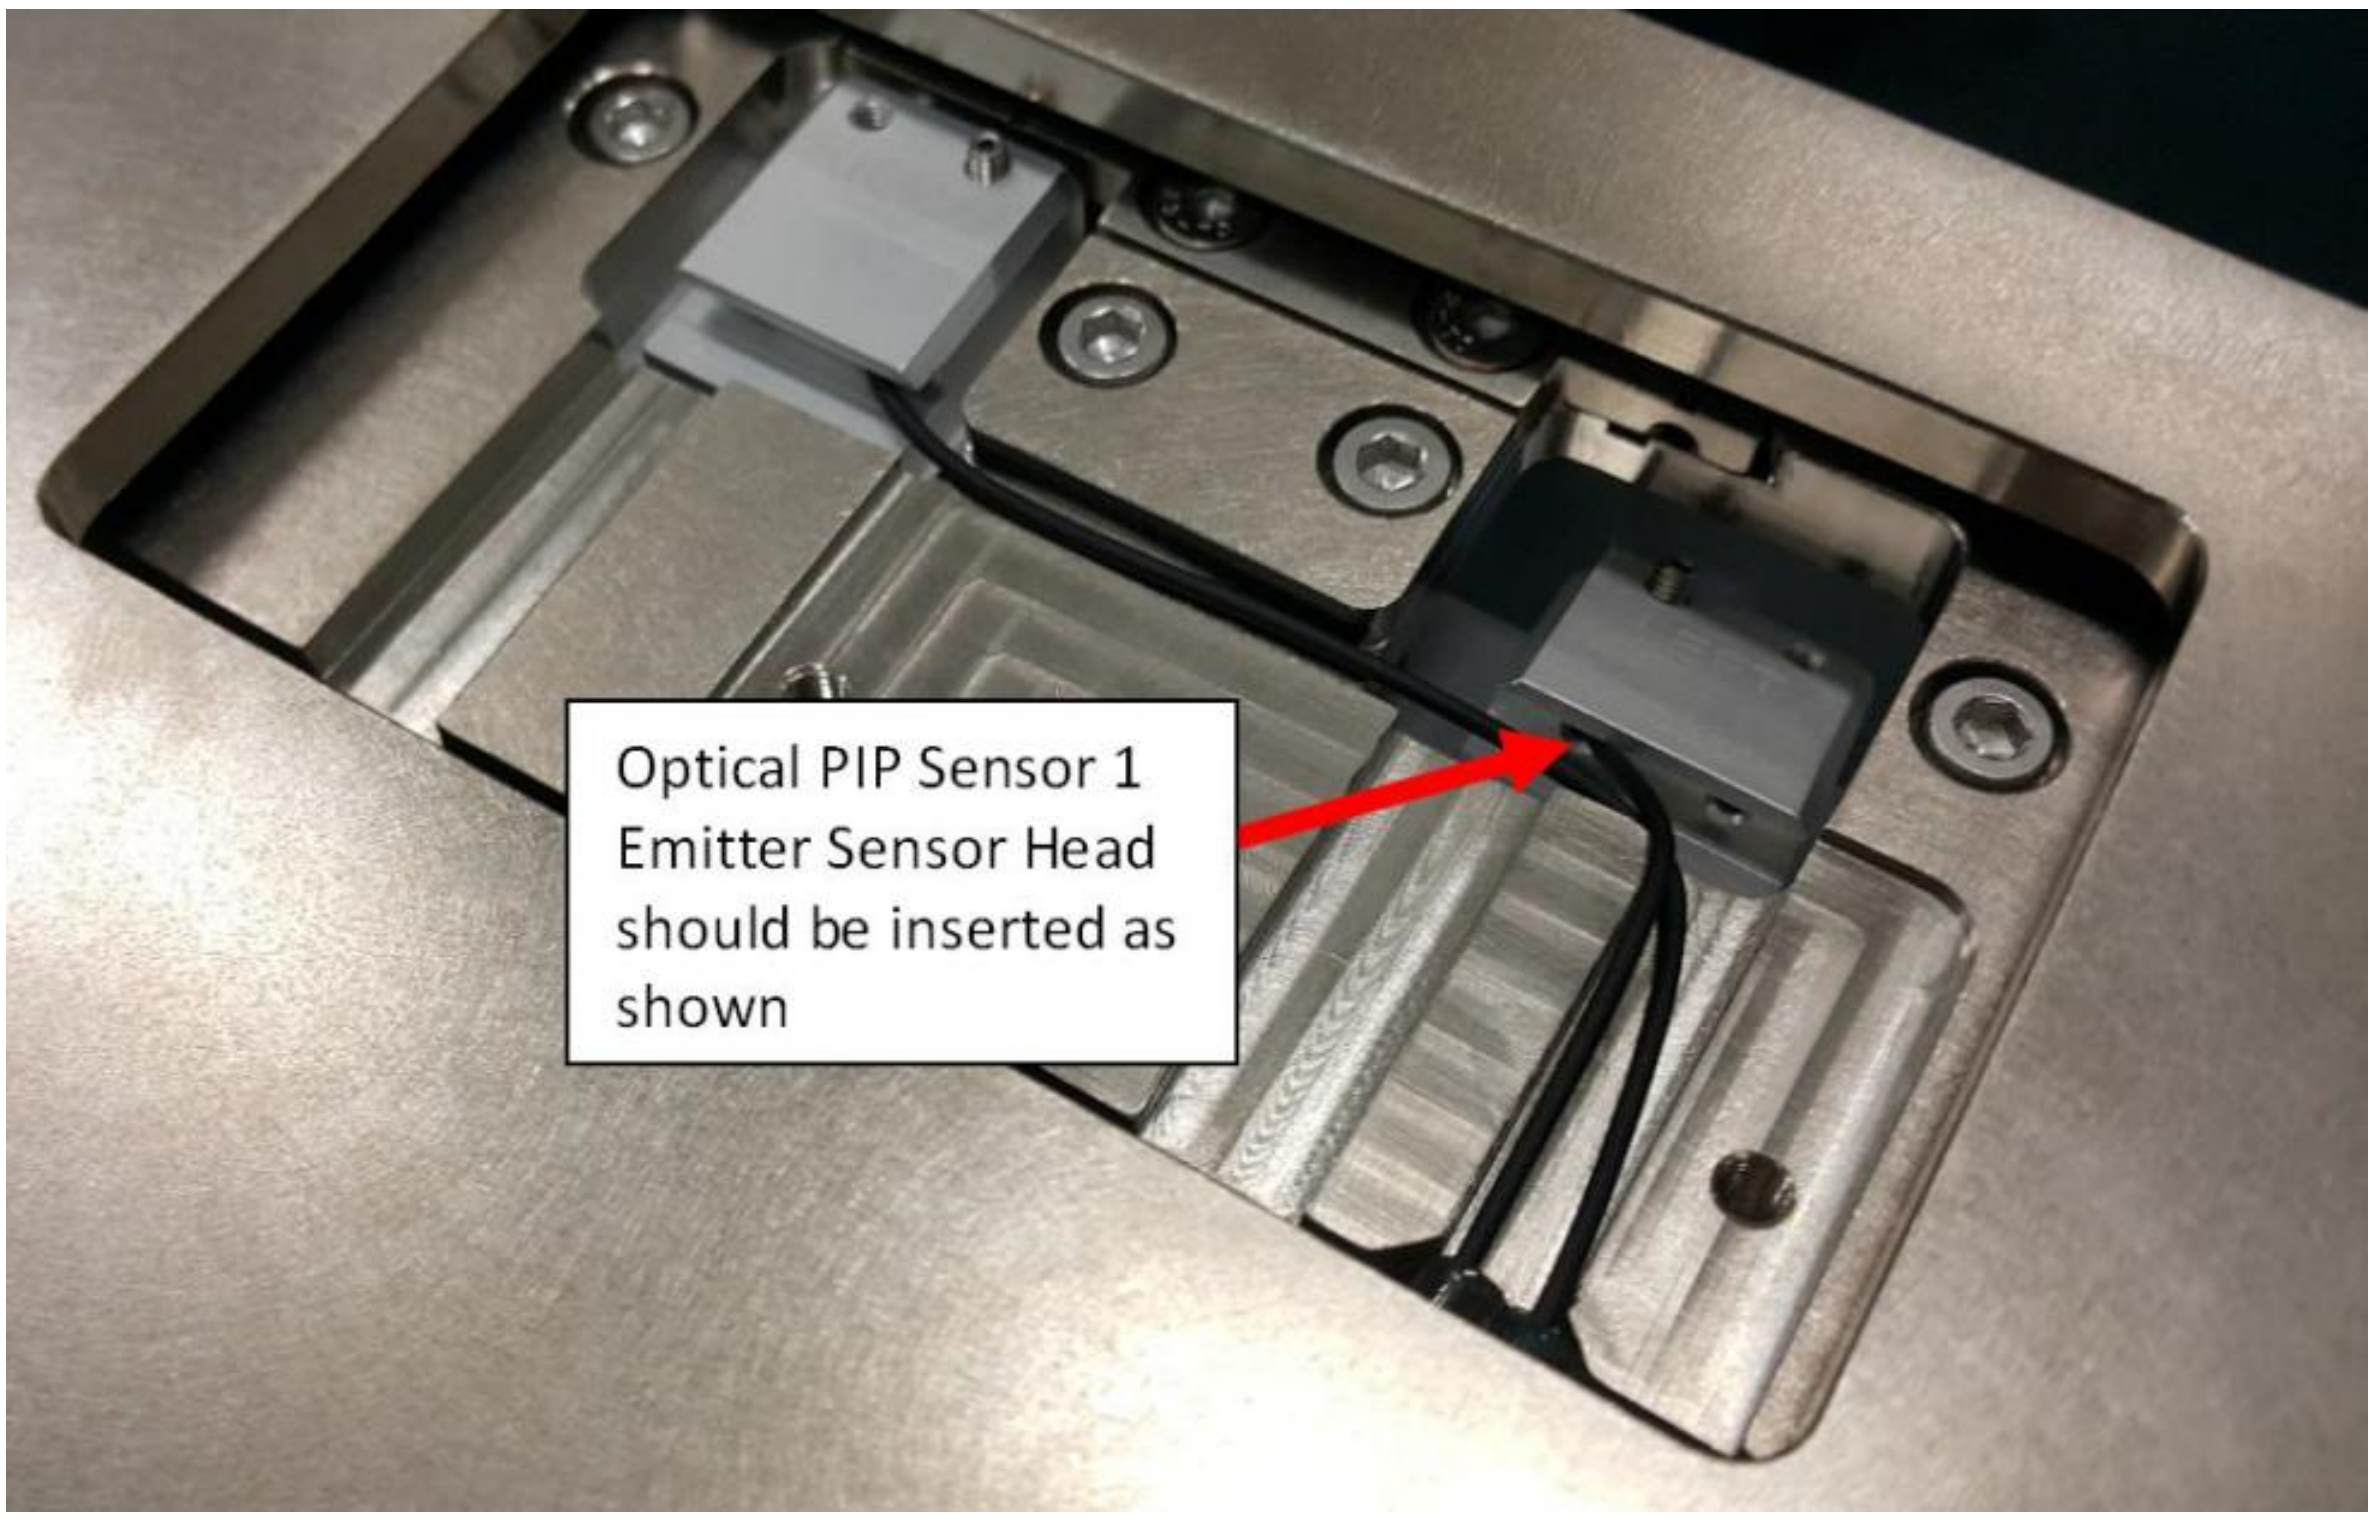

Figure 24 Optical PIP Sensor 1 Emitter Head

3. Push 4JAXY-058 PIP Sensor Mounting Plate 2 to maximum direction (Blue Arrow) and align with the line as shown in the Figure 25.

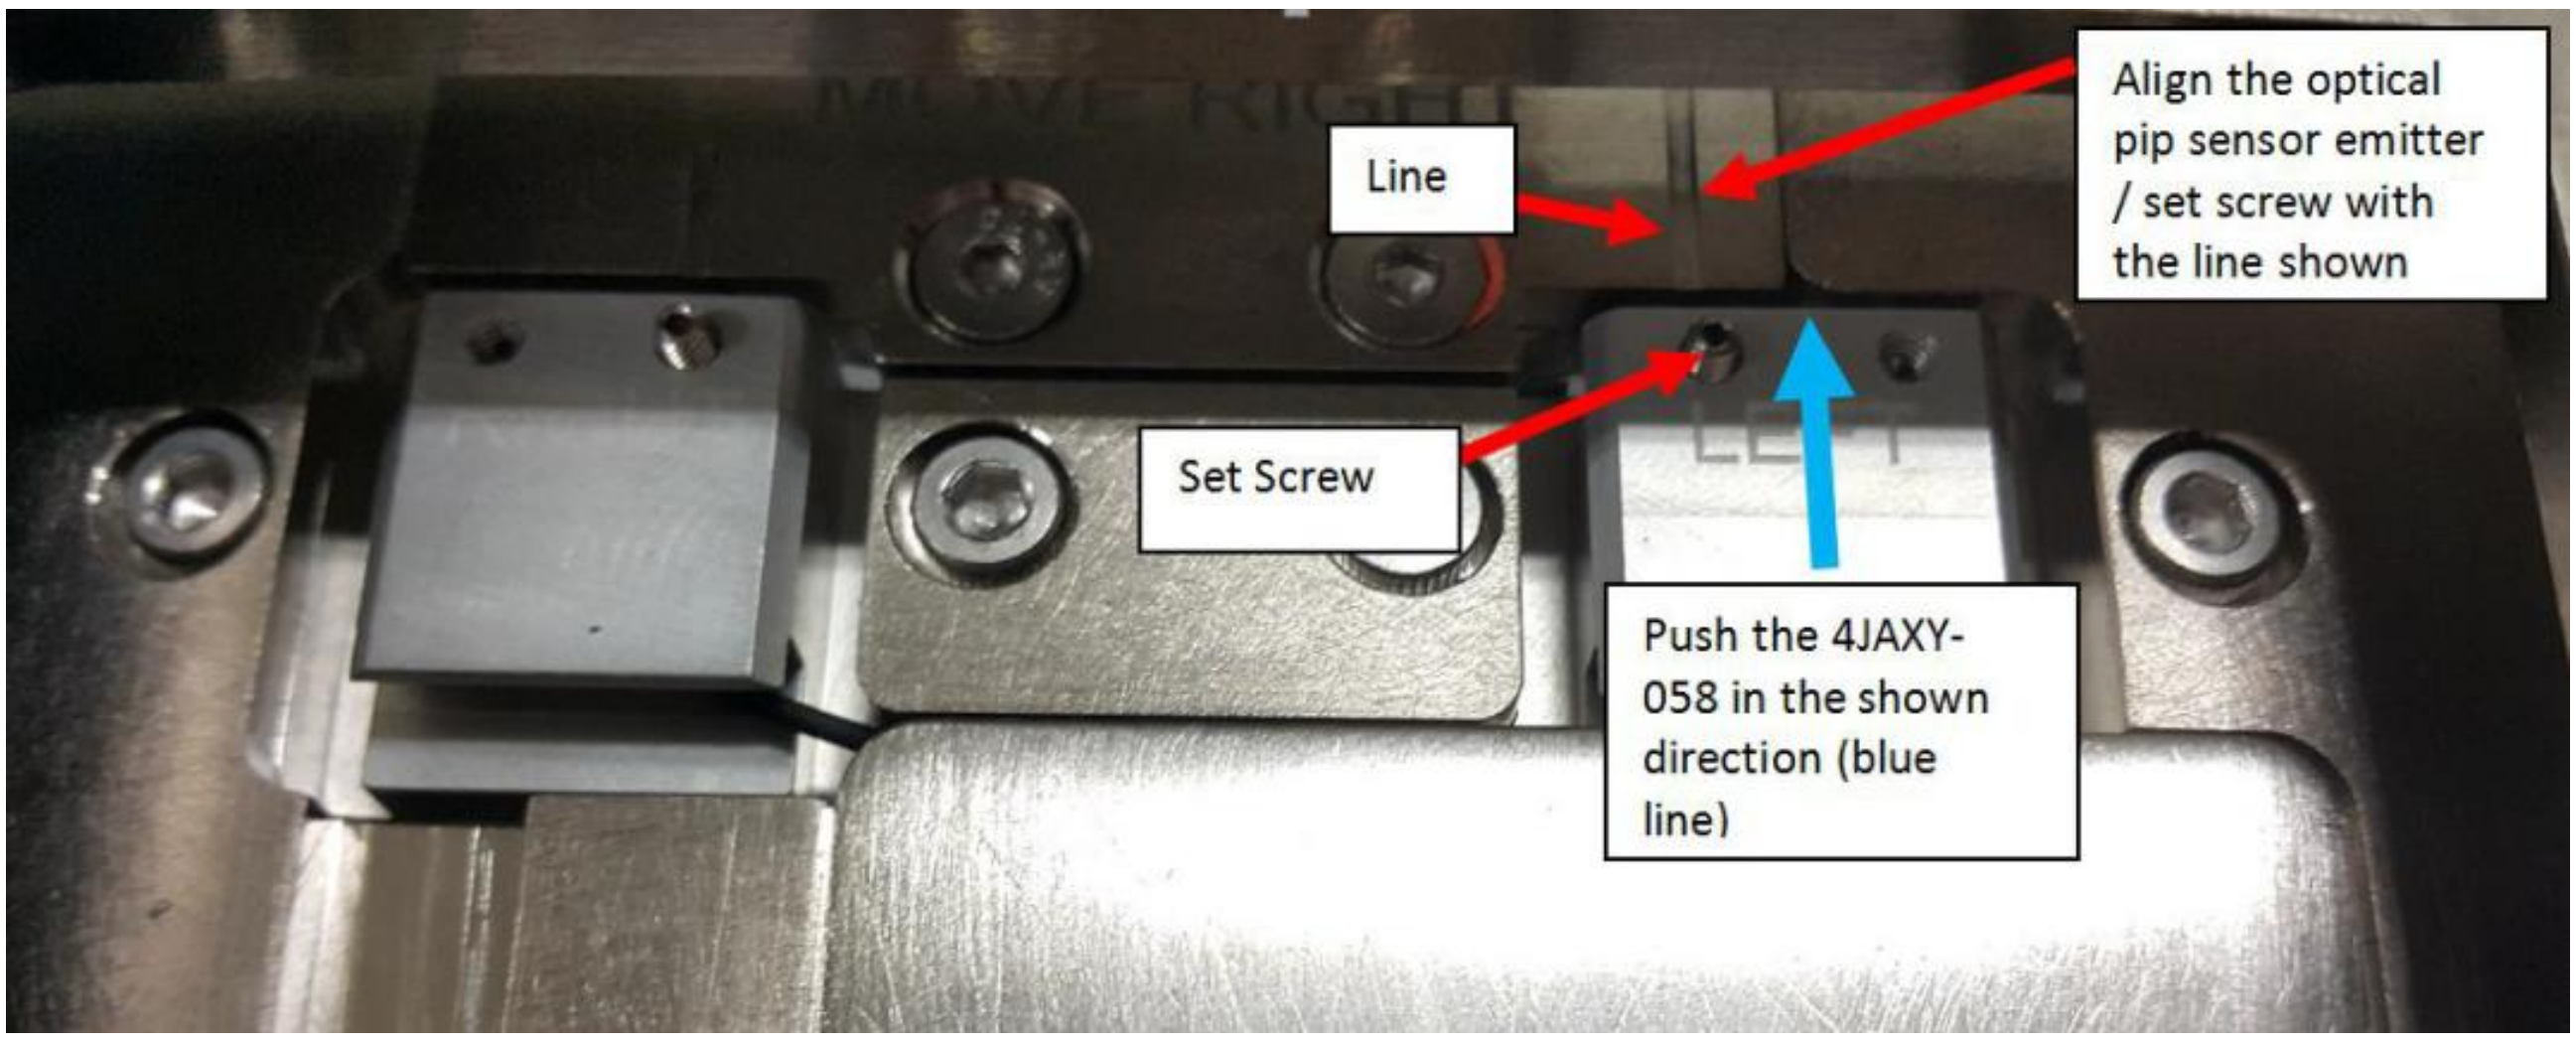

Figure 25 4JAXY-058

4. Tighten back SHCS M3×6 (2x) as shown in Figure 26.

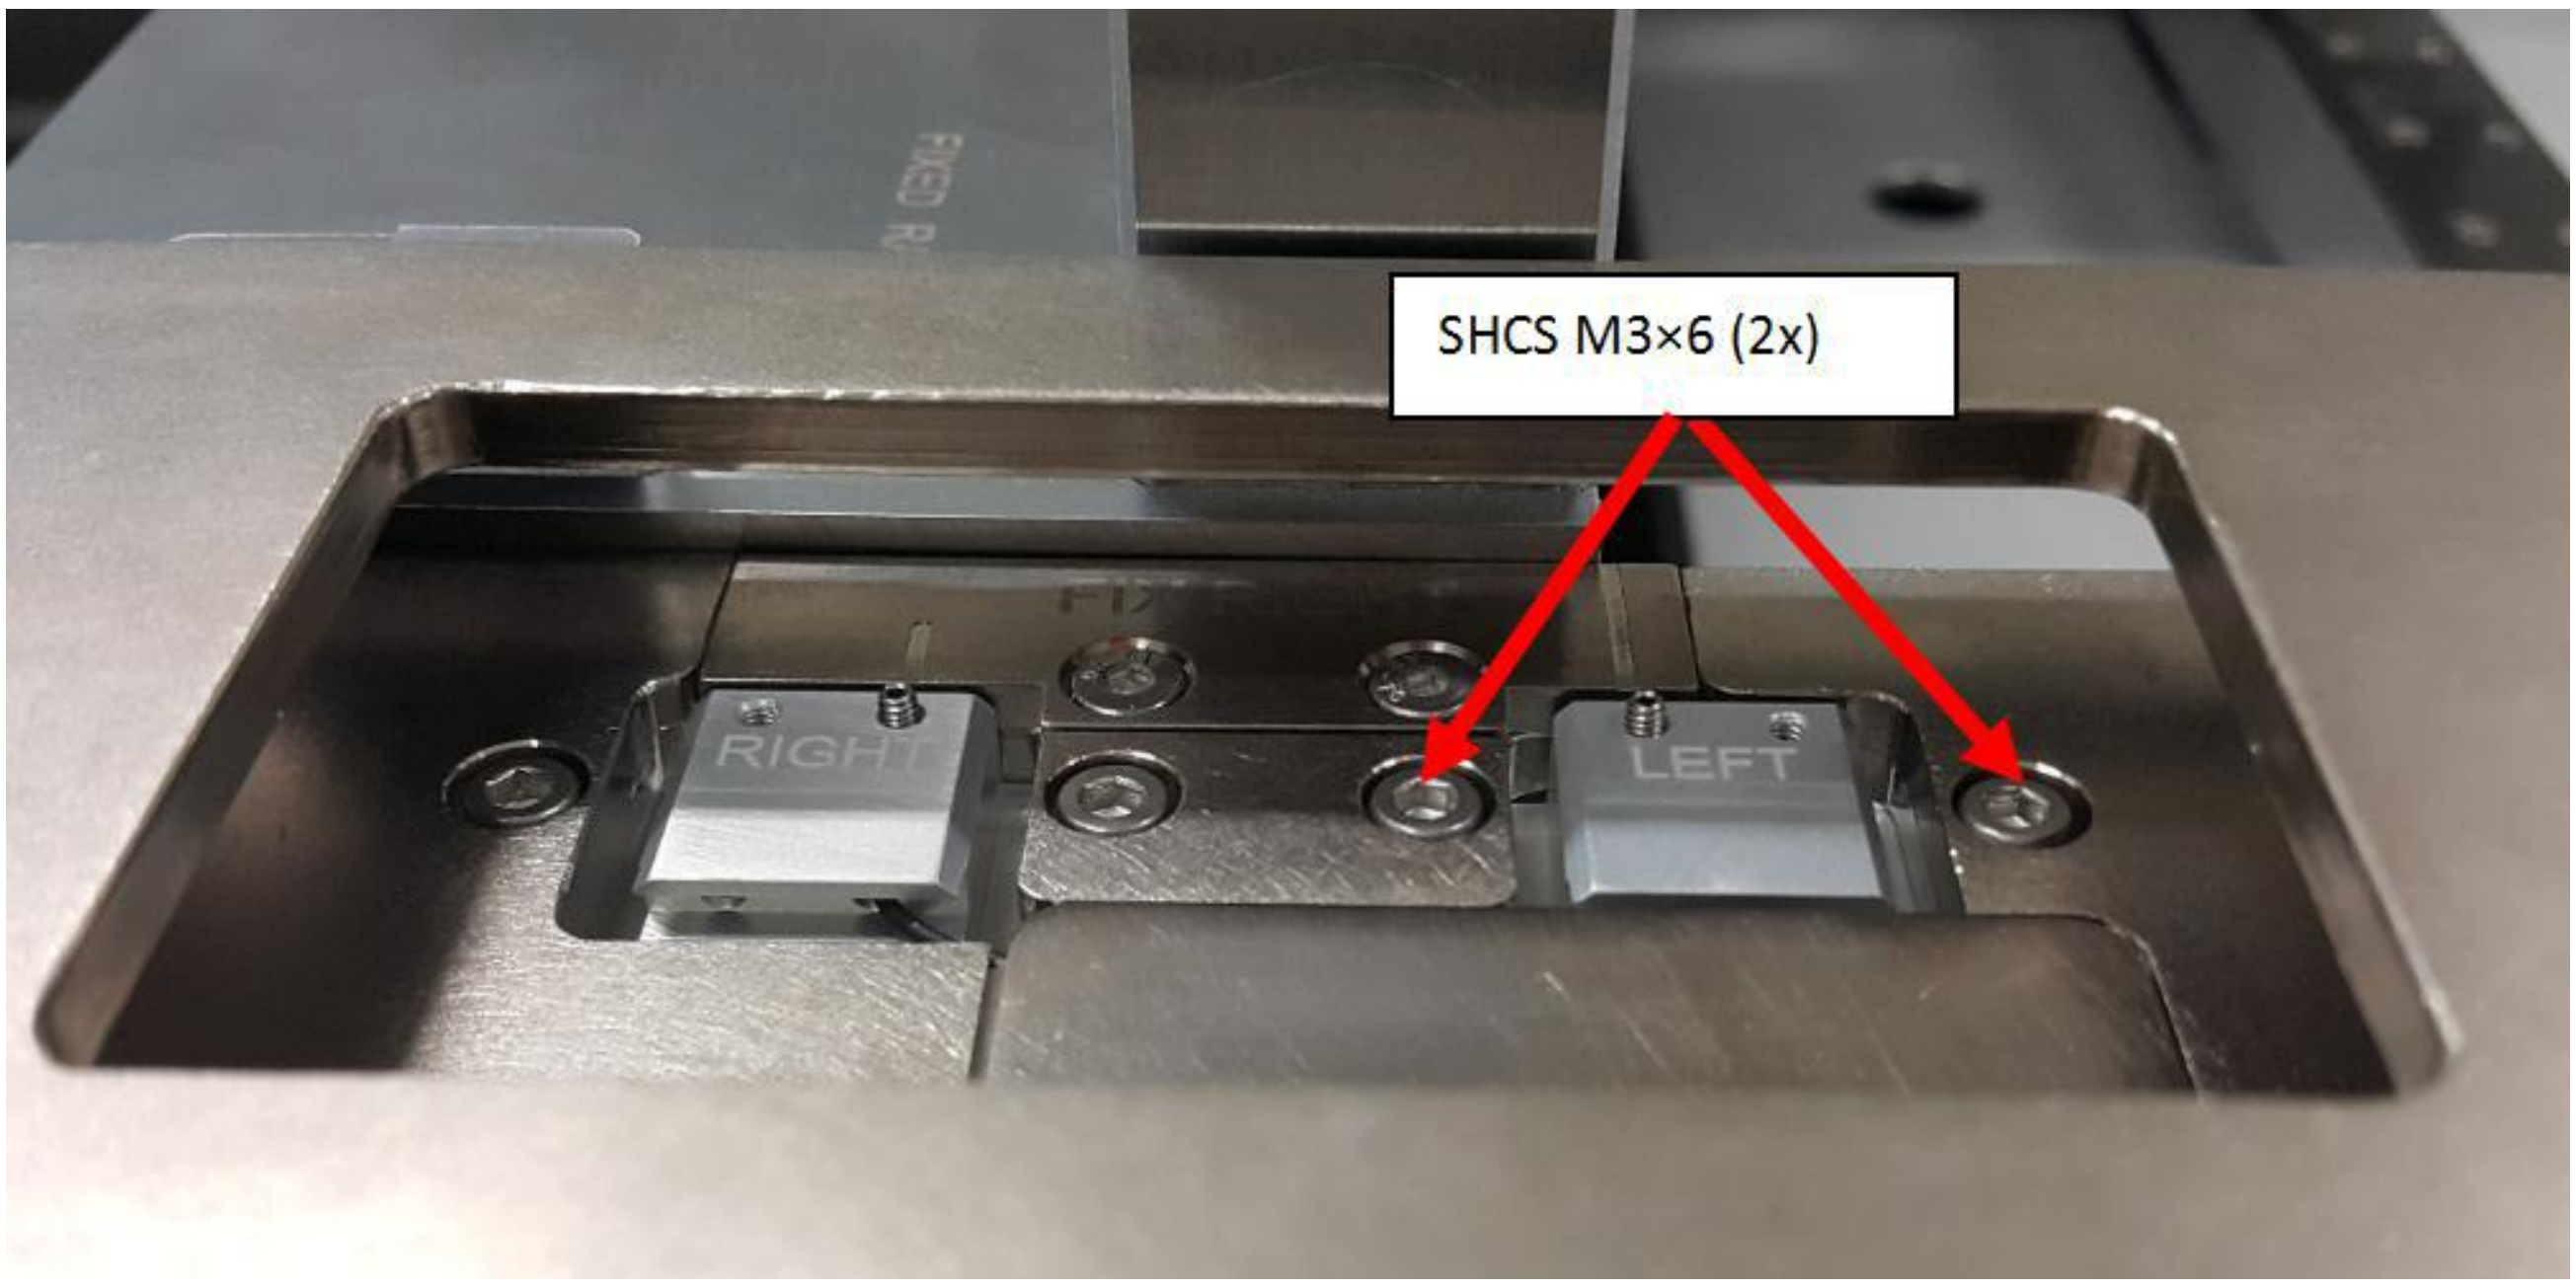

Figure 26 SHCS M3x6 (2x)

5. Ensure sensor emitter 1 head do not protrude from 4JAXY-058 PIP Sensor Mounting Plate 2 as shown in Figure 27
6. Tighten Set Screw M2.5×3 as shown in Figure 27

   Remarks: Caution on Set Screw Fastening

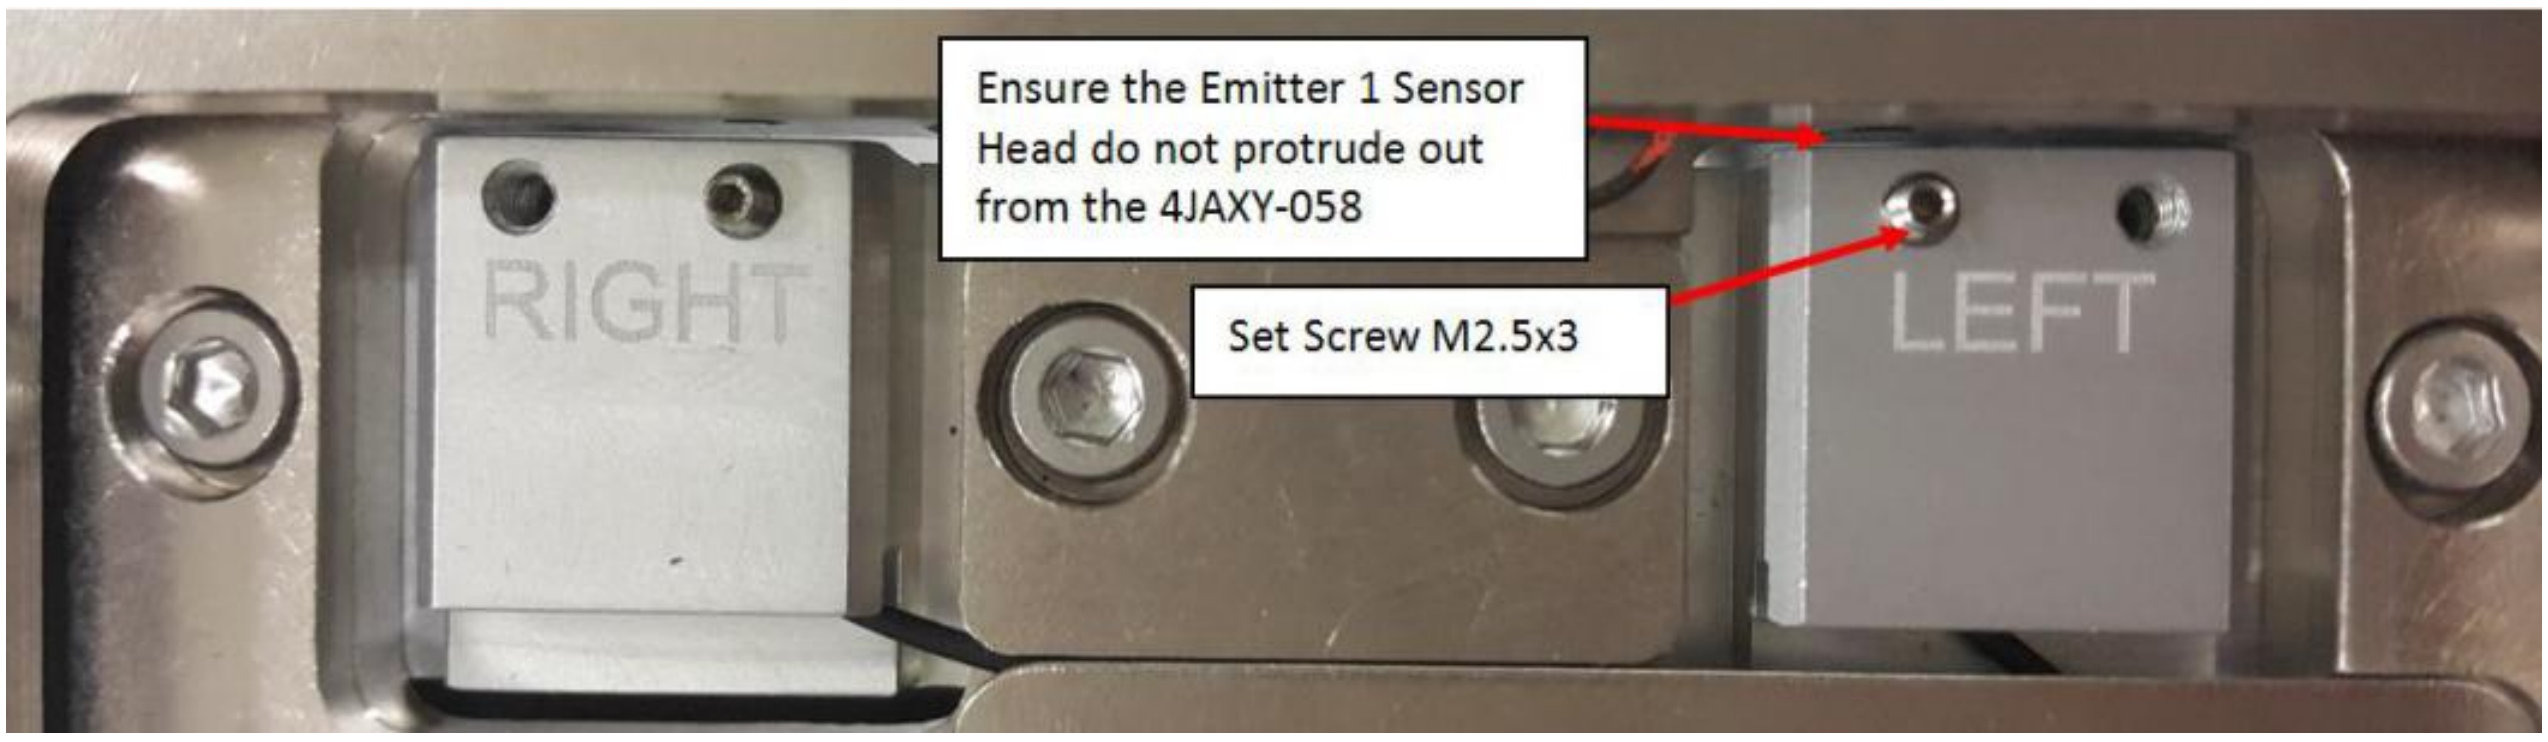

Figure 27 4JAXY-058

7. Routing for Optical Sensor 1 Emitter is as shown below in Figure 28.

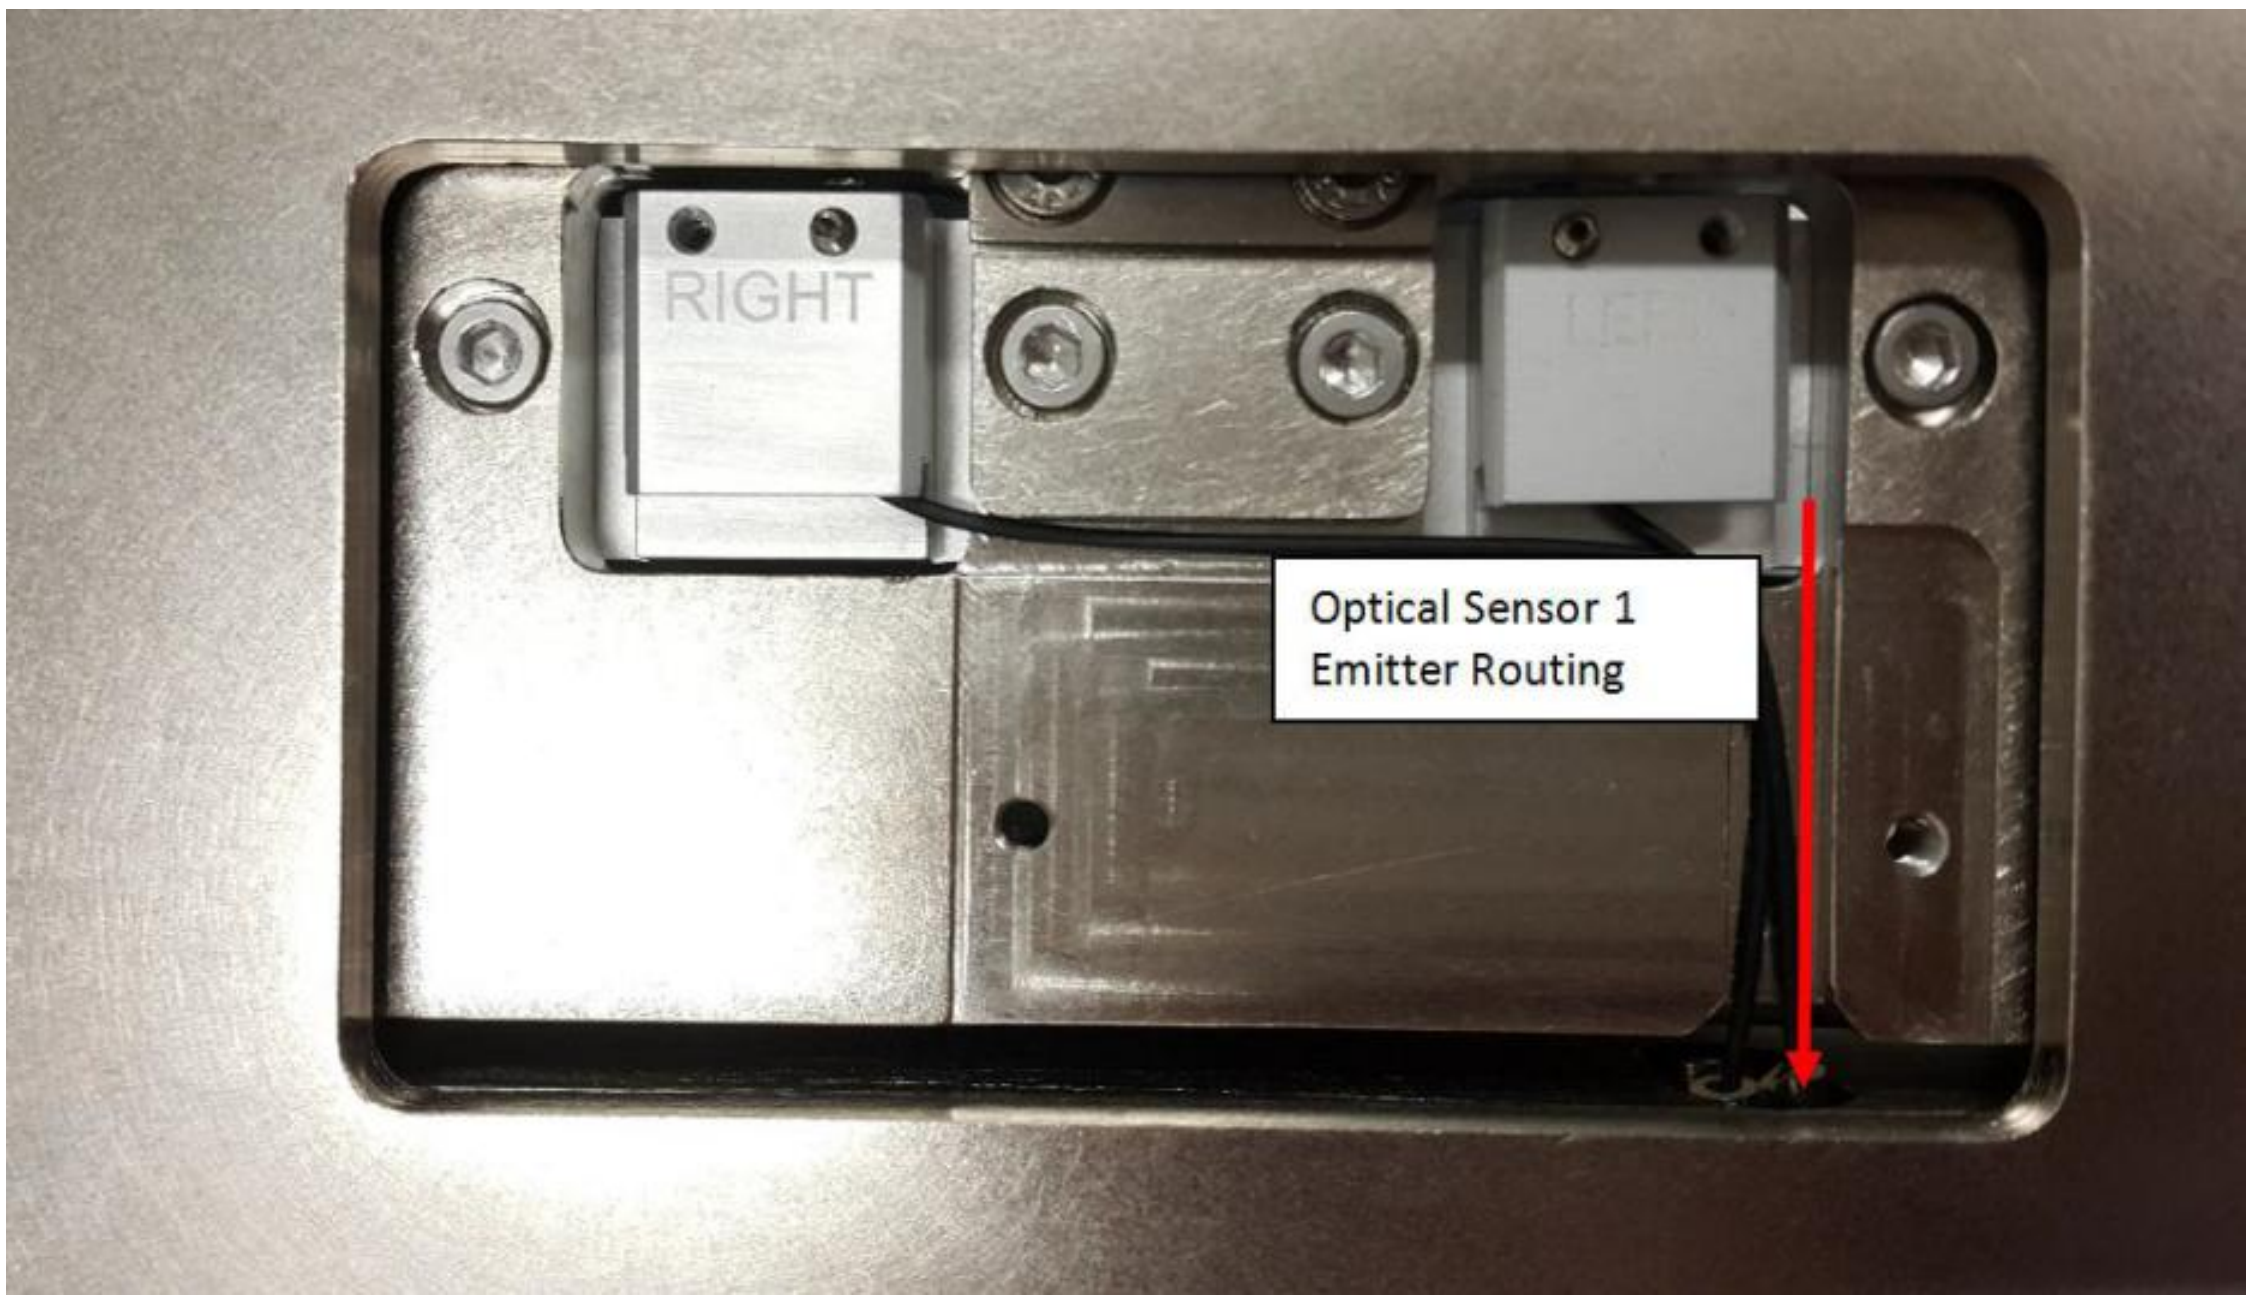

Figure 28 Optical Sensor 1 Emitter Routing

8. Close Optical PIP Sensor Cover with BHCS M3×6 (2x) as shown in Figure 29.

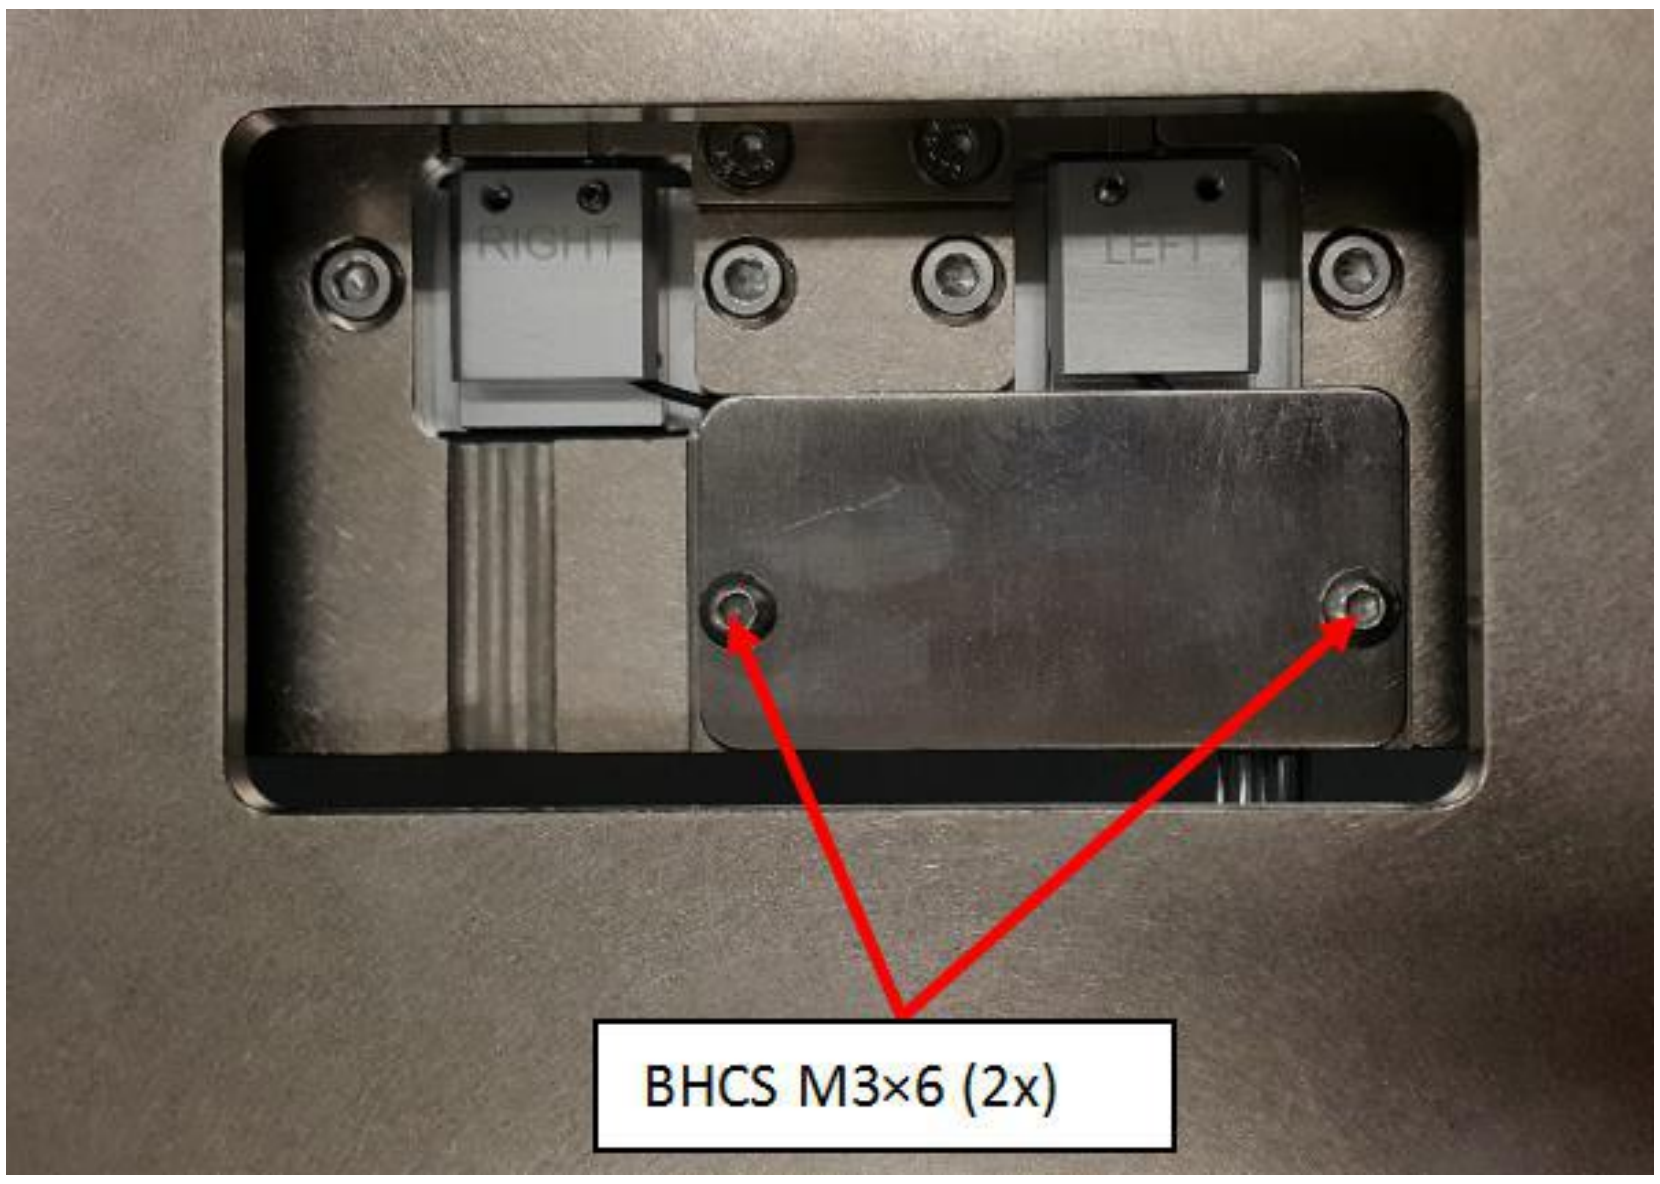

Figure 29 PIP Sensor Cover

9. Route cable by refer Figure 30 to Figure 35.

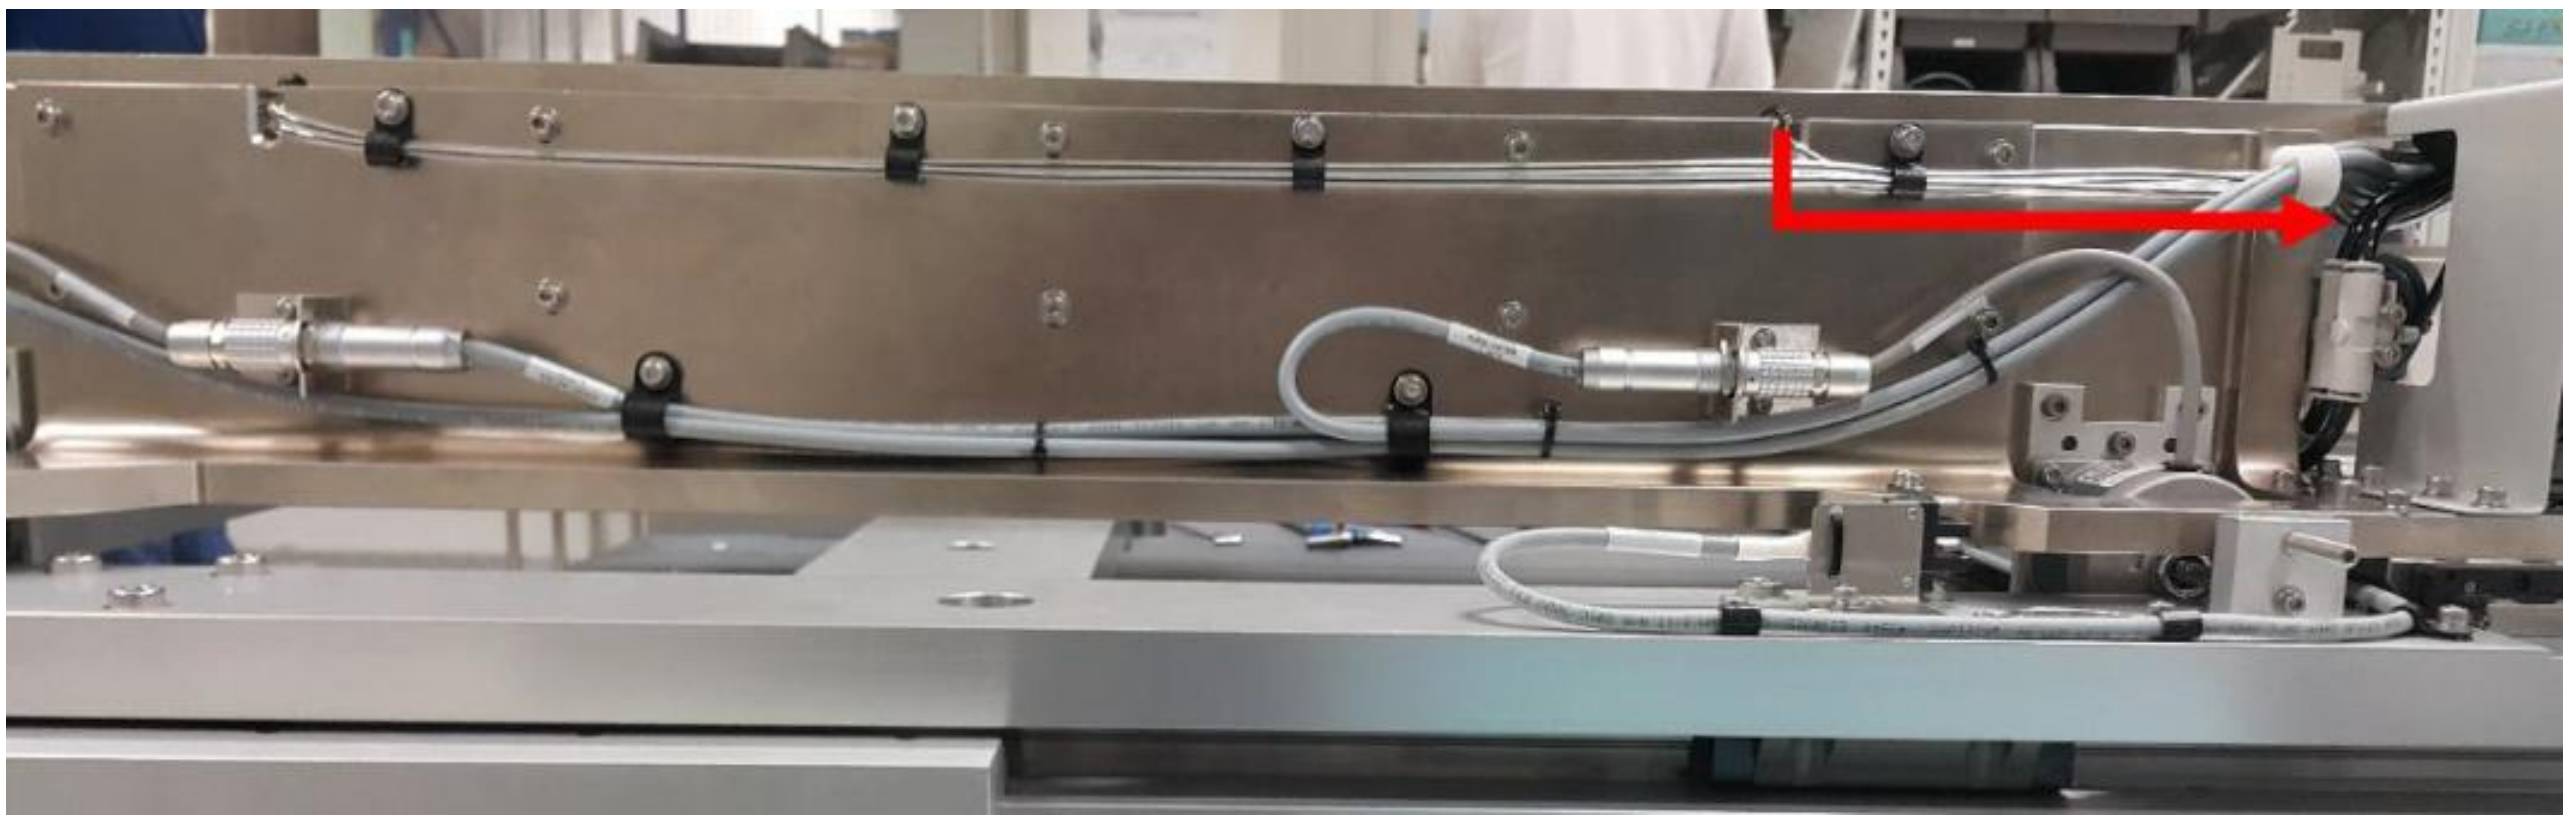

Figure 30 Sensor 1 Emitter Cable Routing

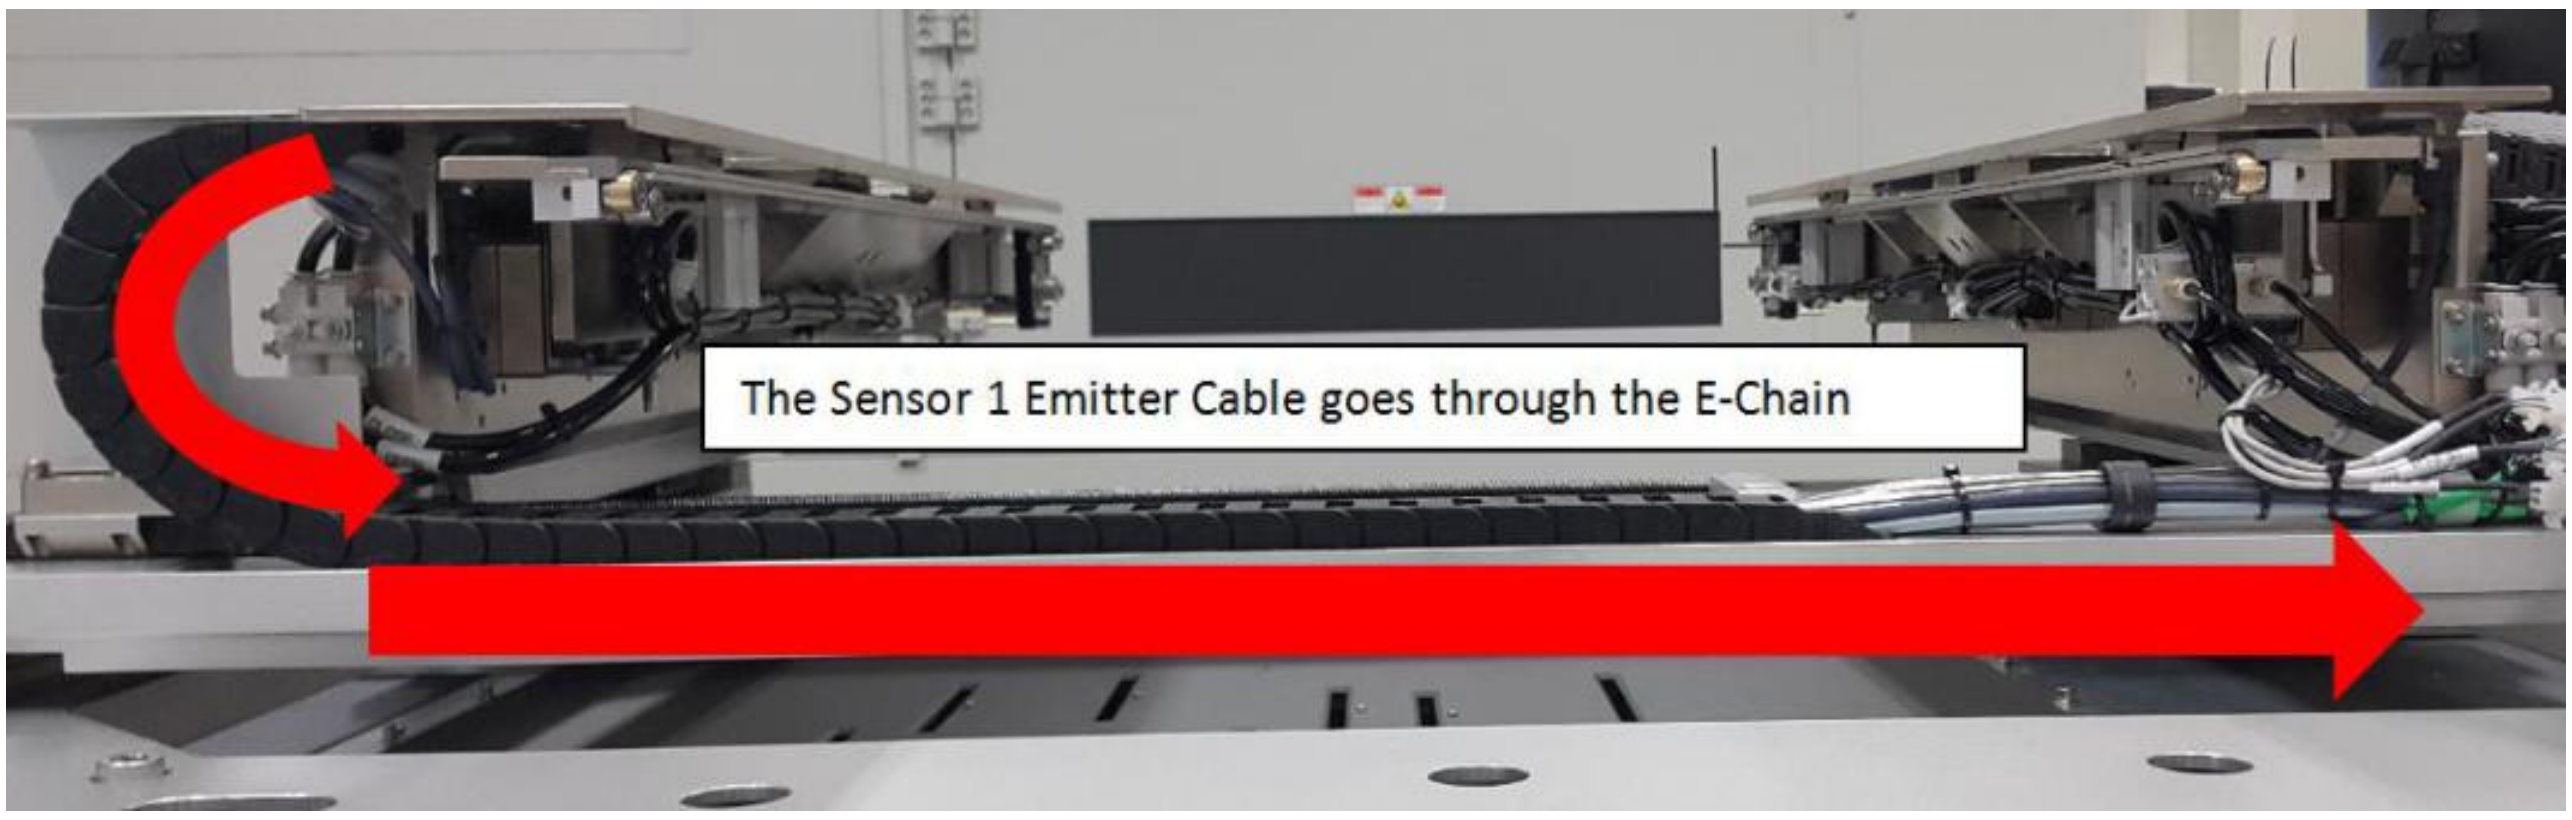

Figure 31 Sensor 1 Emitter (AWA E-Chain)

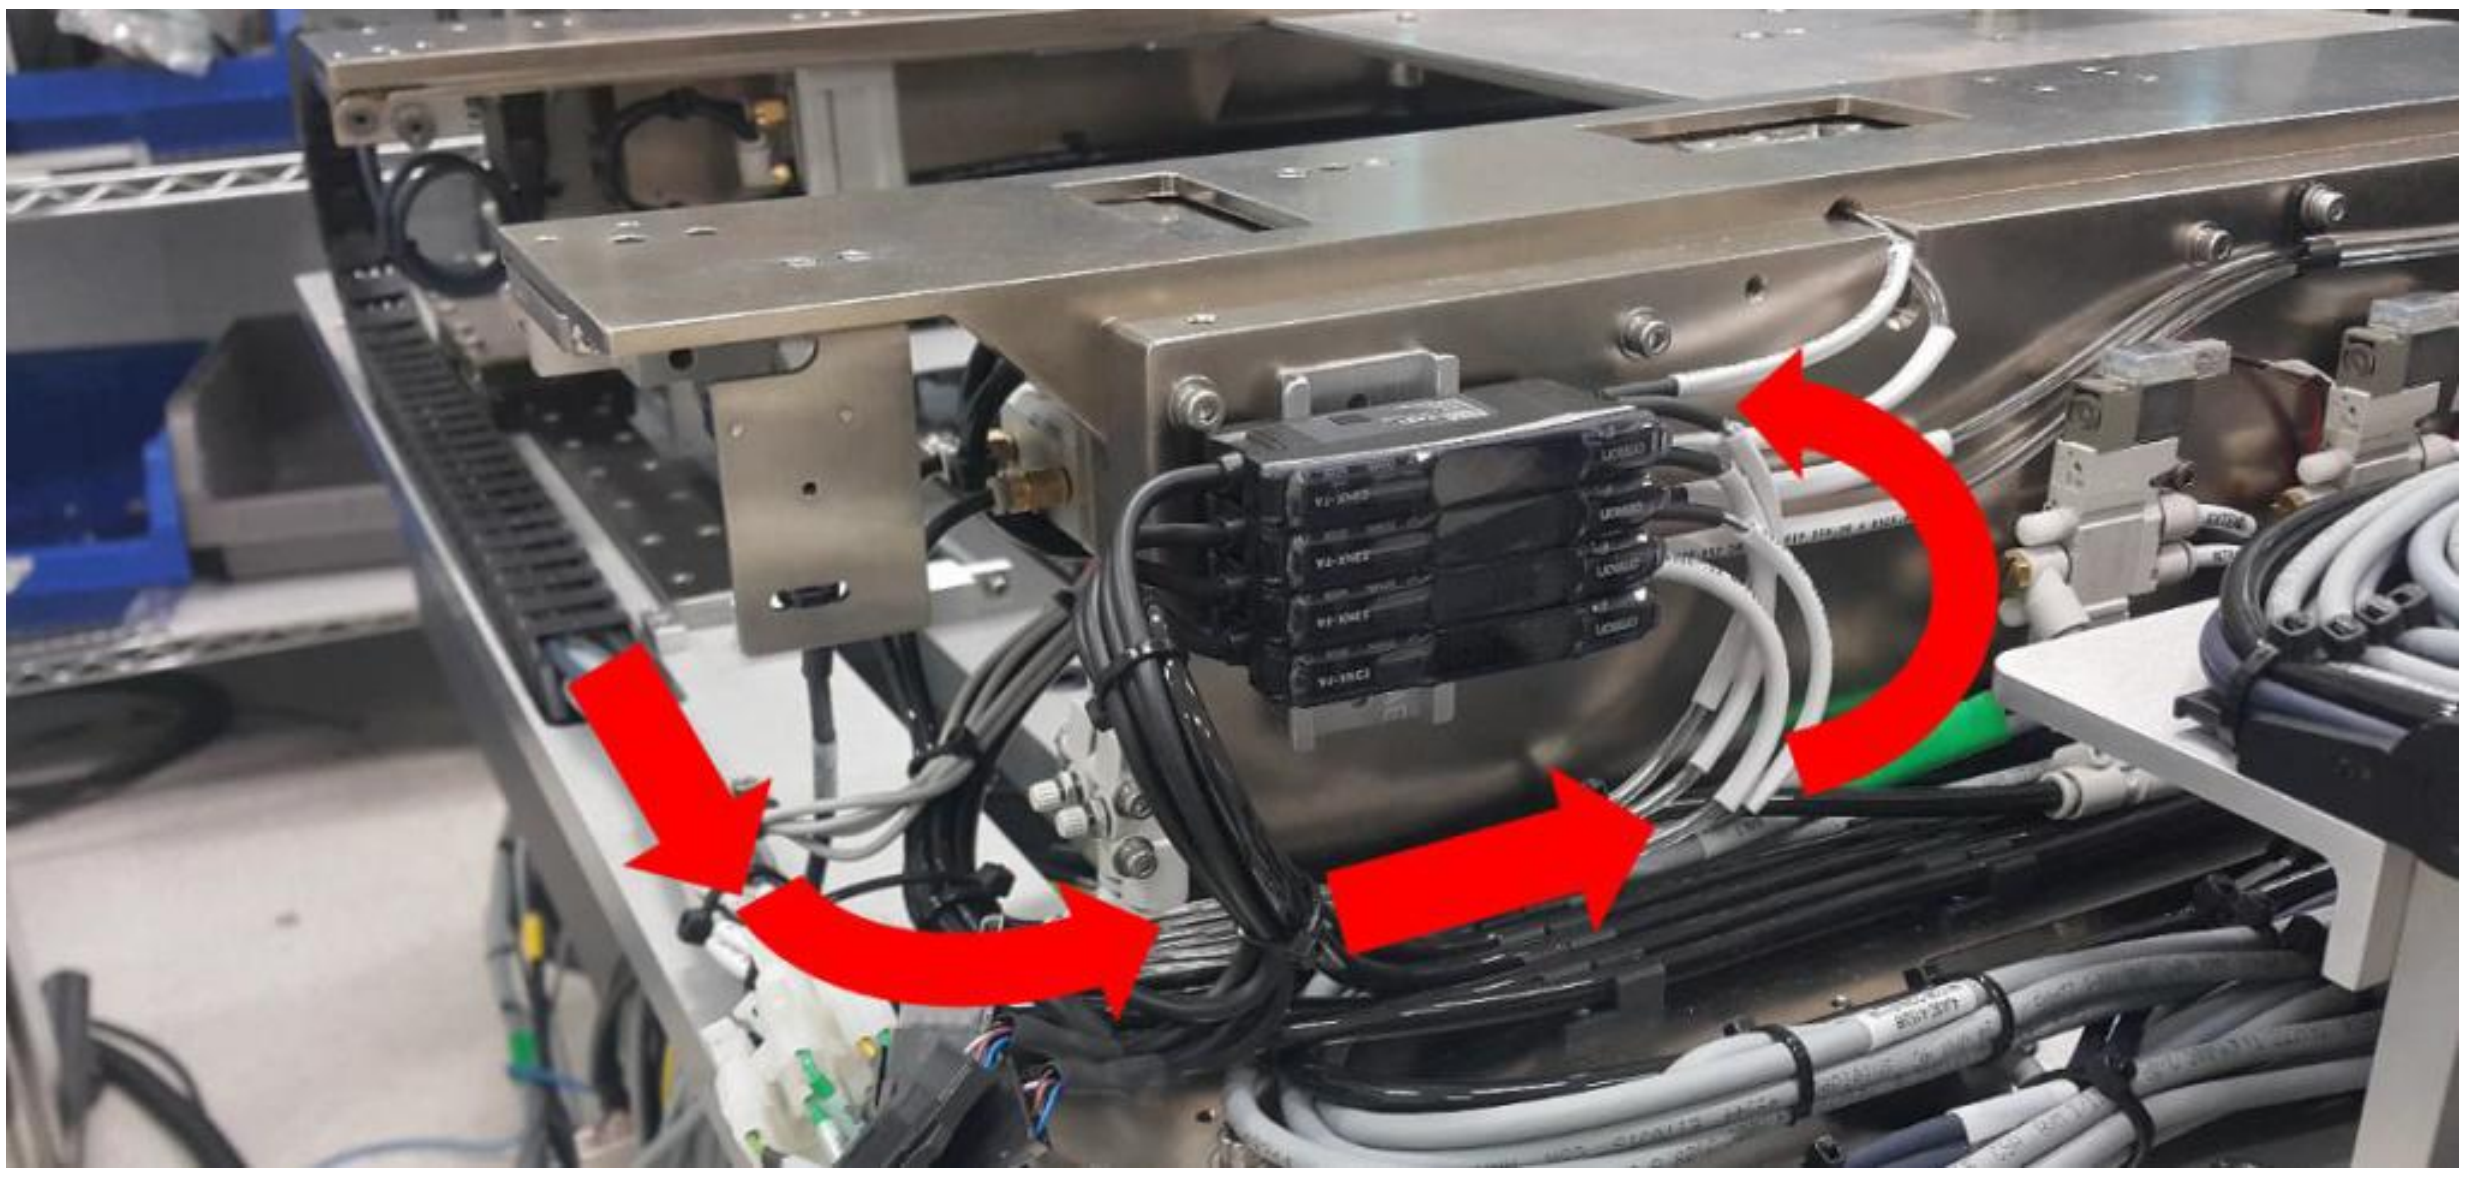

Figure 32 Sensor 1 Emitter (Sensor Amplifier)

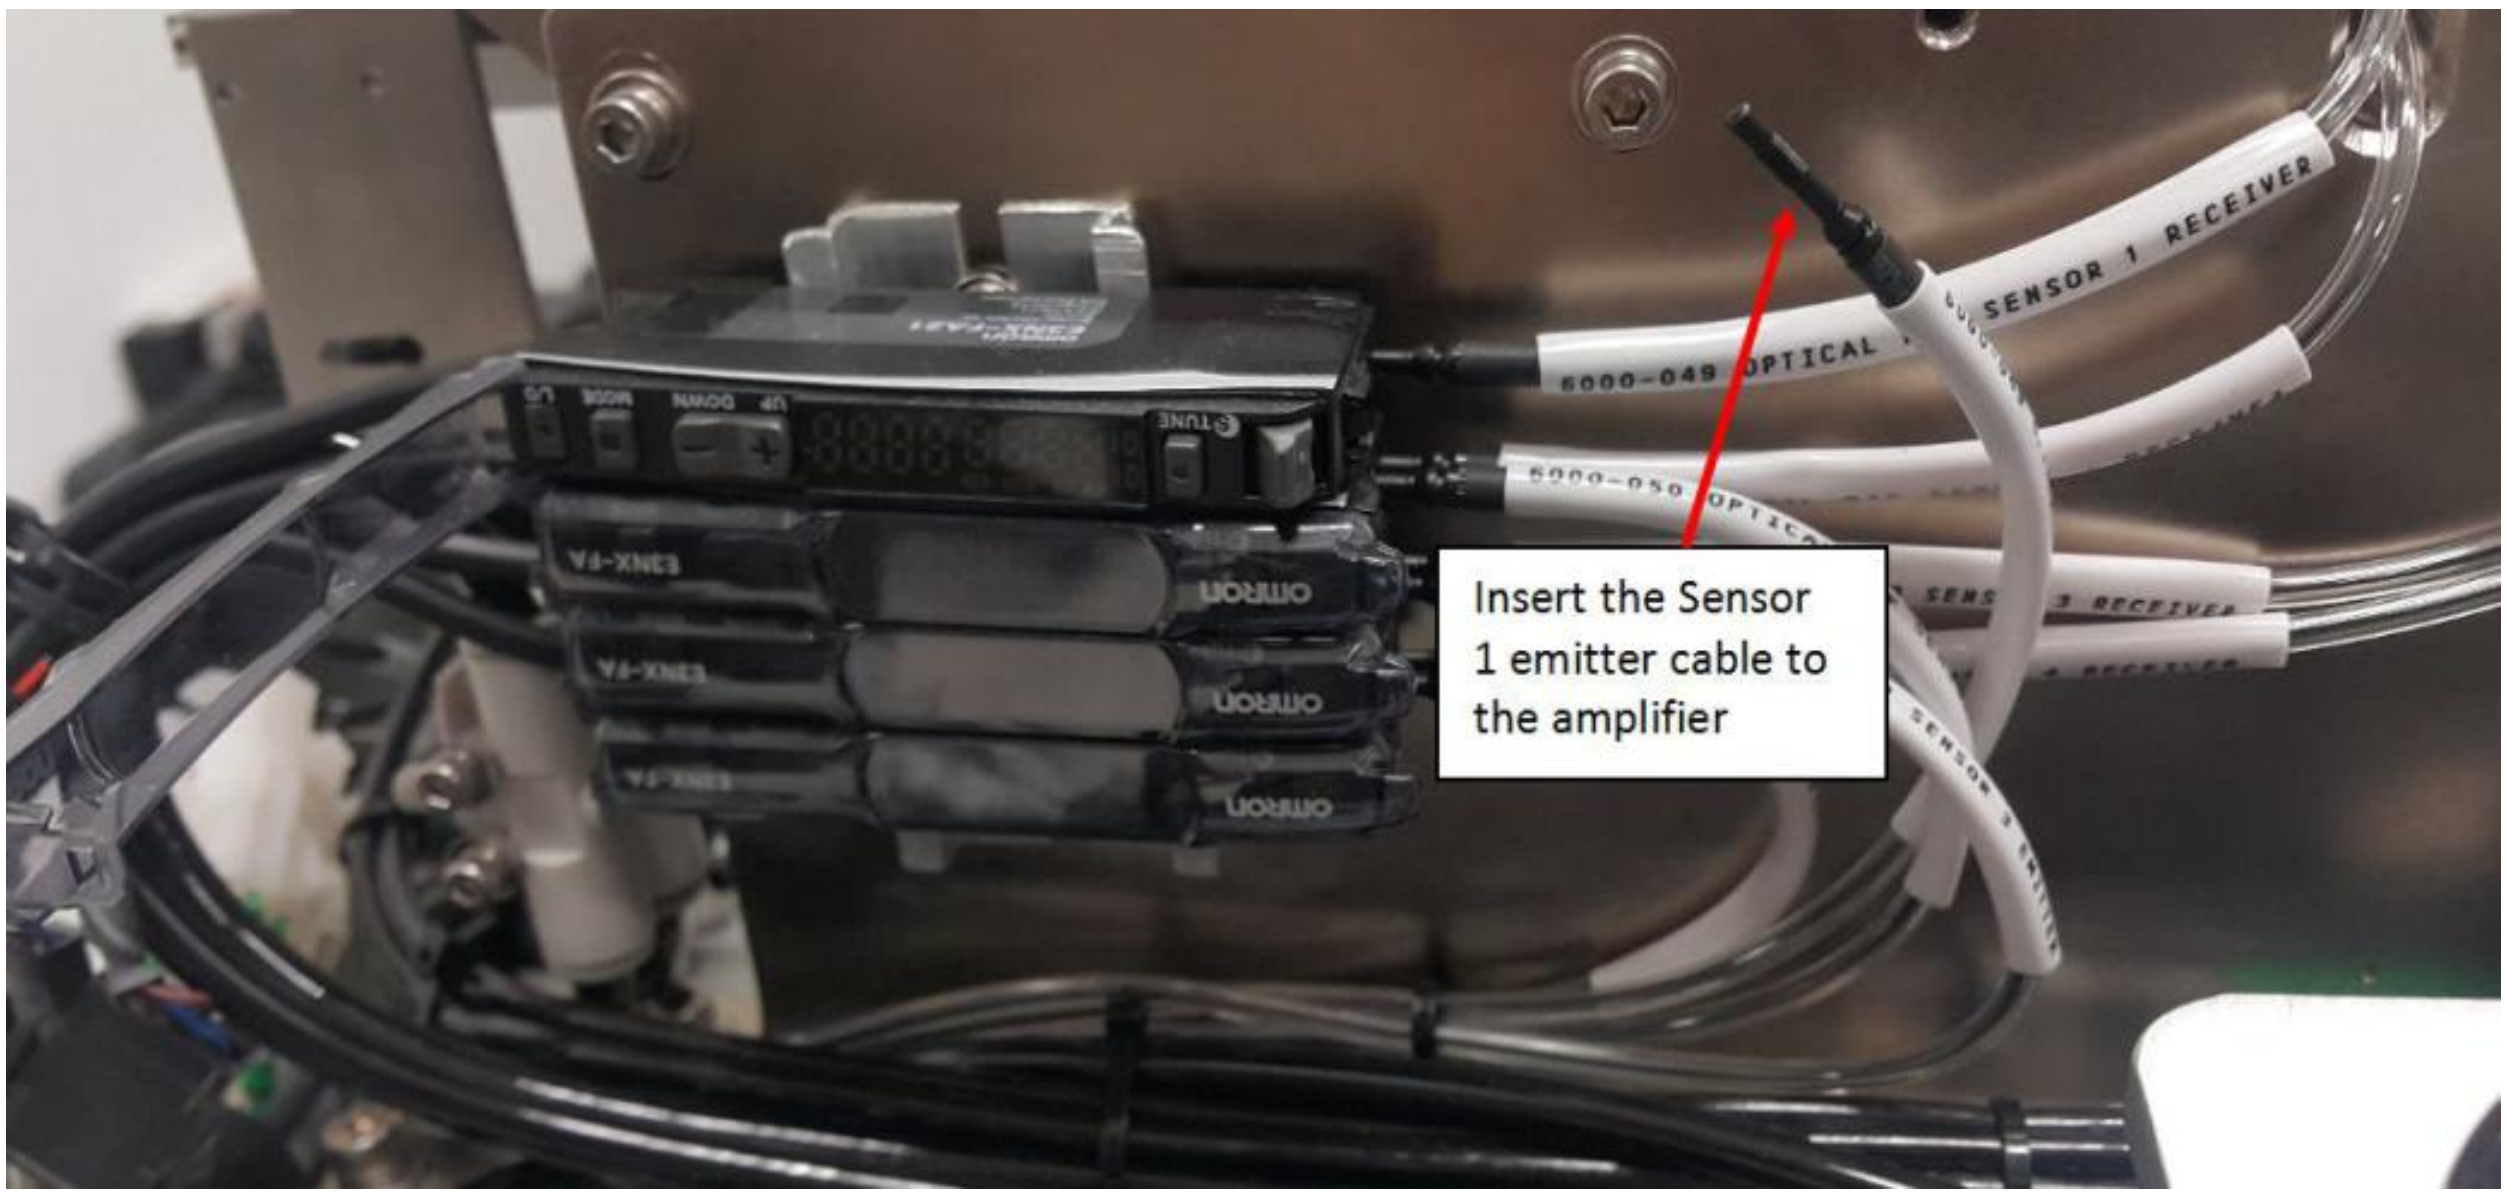

Figure 33 Sensor 1 Emitter Cable

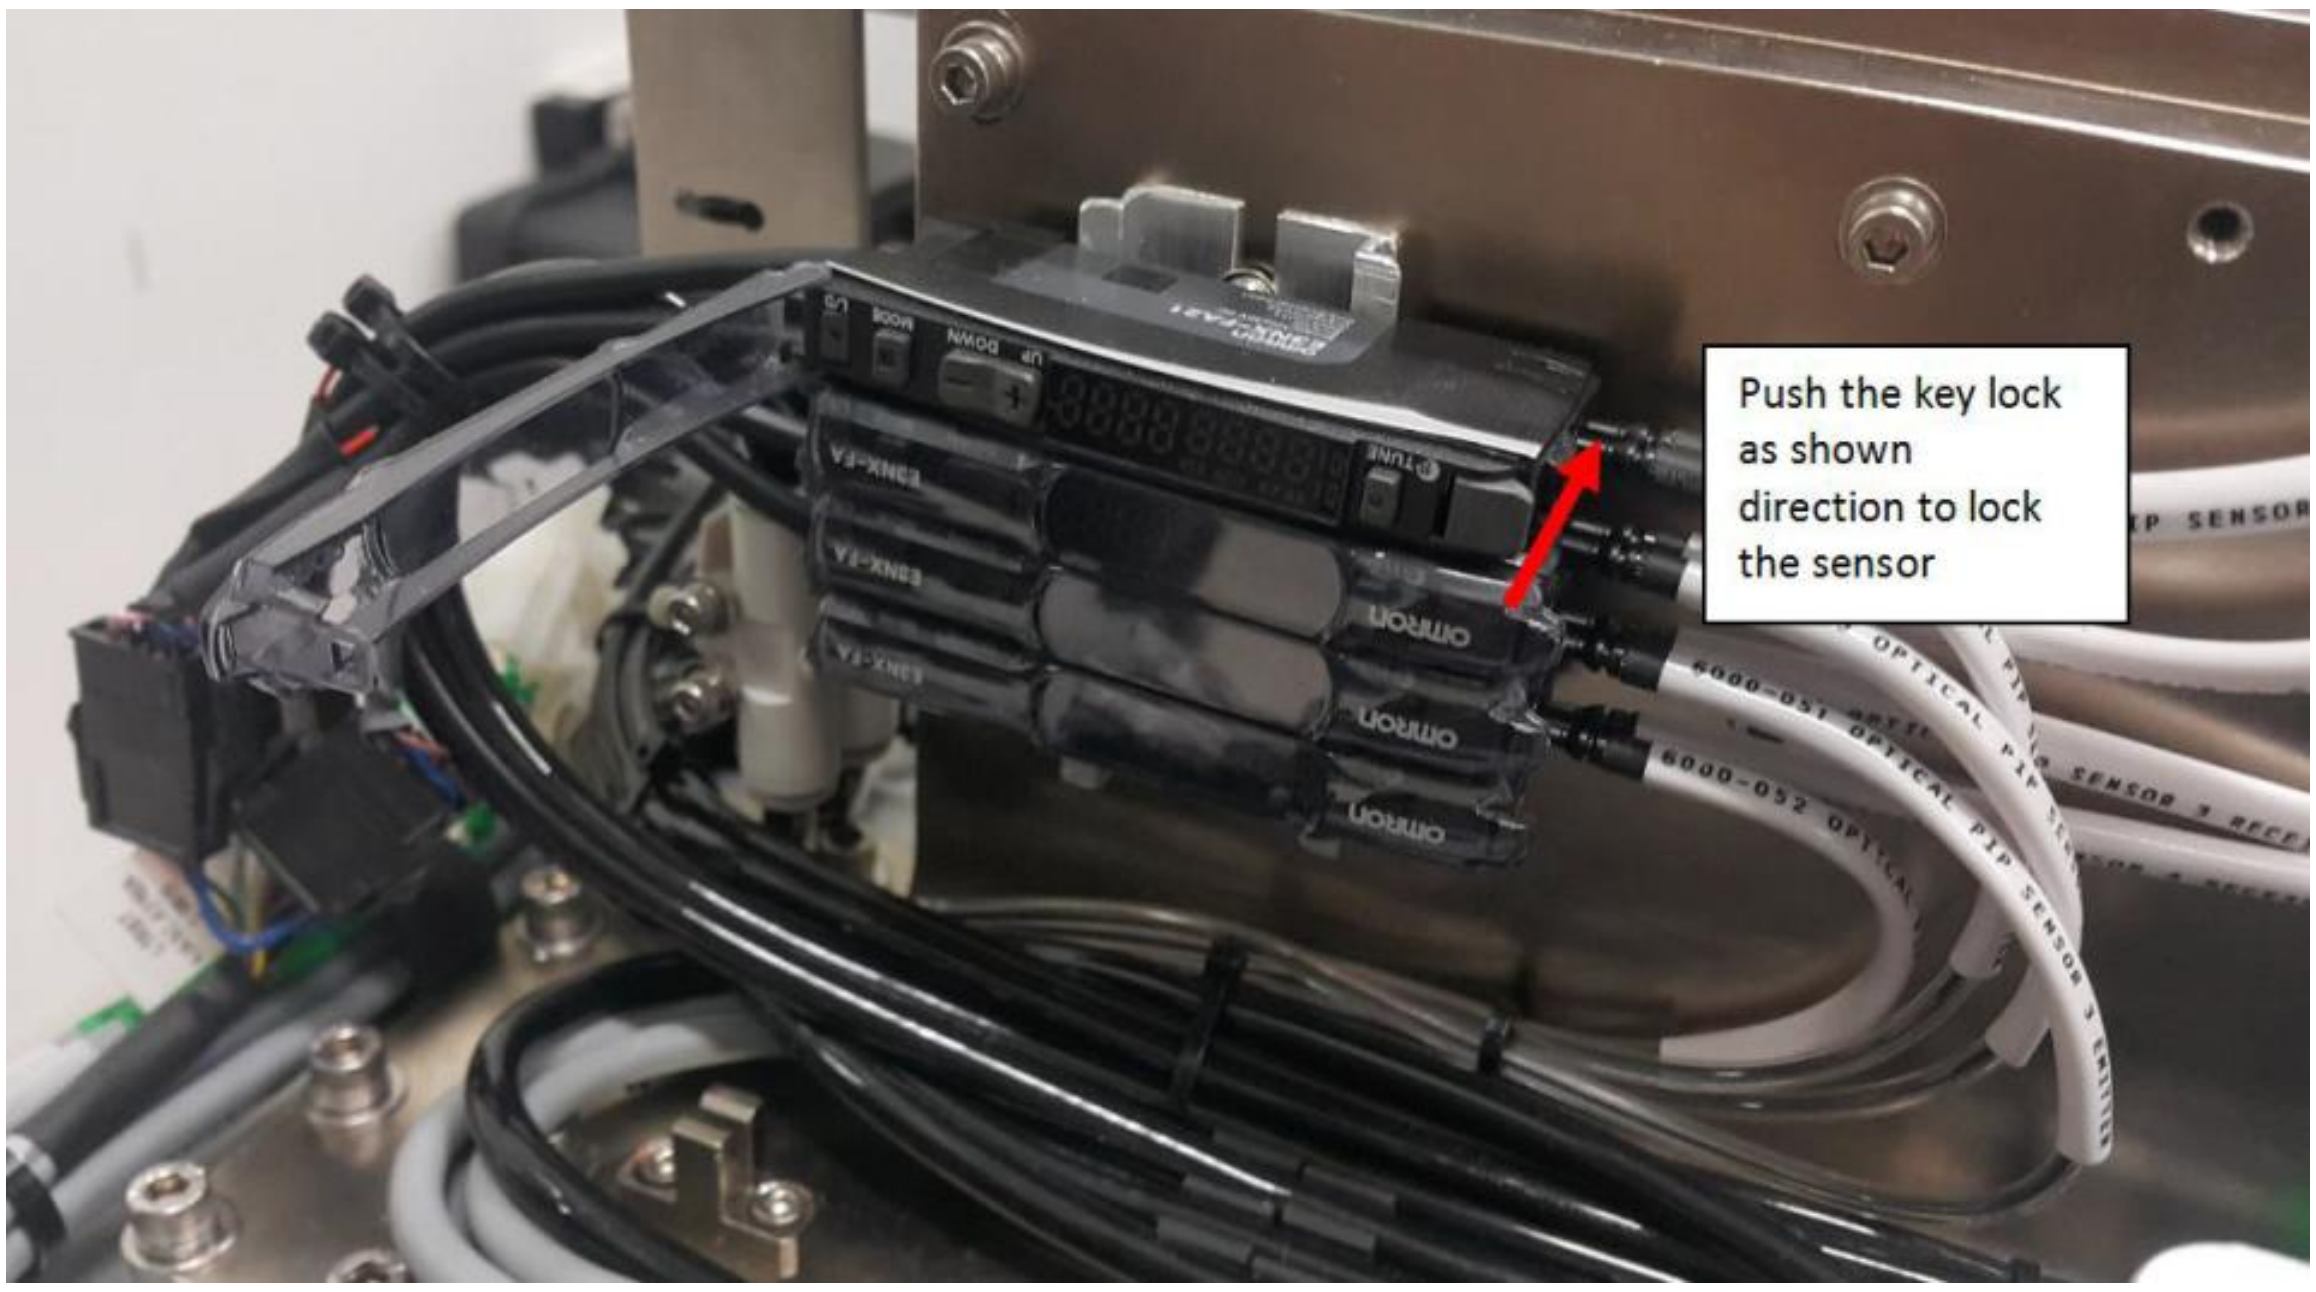

Figure 34 Sensor Amplifier

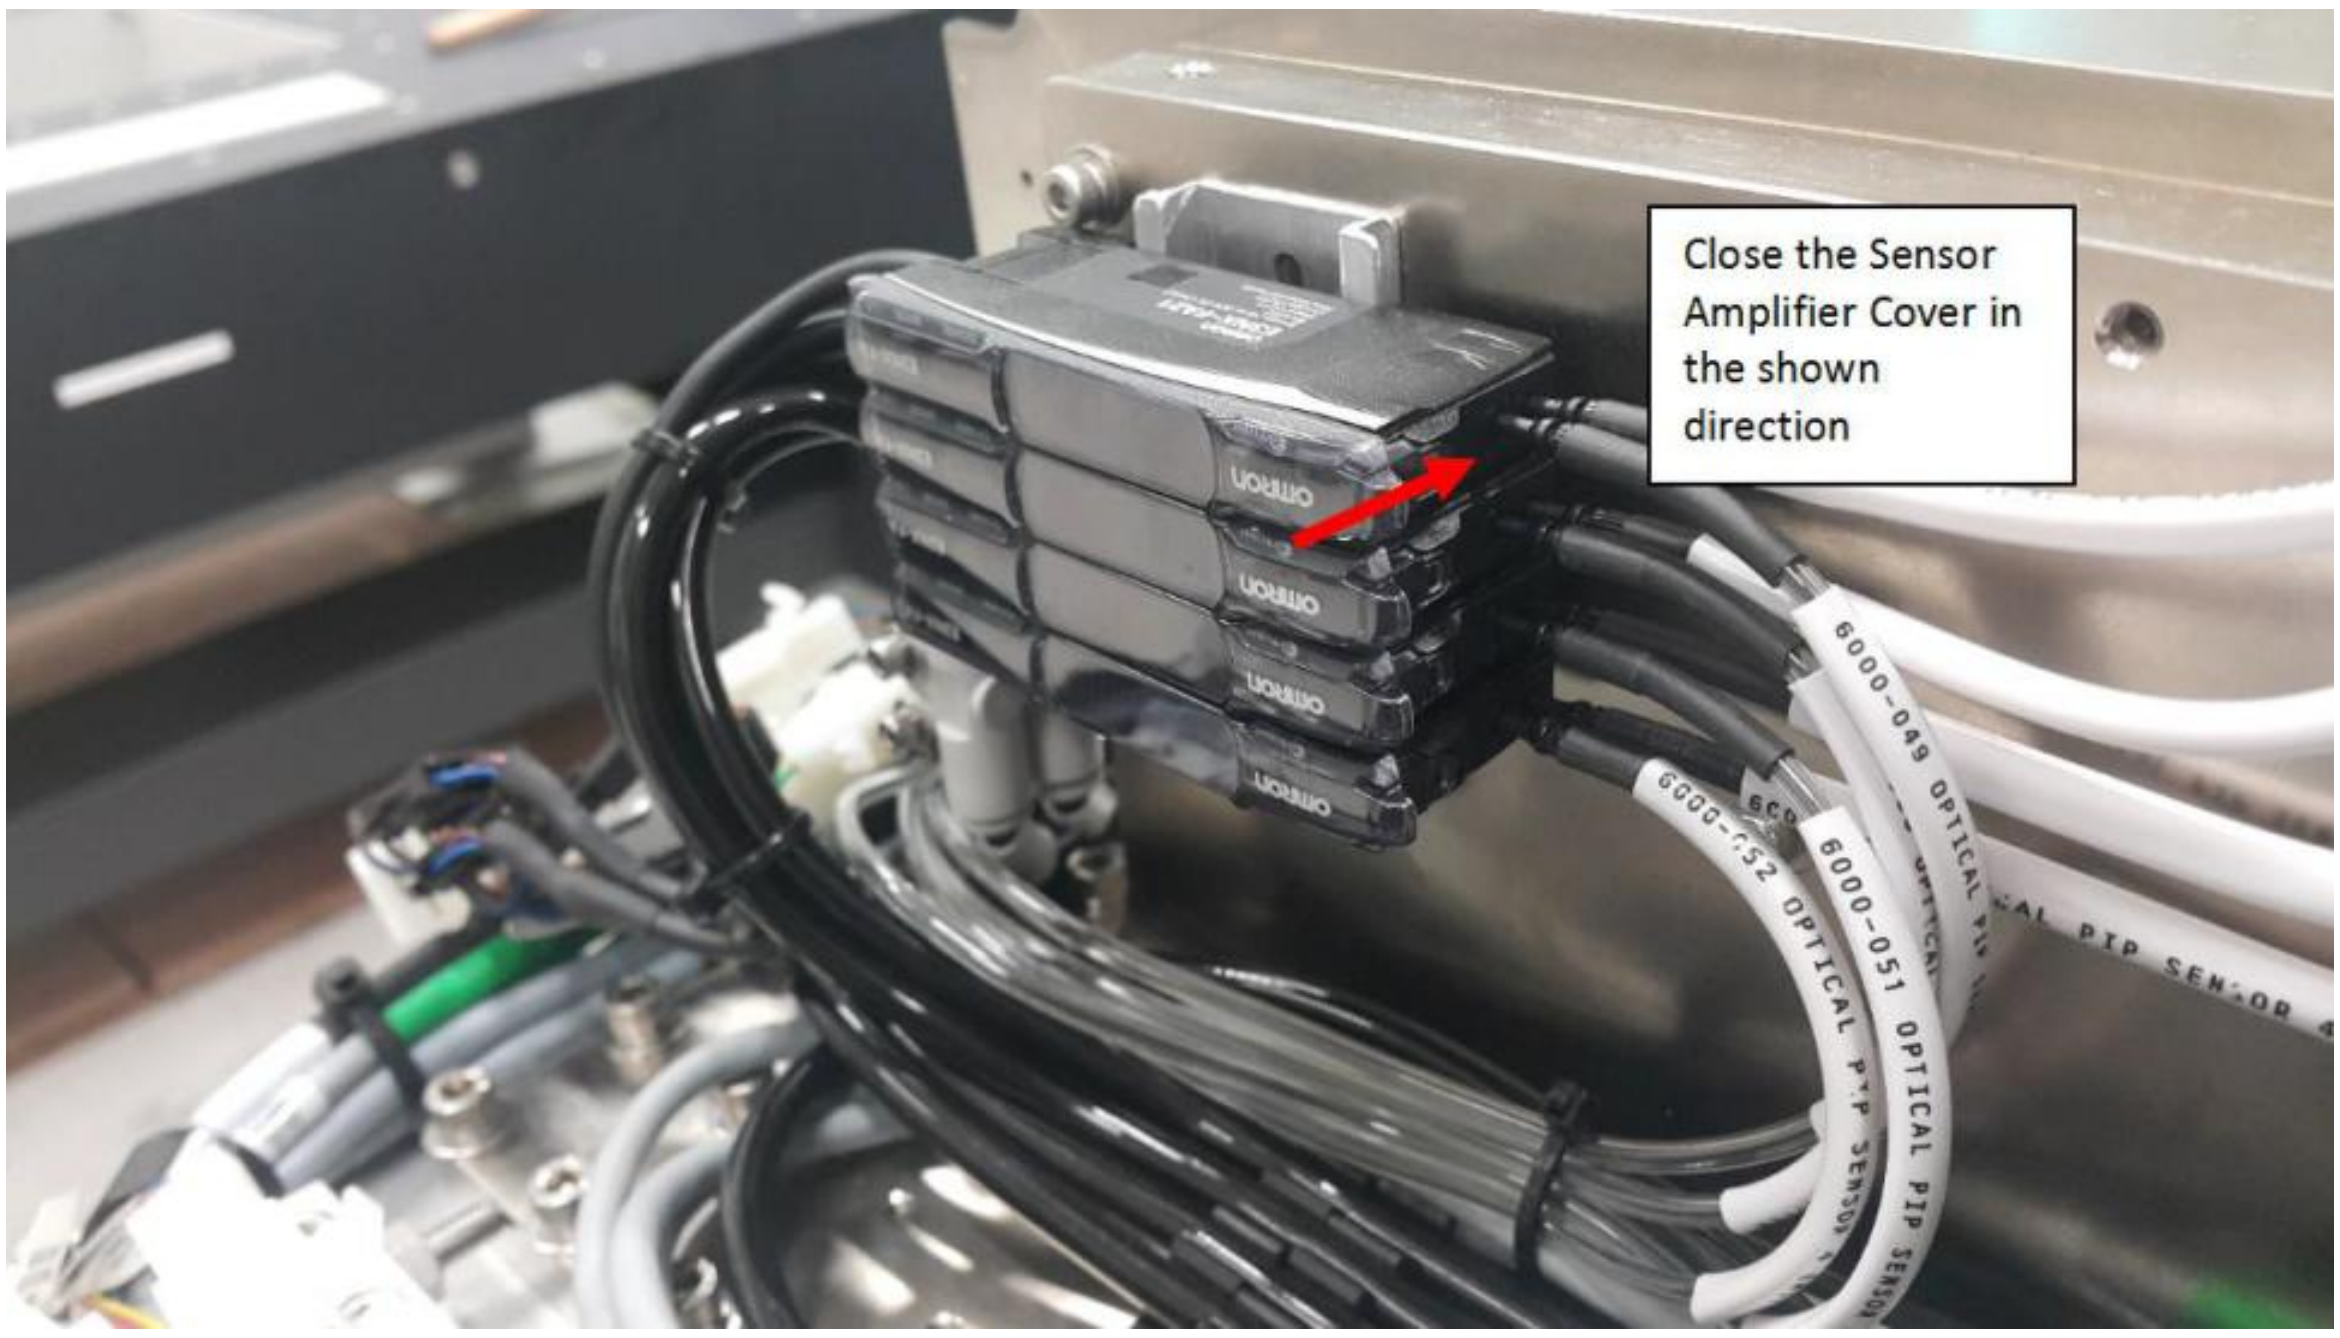

Figure 35 Sensor Amplifier Cover

II. Installation of the Sensor 1 Receiver

1. For Sensor 1 Receiver, insert the tip of Sensor 1 Receiver into 4JAXY-034 PIP Sensor Mounting Plate as shown below in Figure 36

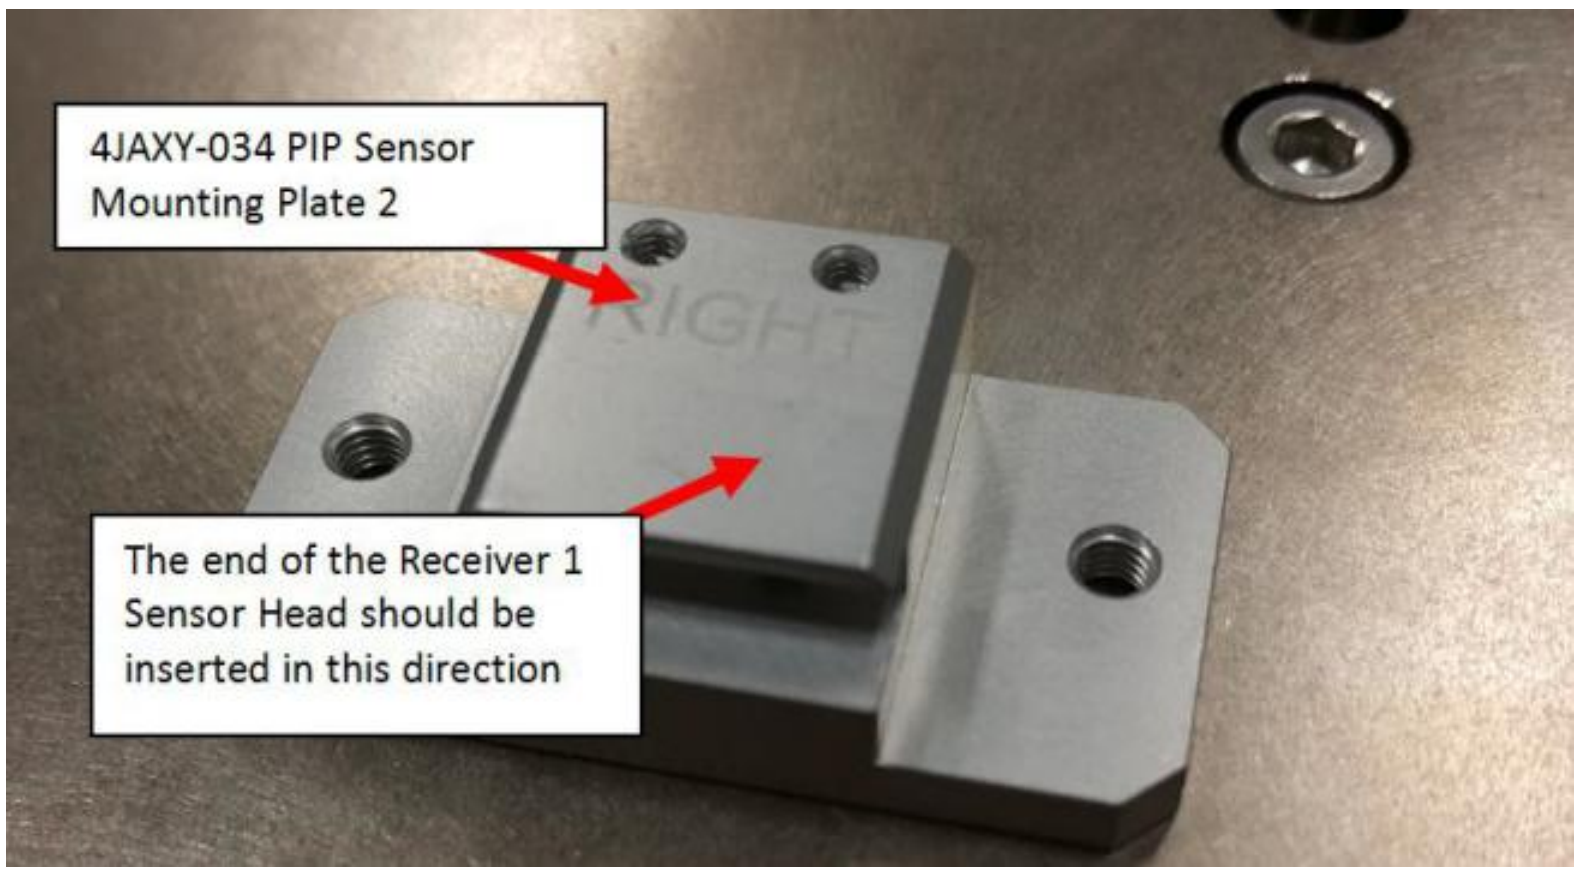

Figure 36 Sensor 1 Receiver Head

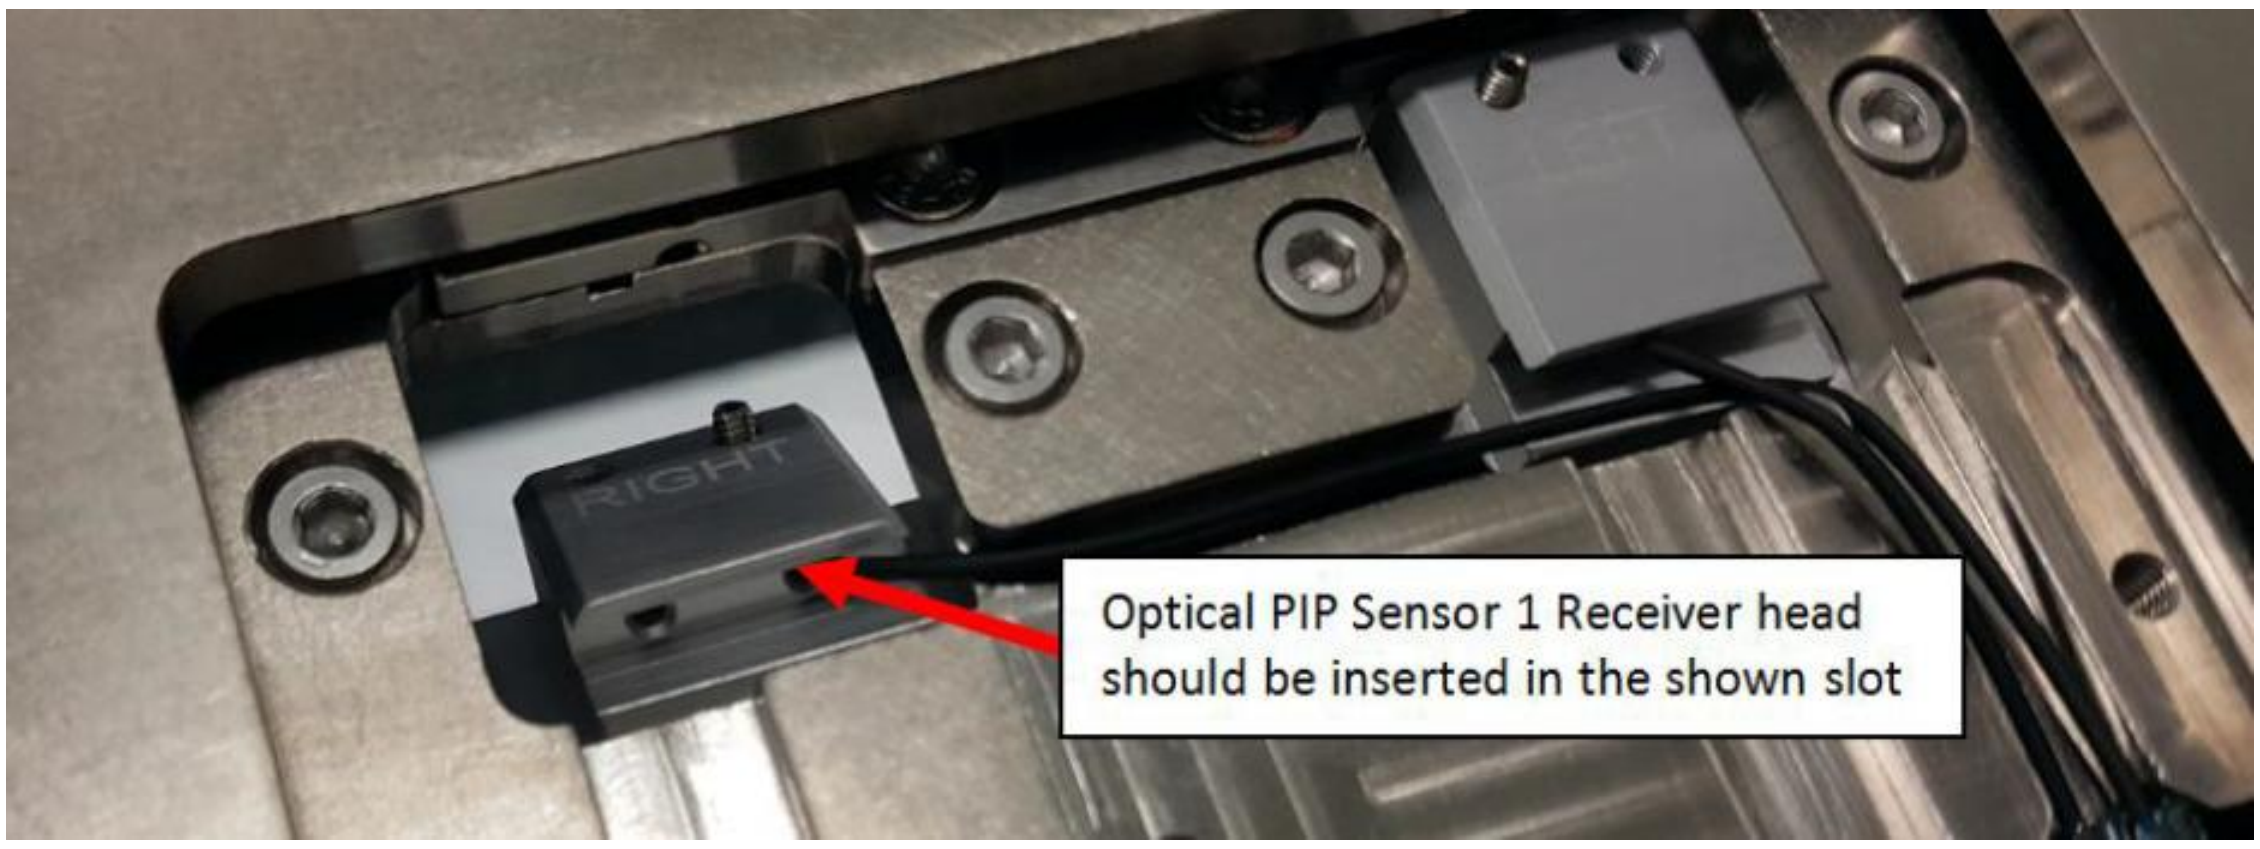

Figure 37 Sensor 1 Receiver

2. Push 4JAXY-034 PIP Sensor Mounting Plate to maximum direction (Blue Arrow) and align with the line as shown in Figure 39

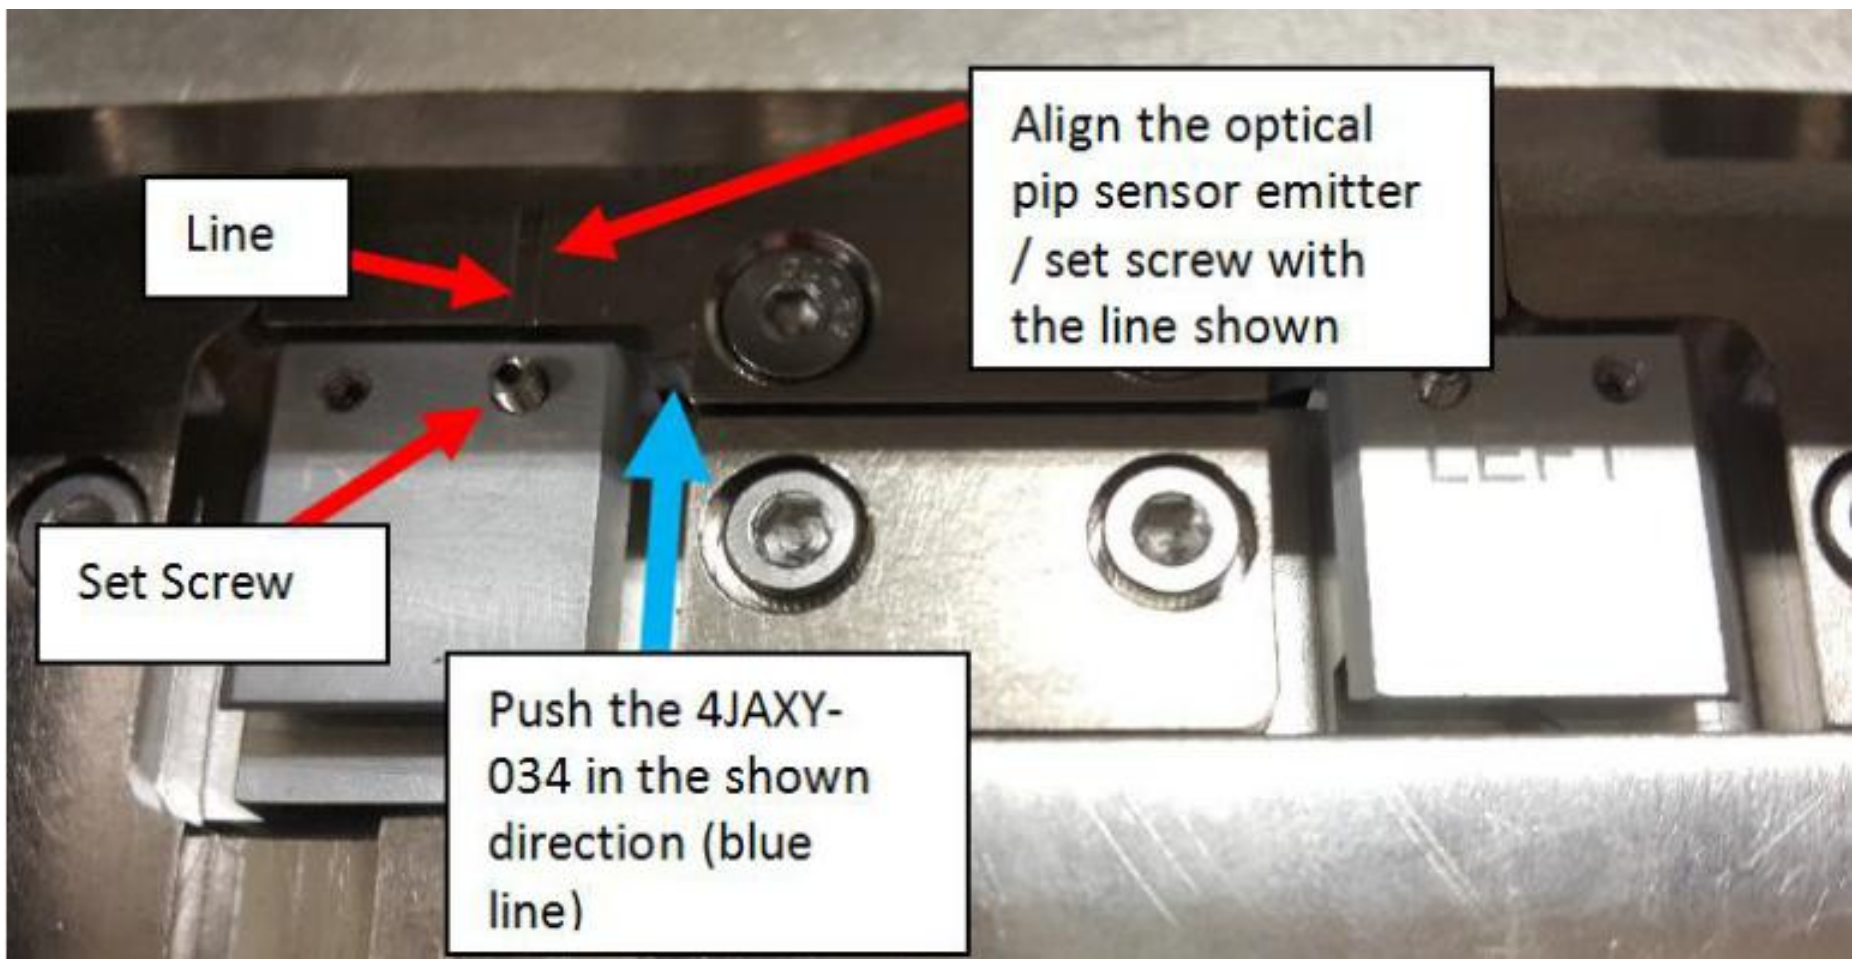

Figure 38 4JAXY-034

3. Tighten back SHCS M3×6 (2x) as shown in Figure 39

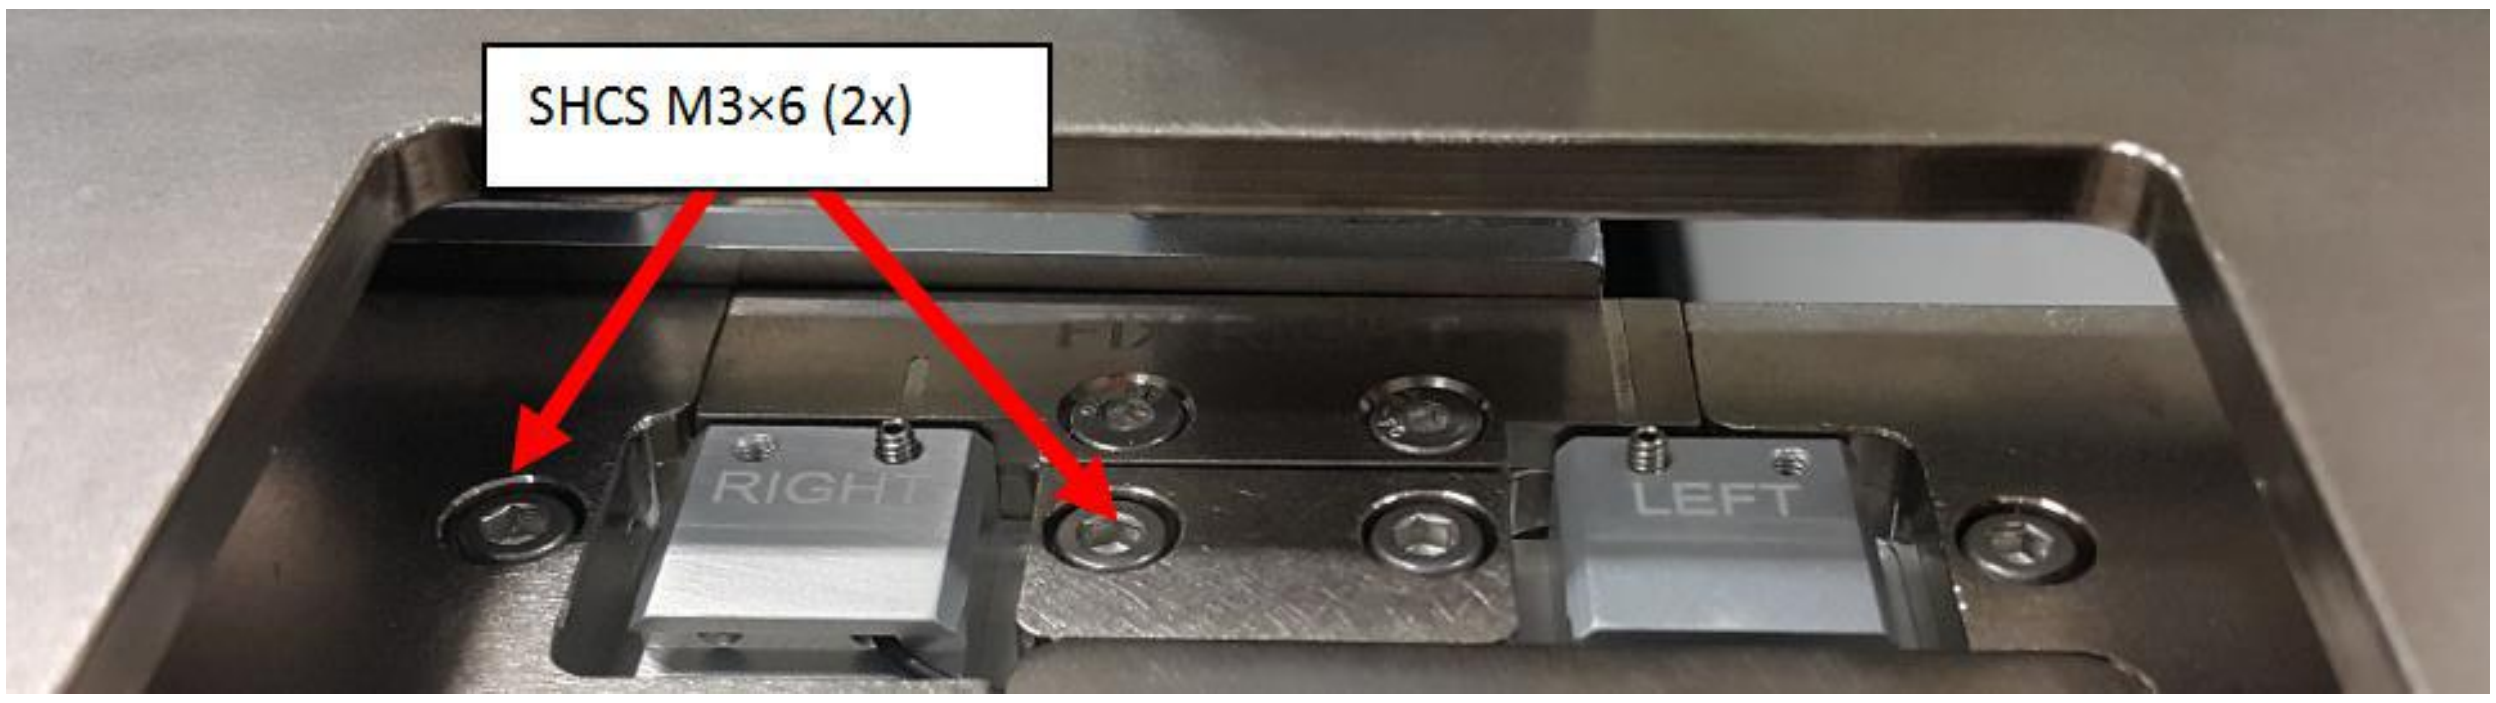

Figure 39 SHCS M3x6 (2x)

4. Ensure sensor head of receiver 1 do not protrude from 4JAXY-034 PIP Sensor Mounting Plate as shown in Figure 40.
5. Tighten back Set Screw M2.5×3 as shown in Figure 40.

   Remarks: Caution on Set Screw Fastening

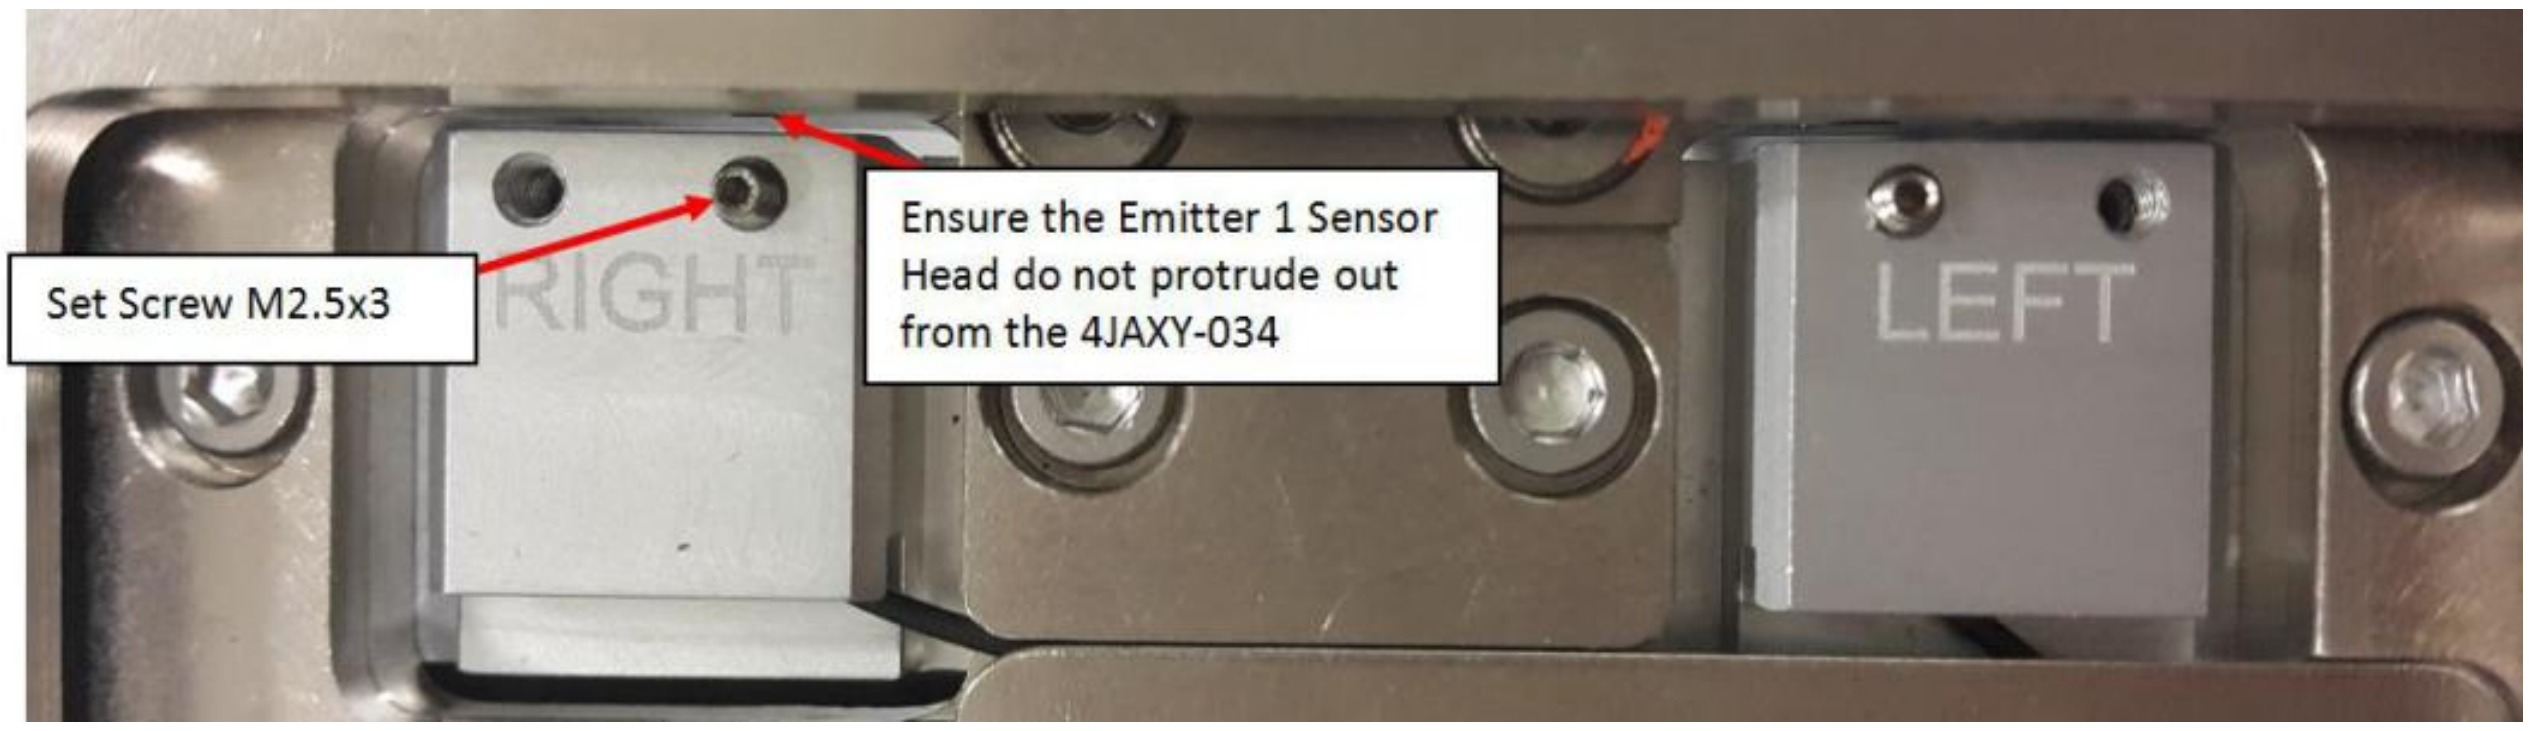

Figure 40 4JAXY-058

6. The routing for Optical PIP Sensor 1 Receiver is as shown in Figure 41.

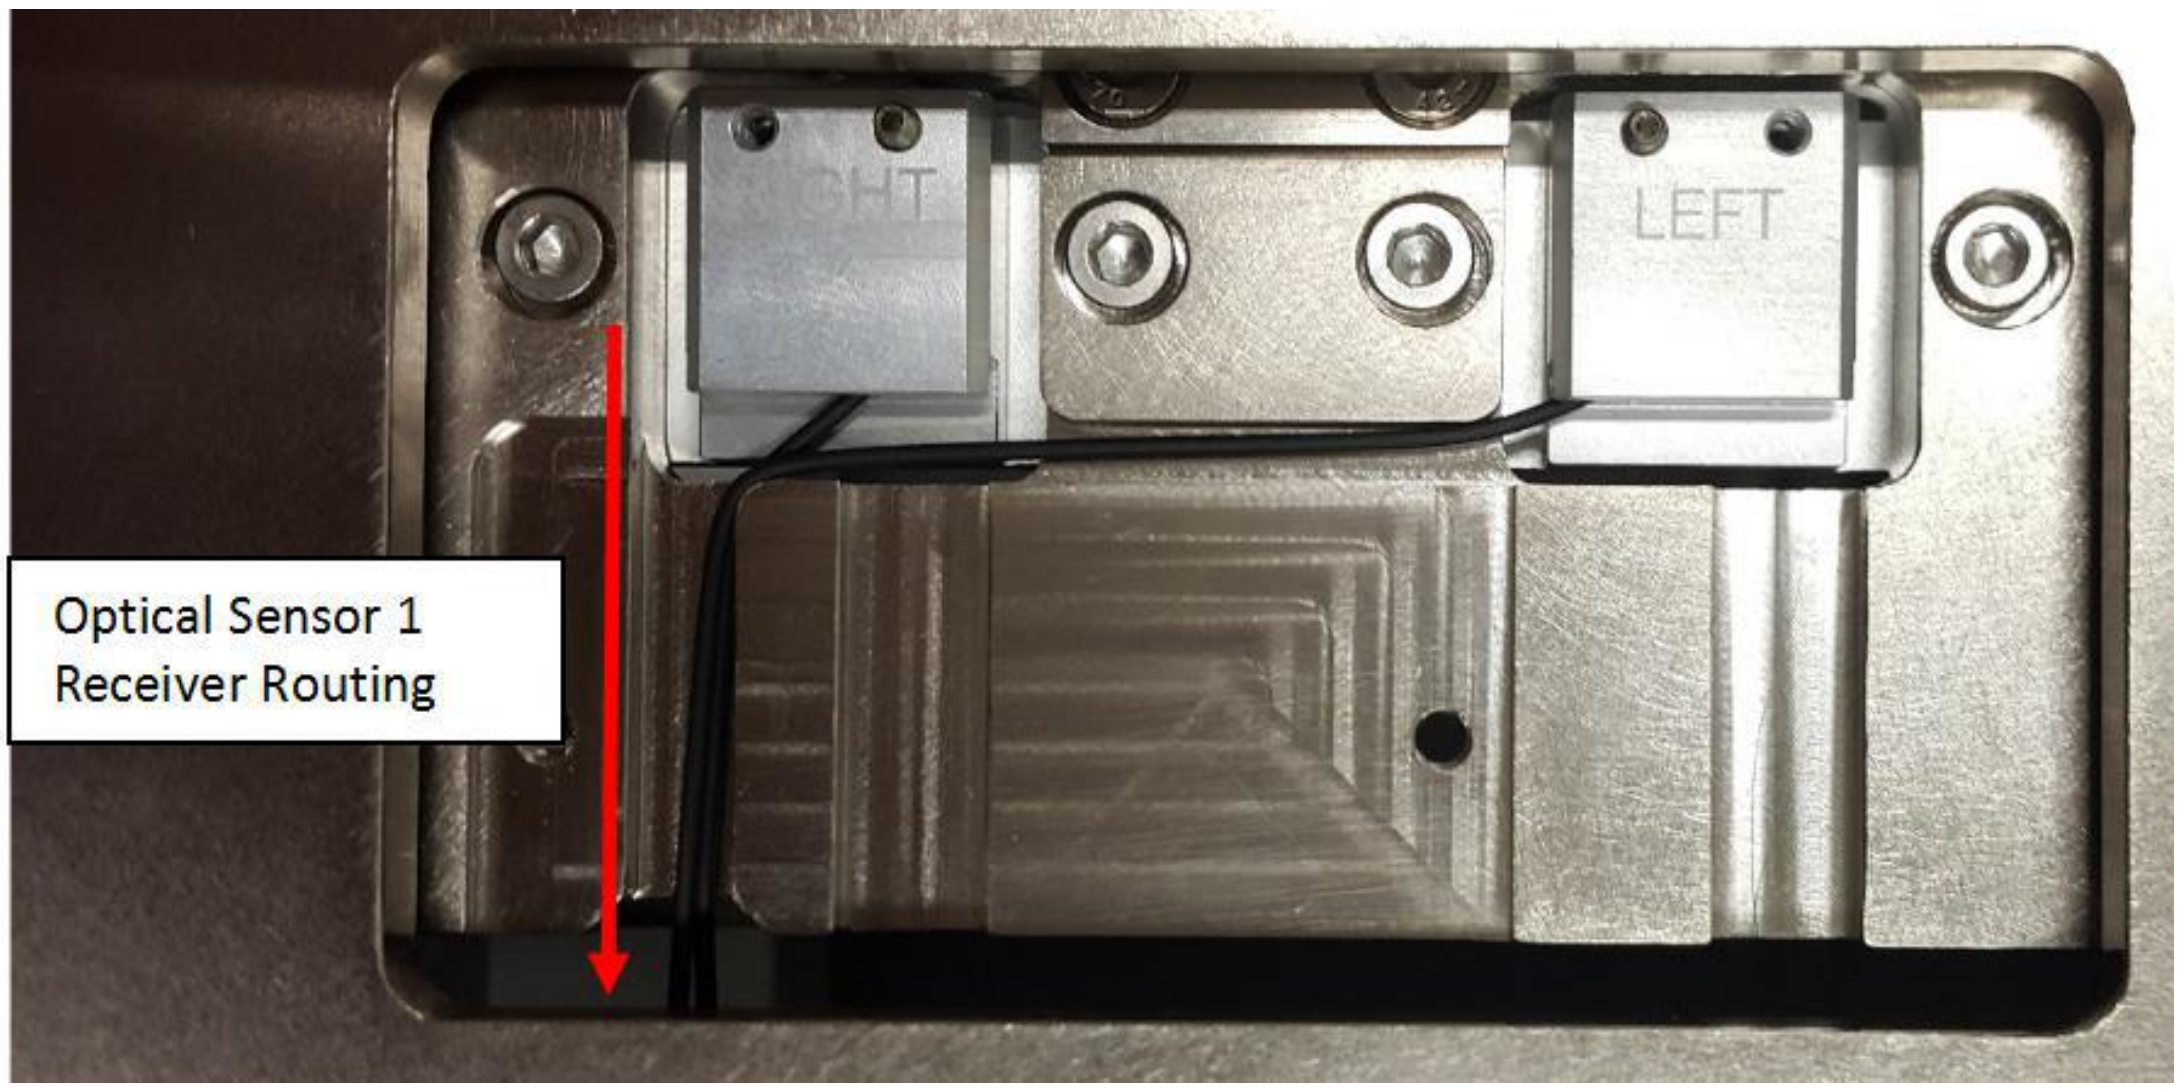

Figure 41 Optical PIP Sensor 1 Routing

7. Close Optical PIP Sensor Cover with BHCS M3×6 (2x) as shown in Figure 42.

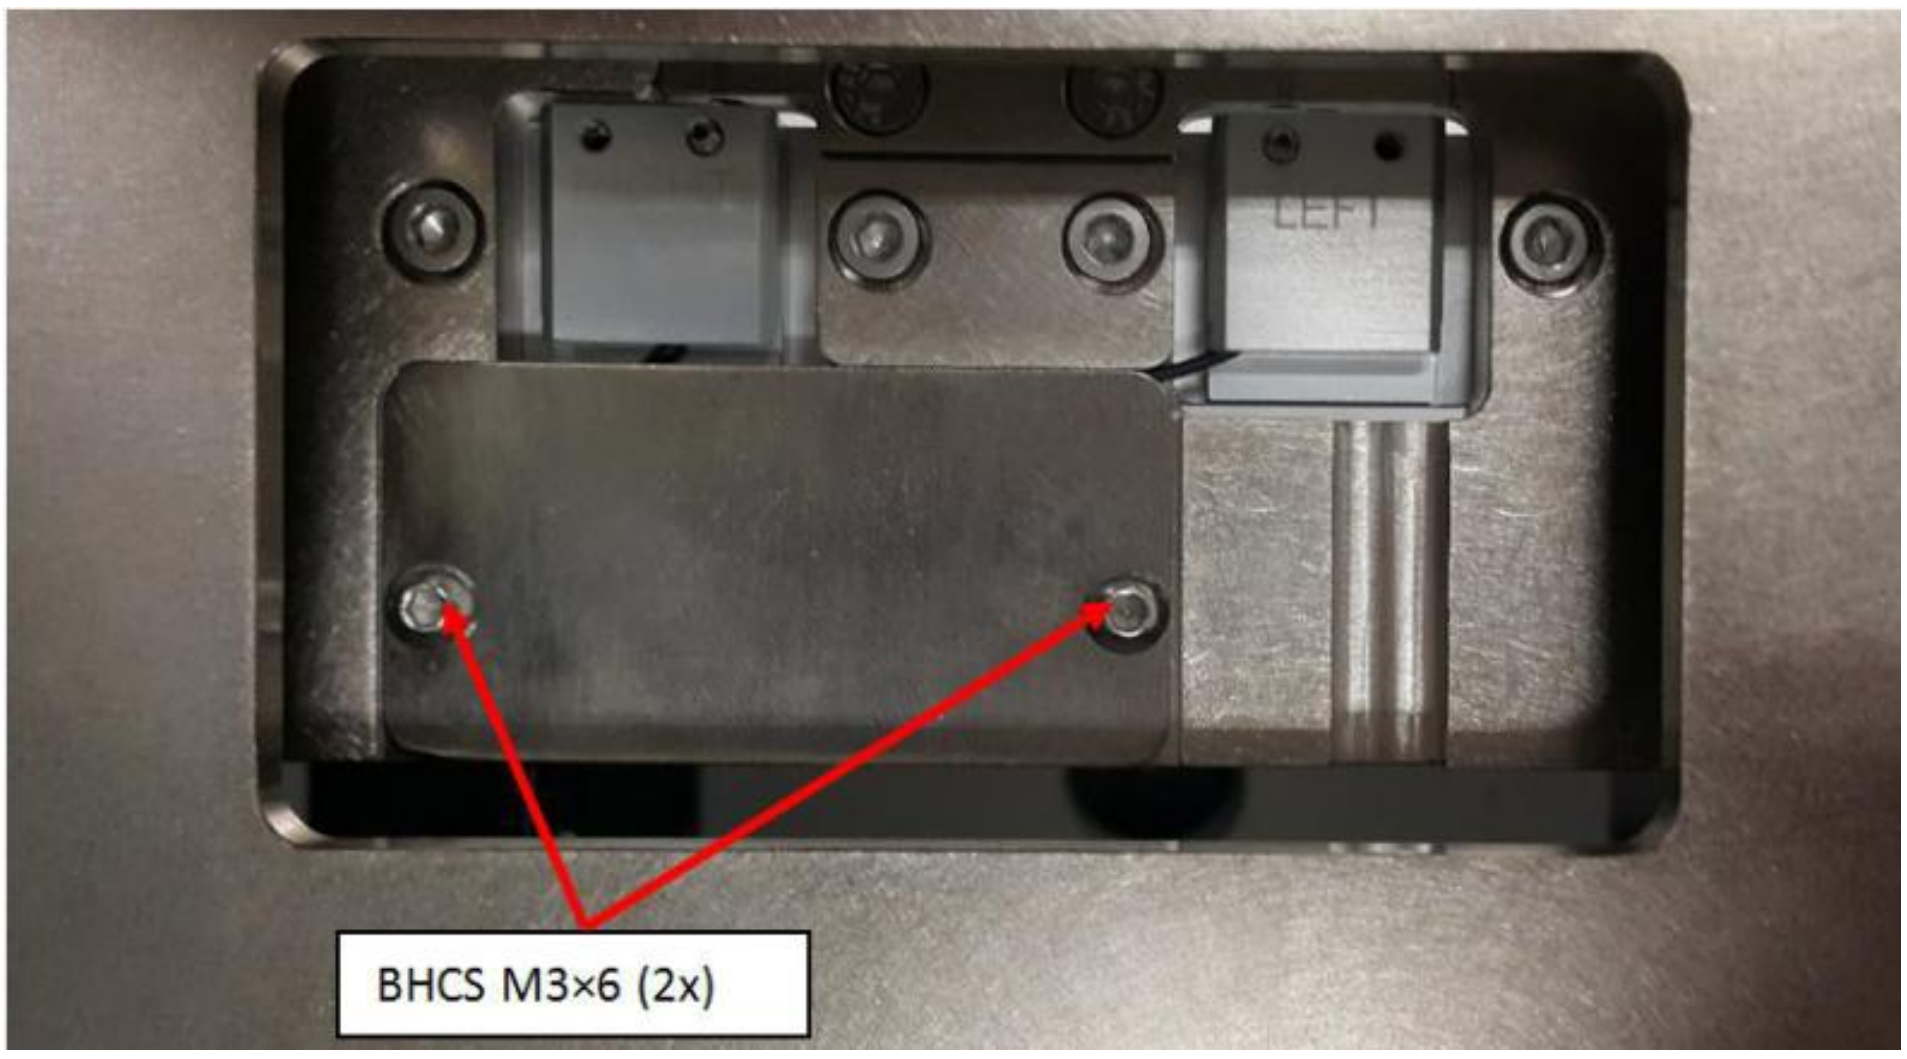

Figure 42 BHCS M3x6 (2x)

8. Route cable by refer Figure 43 to Figure 47

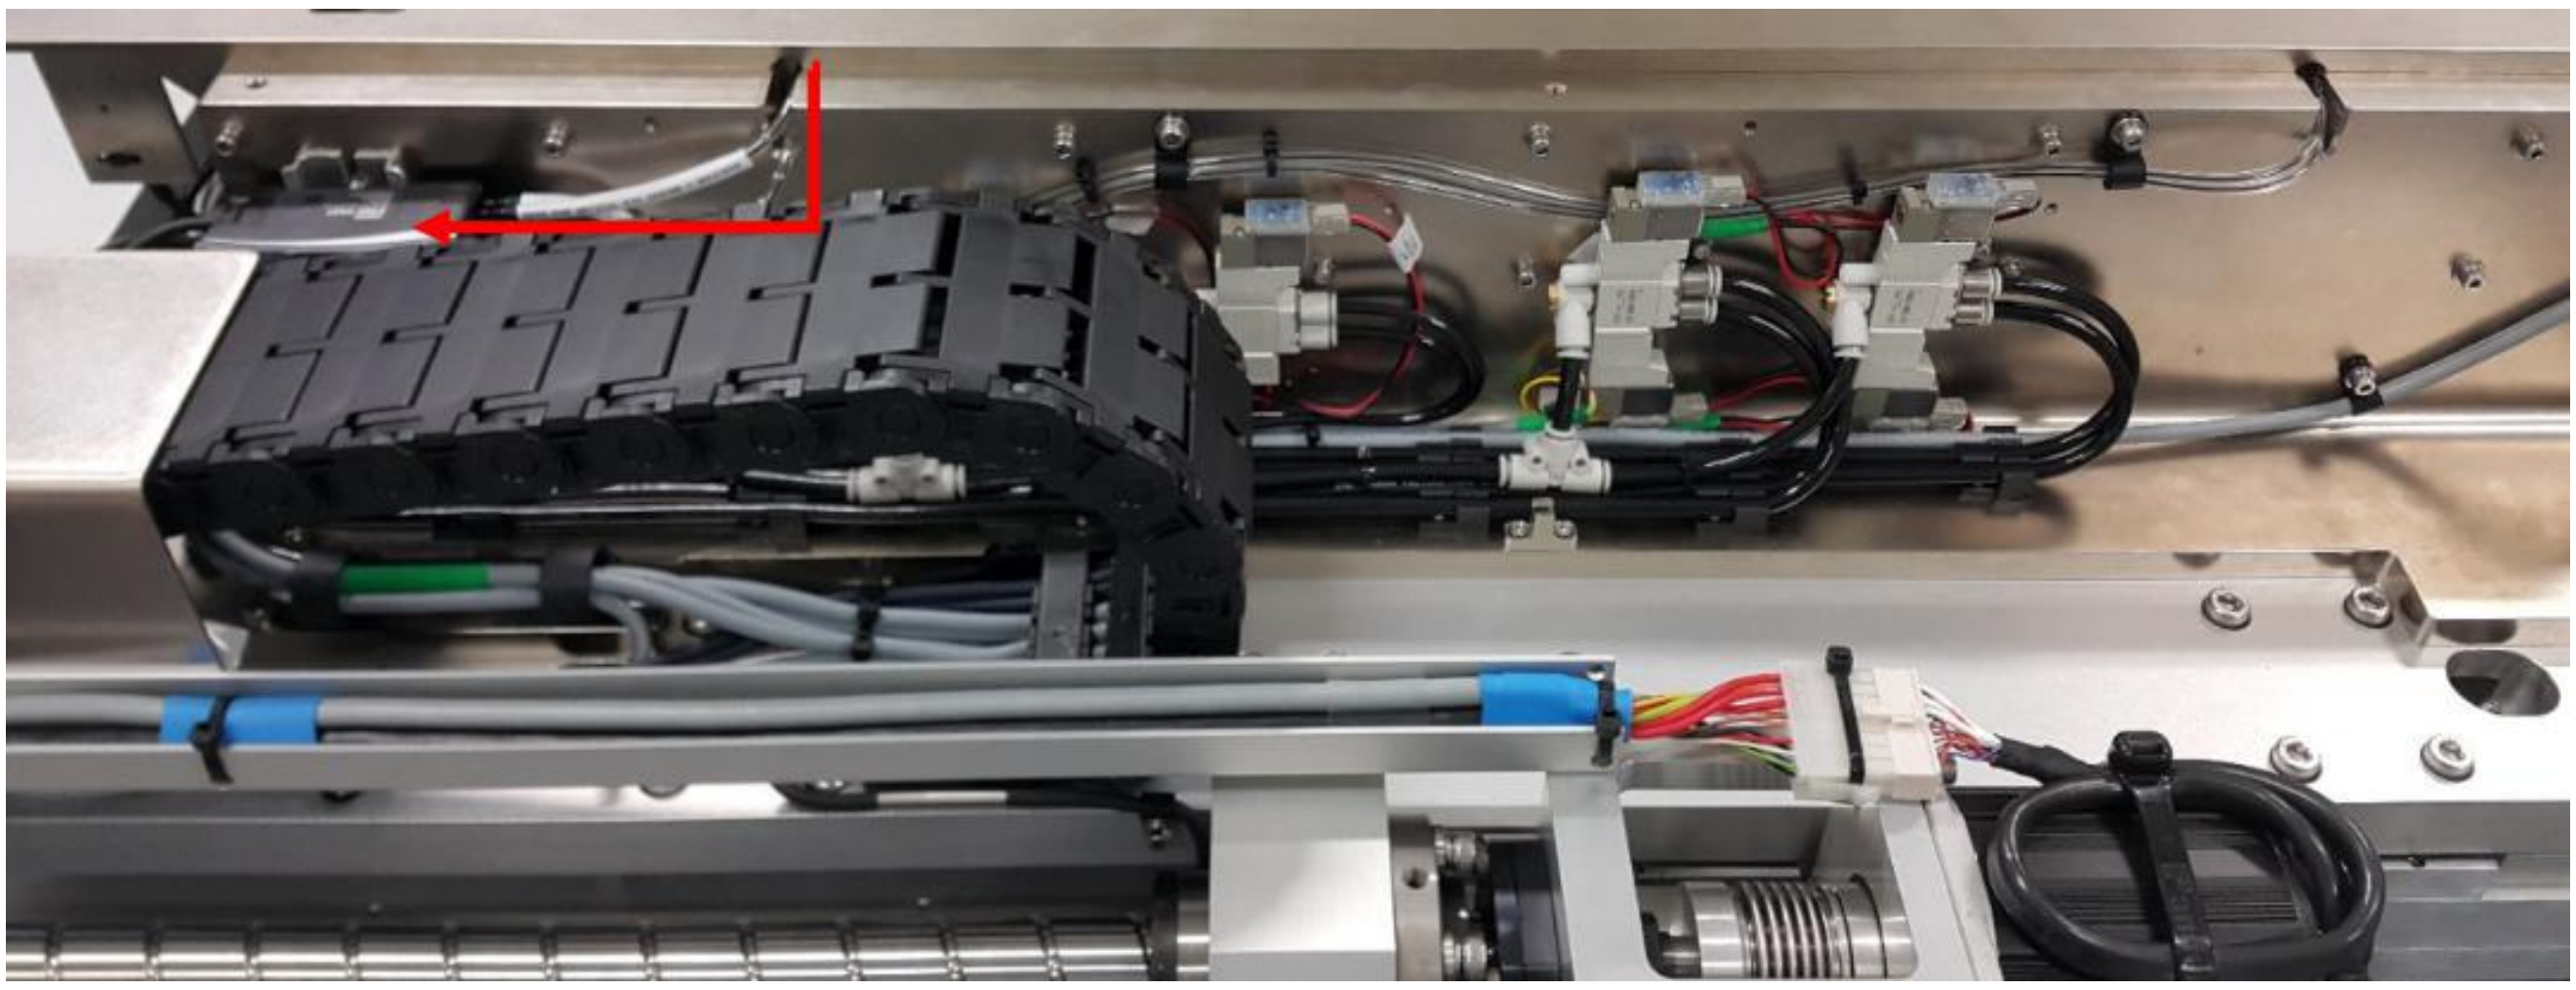

Figure 43 Sensor 1 Receiver Cable Routing

Figure 44 Sensor 1 Receiver Routing

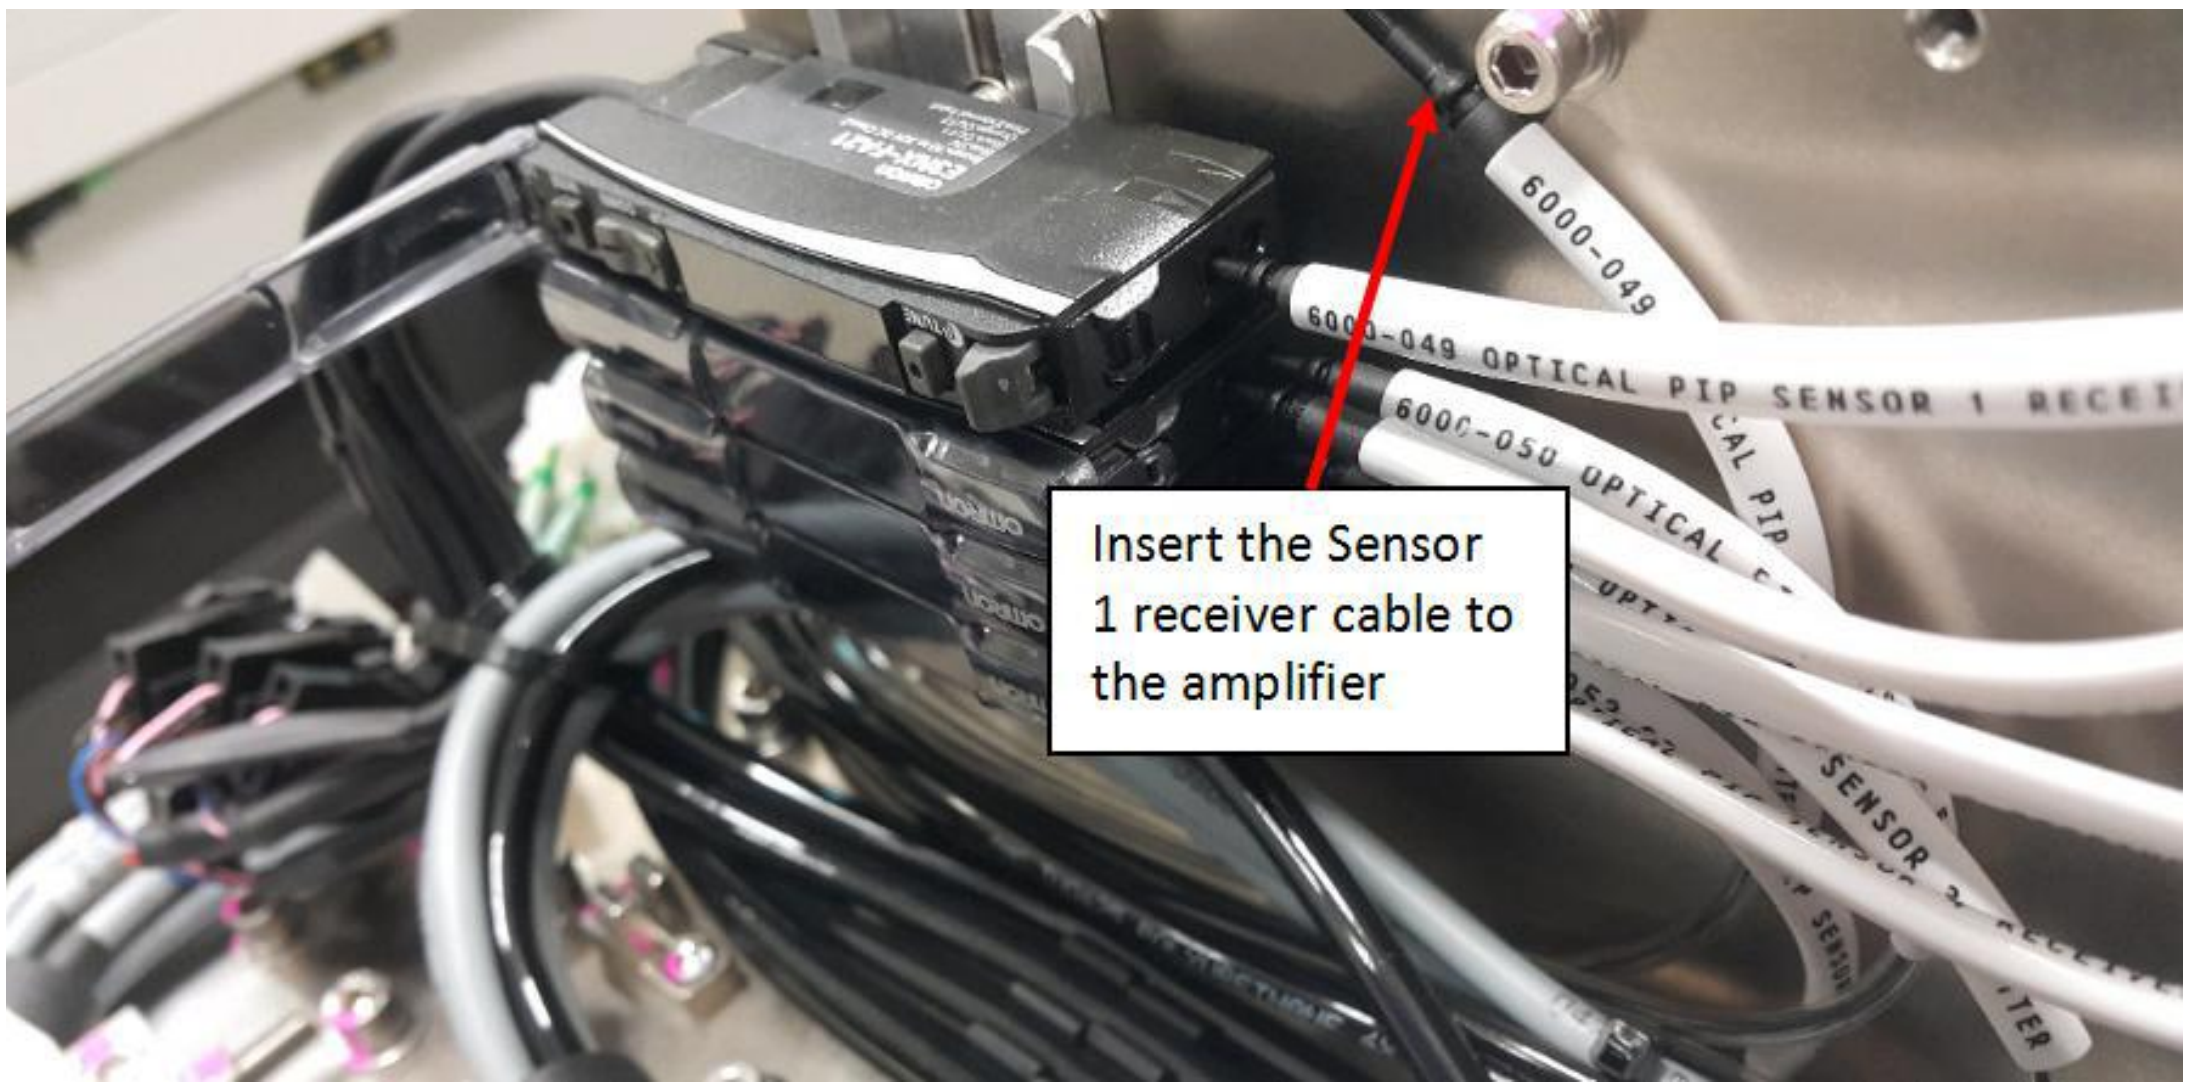

Figure 45 Sensor 1 Receiver

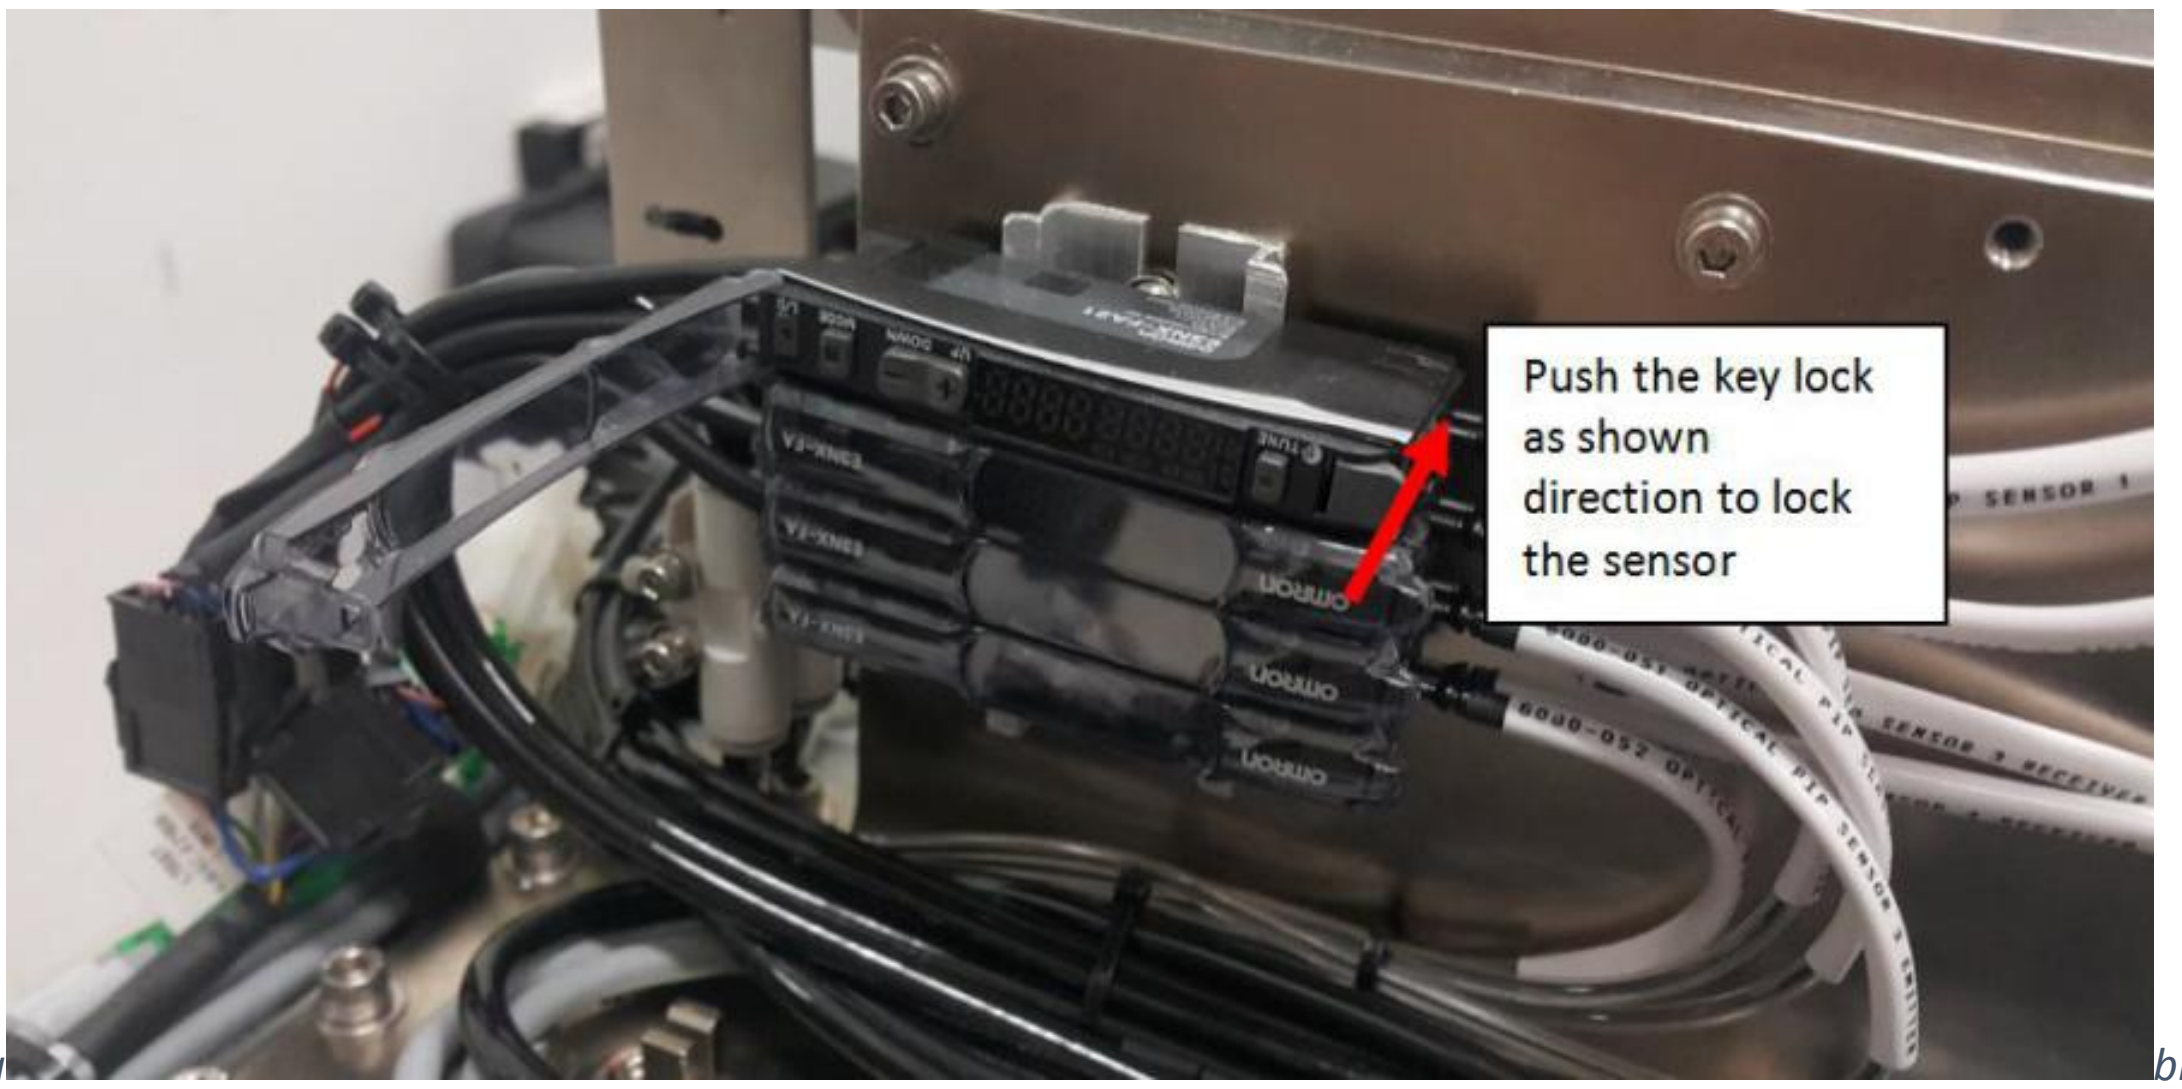

Figure 46 Sensor 1 Amplifier

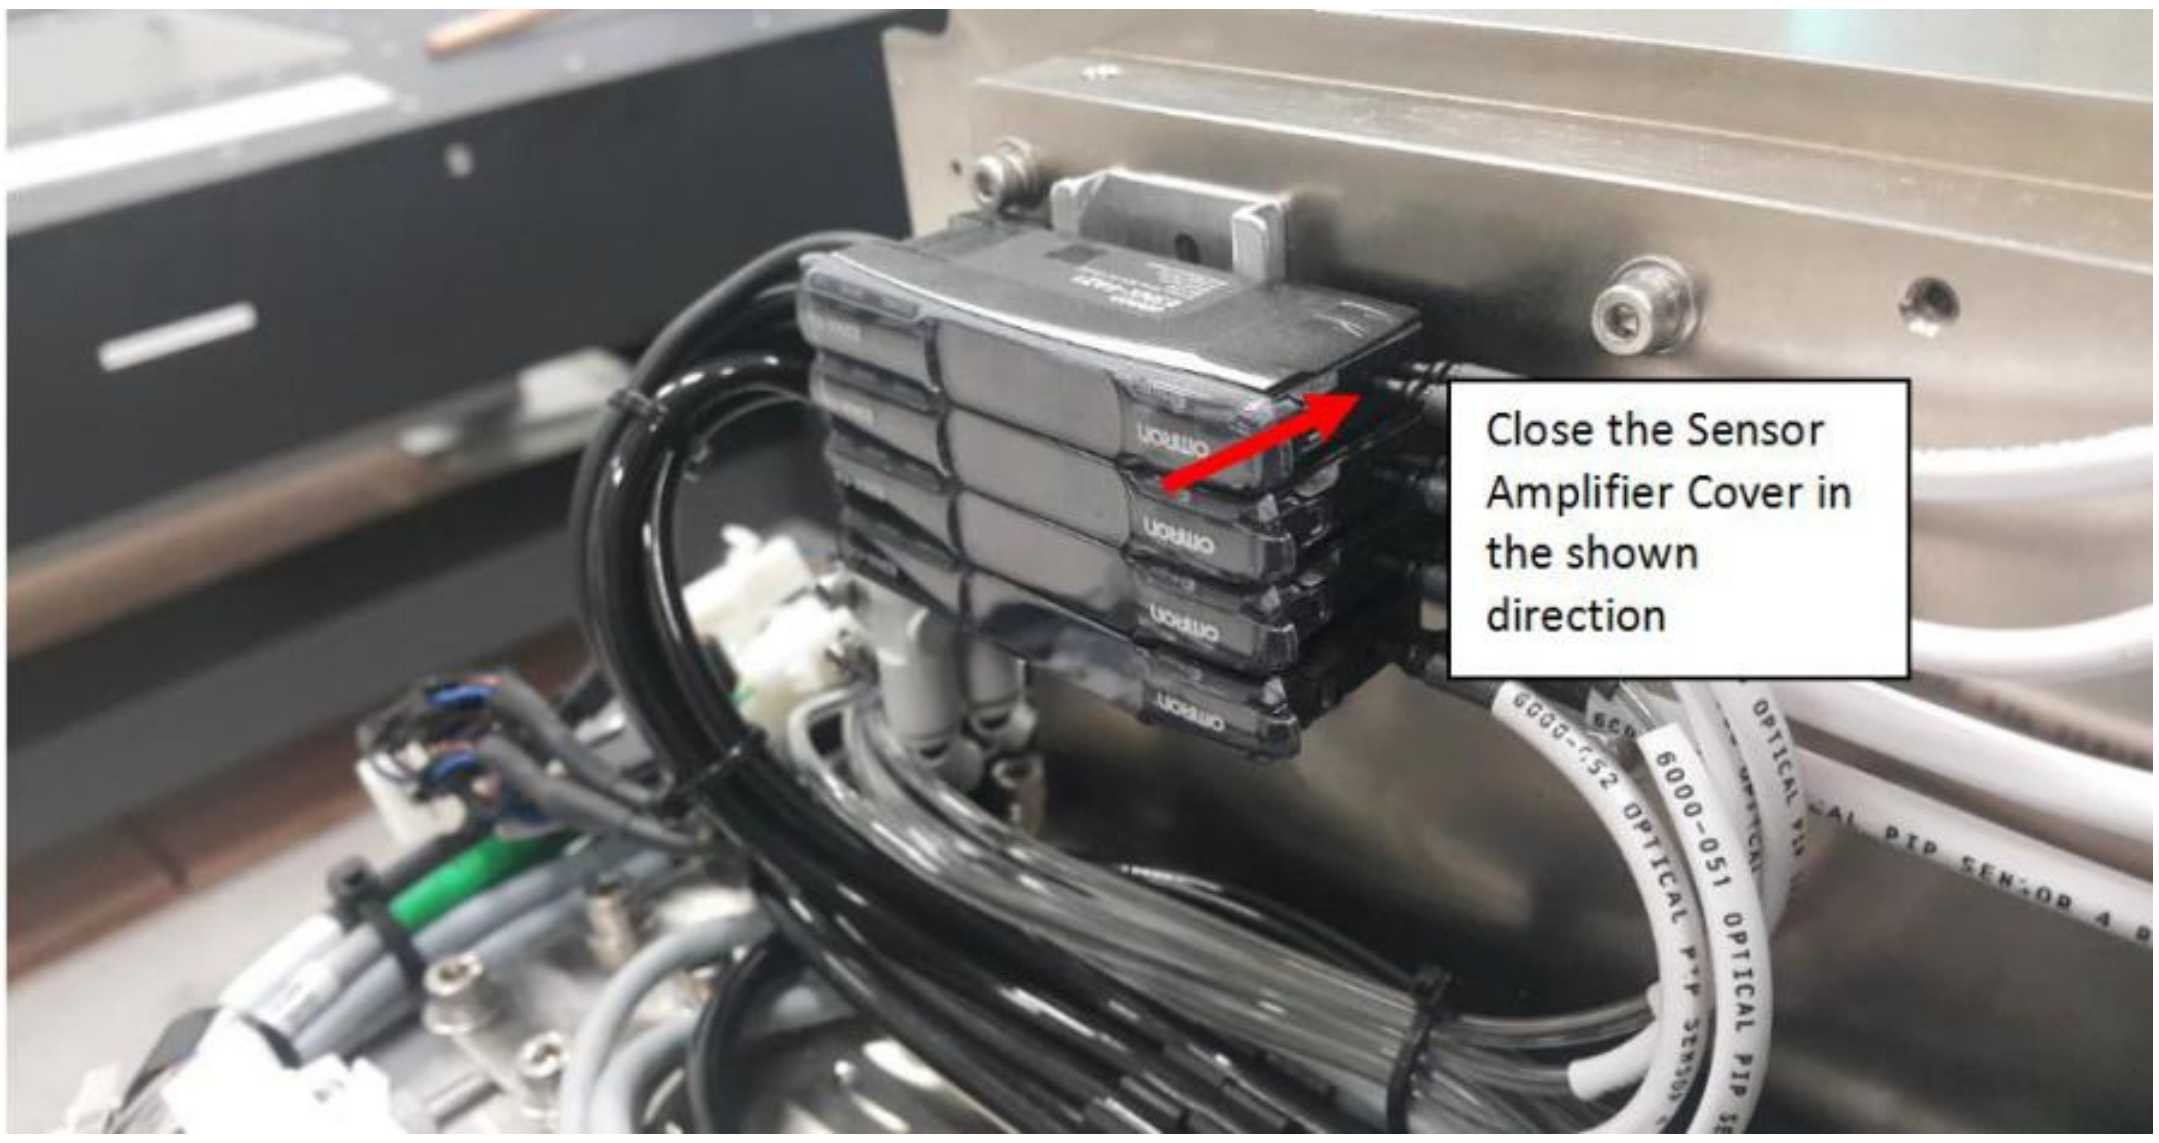

Figure 47 Sensor 1 Amplifier Cover