

	Work Instruction	Doc. Revision	00
	AXI V810 Machine Start Up Procedure	Effective Date	1 May 2017

This procedure is applicable to below models:

V810 STD	☒	S1	☒	S2
V810 XXL	☒	S1	☒	S2
V810 S2EX	☒			
V810 Mini	☐			

REVISION HISTORY

Rev	Effective Date	Description	Doc Originator
00	1 May 2017	First Release	Tan Liang Kai

	Work Instruction	Doc. Revision	00
	AXI V810 Machine Start Up Procedure	Effective Date	1 May 2017

Content

Machine Start Up.....	3
Server Start Up.....	3

	Work Instruction	Doc. Revision	00
	AXI V810 Machine Start Up Procedure	Effective Date	1 May 2017

Machine Start Up

Server Start Up

1. Turn on main power supply & air supply to machine.
2. Adjust Air Pressure Regulator into 80~85 PSI as Figure 1

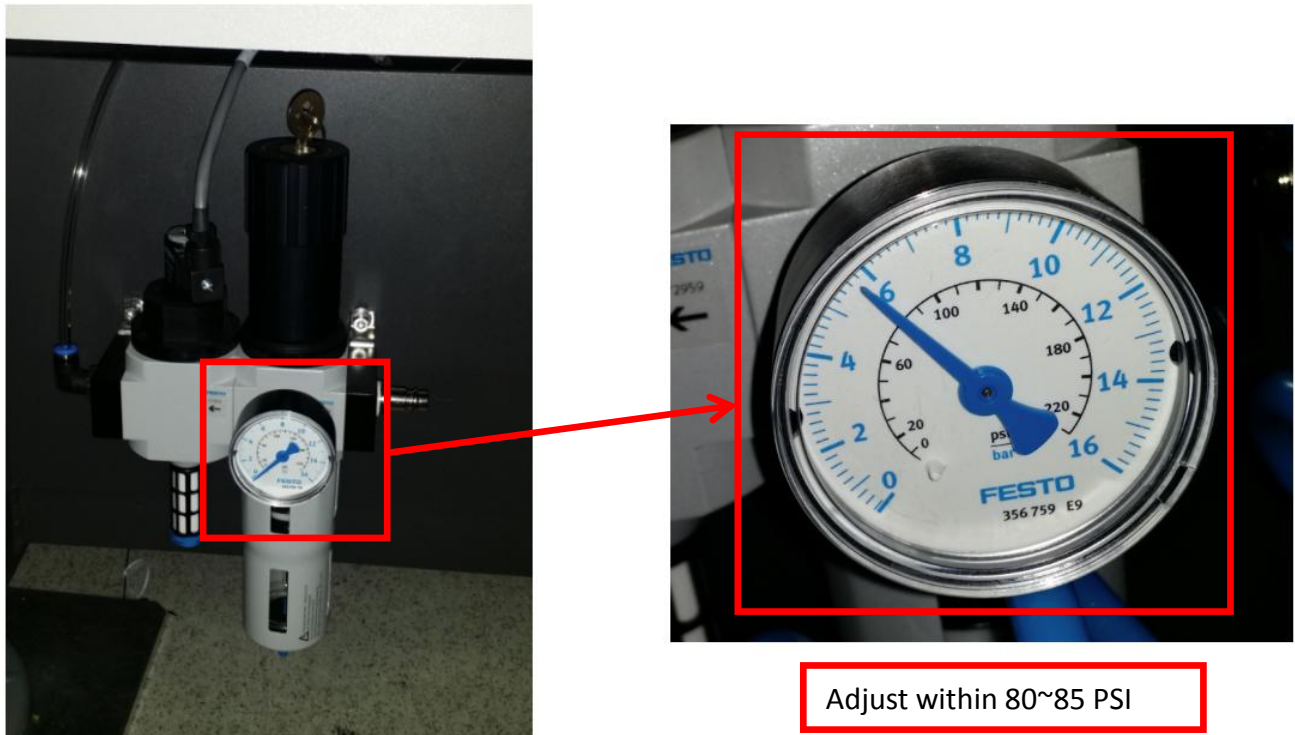


Figure 1

3. Switch on "Main Incoming Power (A)" >> "Safety Power Switch (B)" >> Press Green Button (C) as Figure 2

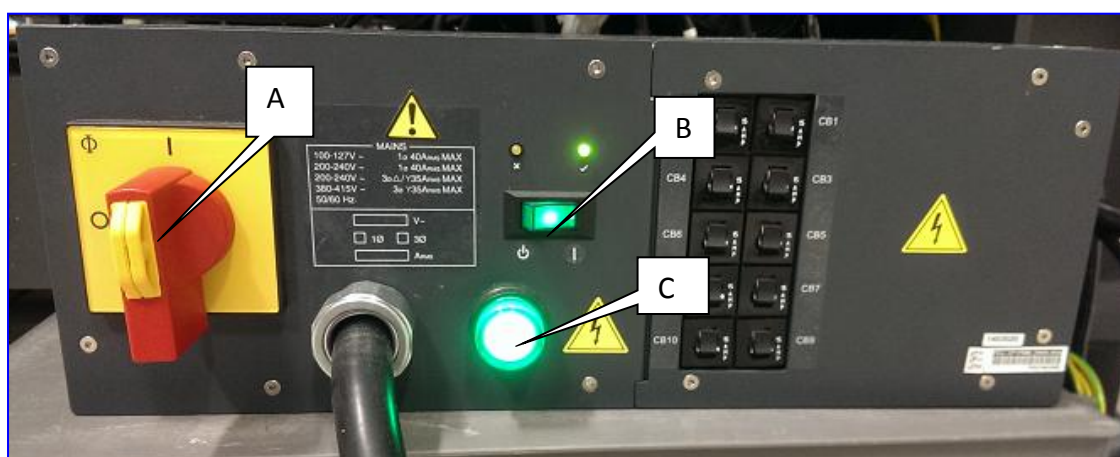


Figure 2 PDU start up

	Work Instruction	Doc. Revision	00
	AXI V810 Machine Start Up Procedure	Effective Date	1 May 2017

4. Turn on SSCA power as shown in Figure 3

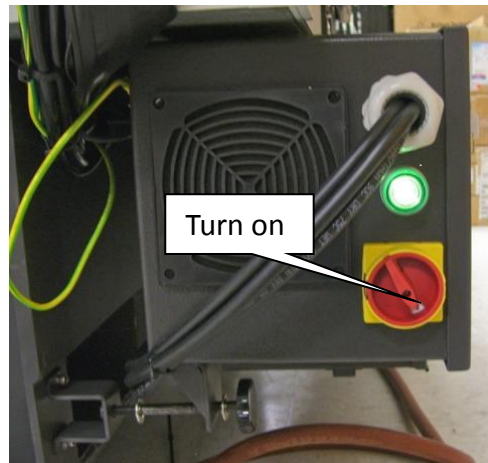


Figure 3 SSCA start up

5. Turn on Atom PC power as shown Figure 4



Figure 4 Atom PC power on

6. Perform Server Start up by refer to V810 Series

a) Series 1 :

- i. Master Controller Server



Figure 5

	Work Instruction	Doc. Revision	00
	AXI V810 Machine Start Up Procedure	Effective Date	1 May 2017

ii. IRP Servers



Figure 6

b) Series 2 :

i. Supermicro Server



Figure 7 Supermicro server power on

7. Close all access door

8. Open X ray Source at Operator Console Panel as below Figure 8

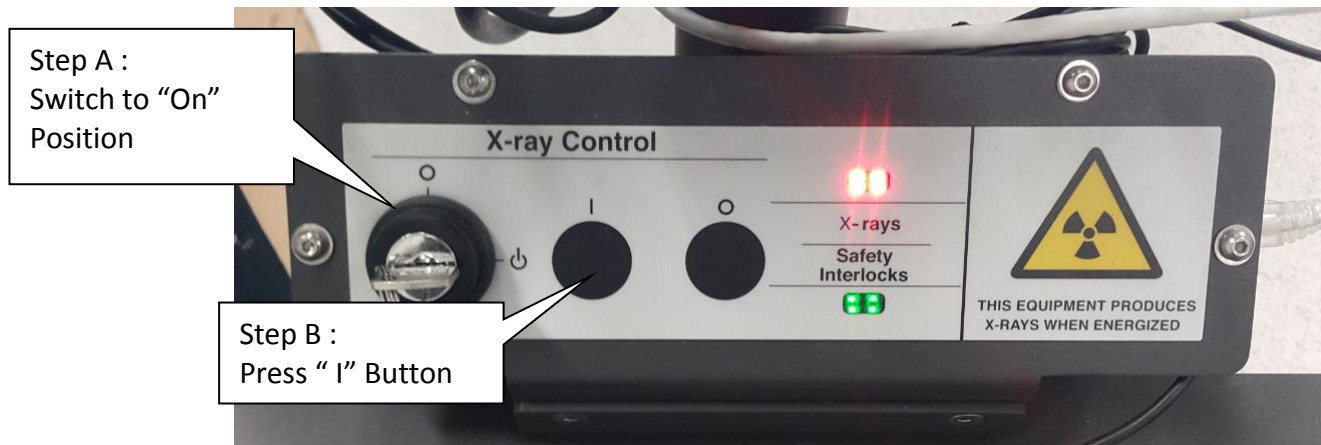


Figure 8

9. Open Cmd & Ping following IP address:

Camera	192.168.128.1
	192.168.128.2
	192.168.128.3
	192.168.128.4
	192.168.128.5
	192.168.128.6
	192.168.128.7
	192.168.128.8
	192.168.128.9
	192.168.128.10
	192.168.128.11
	192.168.128.12
	192.168.128.13
	192.168.128.14
Atom PC	192.168.128.70
Cisco Gigabit	192.168.128.122
Main Server	192.168.128.60
PSP 2 (New IP Address)	123.123.123.100
	123.123.123.101
	123.123.123.200

10. Open V810 GUI & run CD&A for 3 loops.