

CONTROLS AND FEATURES


- Volume
- Texture

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Toupee Fuzz Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	470K	Resistor, 1/4W	
R2	470K	Resistor, 1/4W	
R3	1K	Resistor, 1/4W	
R4	470K	Resistor, 1/4W	
R5	470K	Resistor, 1/4W	
R6	1K	Resistor, 1/4W	
R7	22K	Resistor, 1/4W	
R8	47K	Resistor, 1/4W	
R9	47K	Resistor, 1/4W	
R10	470K	Resistor, 1/4W	
R11	4K7	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	47n	Film capacitor, 7.2 x 2.5mm	
C2 C3 C4 C5	10u	Electrolytic capacitor, 5mm	
C3	47n	Film capacitor, 7.2 x 2.5mm	
C4	2n2	Film capacitor, 7.2 x 2.5mm	
C5	47u	Electrolytic capacitor, 5mm	
C6 C7	4n7	Film capacitor, 7.2 x 2.5mm	
C7	47u	Electrolytic capacitor, 5mm	
C8	100n	Film capacitor, 7.2 x 2.5mm	
C100	47u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	2N2222A	BJT transistor, NPN TO-18	
Q2	2N2222A	BJT transistor, NPN TO-18	
Q3	2N2222A	BJT transistor, NPN TO-18	
TEXTURE	B500K	16mm right-angle PCB mount pot	
VOLUME	B500K	16mm right-angle PCB mount pot	

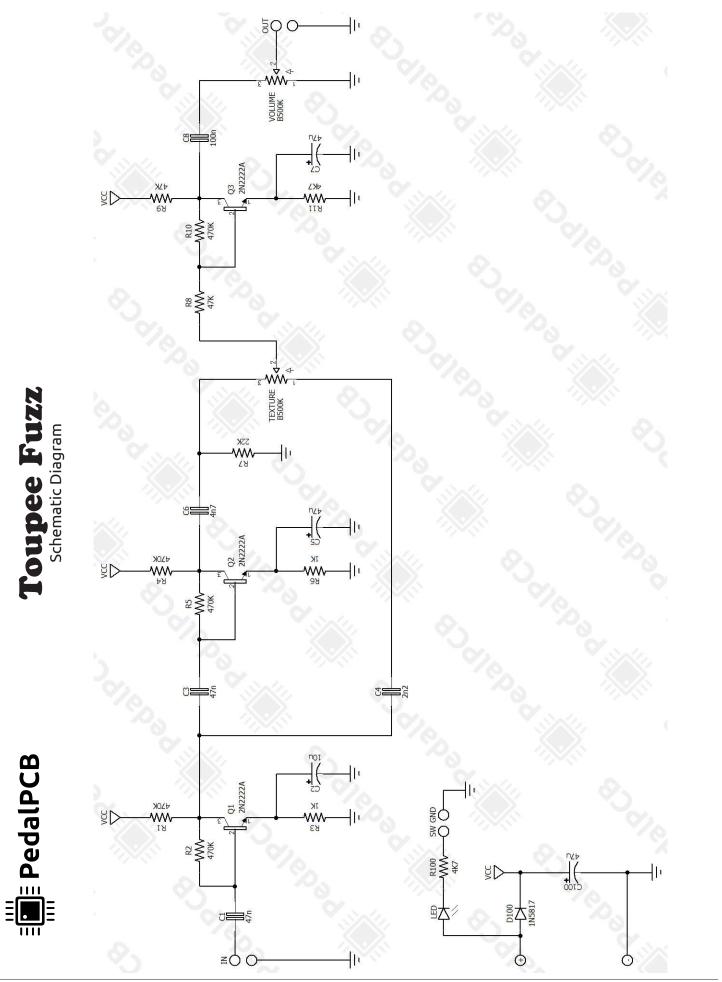



Toupee Fuzz Wiring Diagram

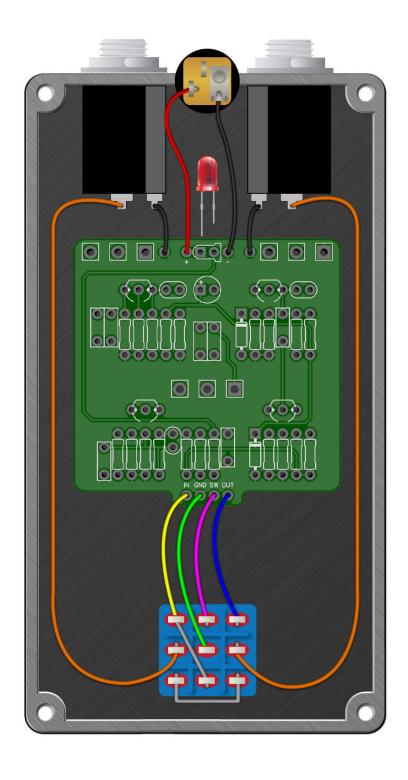



Toupee Fuzz Drill Template 125B enclosure

