


Revised 1/3/22

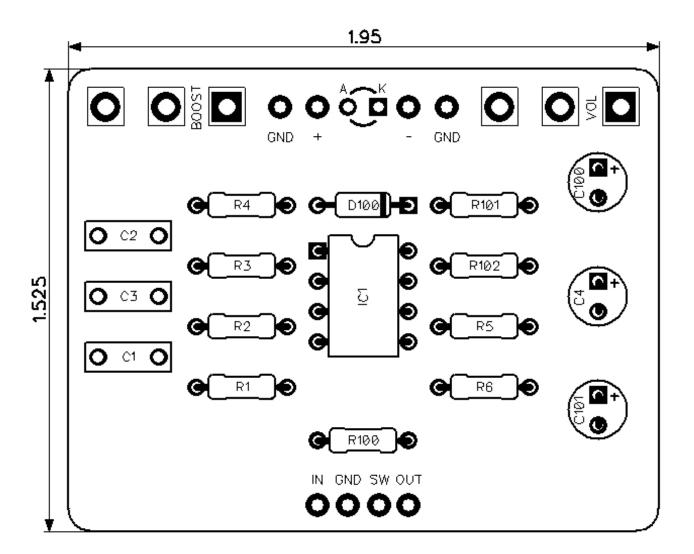

### **CONTROLS AND FEATURES**

- Volume
- Boost

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



## **Pariah Mid-Boost**


Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	470K	Resistor, 1/4W	NOTES
R2	10K	Resistor, 1/4W	
R3	10K	Resistor, 1/4W	
	5K6		
R4		Resistor, 1/4W	
R5	10K	Resistor, 1/4W	
R6	10K	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
R101	10K	Resistor, 1/4W	
R102	10K	Resistor, 1/4W	
	400		
C1	100n	Film capacitor, 7.2 x 2.5mm	
C1 C2 C3 C4	22n	Film capacitor, 7.2 x 2.5mm	
C3	22n	Film capacitor, 7.2 x 2.5mm	
C4	2u2	Electrolytic capacitor, 5mm	
C100	100u	Electrolytic capacitor, 5mm	
C101	10u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
IC1	LM353	Dual op-amp, DIP8	
VOL	A10K	16mm right-angle PCB mount pot	
BOOST	B10K	16mm right-angle PCB mount pot	




# **Pariah Mid-Boost**

Schematic Diagram

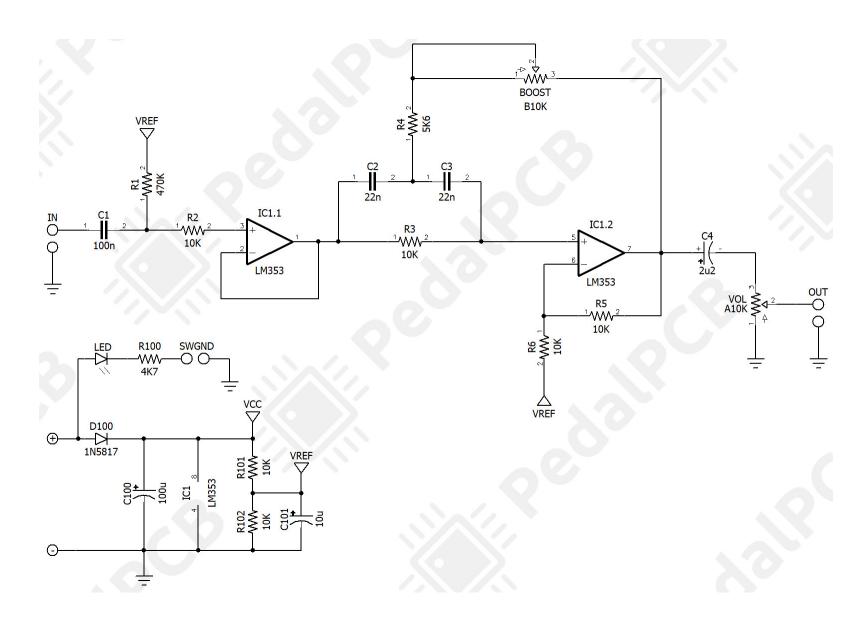



Wiring Diagram

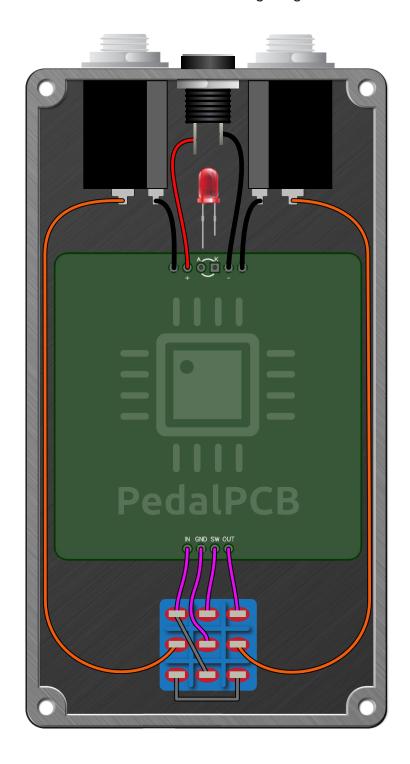



**Drill Template** 125B Enclosure

