




Cujo Fuzz

Revised 6/26/21

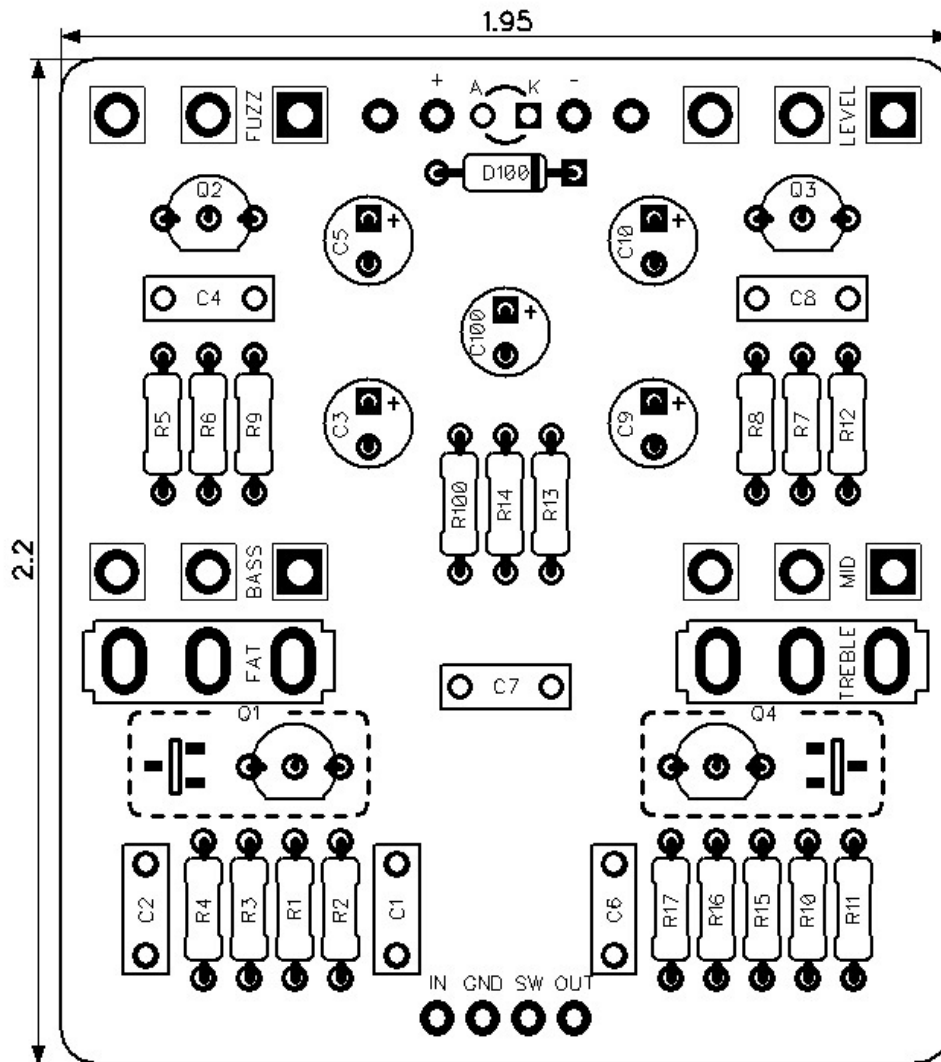

CONTROLS AND FEATURES

- Level
- Fuzz
- Mid
- Bass
- Treble (Toggle switch)
- Fat (Toggle switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

LOCATION	VALUE	TYPE	NOTES
R1	4K7	Resistor, 1/4W	
R2	1M	Resistor, 1/4W	
R3	33K	Resistor, 1/4W	
R4	20K	Resistor, 1/4W	
R5	33K	Resistor, 1/4W	
R6	200K	Resistor, 1/4W	
R7	680R	Resistor, 1/4W	
R8	8K2	Resistor, 1/4W	
R9	820R	Resistor, 1/4W	
R10	33K	Resistor, 1/4W	
R11	100K	Resistor, 1/4W	
R12	33K	Resistor, 1/4W	
R13	68K	Resistor, 1/4W	
R14	91K	Resistor, 1/4W	
R15	1M	Resistor, 1/4W	
R16	20K	Resistor, 1/4W	
R17	5K1	Resistor, 1/4W	
R100	4K7	Resistor, 1/4W	
C1	820p	Ceramic capacitor	
C2	22n	Film capacitor, 7.2 x 2.5mm	
C3	1u	Electrolytic capacitor, 5mm	
C4	1n5	Film capacitor, 7.2 x 2.5mm	
C5	10u	Electrolytic capacitor, 5mm	
C6	1n5	Film capacitor, 7.2 x 2.5mm	
C7	22n	Film capacitor, 7.2 x 2.5mm	
C8	22n	Film capacitor, 7.2 x 2.5mm	
C9	2u2	Electrolytic capacitor, 5mm	
C10	10u	Electrolytic capacitor, 5mm	
C100	100u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	J202	JFET transistor, N-channel	
Q2	BC546A	BJT transistor, NPN TO-18	
Q3	BC546A	BJT transistor, NPN TO-18	
Q4	J202	JFET transistor, N-channel	
LEVEL	B100K	16mm right-angle PCB mount pot	
FUZZ	B1K	16mm right-angle PCB mount pot	
MID	B25K	16mm right-angle PCB mount pot	
BASS	A500K	16mm right-angle PCB mount pot	
FAT	SPDT	Toggle switch, SPDT	2-position (ON/ON)
TREBLE	SPDT	Toggle switch, SPDT	3-position (ON/OFF/ON)

