




Triad Fuzz

Revised 12/30/20

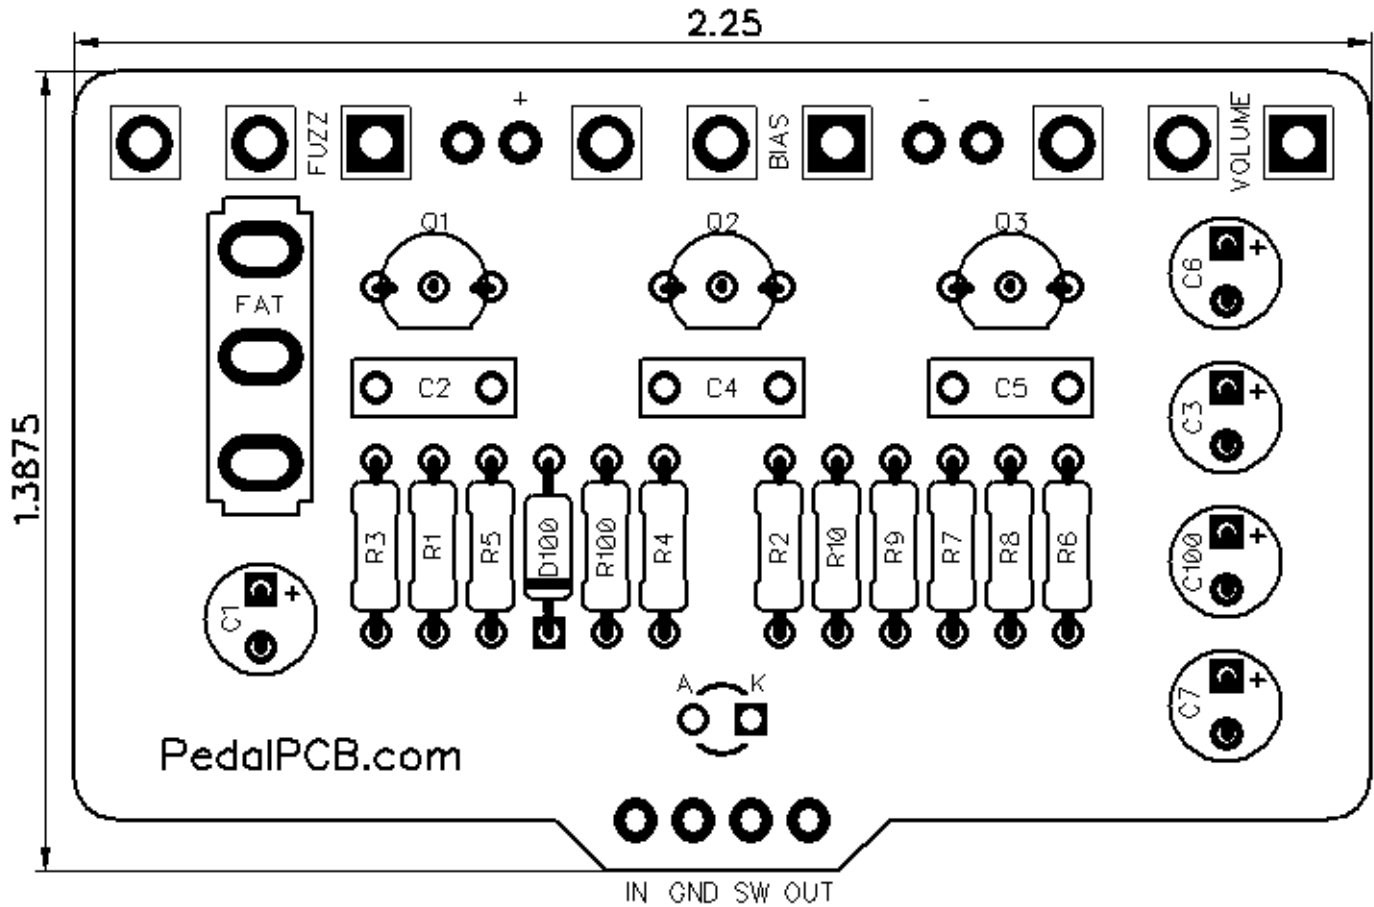

CONTROLS AND FEATURES

- Volume
- Bias
- Fuzz
- Fat (Toggle switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Triad Fuzz


Parts List (Page 1 of 1)

| LOCATION | VALUE | TYPE | NOTES |
|----------|--------|--------------------------------|--------------------|
| R1 | 100K | Resistor, 1/4W | |
| R2 | 1K | Resistor, 1/4W | |
| R3 | 33K | Resistor, 1/4W | |
| R4 | 8K2 | Resistor, 1/4W | |
| R5 | 330R | Resistor, 1/4W | |
| R6 | 1K8 | Resistor, 1/4W | |
| R7 | 10K | Resistor, 1/4W | |
| R8 | 100K | Resistor, 1/4W | |
| R9 | 15K | Resistor, 1/4W | |
| R10 | 100K | Resistor, 1/4W | |
| R100 | 4K7 | Resistor, 1/4W | |
| C1 | 4u7 | Electrolytic capacitor, 5mm | |
| C2 | 22n | Film capacitor, 7.2 x 2.5mm | |
| C3 | 47u | Electrolytic capacitor, 5mm | |
| C4 | 100p | Ceramic capacitor | |
| C5 | 100n | Film capacitor, 7.2 x 2.5mm | |
| C6 | 4u7 | Electrolytic capacitor, 5mm | |
| C7 | 4u7 | Electrolytic capacitor, 5mm | |
| C100 | 100u | Electrolytic capacitor, 5mm | |
| D100 | 1N5817 | Schottky diode, DO-41 | |
| Q1 | BC548A | BJT transistor, NPN TO-92 | |
| Q2 | BC548A | BJT transistor, NPN TO-92 | |
| Q3 | BC548A | BJT transistor, NPN TO-92 | |
| VOLUME | B100K | 16mm right-angle PCB mount pot | |
| BIAS | B5K | 16mm right-angle PCB mount pot | |
| FUZZ | B250K | 16mm right-angle PCB mount pot | |
| FAT | ON/ON | Toggle switch, SPDT | 2-position (ON/ON) |

Triad Fuzz

Schematic Diagram

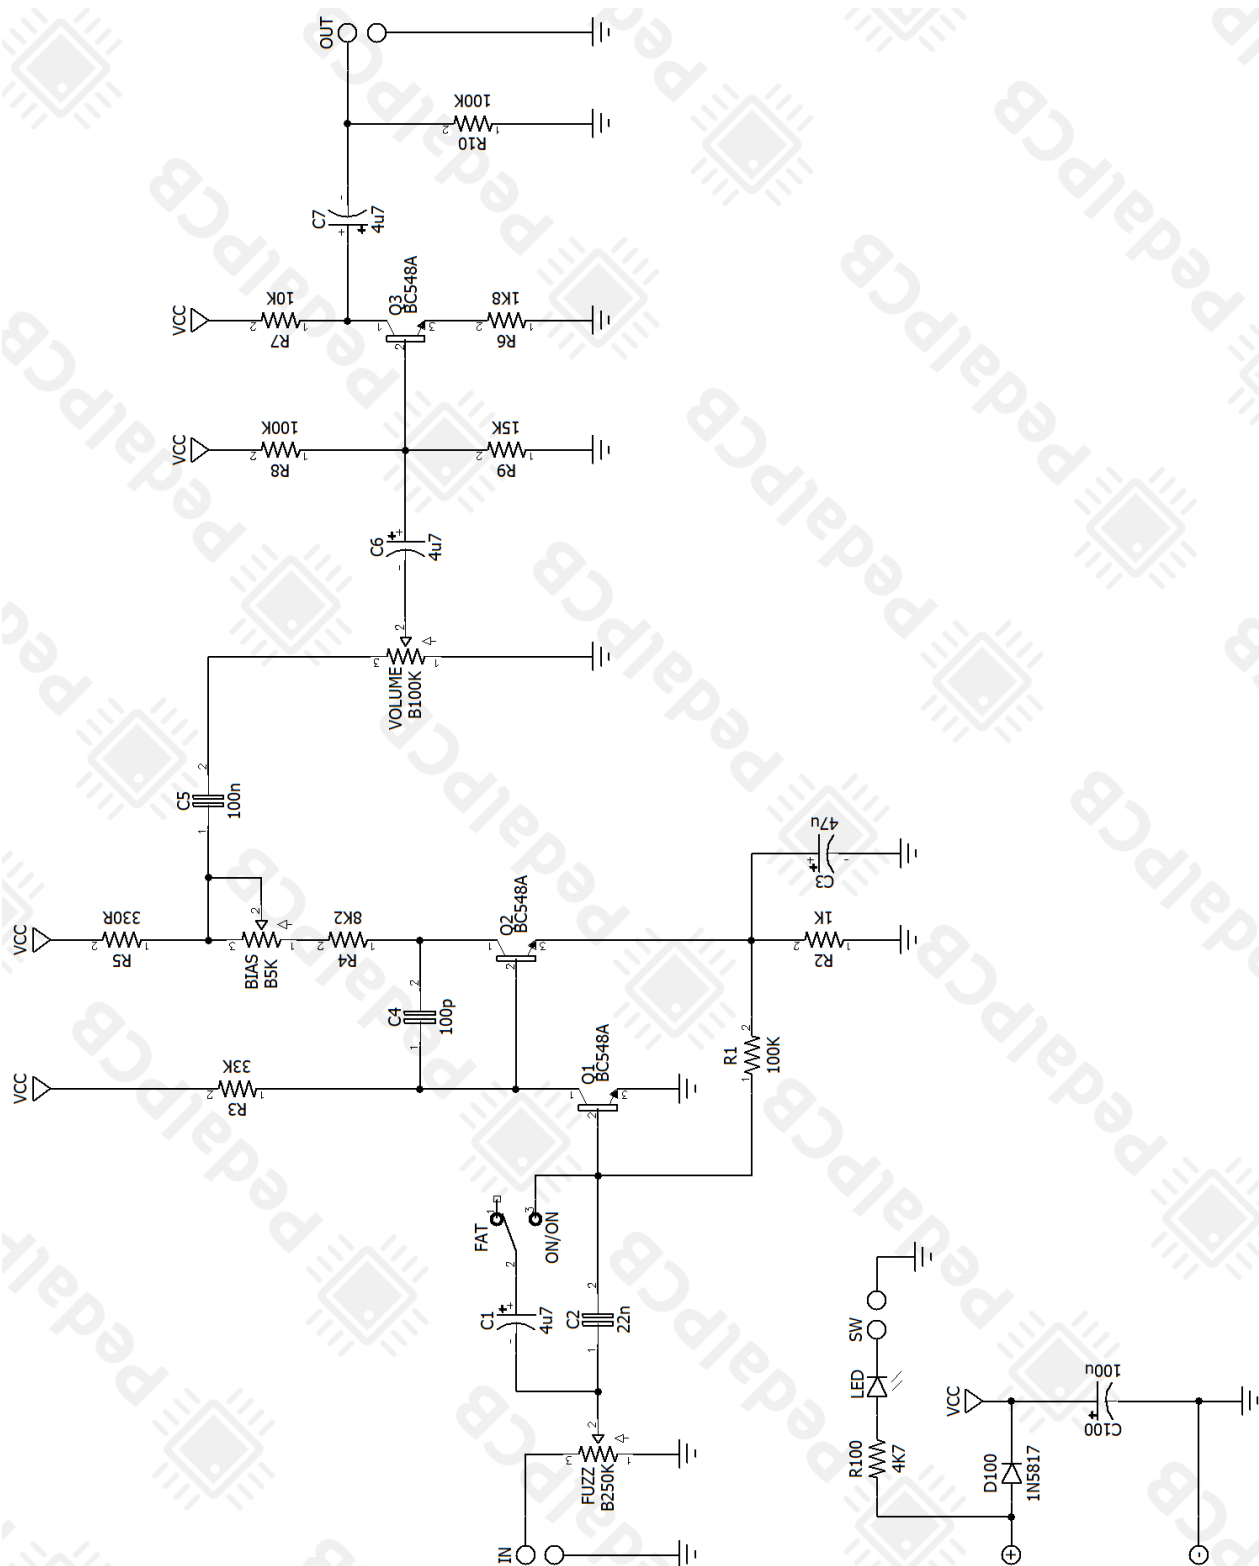

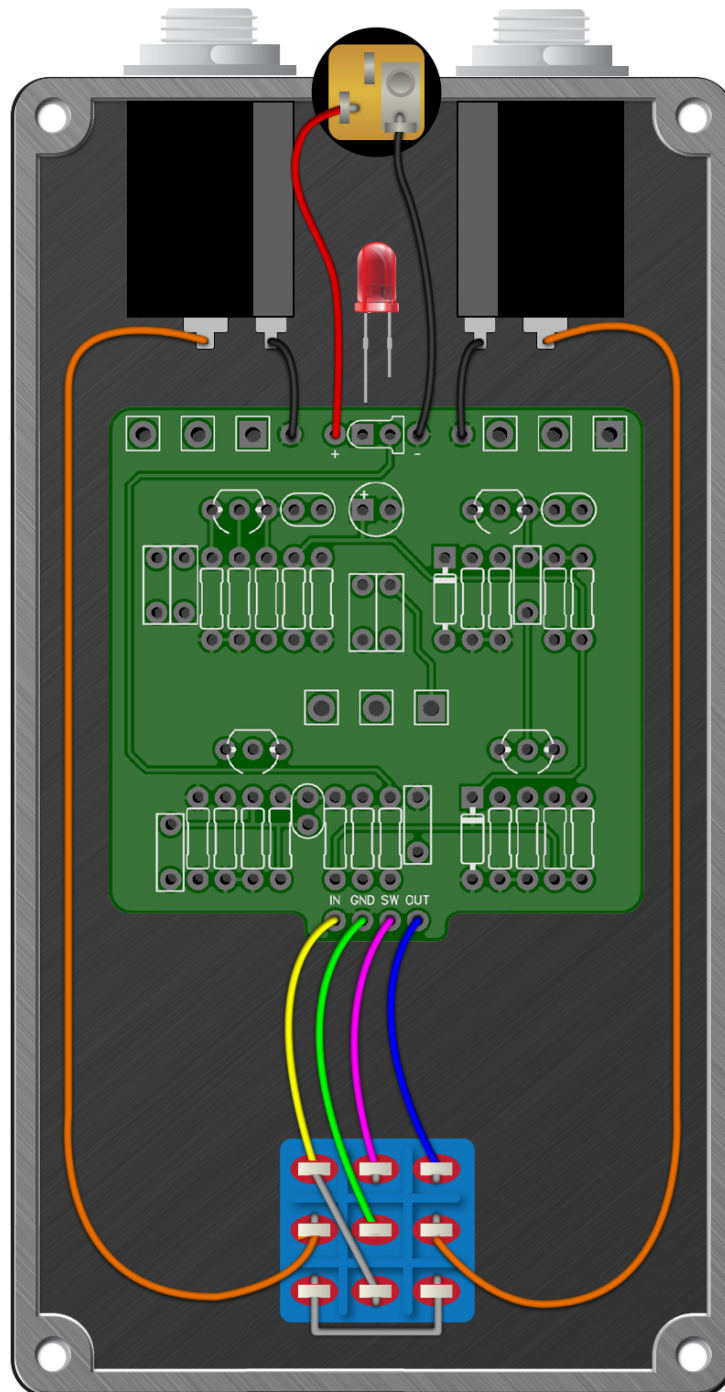

Triad Fuzz

Drill Template
125B Enclosure

