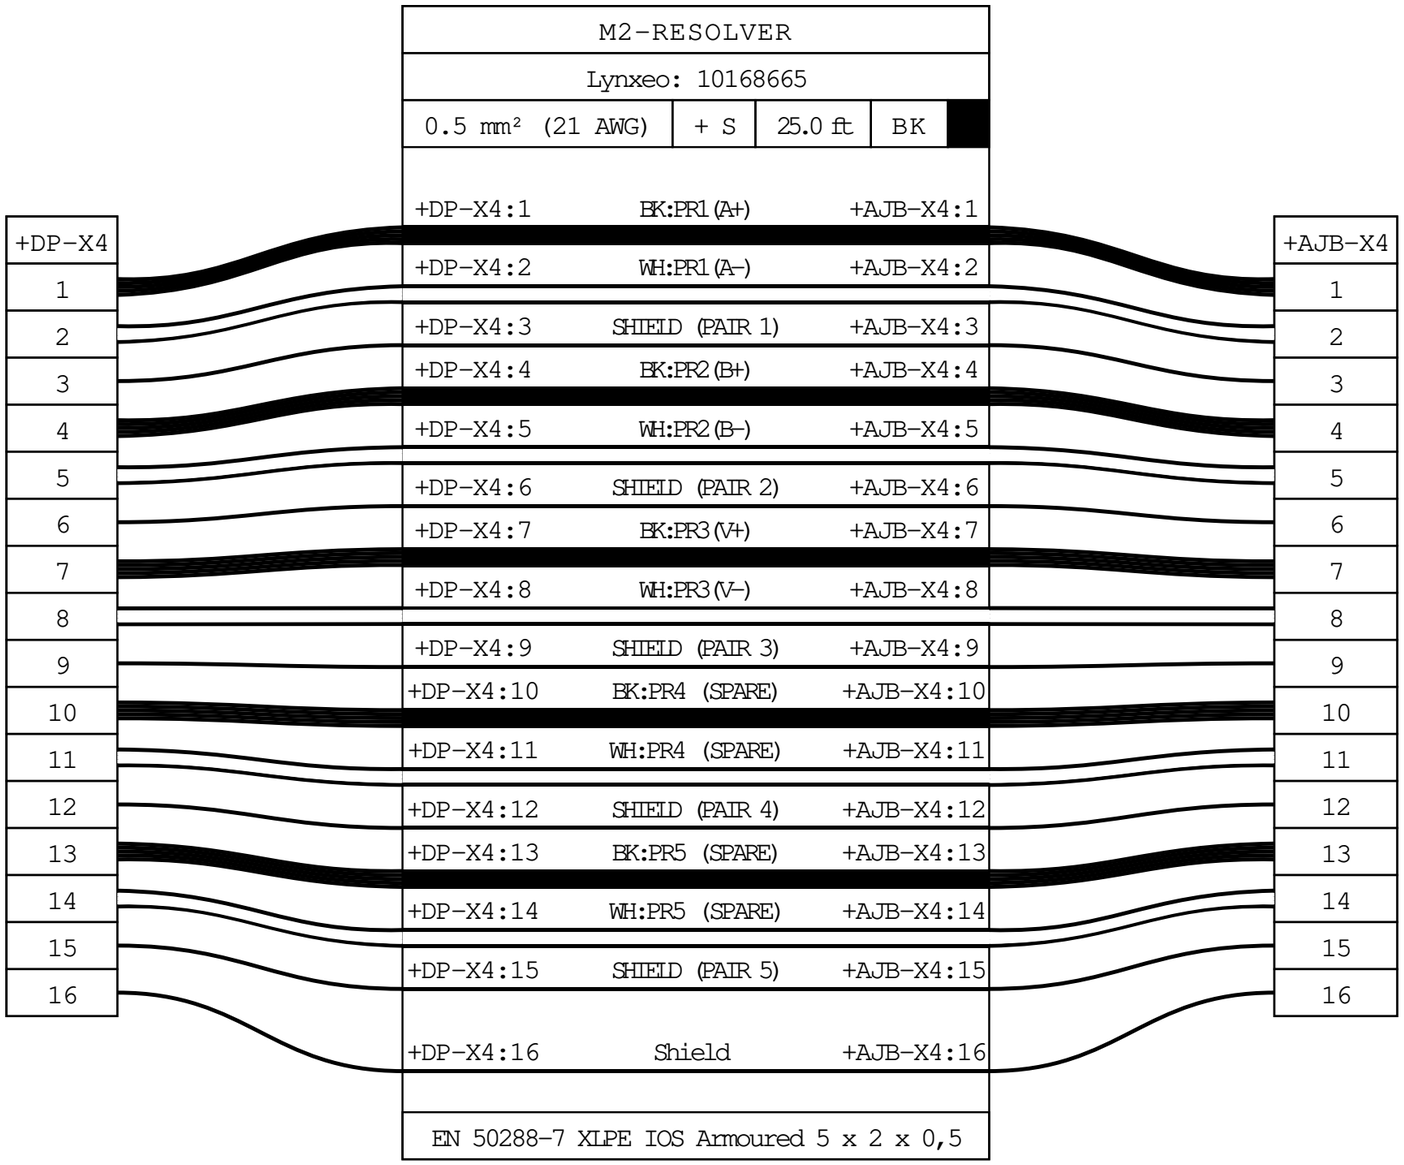
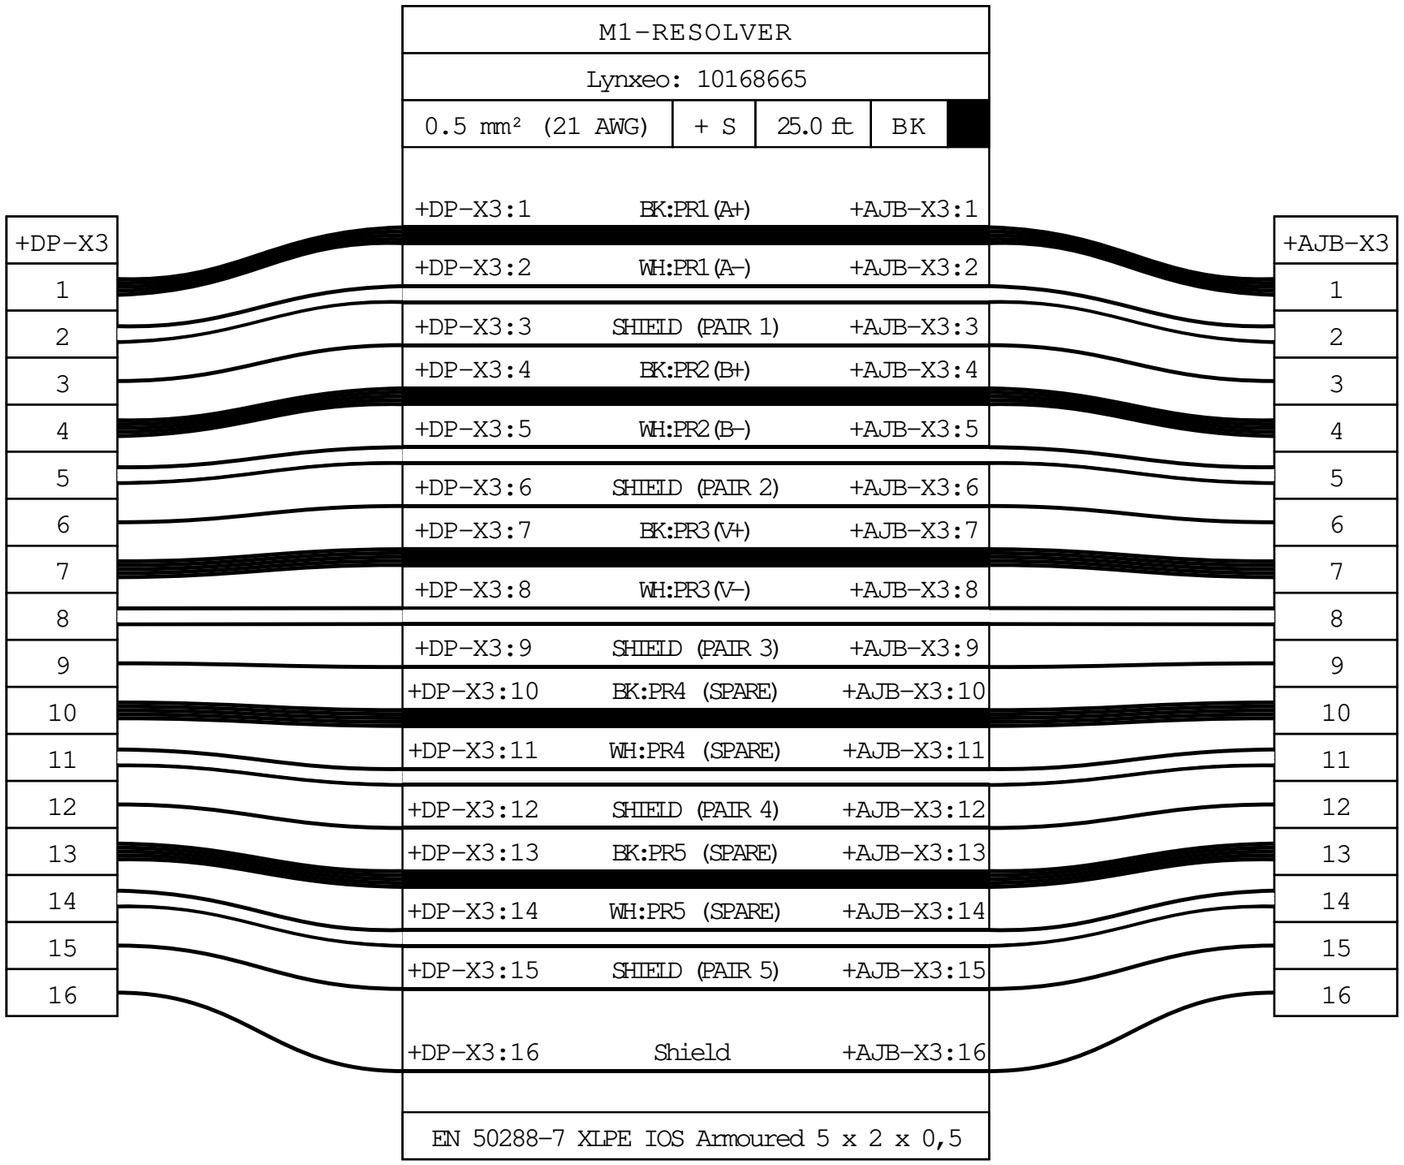
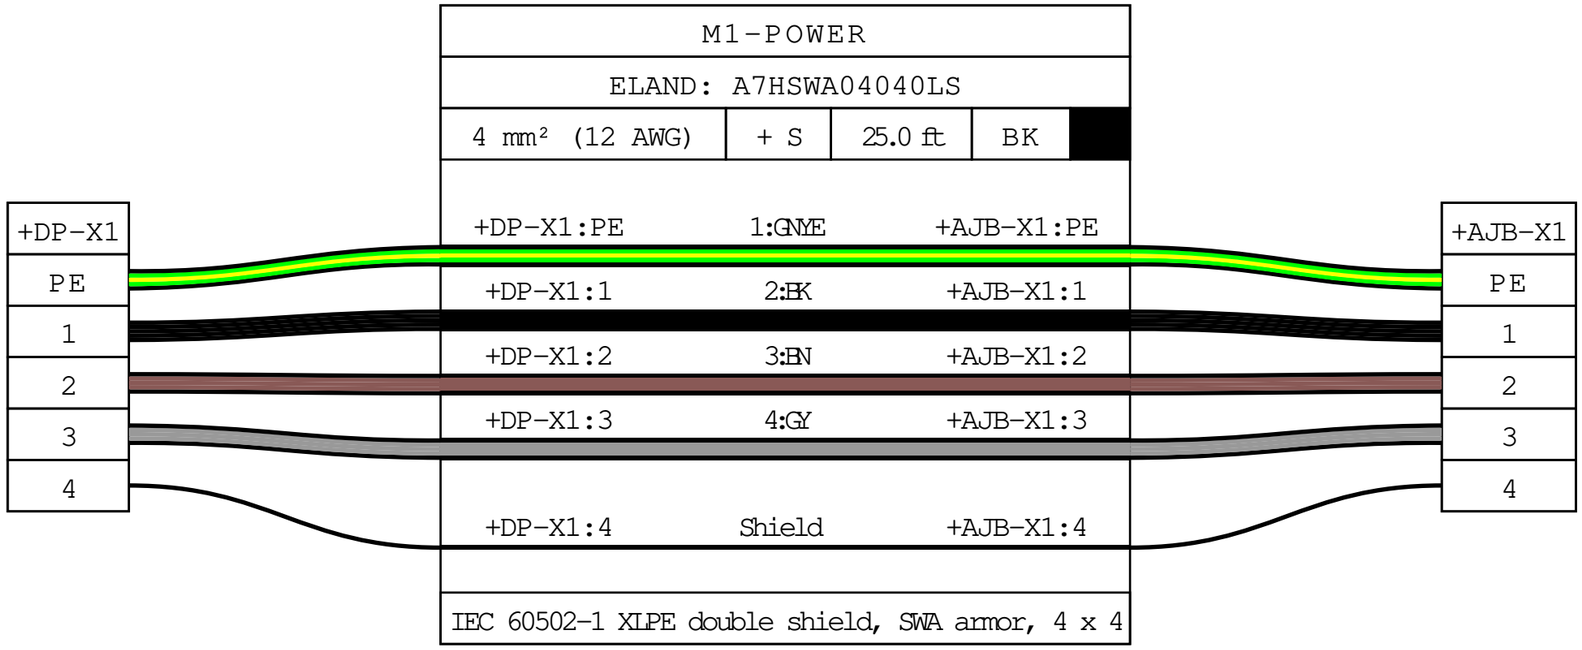

M2-RESOLVER
Lynxeo: 10168665
0.5 mm² (21 AWG)
+ S
25.0 ft
BK
+DP-X4
+AJB-X4
+DP-X4:1 BK:PR1(A+) +AJB-X4:1
+DP-X4:2 WH:PR1(A-) +AJB-X4:2
+DP-X4:3 SHIELD (PAIR 1) +AJB-X4:3
+DP-X4:4 BK:PR2(B+) +AJB-X4:4
+DP-X4:5 WH:PR2(B-) +AJB-X4:5
+DP-X4:6 SHIELD (PAIR 2) +AJB-X4:6
+DP-X4:7 BK:PR3(V+) +AJB-X4:7
+DP-X4:8 WH:PR3(V-) +AJB-X4:8
+DP-X4:9 SHIELD (PAIR 3) +AJB-X4:9
+DP-X4:10 BK:PR4 (SPARE) +AJB-X4:10
+DP-X4:11 WH:PR4 (SPARE) +AJB-X4:11
+DP-X4:12 SHIELD (PAIR 4) +AJB-X4:12
+DP-X4:13 BK:PR5 (SPARE) +AJB-X4:13
+DP-X4:14 WH:PR5 (SPARE) +AJB-X4:14
+DP-X4:15 SHIELD (PAIR 5) +AJB-X4:15
+DP-X4:16 Shield +AJB-X4:16
EN 50288-7 XLPE IOS Armoured 5 x 2 x 0,5


M1-RESOLVER
Lynxeo: 10168665
0.5 mm² (21 AWG)
+ S
25.0 ft
BK
+DP-X3
+AJB-X3
+DP-X3:1 BK:PR1(A+) +AJB-X3:1
+DP-X3:2 WH:PR1(A-) +AJB-X3:2
+DP-X3:3 SHIELD (PAIR 1) +AJB-X3:3
+DP-X3:4 BK:PR2(B+) +AJB-X3:4
+DP-X3:5 WH:PR2(B-) +AJB-X3:5
+DP-X3:6 SHIELD (PAIR 2) +AJB-X3:6
+DP-X3:7 BK:PR3(V+) +AJB-X3:7
+DP-X3:8 WH:PR3(V-) +AJB-X3:8
+DP-X3:9 SHIELD (PAIR 3) +AJB-X3:9
+DP-X3:10 BK:PR4 (SPARE) +AJB-X3:10
+DP-X3:11 WH:PR4 (SPARE) +AJB-X3:11
+DP-X3:12 SHIELD (PAIR 4) +AJB-X3:12
+DP-X3:13 BK:PR5 (SPARE) +AJB-X3:13
+DP-X3:14 WH:PR5 (SPARE) +AJB-X3:14
+DP-X3:15 SHIELD (PAIR 5) +AJB-X3:15
+DP-X3:16 Shield +AJB-X3:16
EN 50288-7 XLPE IOS Armoured 5 x 2 x 0,5


M2-POWER			
ELAND: A7HSWA04040LS			
4 mm² (12 AWG)	+ S	25.0 ft	BK

+DP-X2			+AJB-X2
PE	+DP-X2:PE	1:GNYE	+AJB-X2:PE
1	+DP-X2:1	2:BK	+AJB-X2:1
2	+DP-X2:2	3:BN	+AJB-X2:2
3	+DP-X2:3	4:GY	+AJB-X2:3
4	+DP-X2:4	Shield	+AJB-X2:4

IEC 60502-1 XLPE double shield, SWA armor, 4 x 4


M1-POWER
ELAND: A7HSWA04040LS
4 mm² (12 AWG)
+ S
25.0 ft
BK
+DP-X1
PE
1
2
3
4
+DP-X1:PE
1:GNYE
+AJB-X1:PE
+DP-X1:1
2:BK
+AJB-X1:1
+DP-X1:2
3:BN
+AJB-X1:2
+DP-X1:3
4:GY
+AJB-X1:3
+DP-X1:4
Shield
+AJB-X1:4
IEC 60502-1 XLPE double shield, SWA armor, 4 x 4
+AJB-X1
PE
1
2
3
4

+MCP-X4
1U
1M
1L
2U
2M
2L
3U
3M
3L
4U
4M
4L
5U
5M
5L
SHIELD



3-deck fuse terminal block with shield to rail.

ACTUATOR-ANALOG			
Lynxeo: 10168748			
0.75 mm² (20 AWG)	+ S	25.0 ft	BK
+MCP-X4:1U	BK:1(BK)	+AJB-X4-MCP:1U	
+MCP-X4:1M	WH:1(WH)	+AJB-X4-MCP:1M	
+MCP-X4:1L	SHIELD (PAIR 1)	+AJB-X4-MCP:1L	
+MCP-X4:2U	BK:2(BK)	+AJB-X4-MCP:2U	
+MCP-X4:2M	WH:2(WH)	+AJB-X4-MCP:2M	
+MCP-X4:2L	SHIELD (PAIR 2)	+AJB-X4-MCP:2L	
+MCP-X4:3U	BK:3(BK)	+AJB-X4-MCP:3U	
+MCP-X4:3M	WH:3(WH)	+AJB-X4-MCP:3M	
+MCP-X4:3L	SHIELD (PAIR 3)	+AJB-X4-MCP:3L	
+MCP-X4:4U	BK:4(BK)	+AJB-X4-MCP:4U	
+MCP-X4:4M	WH:4(WH)	+AJB-X4-MCP:4M	
+MCP-X4:4L	SHIELD (PAIR 4)	+AJB-X4-MCP:4L	
+MCP-X4:5U	BK:5(BK)	+AJB-X4-MCP:5U	
+MCP-X4:5M	WH:5(WH)	+AJB-X4-MCP:5M	
+MCP-X4:5L	SHIELD (PAIR 5)	+AJB-X4-MCP:5L	
+MCP-X4:SHIELD	Shield	+AJB-X4-MCP:SHIELD	

EN 50288-7 XLPE IOS Armoured 5 x 2 x 0,75
Pair 5 spare

+AJB-X4-MCP
1U
1M
1L
2U
2M
2L
3U
3M
3L
4U
4M
4L
5U
5M
5L
SHIELD



3-deck through terminal block.

+MCP-X2
1
2
3
4
5
6
7

ACTUATOR-DISCRETE		
Lynxeo: 10108697		
1.5 mm² (16 AWG)	25.0 ft	BK

+MCP-X2:1	1:BK	+AJB-X2-MCP:1U
+MCP-X2:2	2:BK	+AJB-X2-MCP:2L
+MCP-X2:3	3:BK	+AJB-X2-MCP:3L
+MCP-X2:4	4:BK	+AJB-X2-MCP:4L
+MCP-X2:5	5:BK	+AJB-X2-MCP:5L
+MCP-X2:6	6:BK	+AJB-X2-MCP:6L
+MCP-X2:7	7:BK	+AJB-X2-MCP:7

IEC 60502-1 Armoured (SWA) 7 x 1,5
Core 7 spare

+AJB-X2-MCP		
1U	BU	
2L	BU	
3L	BU	
4L	BU	
5L	BU	
6L	BU	
7		



Use the terminal that is marked blue.
(Upper for T1, lower for 2-6.)


* Terminal 3U means land the wire on the upper deck of the block.
* Note that there are two of each block 3-6.
* (Terminals for field wiring marked BU for clarity.)

+MCP-X1
1
2
3
4
5
6
7

ACTUATOR-DC-POWER		
Lynxeo: 10108697		
1.5 mm² (16 AWG)	25.0 ft	BK
+MCP-X1:1	1:BK	+AJB-X1-MCP:1
+MCP-X1:2	2:BK	+AJB-X1-MCP:2L
+MCP-X1:3	3:BK	+AJB-X1-MCP:3U
+MCP-X1:4	4:BK	+AJB-X1-MCP:4U
+MCP-X1:5	5:BK	+AJB-X1-MCP:5U
+MCP-X1:6	6:BK	+AJB-X1-MCP:6U
+MCP-X1:7	7:BK	+AJB-X1-MCP:7


IEC 60502-1 Armoured (SWA) 7 x 1,5
Core 1 and core 7 spare


+AJB-X1-MCP	
1	
2L	BU
3U	BU
4U	BU
5U	BU
6U	BU
7	




Use the upper terminal that is marked blue.

* Terminal 3U means land the wire on the upper deck of the block.
* Note that there are two of each block 3-6.
* (Terminals for field wiring marked BU for clarity.)

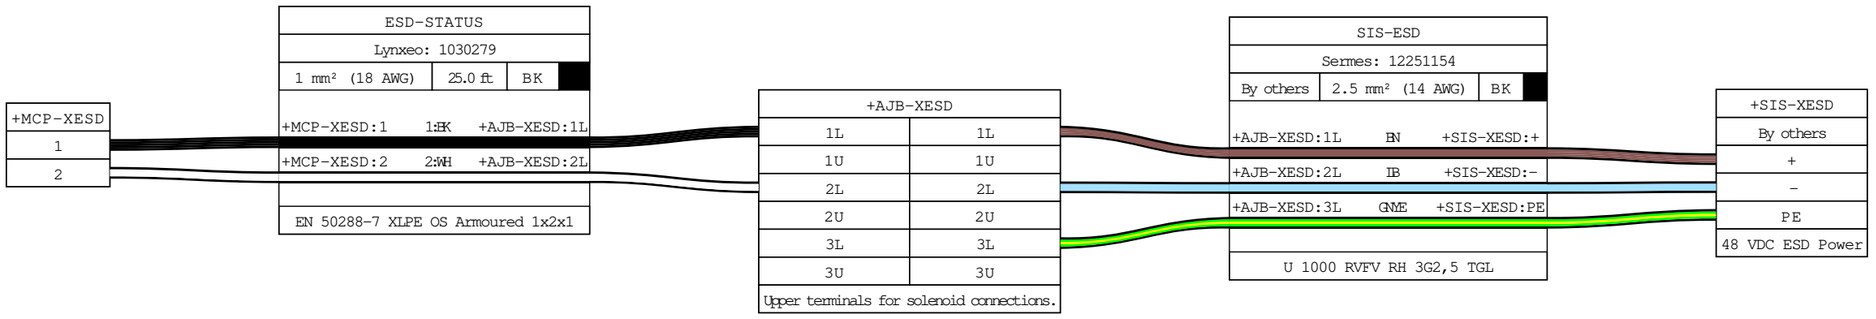
+MCP-XESD
1
2
ESD-STATUS
Lynxeo: 1030279
1 mm² (18 AWG)
25.0 ft
BK
+MCP-XESD:1
1:BK
+AJB-XESD:1L
+MCP-XESD:2
2:WH
+AJB-XESD:2L
EN 50288-7 XLPE OS Armoured 1x2x1
+AJB-XESD
1L
1L
1U
1U
2L
2L
2U
2U
3L
3L
3U
3U
Upper terminals for solenoid connections.
SIS-ESD
Sermes: 12251154
By others
2.5 mm² (14 AWG)
BK
+AJB-XESD:1L
BN
+SIS-XESD:+
+AJB-XESD:2L
IB
+SIS-XESD:-
+AJB-XESD:3L
GNYE
+SIS-XESD:PE
U 1000 RVFV RH 3G2,5 TGL
+SIS-XESD
By others
+
-
PE
48 VDC ESD Power

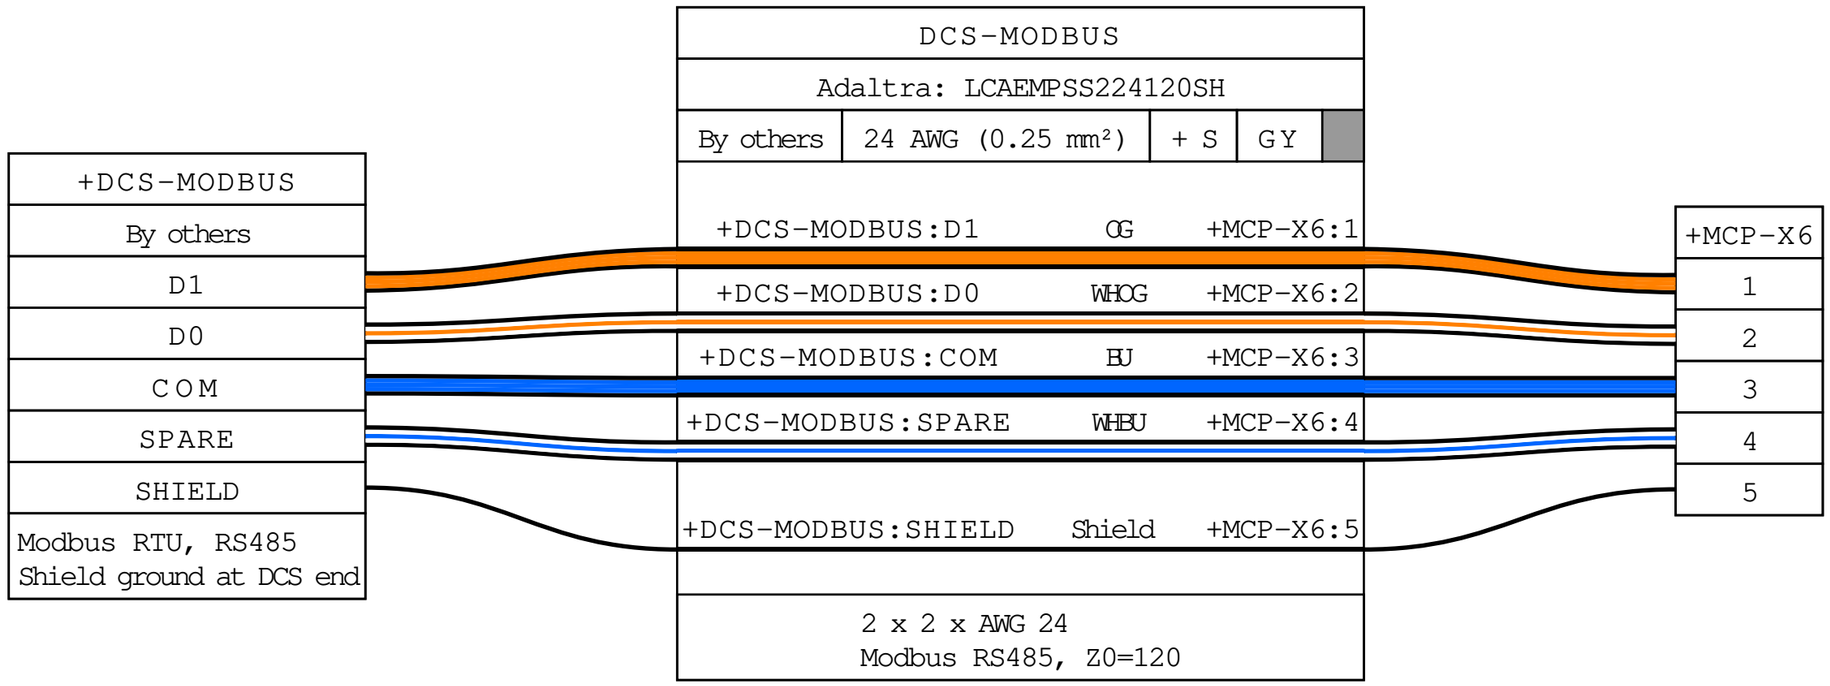
DCS-MODBUS
Adaltra: LCAEMPSS224120SH
By others
24 AWG (0.25 mm²)
+ S
GY
+DCS-MODBUS:D1
OG
+MCP-X6:1
+DCS-MODBUS:D0
WHOG
+MCP-X6:2
+DCS-MODBUS:COM
BU
+MCP-X6:3
+DCS-MODBUS:SPARE
WHBU
+MCP-X6:4
+DCS-MODBUS:SHIELD
Shield
+MCP-X6:5
2 x 2 x AWG 24
Modbus RS485, Z0=120
+DCS-MODBUS
By others
D1
D0
COM
SPARE
SHIELD
Modbus RTU, RS485
Shield ground at DCS end
+MCP-X6
1
2
3
4
5

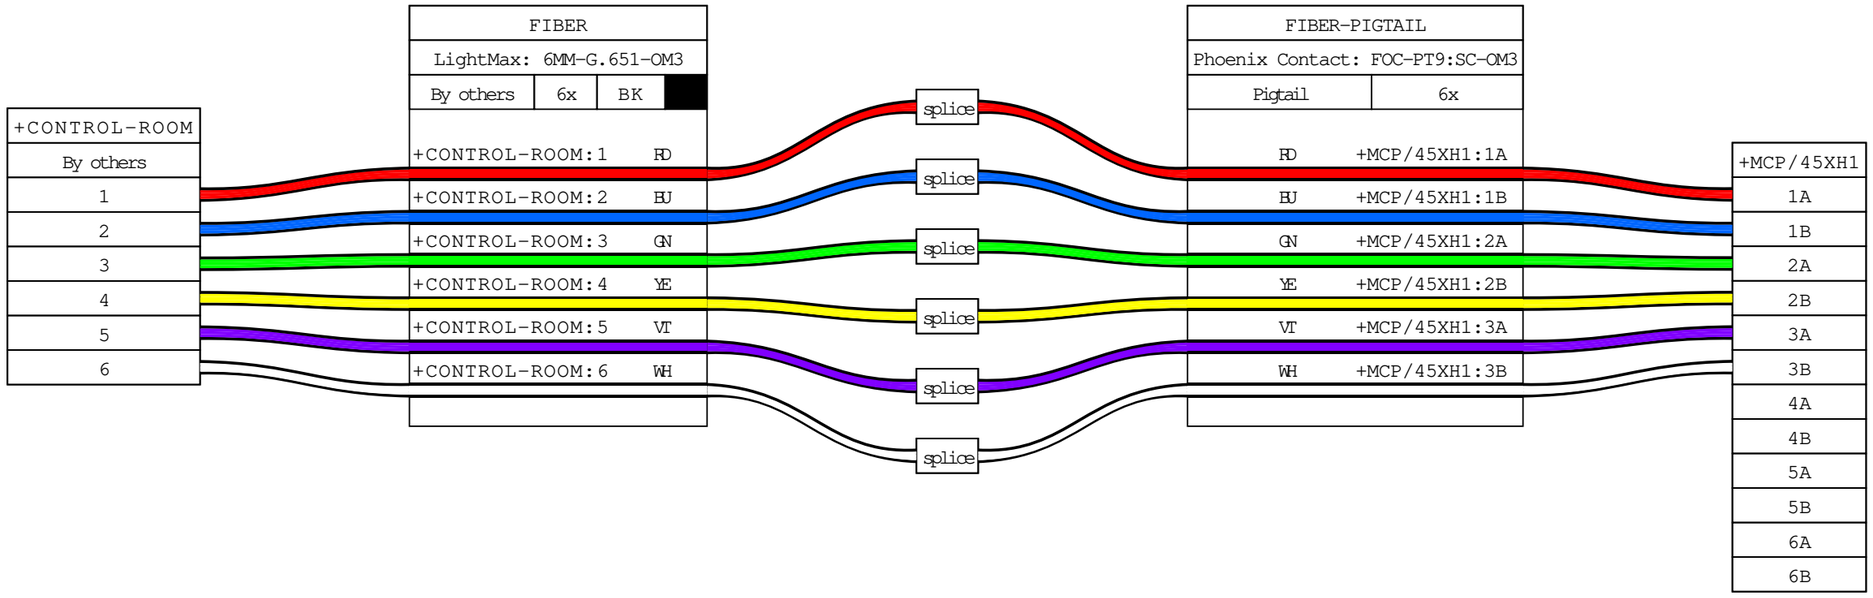
+CONTROL-ROOM
By others
1
2
3
4
5
6
FIBER
LightMax: 6MM-G.651-OM3
By others
6x
BK
+CONTROL-ROOM:1 RD
+CONTROL-ROOM:2 BU
+CONTROL-ROOM:3 GN
+CONTROL-ROOM:4 YE
+CONTROL-ROOM:5 VT
+CONTROL-ROOM:6 WH
splice
splice
splice
splice
splice
splice
FIBER-PIGTAIL
Phoenix Contact: FOC-PT9:SC-OM3
Pigtail
6x
RD +MCP/45XH1:1A
BU +MCP/45XH1:1B
GN +MCP/45XH1:2A
YE +MCP/45XH1:2B
VT +MCP/45XH1:3A
WH +MCP/45XH1:3B
+MCP/45XH1
1A
1B
2A
2B
3A
3B
4A
4B
5A
5B
6A
6B

+DCS-INSTRUMENT	
By others	
ZC +	1
ZC –	2
ZI +	3
ZI –	4
PT ACC +	5
PT ACC –	6
PT A +	7
PT A –	8
PT B +	9
PT B –	10
ESD Alarm +	11
ESD Alarm –	12
Auto Alarm +	13
Auto Alarm –	14
Trouble Alarm +	15
Trouble Alarm –	16
Mode Bit 0 +	17
Mode Bit 0 –	18
Mode Bit 1 +	19
Mode Bit 1 –	20
Mode Bit 2 +	21
Mode Bit 2 –	22
SHIELD	23

Shield grounded at DCS end only
Unused cores terminated and earthed at DCS end per 60079-14 8.2.3.2

DCS-INSTRUMENT			
Sermes: 14483064			
By others	0.88 mm² (Unknown AWG)	+ S	BU


+DCS-INSTRUMENT:1:ZC +	RD:PR1	+MCP-X5:1U
+DCS-INSTRUMENT:2:ZC –	WH:PR1	+MCP-X5:1M
+DCS-INSTRUMENT:3:ZI +	RD:PR2	+MCP-X5:2U
+DCS-INSTRUMENT:4:ZI –	WH:PR2	+MCP-X5:2M
+DCS-INSTRUMENT:5:PT ACC +	RD:PR3	+MCP-X5:3U
+DCS-INSTRUMENT:6:PT ACC –	WH:PR3	+MCP-X5:3M
+DCS-INSTRUMENT:7:PT A +	RD:PR4	+MCP-X5:4U
+DCS-INSTRUMENT:8:PT A –	WH:PR4	+MCP-X5:4M
+DCS-INSTRUMENT:9:PT B +	RD:PR5	+MCP-X5:5U
+DCS-INSTRUMENT:10:PT B –	WH:PR5	+MCP-X5:5M
+DCS-INSTRUMENT:11:ESD Alarm +	RD:PR6	+MCP-X3:1
+DCS-INSTRUMENT:12:ESD Alarm –	WH:PR6	+MCP-X3:2
+DCS-INSTRUMENT:13:Auto Alarm +	RD:PR7	+MCP-X3:3
+DCS-INSTRUMENT:14:Auto Alarm –	WH:PR7	+MCP-X3:4
+DCS-INSTRUMENT:15:Trouble Alarm +	RD:PR8	+MCP-X3:5
+DCS-INSTRUMENT:16:Trouble Alarm –	WH:PR8	+MCP-X3:6
+DCS-INSTRUMENT:17:Mode Bit 0 +	RD:PR9	+MCP-X3:7
+DCS-INSTRUMENT:18:Mode Bit 0 –	WH:PR9	+MCP-X3:8
+DCS-INSTRUMENT:19:Mode Bit 1 +	RD:PR10	+MCP-X3:9
+DCS-INSTRUMENT:20:Mode Bit 1 –	WH:PR10	+MCP-X3:10
+DCS-INSTRUMENT:21:Mode Bit 2 +	RD:PR11	+MCP-X3:11
+DCS-INSTRUMENT:22:Mode Bit 2 –	WH:PR11	+MCP-X3:12
+DCS-INSTRUMENT:23:SHIELD	Shield	+MCP-X3:13

19IP09EGFA – BLEU19IP09EGFA – BLEU
Pairs 12 – 19 unused

+MCP-X5
1U
1M
2U
2M
3U
3M
4U
4M
5U
5M

+MCP-X3
1
2
3
4
5
6
7
8
9
10
11
12
13

Terminate unused cores per IEC 60079-14 8.2.3.2.

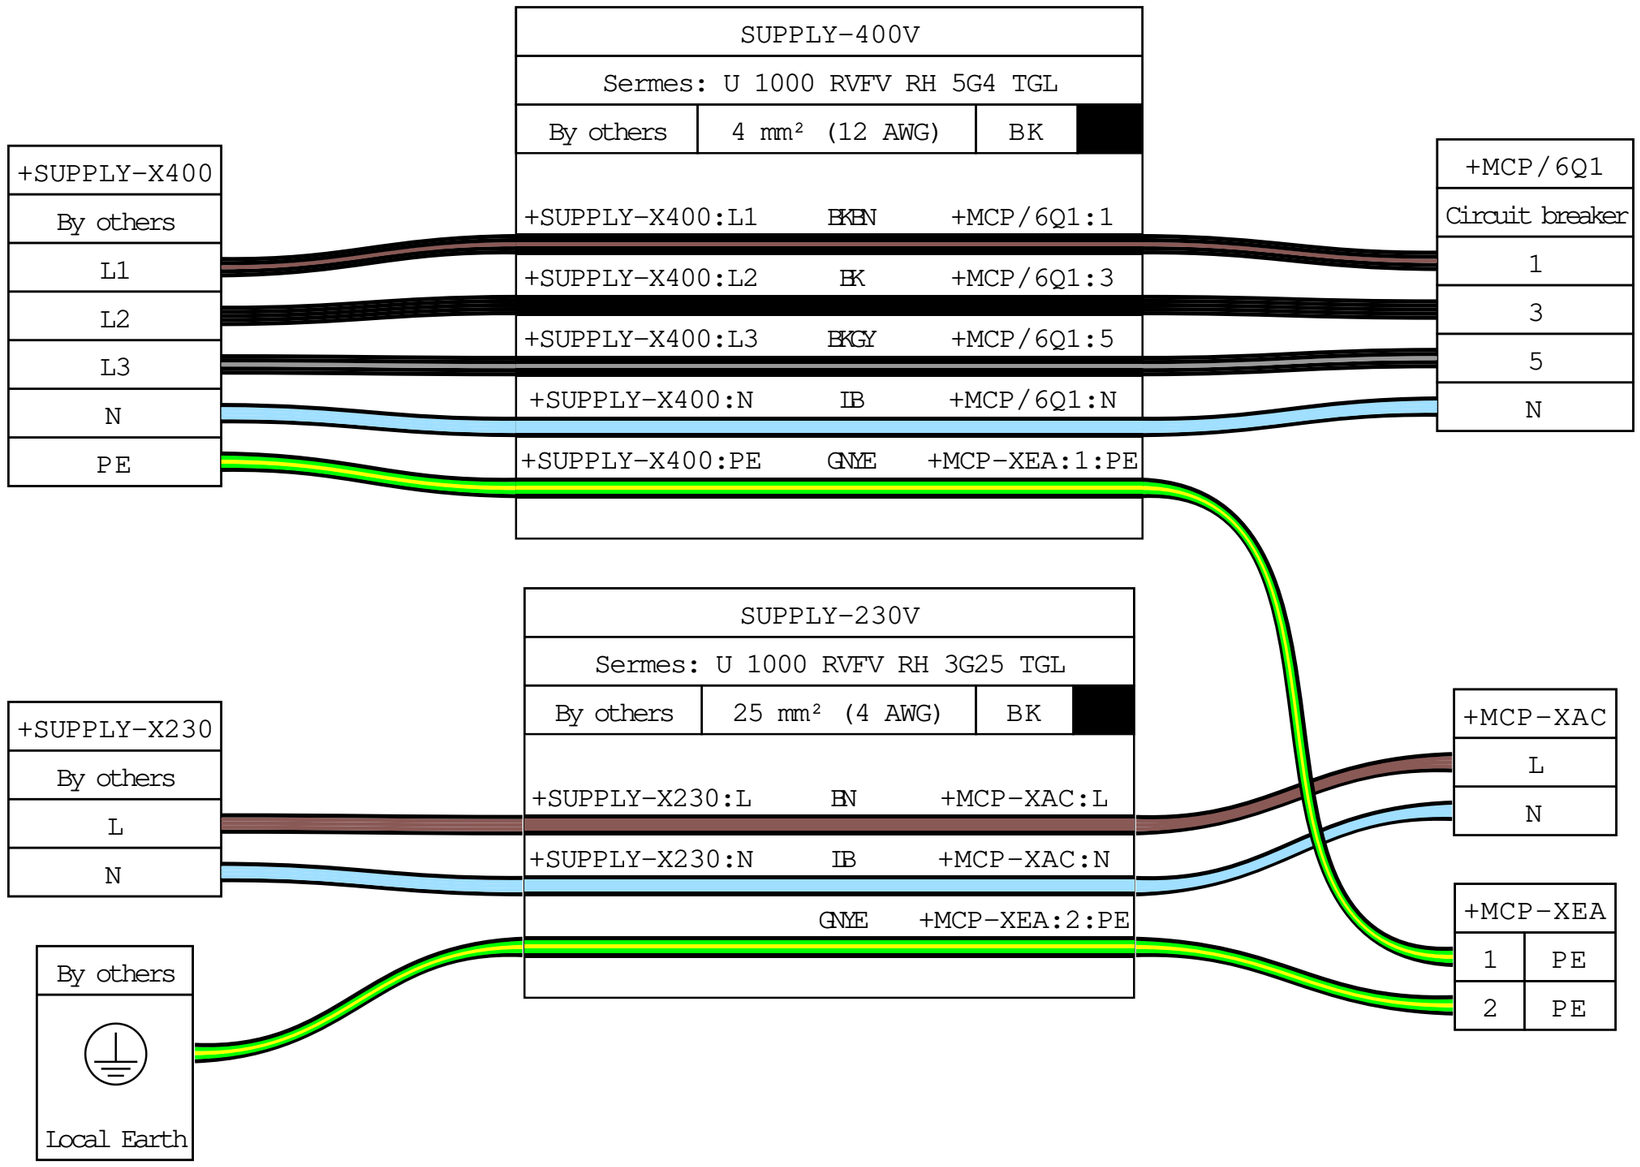
SUPPLY-400V
Sermes: U 1000 RVFV RH 5G4 TGL
By others
4 mm² (12 AWG)
BK
+SUPPLY-X400
By others
L1
L2
L3
N
PE
+SUPPLY-X400:L1
BKBN
+MCP/6Q1:1
+SUPPLY-X400:L2
BK
+MCP/6Q1:3
+SUPPLY-X400:L3
BKGY
+MCP/6Q1:5
+SUPPLY-X400:N
LB
+MCP/6Q1:N
+SUPPLY-X400:PE
GNYE
+MCP-XEA:1:PE
+MCP/6Q1
Circuit breaker
1
3
5
N
SUPPLY-230V
Sermes: U 1000 RVFV RH 3G25 TGL
By others
25 mm² (4 AWG)
BK
+SUPPLY-X230
By others
L
N
+SUPPLY-X230:L
BN
+MCP-XAC:L
+SUPPLY-X230:N
LB
+MCP-XAC:N
GNYE
+MCP-XEA:2:PE
+MCP-XAC
L
N
+MCP-XEA
1
PE
2
PE
By others
Local Earth