




Use the terminal that is marked blue.
(Upper for TL, lower for 2-6.)

- * Terminal 3U means land the wire on the upper deck of the block.
- * Note that there are two of each block 3-6.
- * (Terminals for field wiring marked BU for clarity.)

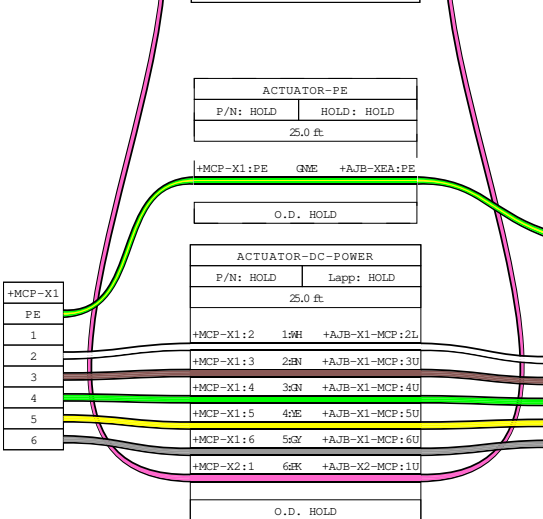

Use the upper terminal that is marked blue.


- * Terminal 3U means land the wire on the upper deck of the block.
- * Note that there are two of each block 3-6.
- * (Terminals for field wiring marked BU for clarity.)


2M		+MCP-X4:2L	SHIELD (PAIR 2)	+AJB-X4-MCP:2L		2 M	
2L		+MCP-X4:3U	EK:3(EK)	+AJB-X4-MCP:3U		2L	
3U		+MCP-X4:3M	WH:3(WH)	+AJB-X4-MCP:3M		3U	
3M		+MCP-X4:3L	SHIELD (PAIR 3)	+AJB-X4-MCP:3L		3 M	
3L		+MCP-X4:4U	EK:4(EK)	+AJB-X4-MCP:4U		3L	
4U		+MCP-X4:4M	WH:4(WH)	+AJB-X4-MCP:4M		4U	
4M						4 M	
4L		+MCP-X4:4L	SHIELD (PAIR 4)	+AJB-X4-MCP:4L		4L	
5U		+MCP-X4:5U	EK:5(EK)	+AJB-X4-MCP:5U		5U	
5M		+MCP-X4:5M	WH:5(WH)	+AJB-X4-MCP:5M		5 M	
5L		+MCP-X4:5L	SHIELD (PAIR 5)	+AJB-X4-MCP:5L		5L	
6U		+MCP-X4:6U	EK:6(EK)	+AJB-X4-MCP:6U		6U	
6M		+MCP-X4:6M	WH:6(WH)	+AJB-X4-MCP:6M		6 M	
6L		+MCP-X4:6L	SHIELD (PAIR 6)	+AJB-X4-MCP:6L		6L	
7U		+MCP-X4:7U	EK:7(EK)	+AJB-X4-MCP:7U		7U	
7M		+MCP-X4:7M	WH:7(WH)	+AJB-X4-MCP:7M		7 M	
7L		+MCP-X4:7L	SHIELD (PAIR 7)	+AJB-X4-MCP:7L		7L	
SHIELD		+MCP-X4:7L	SHIELD (PAIR 7)	+AJB-X4-MCP:7L		SHIELD	
			EK:8(EK)				
			WH:8(WH)				
			SHIELD (PAIR 8)				
			OG:SPARE				
		+MCP-X4:SHIELD	Shield	+AJB-X4-MCP:SHIELD			
3-deck fuse terminal block with shield to rail.		O.D. 0.567 in Pair 8 and OG core unused. Coil, mark, and insulate at both ends.				3-deck through terminal block.	


M1-POWER				
P/N: 10300516		LUTZE: A3311204		
12 AWG (4 mm ²)	+ S	25.0 ft	BK	
+DP-X1:PE	1:GNYE	+AJB-X1:PE		
+DP-X1:1	2:BK	+AJB-X1:1		
+DP-X1:2	3:BK	+AJB-X1:2		
+DP-X1:3	4:BK	+AJB-X1:3		
+DP-X1:4	Shield	+AJB-X1:4		
OD 0.437 in (11.1 mm)				


+DP-X1
PE
1
2
3
4

+AJB-X1
PE
1
2
3
4

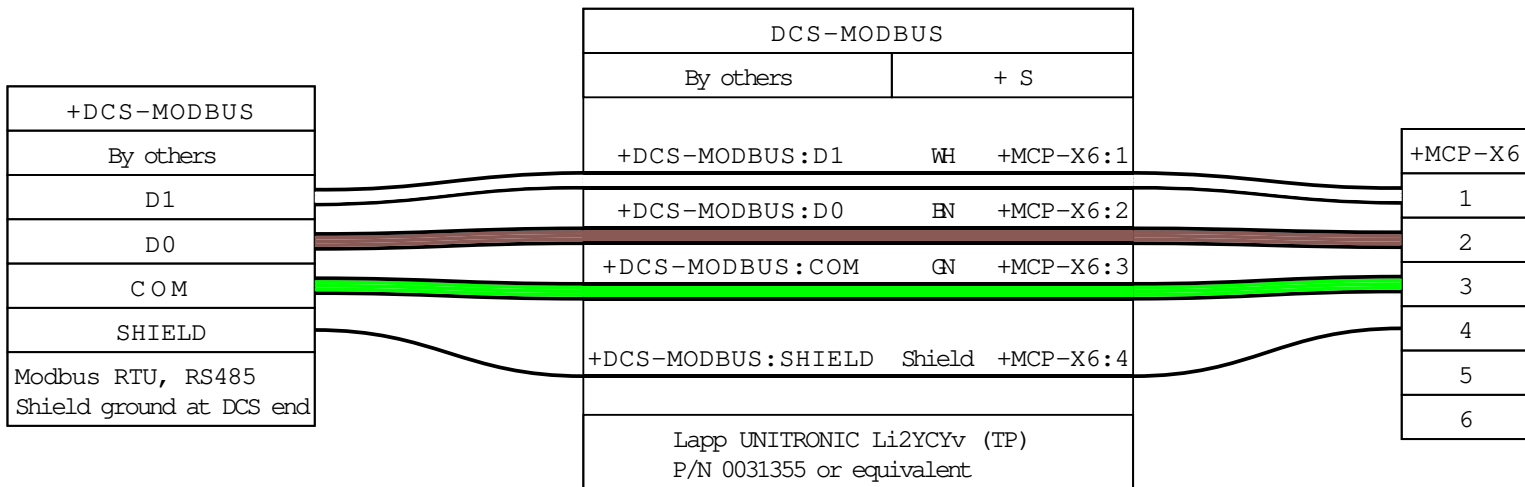


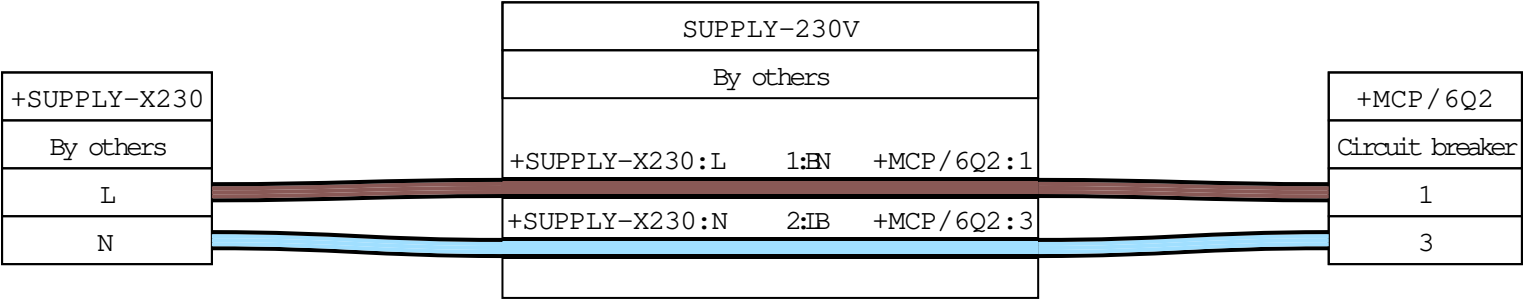

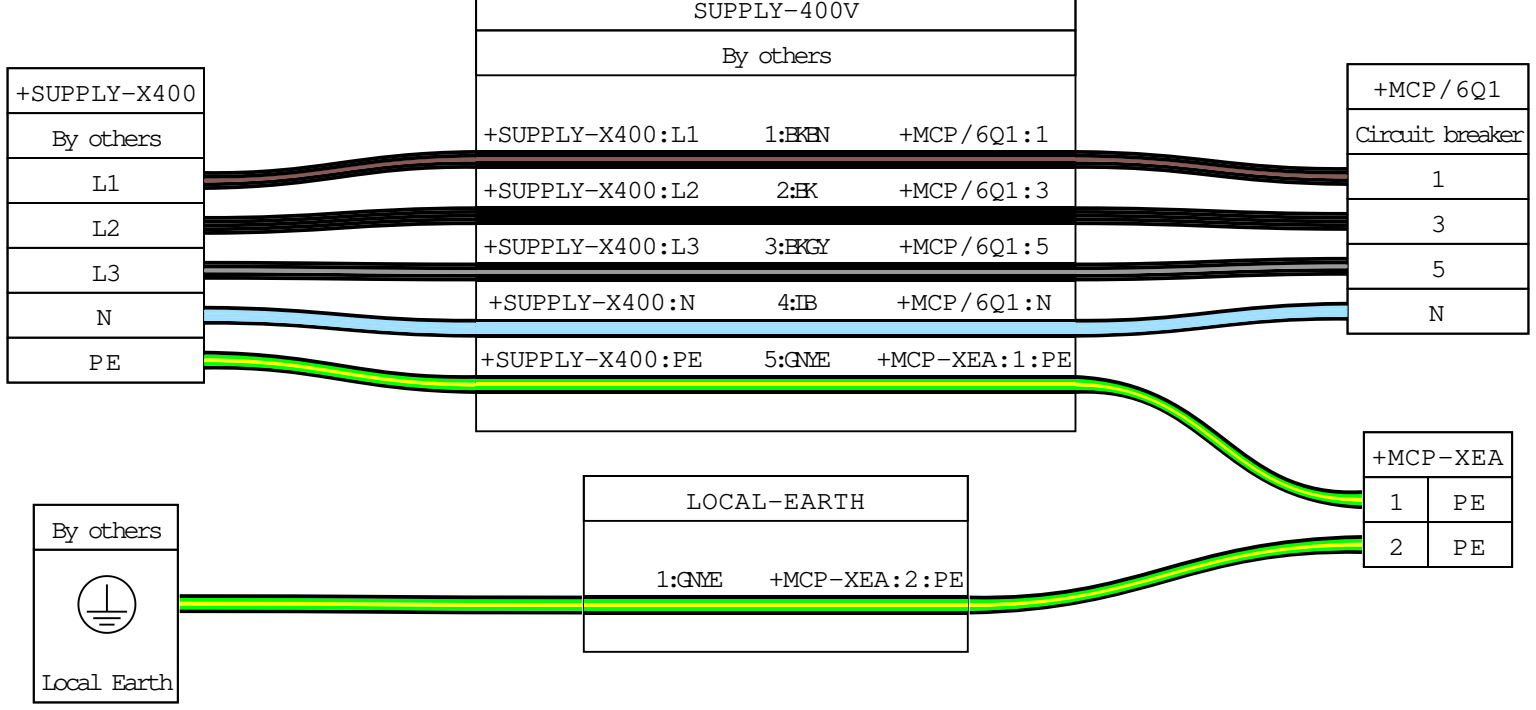

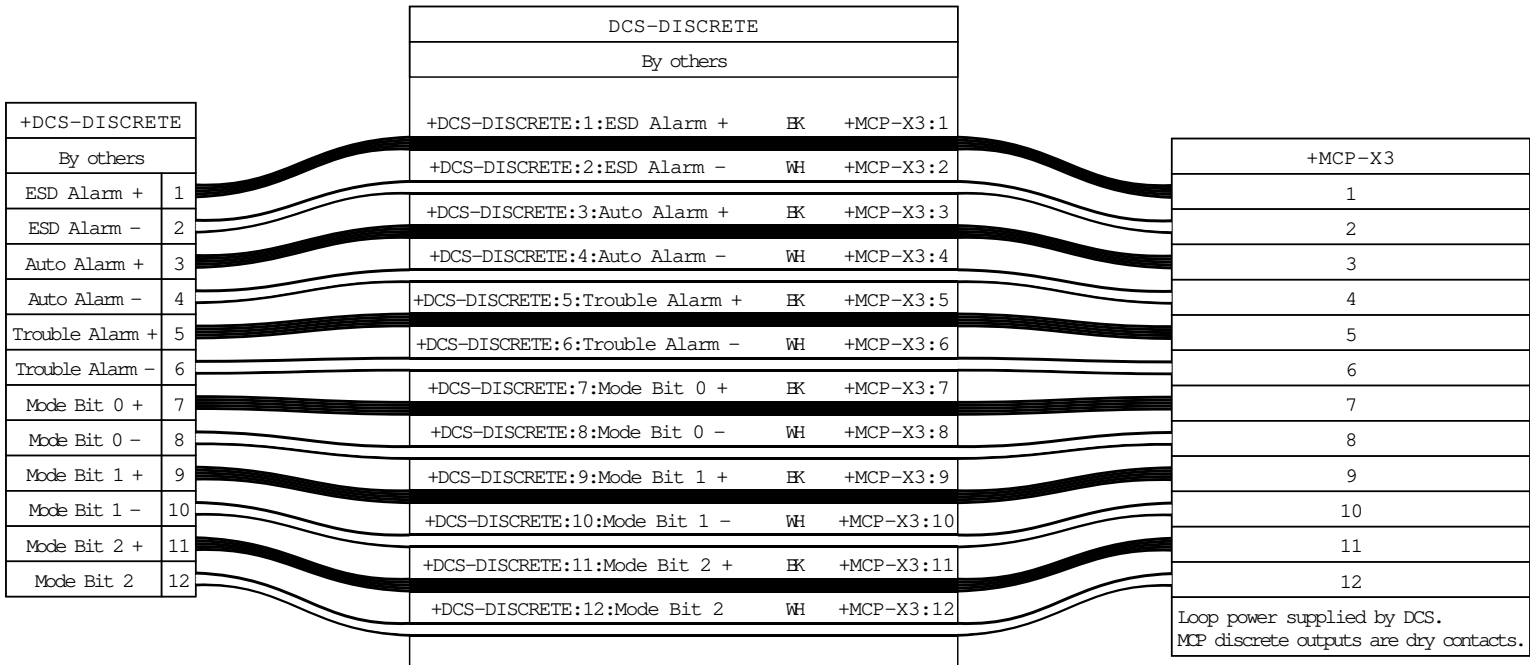

1	2	3	4	5	6	7	8	9
1		+DP-X4:2	BN:PR1 (A-)	+AJB-X4:2				1
2		+DP-X4:3	SHIELD (PAIR 1)	+AJB-X4:3				2
3		+DP-X4:4	GN:PR2 (B+)	+AJB-X4:4				3
4		+DP-X4:5	YE:PR2 (B-)	+AJB-X4:5				4
5		+DP-X4:6	SHIELD (PAIR 2)	+AJB-X4:6				5
6		+DP-X4:7	PK:V+	+AJB-X4:7				6
7		+DP-X4:8	GY:V-	+AJB-X4:8				7
8								8
9								9
		+DP-X4:9	Shield	+AJB-X4:9				
		Resolver cable						
		2 x (2 x 0.25 mm) + 2 x 0.5 mm						
		O.D. 0.343 in (8.7 mm)						

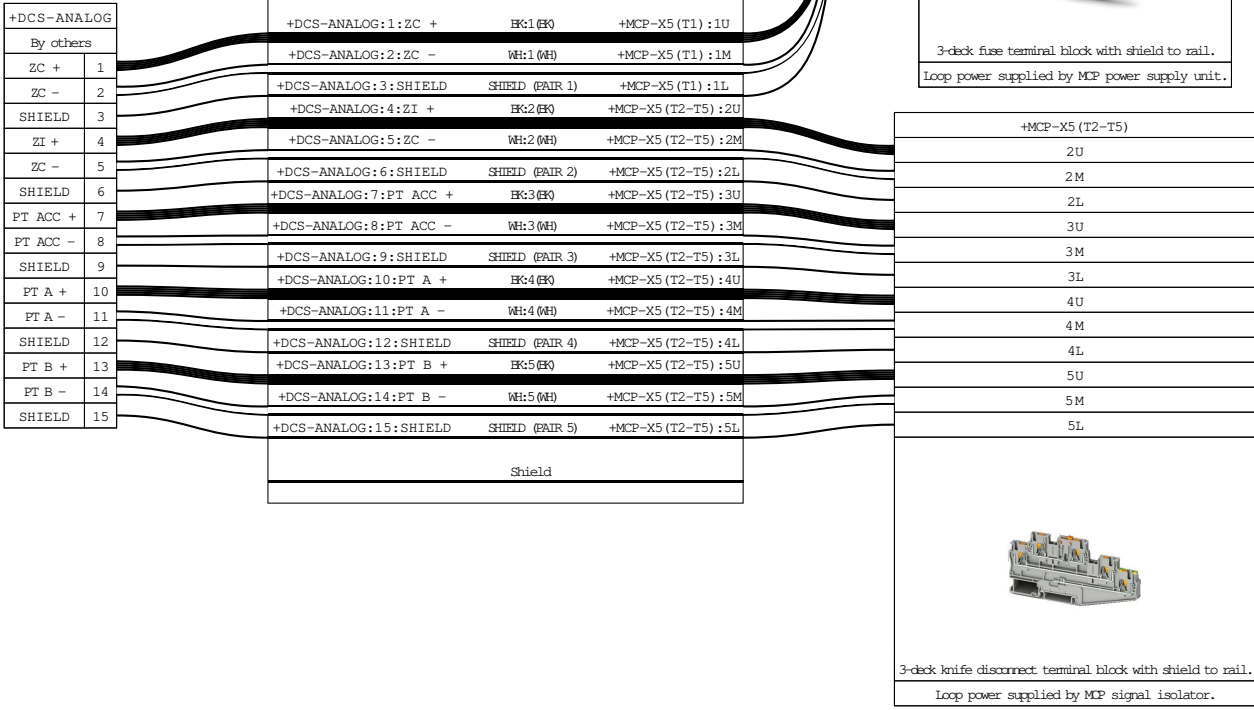

FD1 X3				FAJB X3	
1		+DP-X3:2	BN:PR1 (A-)	+AJB-X3:2	1
2		+DP-X3:3	SHIELD (PAIR 1)	+AJB-X3:3	2
3		+DP-X3:4	GN:PR2 (B+)	+AJB-X3:4	3
4		+DP-X3:5	YE:PR2 (B-)	+AJB-X3:5	4
5					5
6		+DP-X3:6	SHIELD (PAIR 2)	+AJB-X3:6	6
		+DP-X3:7	PK:V+	+AJB-X3:7	
7					7
8		+DP-X3:8	GY:V-	+AJB-X3:8	8
9					9
		+DP-X3:9	Shield	+AJB-X3:9	
		Resolver cable 2 x (2 x 0.25 mm) + 2 x 0.5 mm O.D. 0.343 in (8.7 mm)			

M2-POWER				
P/N: 10300516		LUTZE: A3311204		
12 AWG (4 mm ²)	+ S	25.0 ft	BK	
+DP-X2:PE	1:GNYE	+AJB-X2:PE		
+DP-X2:1	2:BK	+AJB-X2:1		
+DP-X2:2	3:BK	+AJB-X2:2		
+DP-X2:3	4:BK	+AJB-X2:3		
+DP-X2:4	Shield	+AJB-X2:4		
OD 0.437 in (11.1 mm)				

+DP-X2
PE
1
2
3
4

+AJB-X2
PE
1
2
3
4