

D52-2066 DIN-Rail Multi-Function Digital Meter *Amazon ASIN 8094F98PYF*



D52-2066 DIN-rail multi-function Digital meter can measure AC voltage, AC current, active power, power factor, frequency and electric energy and the same time. The meter have a colorful, full-view, high definition LCD to display the measure parameters.

Technical Indicators

1. Accuracy: $1\% \pm 2$ words
2. Range: AC voltage: AC 40.0-300.0V or AC 250.0-450.0V (You should select one type of the meter in your order)
AC Current: AC 0-100.0A, the current resolution is 0.01A.
Frequency: 45.0Hz – 65.0Hz
Power Factor: 0.00-1.00PF
Electric Power: when voltage AC40-300V, the measuring range of real power is 0-30000W ; and when voltage AC250-450V, the measuring range of real power is 0-45000W. Th resolution of real power is 0.1W when the measure range between 0 and 9999.9W, and when real power more than 9999.9W, the resolution is 1W.
Electric Energy: 0-99999kwh, the display of electric energy resolution is 0.01kwh when measure electric engery between 0-999.99kwh, the display of electric energy resolution is 0.1kwh when measure electric engery between 1000.0-9999.9kwh and the display of electric energy resolution is 1kwh when measure electric engery larger than 9999.9kwh
3. Speed: 2 times per second
4. Size: 54×80×64
5. Installation: Din-Rail

Application Method



1. Connect the measure voltage to the 1 and 2 terminal
2. Connections of meter with internal current transformer as graph 1. Make the wire through the hole in the meter and the direction chose arbitrarily.
3. ~~Connections of meter with external current transformer as graph 2. Make the wire through the hole in the meter, and connect the two wires of the secondary transformer to the 3 and 4 terminal.~~
4. When power on, the meter display the measure parameters.
5. When power on, you can press the button of SAM CK last for 5 seconds, then the electric energy will to be zero and start to cumulate when release the button. And when power off, the meter can save the value of electric energy and go on cumulating data when the meter power-on next.

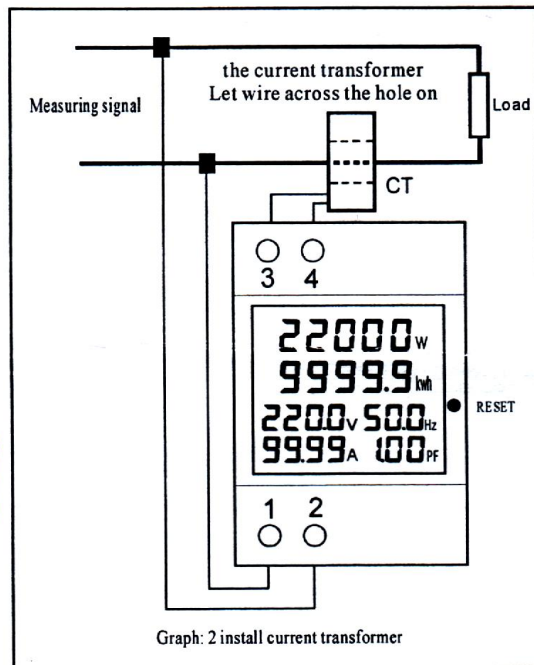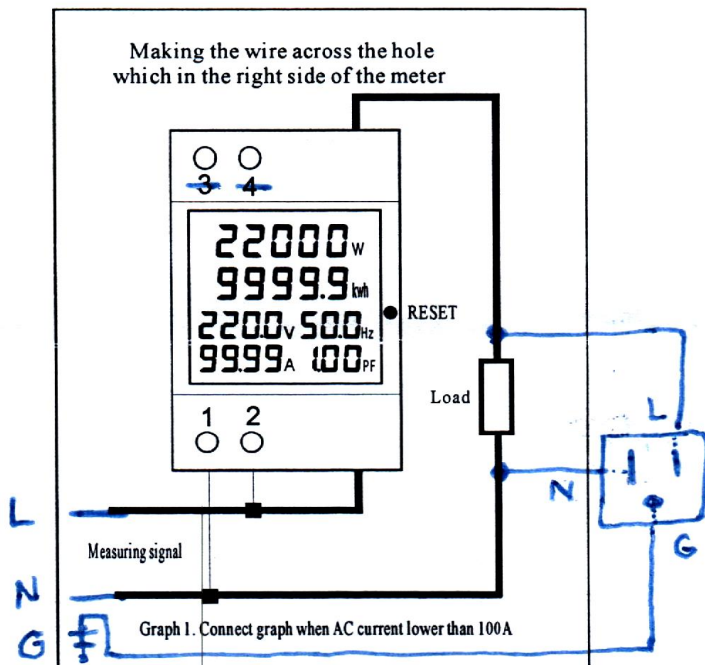

My circuit in Blue above Attention

The meter can only use for measure 45-65Hz AC city electricity.

PRODUCT WIRING

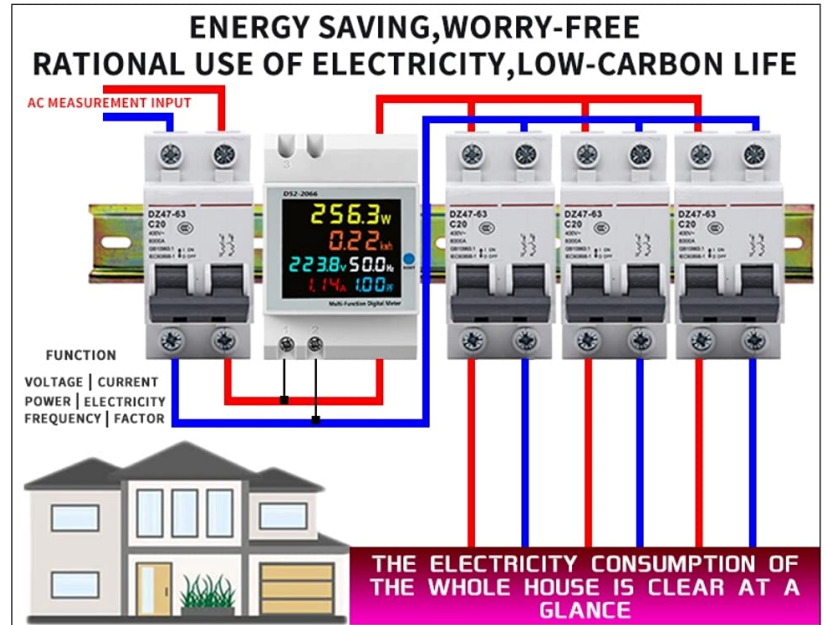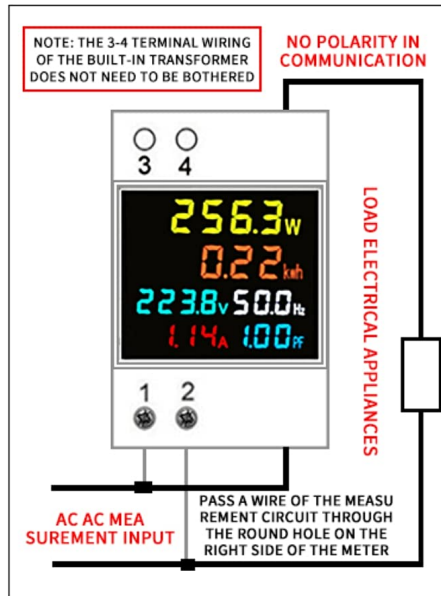

4.0 out of 5 stars

Beware, live power reading is apparent power, not real power...

Reviewed in the United States on December 23, 2022

Style: Built-in CT Verified Purchase

The device is accurate, and easy to install. But after a week of use I noticed the yellow power reading was not real power. Real power is taking the current and multiplying it by the AC voltage... I noticed it was reading only about 50% of the real power. This is due to its ability to measure power factor. Apparent power is real power multiplied by the power factor so if the PF is not 1 then its reading apparent power. This will not help you with your electric bill in America as the power companies charge you for REAL Power, not apparent power. So if you're trying to monitor your actual usage compared to the electric company you're in for a surprise. At the moment I do not know if the accumulated KWH reading is apparent or real,... I'm waiting to hear by from the manufacturer.... Remember if pf is anything less than 1.0 the wattage reading is not real power. PF or power factor is a technical term you can google. Not enough room here to discuss it and its off topic. Just be aware this will not give youu accurage readings for real power.

D52-2066 DIN-Rail Multi-Function Digital Meter



D52-2066 DIN-rail multi-function Digital meter can measure AC voltage, AC current, active power, power factor, frequency and electric energy and the same time. The meter have a colorful, full-view, high definition LCD to display the measure parameters.

Technical Indicators

1. Accuracy: $1\% \pm 2$ words
2. Range: AC voltage: AC 40.0-300.0V or AC 250.0-450.0V (You should select one type of the meter in your order)
AC Current: AC 0-100.0A, the current resolution is 0.01A.
Frequency: 45.0Hz – 65.0Hz
Power Factor: 0.00-1.00PF
Electric Power: when voltage AC40-300V, the measuring range of real power is 0-30000W ; and when voltage AC250-450V, the measuring range of real power is 0-45000W. Th resolution of real power is 0.1W when the measure range between 0 and 9999.9W, and when real power more than 9999.9W, the resolution is 1W.
Electric Energy: 0-99999kwh, the display of electric energy resolution is 0.01kwh when measure electric engery between 0-999.99kwh, the display of electric energy resolution is 0.1kwh when measure electric engery between 1000.0-9999.9kwh and the display of electric energy resolution is 1kwh when measure electric engery larger than 9999.9kwh
3. Speed: 2 times per second
4. Size: 54×80×64
5. Installation: Din-Rail

Application Method

1. Connect the measure voltage to the 1 and 2 terminal
2. Connections of meter with internal current transformer as graph 1. Make the wire through the hole in the meter and the direction chose arbitrarily.
3. Connections of meter with external current transformer as graph 2. Make the wire through the hole in the meter, and connect the two wires of the secondary transformer to the 3 and 4 terminal.
4. When power on, the meter display the measure parameters.
5. When power on, you can press the button of SAM CK last for 5 seconds, then the electric energy will to be zero and start to cumulate when release the button. And when power off, the meter can save the value of electric energy and go on cumulating data when the meter power-on next.

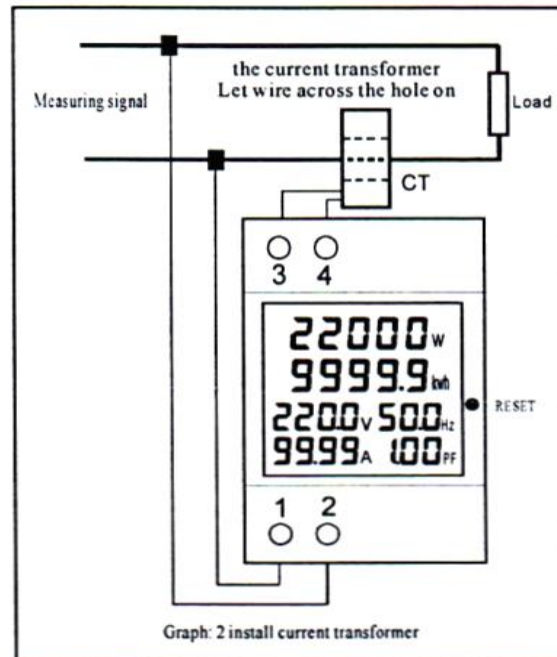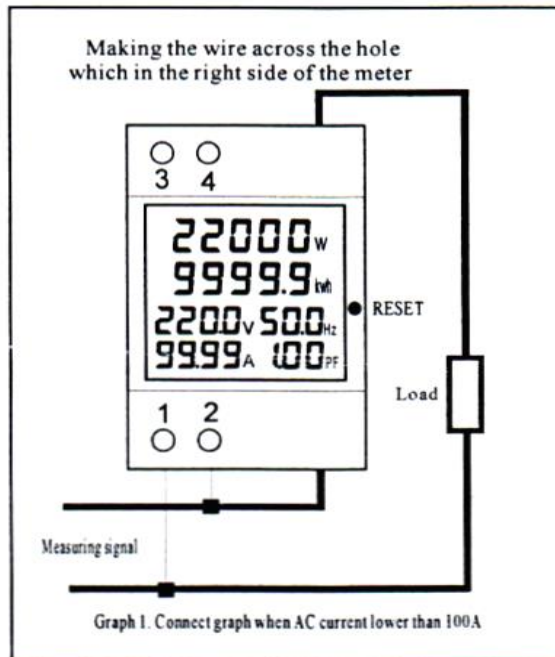

Attention

The meter can only use for measure 45-65Hz AC city electricity.