


XTAR®

PB2S

Portable Power Bank Charger

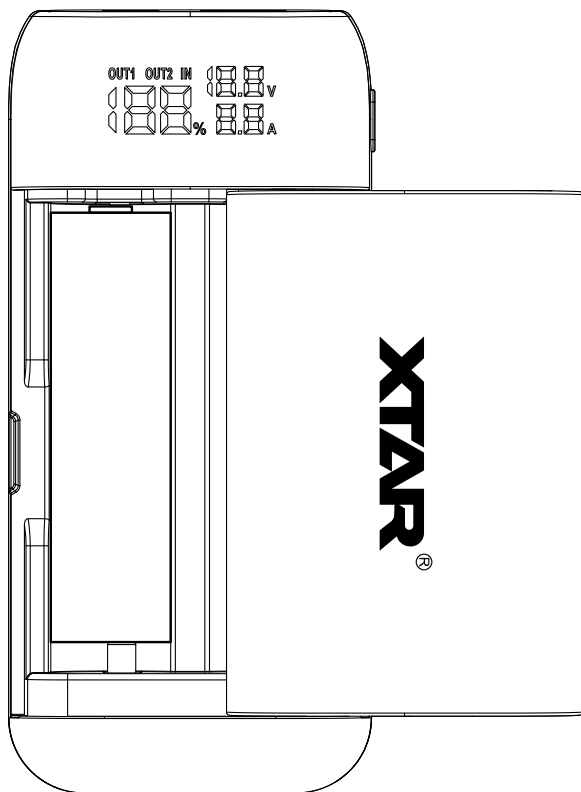

Max output:
18 watts @ 12v
10 watts @ 5v


Max input:
18 watts, USB-PD

English-PB2S

Portable Power Bank Charger

Introduction

Comes with Type-C input, max 2Ax2. The PB2S is not only a battery charger, but also a power bank. Both input and output support QC3.0 and PD3.0 protocol.

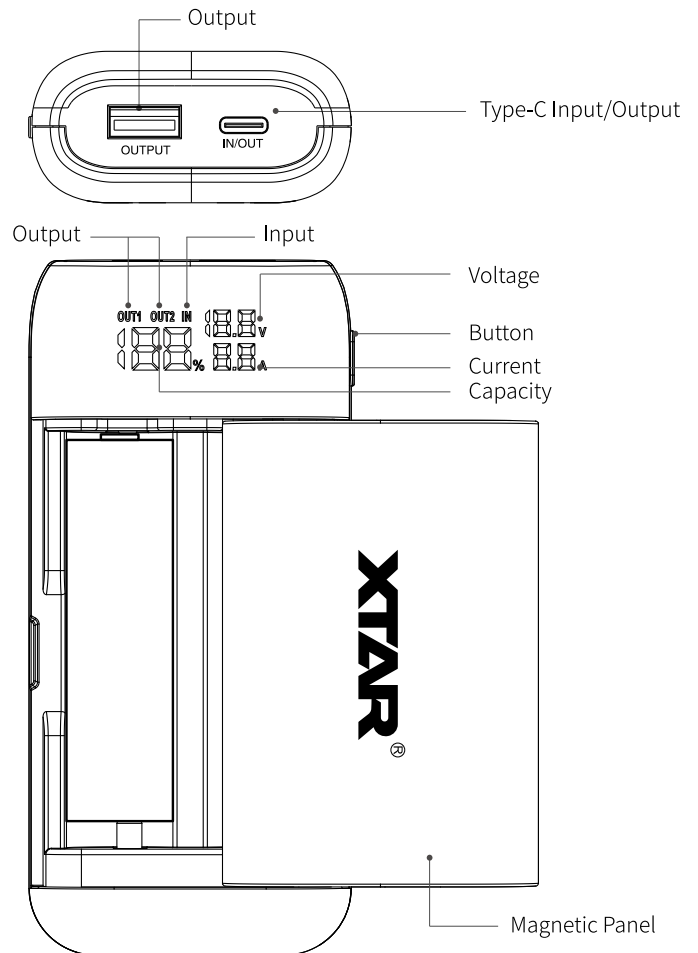

Apply to:

3.6/3.7V unprotected 18650/18700/20700/21700 and protected 18650 Li-ion/IMR/INR/ICR batteries.

Specification

Model	PB2S
Input	QC3.0 & PD3.0 (5V $\Rightarrow$ 2A/9V $\Rightarrow$ 2A/12V $\Rightarrow$ 1.5A)
Constant Current	2Ax2 / 2Ax1 / 1Ax2
USB Output	QC3.0 & PD3.0 (5V $\Rightarrow$ 2A/9V $\Rightarrow$ 2A/12V $\Rightarrow$ 1.5A)
End-of Charge Voltage	4.20 $\pm$ 0.05V
End-of Charge Current	$\leq$ 120mA
Operating Temperature	0-40°C

English

Shenzhen XTAR Electronics Co., Ltd

Address: 5th Floor, No.77 Xinhe Rd, Shangmugu,
Pinghu Area, Longgang District, Shenzhen,
Guangdong, China 518111
Tel/Fax: (+86)755-25507076
Email: info@xtar.cc
Website: www.xtar.cc



Facebook



WeChat

Operation

I . Charge Li-ion Battery

Connecting power supply and inserting batteries, it will automatically start charging. The input supports several fast charging protocols. When the demands of fast charging are met, the input voltage and current will be 9V 2A, charging current will be 2Ax2/2Ax1. When there is no fast charging, the input voltage and current will be 5V 2A, charging current will be 2Ax1/1Ax2.

II . USB Output Function

Insert one or two batteries and connect external devices, the charger will automatically charge the external device. The output supports several fast charging protocols. When the device doesn't support fast charging, the output voltage and current of the charger will be 5V 2A by default. When the device supports fast charging, the charger will adjust the output power according to the device, and its max output power is 18W.

Note: Type-C and USB-A ports can charge two external devices at the same time.

III.0V Activation Function

When batteries are inserted, they will automatically be detected and activated. Batteries which are unable to be activated will be identified as broken batteries, and the display will show "0%, 00.0V, 0.0A".

IV. Button Function

1.When charging, the numeric display shows the input voltage, current and battery capacity percentage. Press the button to switch the display of charging voltage and charging current of the battery in slot 1 and "B1" (battery1). Press again to switch the display of charging voltage and charging current of the battery in slot 2 and "B2" (battery2). Press again back to input display.

2.When the charger is off, press the button to check the capacity.

V. "Low-current" Output

When the charger is off, press and hold the button to enter low-current output mode, so that the charger can charge low-current devices, such as Bluetooth headphones and USB lights. The display will then blink slowly to indicate this mode. Press and hold the button again to shut USB output.

Numeric Display Meaning

1. "IN": Charging
2. "OUT1" or "OUT2": Discharging
3. Percentage number: power percentage of one battery / average power percentage of two batteries

Warranty

Please take the product (with warranty number) and receipt to local dealer to get after-sales service.

- 15 days free replacement.
- 12 months free repair. If problems occur after 12 months, we will offer free repair service but charge for parts replaced. The dealer will inform you the repair fee before repair.
- Lifetime technical support will be offered.

Note:

1. Mechanical and/or misuse damage are not covered by the warranty.
2. You are recommended to store warranty info online: register and login to www.xtar.cc - Member Center - Warranty Information.

Global After-sales Email: service@xtar.cc

US After-sales Email: serviceus@xtar.cc

Anti-Fake

1. Scratch the anti-counterfeiting label on the package to get an 18-digit number.
2. Input the number into the query page on www.xtar.cc (Contact Us - Anti-fake).

Warning

1. When the power supply is insufficient, the charger will reduce the charge current correspondingly.
2. Do not charge unsuitable batteries with the charger.
3. Keep the charger away from humidity, water, and excessive dust.
4. Please operate the charger in a well-ventilated area. Remove all batteries and unplug the charging unit from the power source when not in use.
5. Please insert the batteries above the ribbon so that it will be easier to remove the batteries.
6. Children should use the charger accompanied by an adult.
7. Do not disassemble or use the charger if it is damaged.
8. For more and updated info, please visit www.xtar.cc.