


Control board X2Q322_K_V4 (260703), controller with sticker “X2Q311OW OTA V22”, LQFP64. View as in the photo: sticker readable, module site U10 on the right. Pin keys: u = top edge, d = bottom edge (numbered from the left), l = left edge, p = right edge (numbered from the bottom). Grey: standard pin number and function in the STM32F103 / GD32F103 / GD32F303 family. AMPERE POINT, 28 September 2026, EN v1 (from PL v2 of 25 September 2026): ground measured.

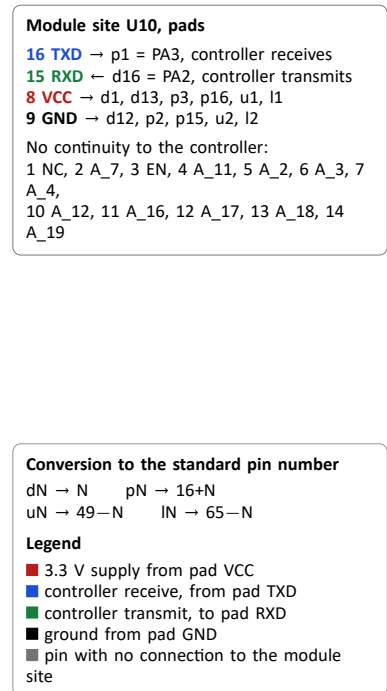

Connections between the module site and the controller

Module pad	Pin (u/d/l/p)	Standard no.	Function in the controller	Status
16 TXD	p1	17	PA3 USART RX	measured
15 RXD	d16	16	PA2 USART TX	measured
8 VCC	d1	1	VBAT	measured
8 VCC	d13	13	VDDA	measured
8 VCC	p3	19	VDD	measured
8 VCC	p16	32	VDD	measured
8 VCC	u1	48	VDD	measured
8 VCC	l1	64	VDD	measured
9 GND	d12	12	VSSA	measured
9 GND	p2	18	VSS	measured
9 GND	p15	31	VSS	measured
9 GND	u2	47	VSS	measured
9 GND	l2	63	VSS	measured

Findings

- 1. Controller family.** The six supply pins fall exactly on positions 1, 13, 19, 32, 48 and 64, which is the supply pattern of the STM32F103 and its GD32F103 / GD32F303 equivalents in LQFP64. The module port lands on PA2 and PA3, the USART pins of that family. All five ground pins fall on the positions given by the datasheet: 12, 18, 31, 47 and 63. These three independent matches confirm both the family and the location of pin 1 in the bottom-left corner. The exact part number is under the sticker.
- 2. Directions.** Pad TXD (module transmit) reaches the controller receive pin PA3. Pad RXD reaches the controller transmit pin PA2. The DevKit is wired accordingly: pin 4 (TX) to pad TXD, pin 5 (RX) to pad RXD.
- 3. Nothing but the port.** Pads A_x, EN and NC have no continuity to the controller. The module has no reset line and no auxiliary signals from the controller.
- 4. Ground** from pad GND reaches d12, p2, p15, u2 and l2, as in the datasheet. By the datasheet the 8 MHz crystal should be on d5 and d6 and the controller reset on d7.
- 5. Programming connector of the controller,** if ever needed: SWDIO on u3, SWCLK on l16, BOOT0 on l5, reset on d7.