
CoffeeFlow — combined board v2: valve SSR (230 V) and gear pump interface (24 V pump, isolated)

LOW VOLTAGE SIDE (3.3 V logic) | everything right of U1 is MAINS 230 V — keep isolation slot / creepage under U1.


1 / Logic inputs

SSR, PUMP_SPEED, PUMP_TACHO and 3V3
from the XIAO (Controller sheet)

2 / Valve SSR — zero-cross (M5Stack Unit SSR, 3.3 V drive)

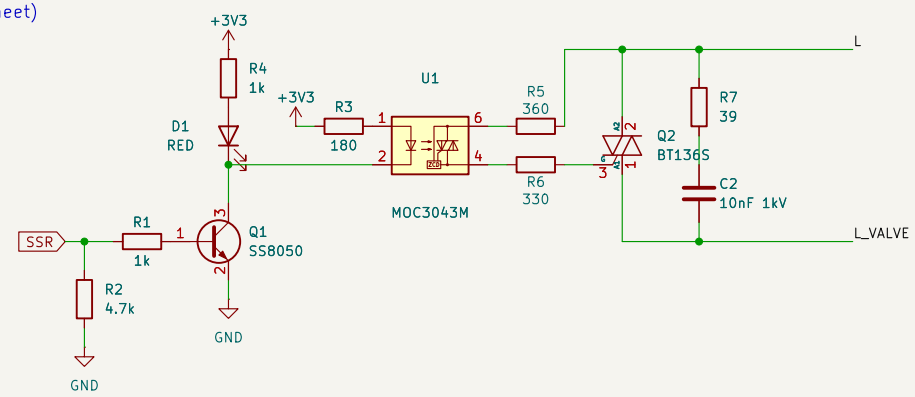



5 / Mains connectors (HT3.96)




N goes straight from J2 to J3.
F1 protects the valve channel.

3 / Gear pump interface (MPB003) — two EL817C, pump side isolated

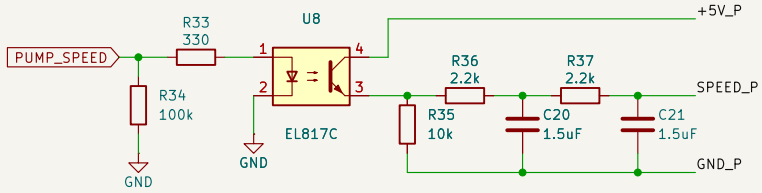



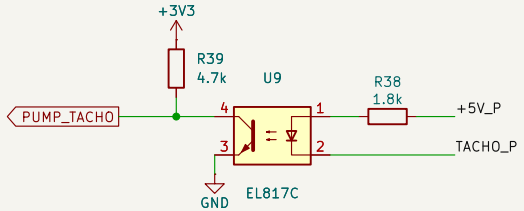

GND_P, +5V_P, SPEED_P and TACHO_P belong to the pump (green, yellow, brown, blue wires):
never tie them to board GND or +5V. Rotation (white) stays unconnected in the cable.
U8 off (reset, boot, XIAO absent): R35 pulls the setpoint to GND_P, pump stopped.
PWM 1 kHz, 16 bits on GPIO1; 2 x 2.2k / 1.5uF filter: 48 Hz, about 12 mV ripple, 10 ms response.
PUMP_TACHO is low while blue is low; count its edges (PCNT).

Controller

File: combined_controller.kicad_sch

Interfaces

File: combined_interfaces.kicad_sch


CoffeeFlow

Sheet: /
File: combined.kicad_sch

Title: Combined — valve SSR (230 V) and gear pump interface


Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/3

1. POWER — 24 V in (J7), 24 to 5 V buck (U10), 5 V out to the screen (J1), XIAO 3.3 V regulator

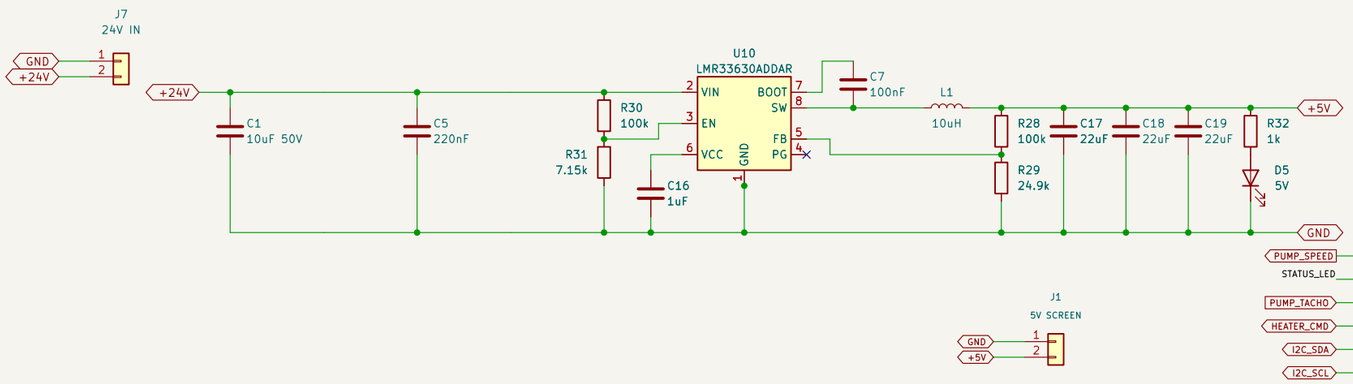

U10 LMR33630A, 400 kHz: 5.02 V with R28/R29 (100k / 24.9k). EN divider R30/R31 (100k / 7.15k): starts at 18.4 V, stops at 16.9 V. +5V feeds J1 (screen), CAN, FLOW and the boiler SSR output.
The XIAO 5V pin is VBUS of its USB-C, with no diode: never plug USB into the XIAO on this board.
USB would drive +5V and, through the buck high-side body diode, the 24 V rail. Flash it off the board.
XIAO 3V3 supplies CAN VIO, I2C, TMP102, ADS1115, FLOW pull-up, the valve driver
and the PUMP_TACHO pull-up. USB-C, LDO, BOOT and RESET are on the removable XIAO.


2. XIAO ESP32-S3 — two female 1x7 sockets, 2.54mm pitch

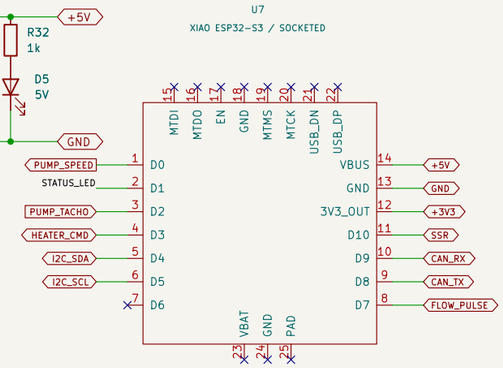


U7: D0/GPIO1 PUMP_SPEED; D1/GPIO2 LED; D2/GPIO3 PUMP_TACHO; D3/GPIO4 BOILER.
D4/GPIO5 SDA; D5/GPIO6 SCL; D7/GPIO44 FLOW; D8/GPIO7 CAN TX.
D9/GPIO8 CAN RX; D10/GPIO9 SSR (valve).

Seeed numbering: 1..7 = D0..D6; 8..11 = D7..D10.
12=3V3 OUT; 13=GND; 14=5V IN. Pins 15..25 are bottom pads, NC.
D6/GPIO43 unused.

10. PRESSURE ADC — optional ADS1115, J10 = screen_sensors J3 order

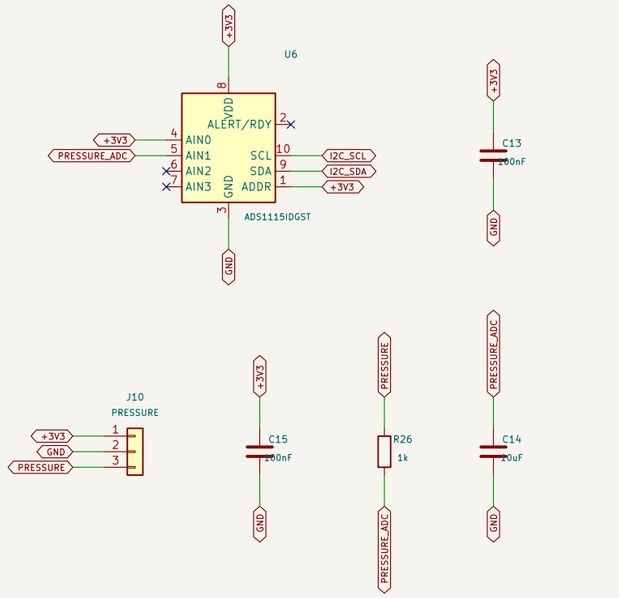


U6 ADS1115 on the shared I2C bus, ADDR tied to 3V3: 0x49 (TMP102 already uses 0x48).
A0 reads the local 3V3; A1 reads pressure through R26/C14 (1k / 10uF, 16 Hz, 10 ms).
A2, A3 and ALERT/RDY unused. J10 pin order matches screen_sensors J3: same cable.
XDB401 output 0.4–2.4V on 3V3 supply, not ratiometric: use the absolute A1 voltage.




3V3 PWR_FLAG represents the regulator output on the XIAO.

Footprint: Combined_Local:XIAO-ESP32-S3-DIP-Headers.
Fit two female 1x7 sockets; XIAO fitted manually from stock.
Row spacing 15.24mm; 2.54mm pitch. GPIO4 avoids boot straps.

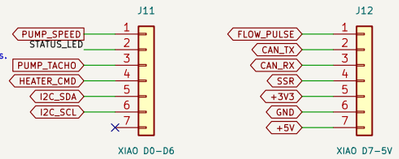

J11/J12: female 1x7 sockets soldered by JLCPCB (THT); the XIAO (U7) plugs in by hand
and is not on the board. J11 pin n = XIAO pin n; J12 pin n = XIAO pin n+7.

3. STATUS LED — GPIO2 / D1, HIGH = ON



Existing green LED and 1k resistor retained.

FUTURE PCB FIRMWARE: BOILER GPIO4, active HIGH (MOSFET driver).
Preload LOW before output enable; disable heater pull-up.
Current HW-399 firmware uses GPIO3, active LOW: do not use unchanged.
Other existing XIAO pins retained; add status LED on GPIO2.
Firmware unchanged; PCB placement and routing pending.



H1 to H6: M2.5 mounting holes, 2.7mm NPTH, not connected.
Metal screws and standoffs: the hardware edge of H2 and H6
stays more than 7 mm from mains and low-voltage copper.

Socketed XIAO ESP32-S3 / Seeed DIP footprint


CoffeeFlow


Sheet: /Controller/
File: combined_controller.kicad_sch


Title: Combined — XIAO ESP32-S3, 5V input, status LED and pressure ADC


Size: A3	Date: 2026-10-13	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 2/3

4. CAN — TJA1051T/3, 5V bus driver / 3.3V logic






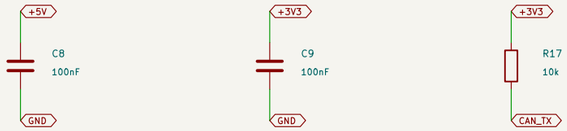




S/SLNT hard-wired low. R17 keeps TX recessive during reset.
R18 permanently terminates this bus-end node (120 ohms).
J5 has no GND pin: power GND must run alongside CAN pair.

5. I2C — 3.3V, on-board TMP102 and ADS1115









R20/R23 (4.7k) pull SDA/SCL up to 3V3: no off-board I2C connector.
Addresses: TMP102 0x48 (ADD0 grounded, ALERT unused) / ADS1115 0x49.
Mount the TMP102 away from XIAO and MOSFET heat.
100kHz initial bus speed.

6. DIGMESA — open collector, existing RC filter










GPIO44 / D7 input; internal pull-up disabled. 1k x 10nF = 10us.
Digmesa powered from 5V; signal pulled to 3.3V only.
Pin order: GND brown / 5V green / SIGNAL yellow.
RC discharge speed also depends on sensor/cable impedance.

7. BOILER SSR — powered 5V output, HIGH command = ON

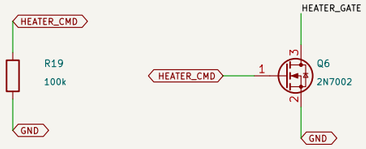









J8: SSR (-) -> pin1 GND; SSR (+) -> pin2 switched 5V.
Q6 pulls Q5 gate LOW; Q5 supplies the SSR current.
GPIO4 / D3 -> HEATER_CMD (HIGH = ON).
R19/R21/R22 ensure off with GPIO floating or 3V3 absent. Shared GND.
Gate pull-up current about 0.5mA when ON; load <=100mA; no mains.

CoffeeFlow

Sheet: /Interfaces/
File: combined_interfaces.kicad_sch

Title: Combined — CAN, I2C, flowmeter and boiler SSR output

Size: A3	Date: 2026-10-13	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 3/3