



start at $z=0.000$ mm

outside $r=1.5$ mm: $2.248\text{e-}09$
inside: 100.000000%
throughput: 100.0000%

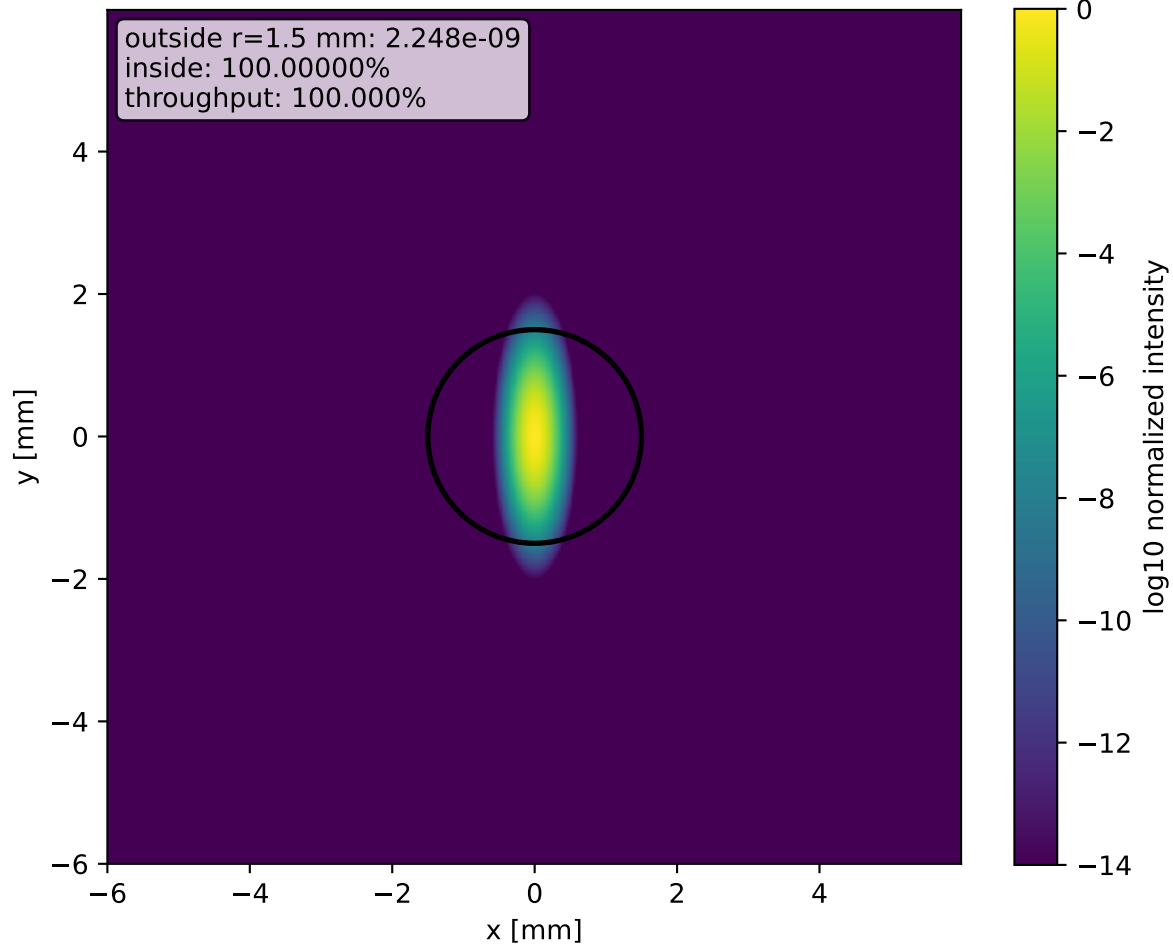


input aperture 1 at z=5.000 mm

outside r=1.5 mm: 0.000e+00
inside: 100.000000%
throughput: 95.172%

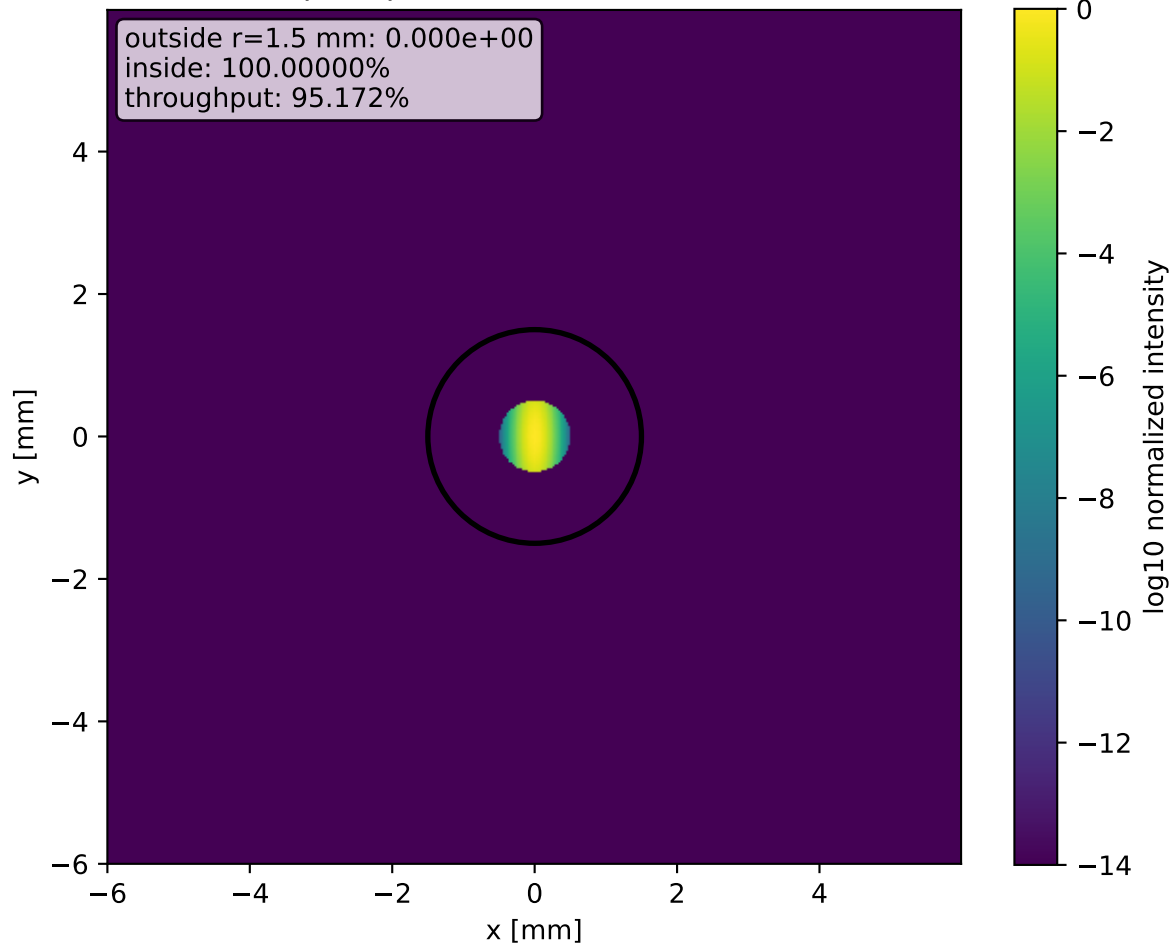


input aperture 2 at z=25.000 mm

outside r=1.5 mm: 0.000e+00
inside: 100.000000%
throughput: 94.786%

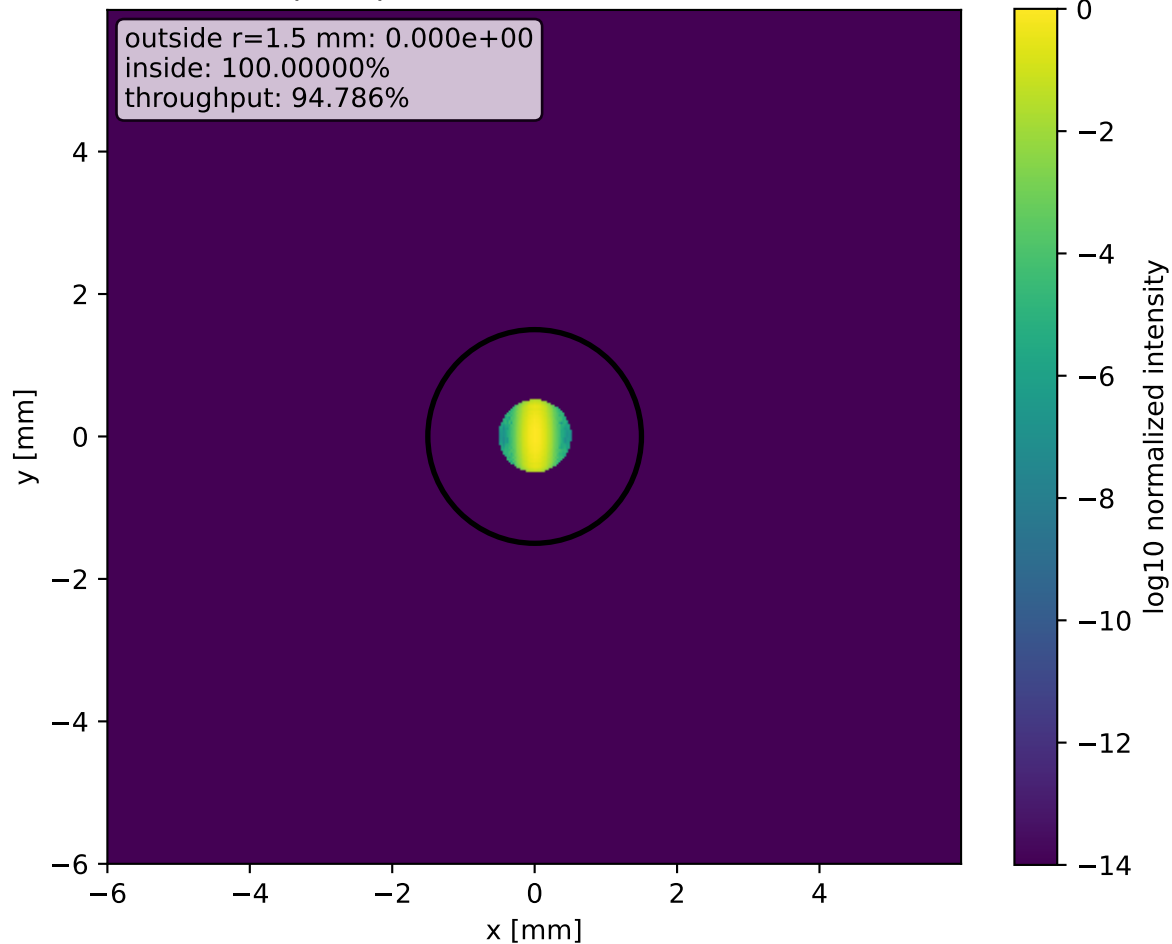


L1 AC254-030-A f=30 mm at z=46.225 mm

outside r=1.5 mm: 1.183e-07
inside: 99.99999%
throughput: 94.786%

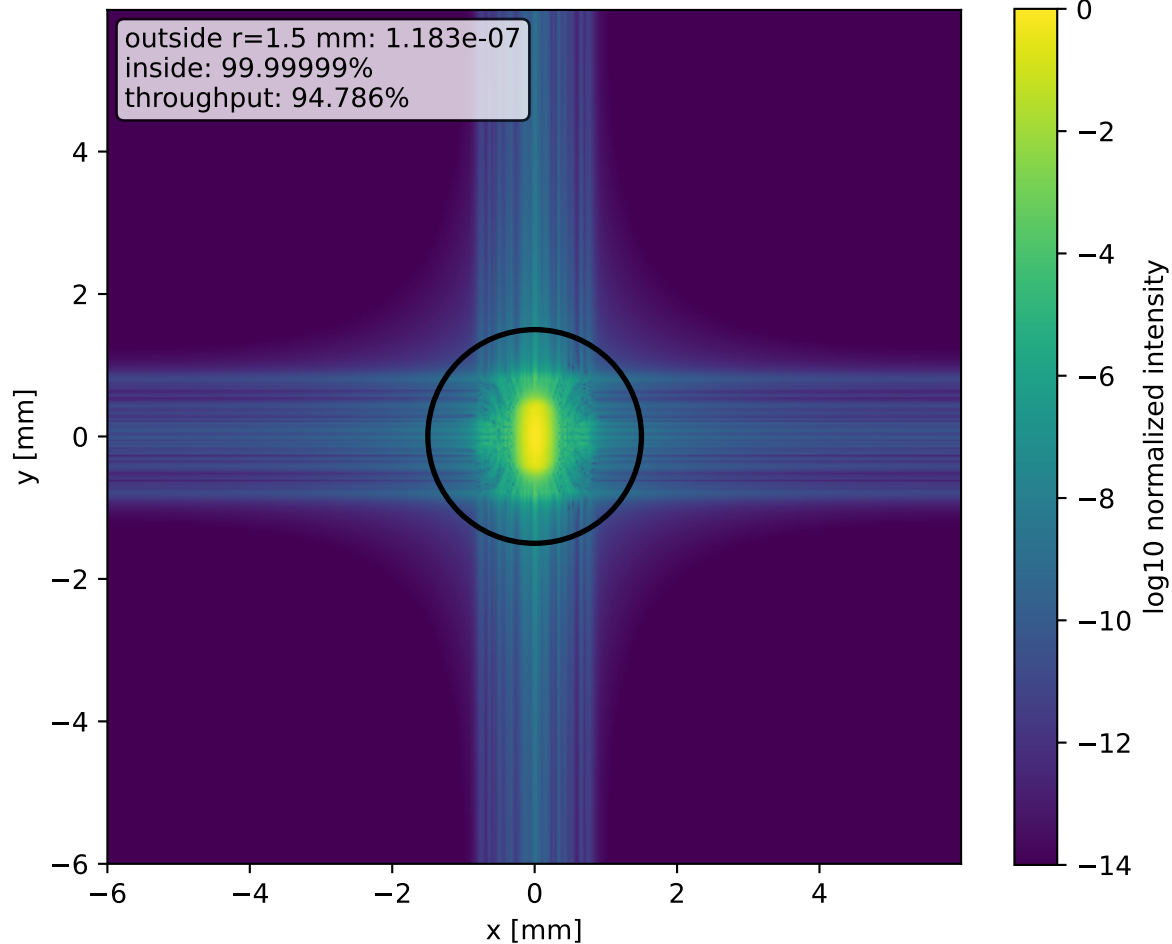


pinhole at z=76.248 mm

outside r=1.5 mm: 4.300e-06
inside: 99.99957%
throughput: 94.786%

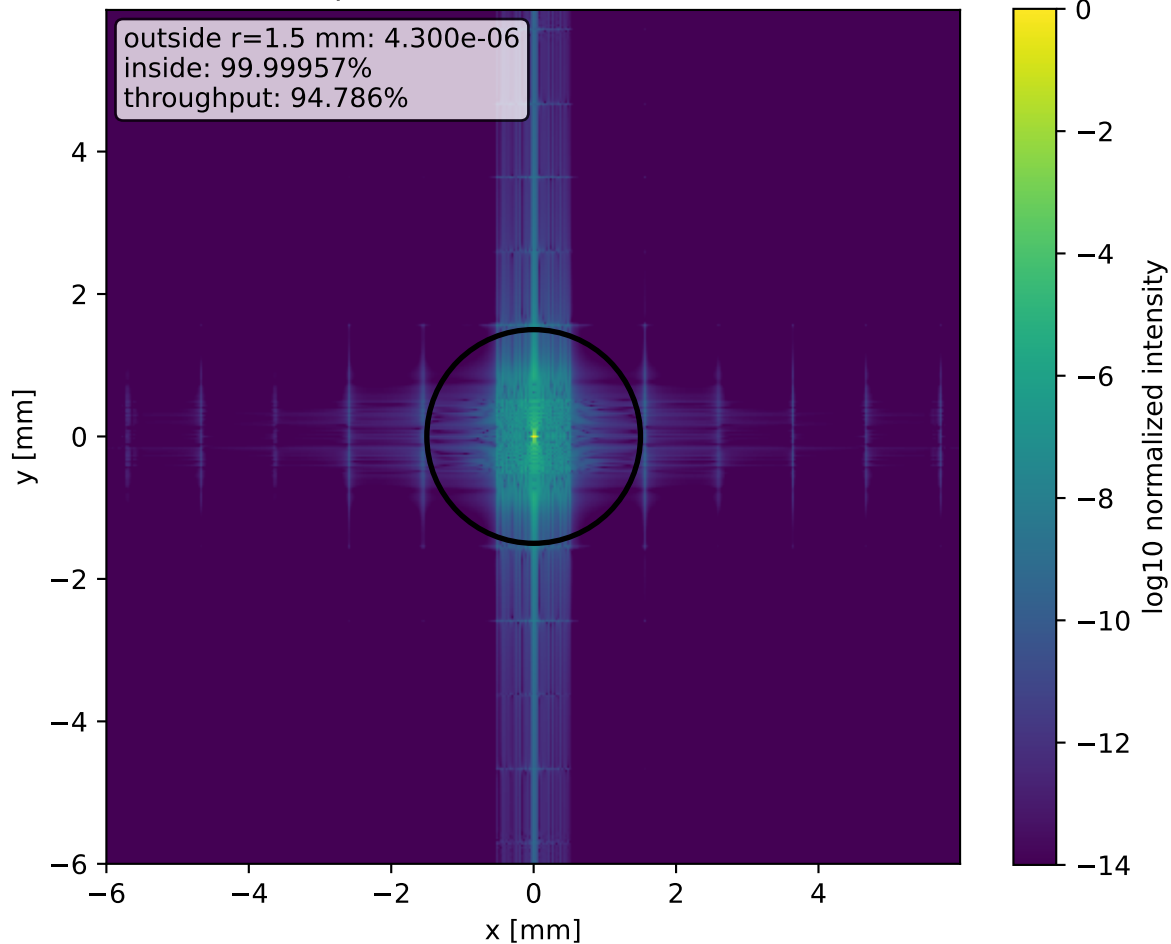

L2 AC254-050-A-ML f=50 mm at z=126.415 mm

outside r=1.5 mm: 2.559e-04
inside: 99.97441%
throughput: 94.786%

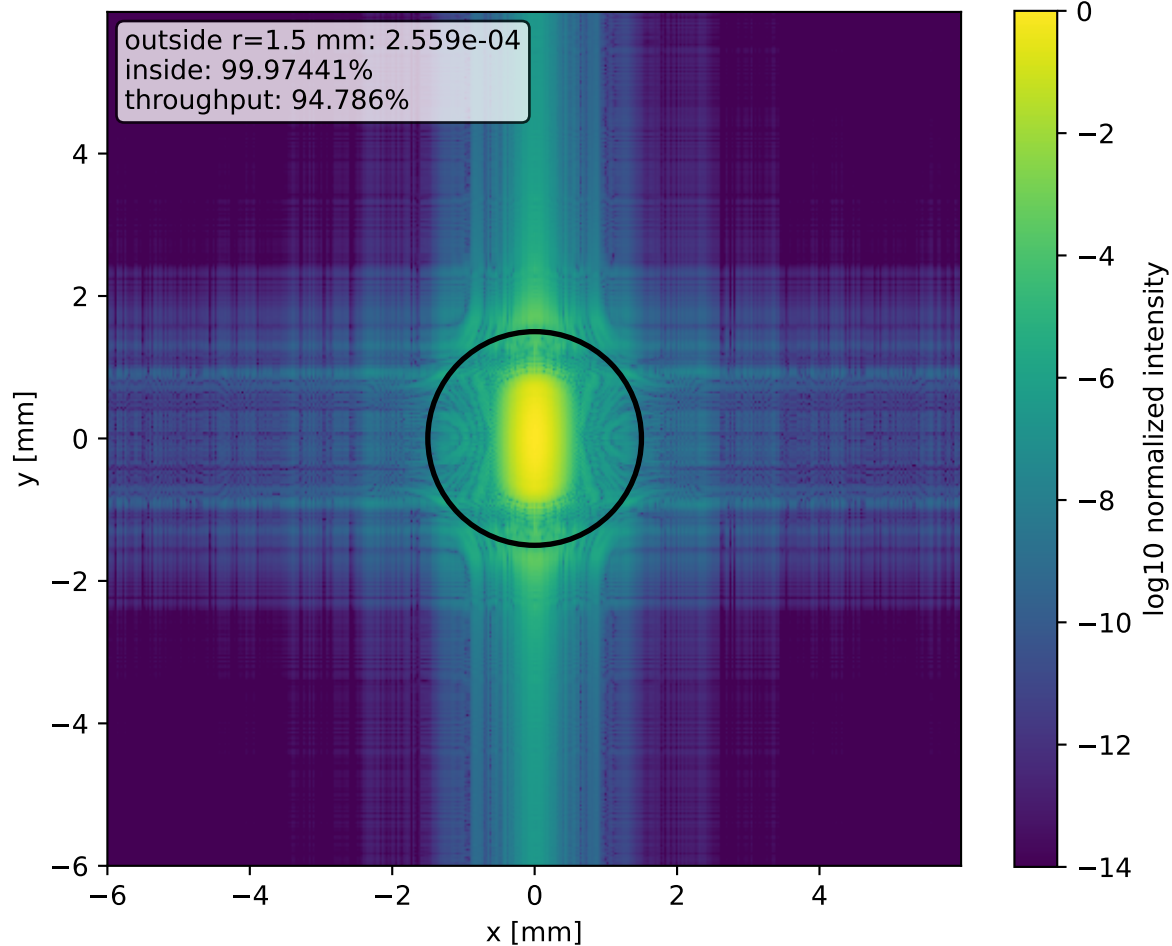

target plane at $z=1000.000$ mm

outside $r=1.5$ mm: $3.156\text{e-}03$
inside: 99.68436%
throughput: 94.786%

