


start at $z=0.000$ mm

outside $r=1.5$ mm: $1.383\text{e-}49$
inside: 100.000000%
throughput: 100.0000%

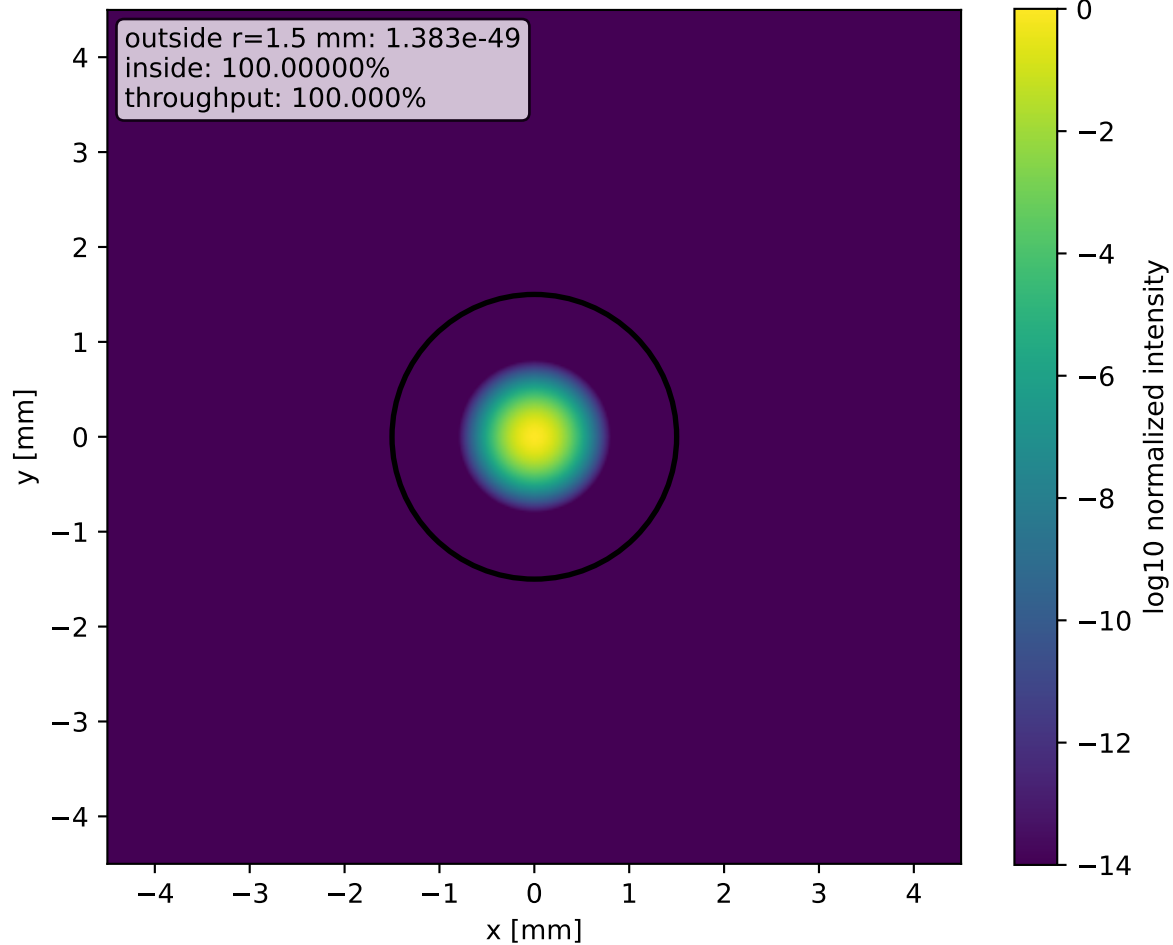

input aperture 1 at z=5.000 mm

outside r=1.5 mm: 0.000e+00
inside: 100.000000%
throughput: 100.0000%

y [mm]

x [mm]

log10 normalized intensity

0

-2

-4

-6

-8

-10

-12

-14

input aperture 2 at z=25.000 mm

outside r=1.5 mm: 0.000e+00
inside: 100.000000%
throughput: 99.999%

y [mm]

x [mm]

log10 normalized intensity

0

-2

-4

-6

-8


-10

-12

-14


L1 AC254-030-A f=30 mm at z=46.225 mm

outside r=1.5 mm: 4.107e-08
inside: 100.000000%
throughput: 99.999%

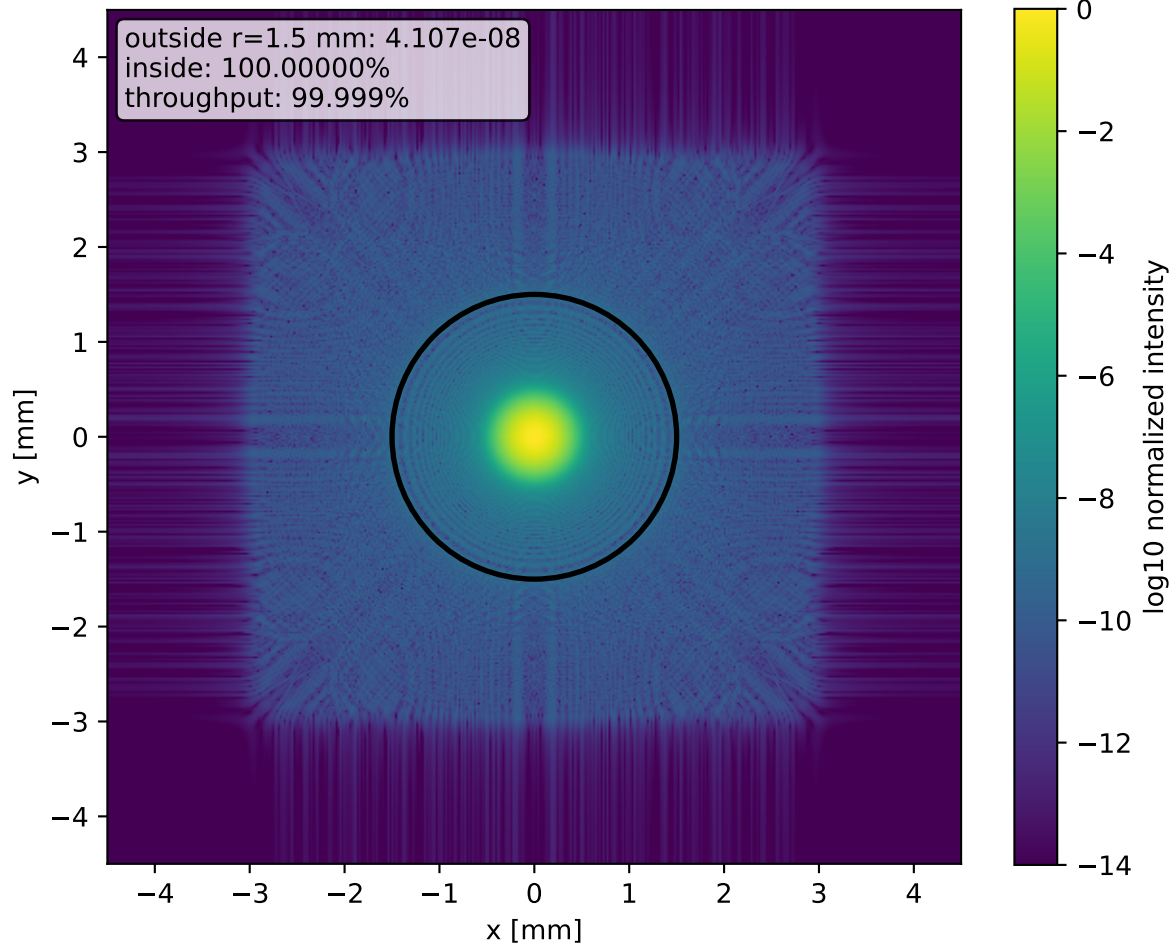

pinhole at z=76.248 mm

outside r=1.5 mm: 4.921e-08
inside: 100.000000%
throughput: 99.999%

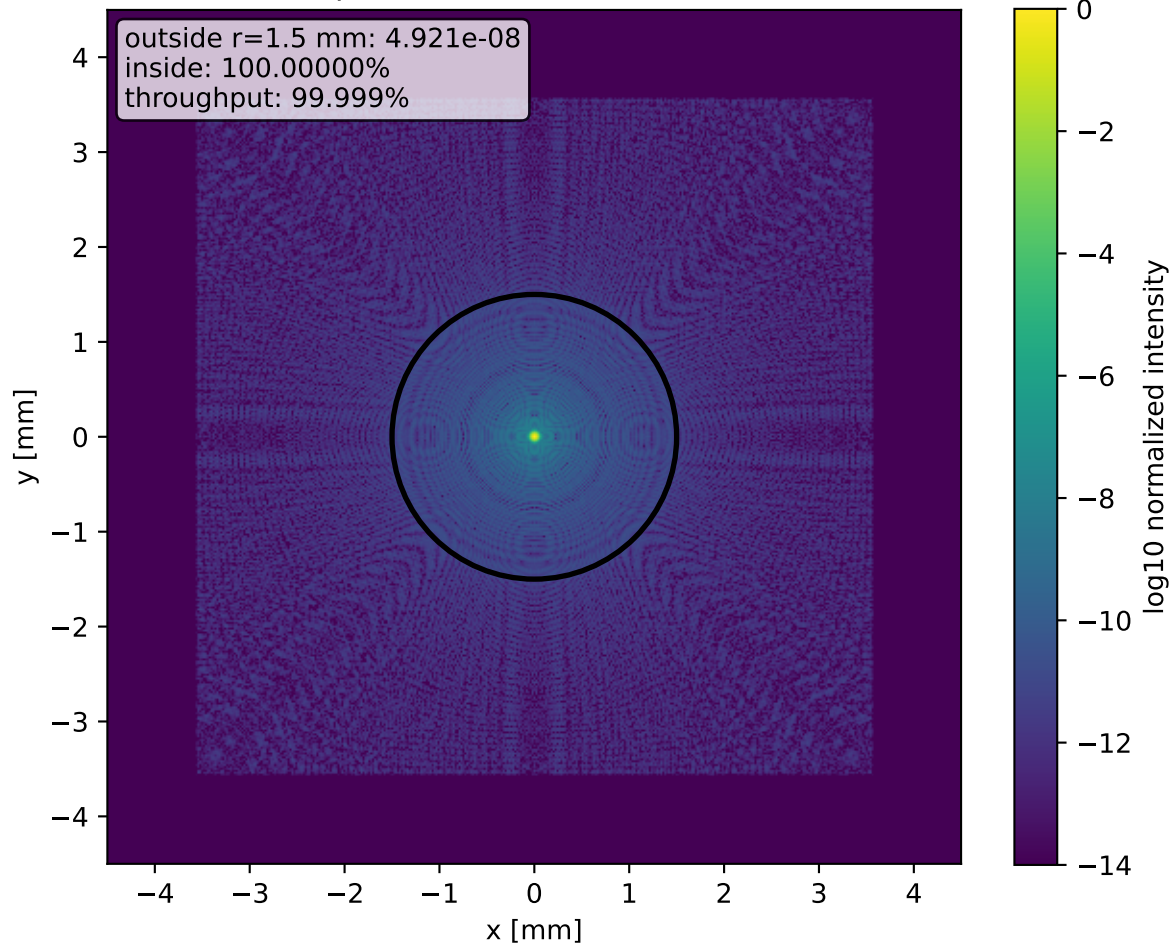

L2 AC254-050-A-ML f=50 mm at z=126.415 mm

outside r=1.5 mm: 1.009e-07
inside: 99.99999%
throughput: 99.999%

y [mm]

x [mm]

log10 normalized intensity

0

-2

-4

-6

-8

-10

-12

-14

target plane at $z=1000.000$ mm

outside $r=1.5$ mm: $1.673\text{e-}06$
inside: 99.99983%
throughput: 99.999%

