

# VC-A50P\_VC-A50PN Quick Installation Guide



## 1. I would like to install Camera on the ceiling

### 1.1 Prepare for the parts and equipment required during the installation

- ▶ Accessories of Camera in the box (metal plates A, B, M3 screw silver x 8, black x 2)
- ▶ Screw for locking on ceiling mounted hanger x 4
- ▶ Drilling machine, screw driver, ladder

### 1.2 Installation steps


1. Please adjust resolution on DIP Switch at first. (Please refer to [2. Instruction on DIP SWITCH Setting](#))
2. Fix the metal plate A on the machine base with 4 M3 silver screws.

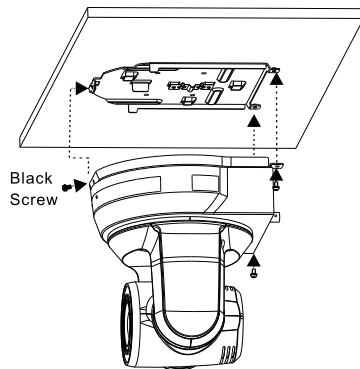

3. Lock the metal plate B on ceiling mounted hanger  
※Caution:  
※Please use the hanger that has obtained UL security approval.
4. Combine the metal plate A and the metal plate B  
▶ Push the metal plate A up to the ceiling and then to the right to latch the metal plate B.  
▶ And then secure with 2 M3 silver screws and 1 M3 black screw.

### 1.3 Connecting to the Network

1. Connect a network cable to the Ethernet port of VC-A50P/ VC-A50PN to connect the VC-A50P/ VC-A50PN to the local network.




### 1.4 Initiation

1. Launch a browser and enter the address of VC-A50P/ VC-A50PN in the address bar. E.g. <http://192.168.100.150> (Default IP address)
2. Enter the administrator account and password to begin using the camera  
Account: admin  
Password: 9999  
\* Lumens VMS, VLC, Quicktime, and other software can also be used to connect to the camera.  
\* To use the Lumens VMS, please visit the Lumens website to download the software and its user manual.

## 2. Instruction on DIP SWITCH Setting

### 2.1 OUTPUT SWITCH




| Output Mode   | Setting |
|---------------|---------|
| 1920x1080/60p |         |
| 1920x1080/50p |         |
| 1920x1080/30p |         |
| 1920x1080/25p |         |
| 1920x1080/60i |         |
| 1920x1080/50i |         |
| 1280x720/60p  |         |
| 1280x720/50p  |         |
| 1080/59.94p   |         |
| 1080/59.94i   |         |
| 1080/29.97p   |         |
| 720/59.94p    |         |

### 2.2 IR SELECT



| ID | Setting |
|----|---------|
| 1  |         |
| 2  |         |
| 3  |         |

### 2.3 Camera Address Selector



| Setting | Function Descriptions |
|---------|-----------------------|
| 0~7     | ID 0~7                |
| 8~9     | Reserved              |

### 2.4 System Switch




| Setting | Function Descriptions                                      |
|---------|------------------------------------------------------------|
| DIP 1   | RS-232C/RS-422 selector<br>OFF: RS-232C / ON: RS-422       |
| DIP 2   | Infrared signal output switch<br>OFF: Off / ON : On        |
| DIP 3   | Communication baud rate selector<br>OFF: 9600 / ON : 38400 |
| DIP 4   | Reserved                                                   |

### 3. Single Camera Connection

#### Device List

- Lumens VC-A50P/ VC-A50PN x1
- VS-KB30 Keyboard Controller(Optional) x1

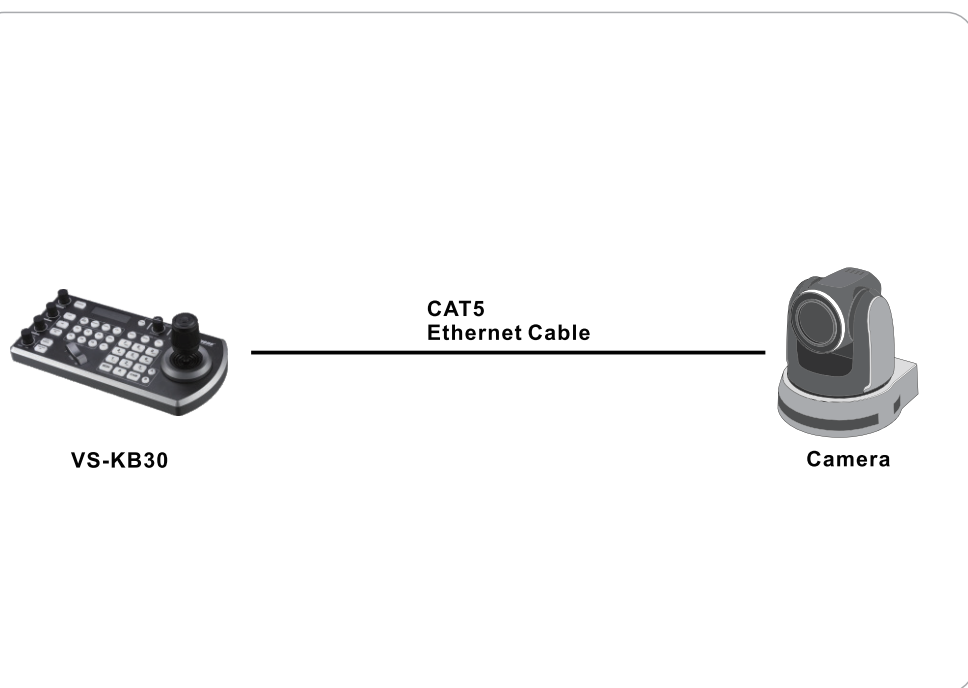

### 4. Multi-Camera Connection

#### Device List

- Lumens VC-A50P/ VC-A50PN x1-7
- Router(Optional) x1
- VS-KB30 Keyboard Controller(Optional) or Computer x1

