



PROJECT 6: Multi-Objective Bayesian Optimization for Transparent Electromagnetic Interference Shielding with Thin-Film Structures

Jungtaek Kim (Team Leader),
Mingxuan Li, Oliver Hinder, and Paul W. Leu

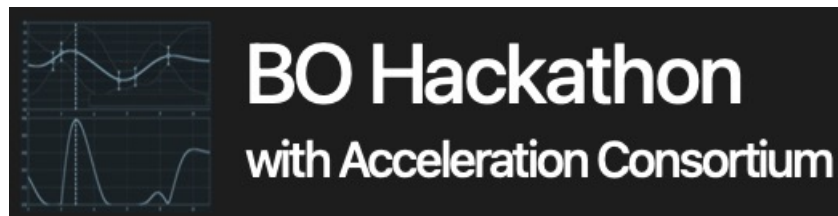

Electromagnetic Interference Shielding

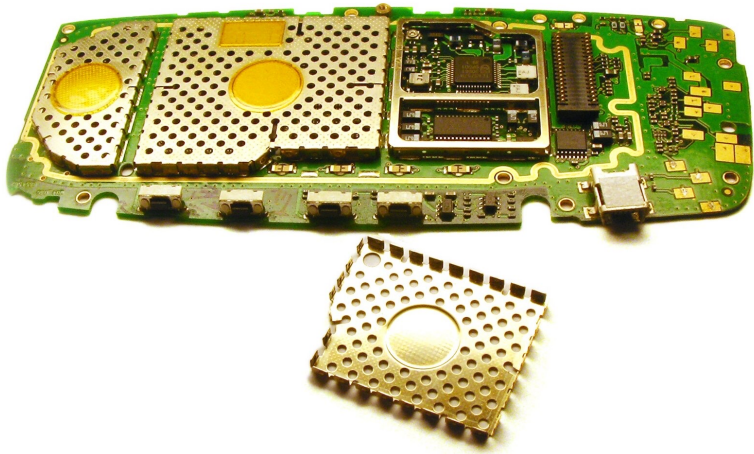

- Protect a device from radio-frequency interference.
- Transparency is required for specific applications such as spacecraft windows.

Problem Formulation

- Simple thin-film structures are used for electromagnetic interference shielding.
- Transmittance and shielding effectiveness are considered as objectives being optimized.
- Material and thickness for each layer is selected by Bayesian optimization.

Multi-Objective Bayesian Optimization

$$\mathbf{x}^* = \arg \max(f_{\text{trans}}(\mathbf{x}), f_{\text{effec}}(\mathbf{x}))$$

- Since two objectives are black-box, multi-objective Bayesian optimization is employed.
- Random scalarization for both acquisition functions are used for multi-objective Bayesian optimization.

Search Space



- Material choices
 - Ag, Al, Al₂O₃, Cr, Ni, Pd, Si₃N₄, SiO₂, Ti, TiN, TiO₂, W
- Thickness range
 - [5, 20] nm

Bayesian Optimization Setting


- Gaussian processes with the Matérn 5/2 kernel
- Expected improvement

$$a_{\text{trans}} + \frac{w_{\text{effec}}}{w_{\text{trans}}} a_{\text{effec}}$$


Experimental Results

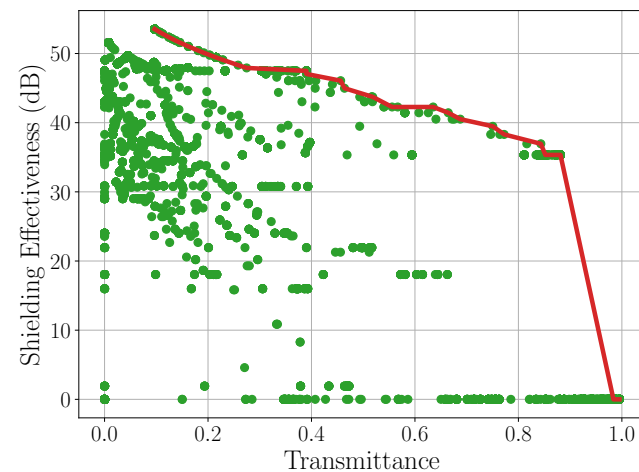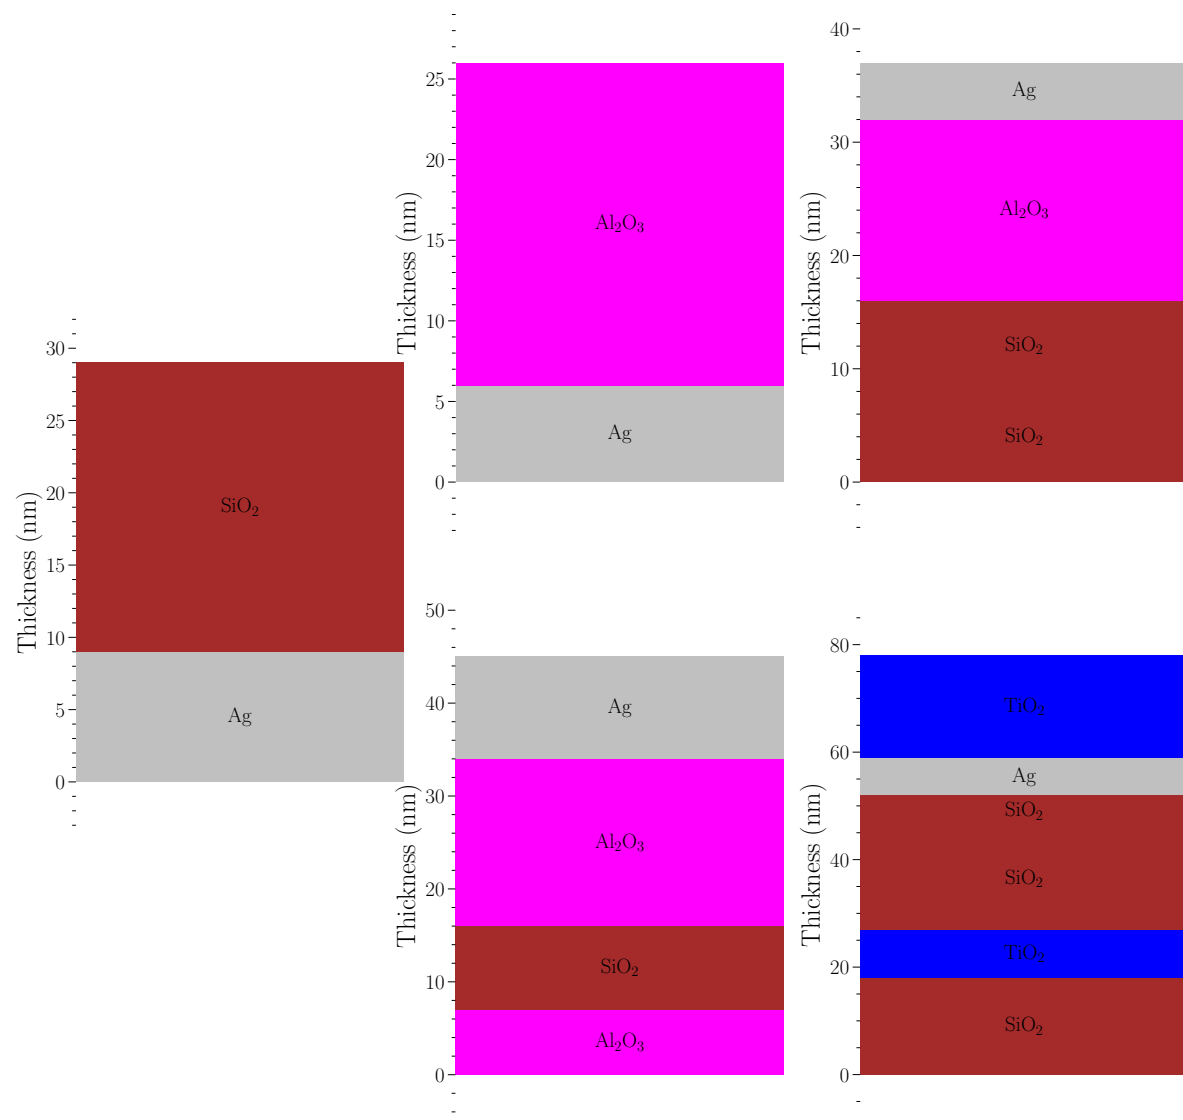


Two-layer system

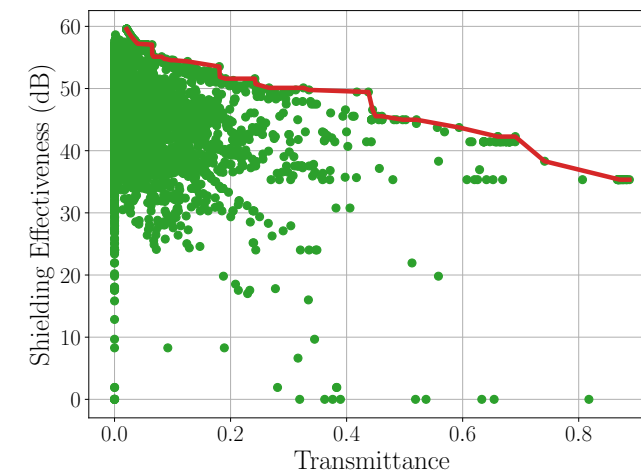

Four-layer system

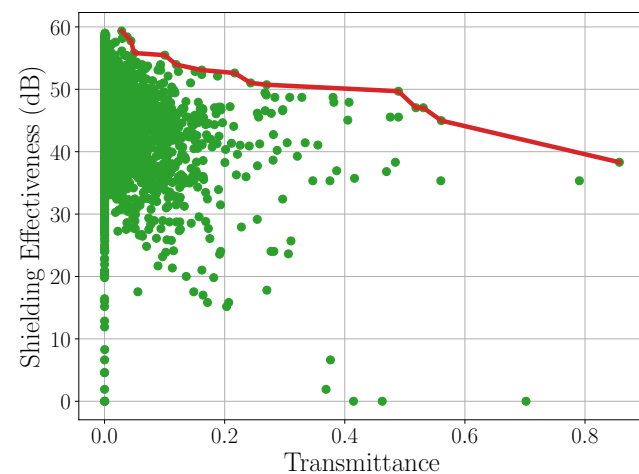

Six-layer system

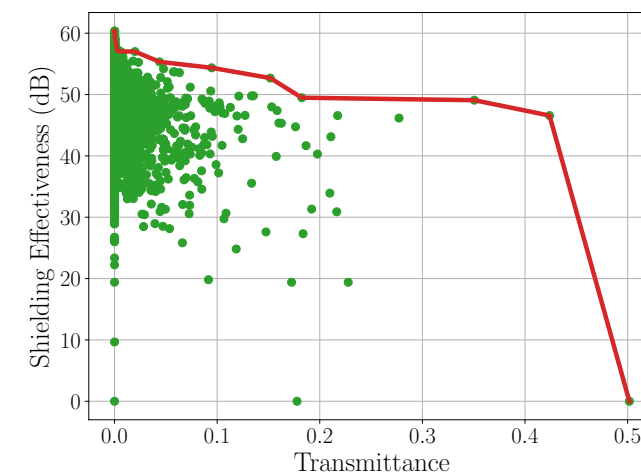

Eight-layer system

Thank you!