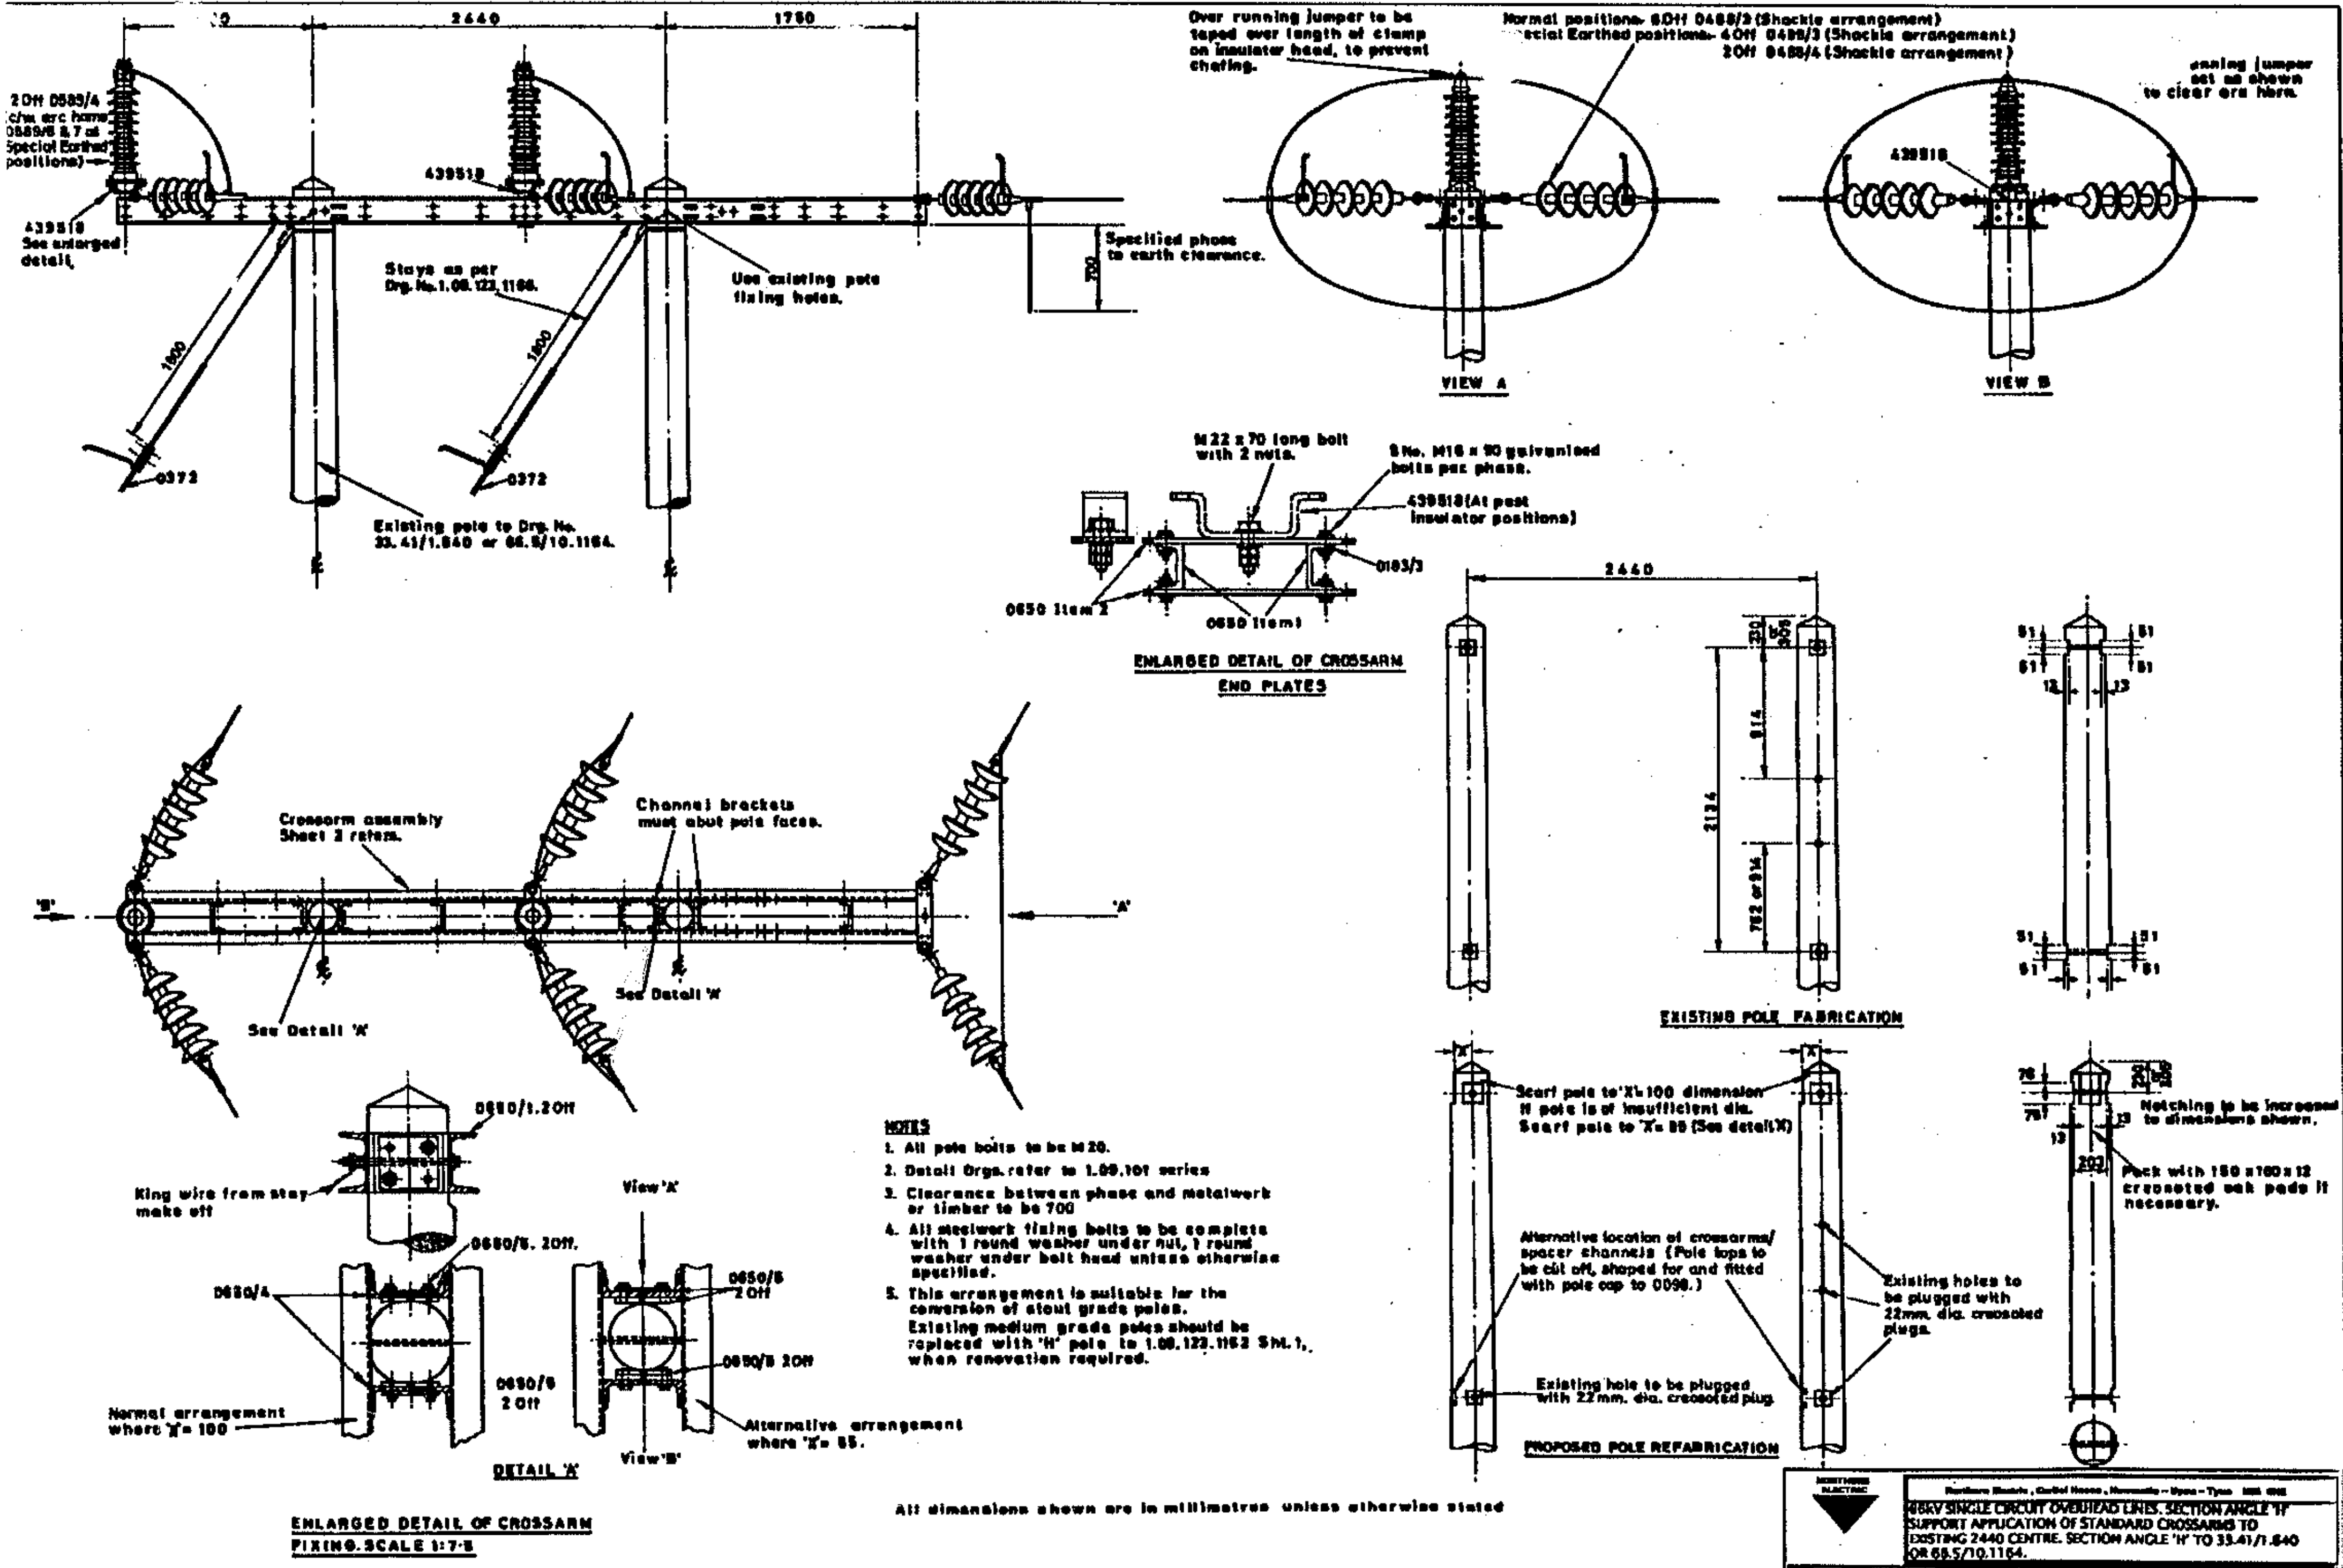
2440
1750
2 Off 0589/4 (c/w arc horns 0589/6 & 7 at Special Earthed positions)
439518 See enlarged detail.
439518
Stays as per Drg. No. 1.08.123.1166.
1800
1800
0372
0372
Use existing pole fixing holes.
Specified phase to earth clearance.
700
Existing pole to Drg. No. 33.41/1.840 or 66.5/10.1164.
Over running jumper to be taped over length of clamp on insulator head, to prevent chafing.
Normal positions- 8 Off 0488/2 (Shackle arrangement)
Special Earthed positions- 4 Off 0488/3 (Shackle arrangement)
2 Off 0488/4 (Shackle arrangement)
running jumper set as shown to clear arc here.
439518
VIEW A
VIEW B
M 22 x 70 long bolt with 2 nuts.
8 No. M16 x 90 galvanised bolts per phase.
439518 (At post insulator positions)
0183/3
0650 Item 2
0650 Item 1
ENLARGED DETAIL OF CROSSARM END PLATES
2440
2134
914
762 or 914
51
13
EXISTING POLE FABRICATION
X
Scarf pole to 'X'= 100 dimension if pole is of insufficient dia. Scarf pole to 'X'= 85 (See detail 'A')
Alternative location of crossarms/spacer channels (Pole tops to be cut off, shaped for and fitted with pole cap to 0098.)
Existing holes to be plugged with 22mm. dia. creosoted plugs.
Existing hole to be plugged with 22mm. dia. creosoted plug.
76
13
203
Notching to be increased to dimensions shown.
Pack with 150 x 100 x 12 creosoted oak pads if necessary.
PROPOSED POLE REFABRICATION
Crossarm assembly Sheet 2 refers.
Channel brackets must abut pole faces.
See Detail 'A'
See Detail 'A'
'B'
'A'
0650/1.2 Off
King wire from stay make off
0650/5. 2 Off.
0650/4
0650/5 2 Off
0650/5 2 Off
View 'A'
View 'B'
0650/6 2 Off
Normal arrangement where 'X'= 100
Alternative arrangement where 'X'= 85.
DETAIL 'A'
ENLARGED DETAIL OF CROSSARM FIXING. SCALE 1:7·5

NOTES

1. All pole bolts to be M20.
2. Detail Drgs. refer to 1.09.101 series
3. Clearance between phase and metalwork or timber to be 700
4. All steelwork fixing bolts to be complete with 1 round washer under nut, 1 round washer under bolt head unless otherwise specified.
5. This arrangement is suitable for the conversion of stout grade poles.
   Existing medium grade poles should be replaced with 'H' pole to 1.08.123.1162 Sht. 1, when renovation required.

All dimensions shown are in millimetres unless otherwise stated

NORTHERN ELECTRIC

Northern Electric, Carliol House, Newcastle - Upon - Tyne [illegible]

66KV SINGLE CIRCUIT OVERHEAD LINES. SECTION ANGLE 'H'
SUPPORT APPLICATION OF STANDARD CROSSARMS TO
EXISTING 2440 CENTRE. SECTION ANGLE 'H' TO 33.41/1.640
OR 68.5/10.1164.

1 09 123 1164