# SIEMENS

# DFFPVA5262A Filler Plate Kit



**⚠ DANGER**

**Hazardous voltage. Will cause death or serious injury.**
Keep out.
Qualified personnel only.
Disconnect and lock off all power before working on this equipment.

**Installation Instructions for replacement filler plates for Siemens Lighting Panels.**
**KIT INCLUDES: Qty. (1) 3VA52/61/62 Breaker Filler Plate (p/n: 11-D-4617-01)**

1. **Lock off ALL power supplying this equipment before working on it.**

2. Remove the deadfront and keep the screws for reassembly later.

3. Remove and discard the old or damaged filler plate from the deadfront, typically by squeezing the clasp at the rear edge of the filler plate and rotating it out of the rectangular deadfront hole.

4. Prepare the new filler plate (refer to Fig. 1 & Fig. 2):
   For 3VA5x breakers: Leave as is
   For 3VA6x breakers: Remove the portion of the wall labelled “REMOVE FOR 3VA61 OR 3VA62 BREAKERS” by supporting the upper wall section and gently bending the lower wall section back and forth until it snaps off.
   (Remove any large burrs of plastic if present.)

5. Orient the filler plate to the deadfront in such a way that the “ON” position marked on the filler plate aligns with the ON position of the breaker it will be fitting over.

6. Squeeze both flexible side walls, angle the HOOK end of the filler plate into the deadfront opening. Slide the filler plate in to allow the HOOK end to engage the edge of the deadfront opening. (Refer to Fig. 3)

7. Press down on the SNAP end of the filler plate until it latches in place.

8. Verify the installation is correct by confirming that the “GUTTER” and “BRANCH” markings align properly with the installation. (Refer to Fig. 4)

9. Carefully place the deadfront onto its supports ensuring the filler plate is properly positioned over the breaker. Secure the deadfront to the deadfront supports with the screws removed in Step 2. (Refer to Fig. 5)

10. **Before energizing the panel, ensure that any barriers and fillers are in place and secure, that the deadfront is installed, that the trim is in place, and the door is closed and locked.**

**Fig. 1**


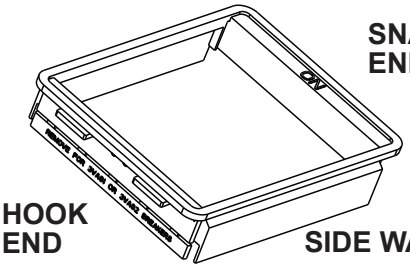



**Fig. 2**

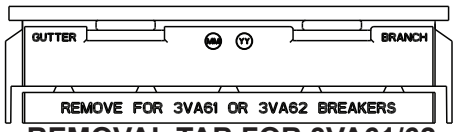


**REMOVAL TAB FOR 3VA61/62**

**Fig. 3**

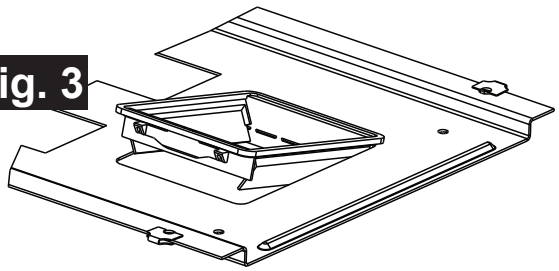


**Fig. 4**


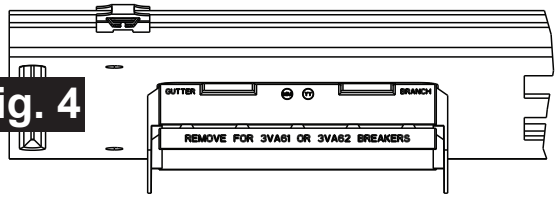



**Fig. 5**

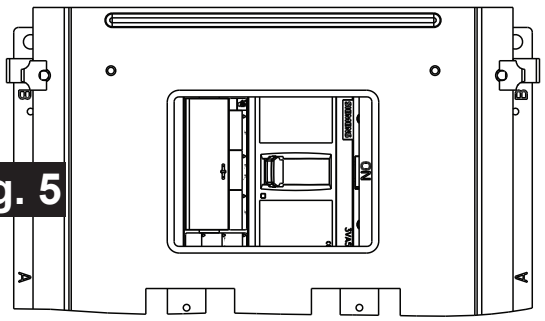


Contact Siemens Sales Office if considering usage in applications other than as shown.

These instructions do not purport to cover all details or variations in equipment, or to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser’s purposes, the matter should be referred to the local Siemens sales office. The contents of this Instruction manual shall not become part of or modify any prior or existing agreement, commitment or relationship. The sales contract contains the entire obligation of Siemens. The warranty contained in the contract between the parties is the sole warranty of Siemens. Any statements contained herein do not create new warranties or modify the existing warranty.

Trademarks-Unless otherwise noted, all names identified by ® are registered trademarks of Siemens AG or Siemens Industry, Inc. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.