
PRL4 blank covers

Used to cover blank space on chassis. All PRL4X and PRL4 cover heights are measured in "X" units. 1X equals 1.38 inches (35.1 mm).

Table 45. PRL4 blank covers

Cover size	Style number 24.00-inch (609.6 mm) width box	Style number 36.00, 44.00-inch (914.4, 1117.6 mm) width box
1X	**6554C01H01**	**6554C02H01**
2X	**6554C01H02**	**6554C02H02**
3X	**6554C01H03**	**6554C02H03**
4X	**6554C01H13**	**6554C02H13**
5X	**6554C01H14**	**6554C02H14**
6X	**6554C01H04**	**6554C02H04**
7X	**6554C01H05**	**6554C02H05**
9X	**6554C01H06**	**6554C02H06**
10X	**6554C01H07**	**6554C02H07**
11X	**6554C01H08**	**6554C02H08**
12X	**6554C01H09**	**6554C02H09**
13X	**6554C01H10**	**6554C02H10**
15X	**6554C01H11**	**6554C02H11**
20X	**6554C01H12**	**6554C02H12**

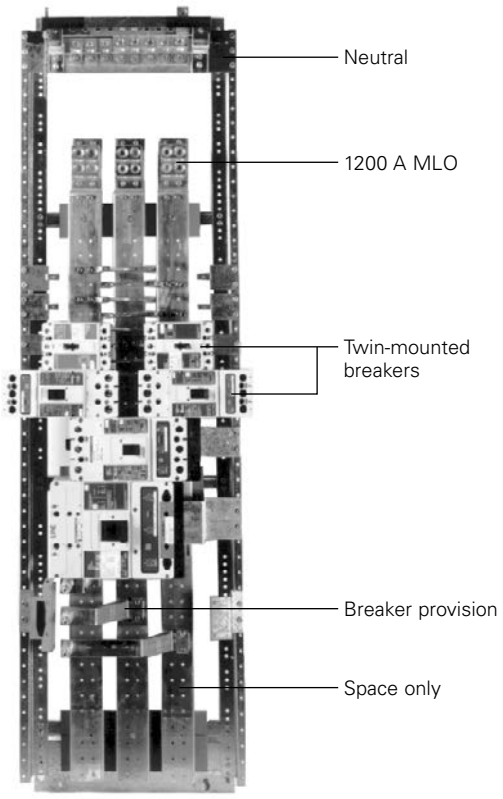

PRL4B Interior

PRL4 breaker connector kits

Breaker connector kits

Each kit includes copper connectors, mounting brackets, covers, hardware, and instructions for mounting breaker(s) in a PRL4X and PRL4. **Breakers are not included.** Contact your local satellite plant for availability and application information (see **page 3**).

Connector kit

Each kit includes copper connectors mounting brackets, cover, hardware, and instructions.


Table 46. PRL4 breaker connector kits

Breaker frame	Space required Inches (mm)	Space required "X"	Number of poles	Mounting type	Connector kit catalog number
PD2	2.75 (69.9)	2X	1 ①	Twin	**KPRL4X12**
			2	Twin	**KPRL4X22**
PD2	4.13 (104.9)	3X	3	Twin	**KPRL4X32**
PD3 (400 A Frame)	5.50 (139.7)	4X	3	Single	**KPRL4X334S** ②
PD3 (400 A Frame)	5.50 (139.7)	4X	3	Twin	**KPRL4X334T** ③
PD3 (600 A Frame)	5.50 (139.7)	4X	3	Single	**KPRL4X336** ②
PD4	8.25 (209.6)	6X	3	Single	**KPRL4X34** ②
PD5	8.25 (209.6)	6X	3	Single	**KPRL4X35** ②

① Two sets of twin-mounted single-pole breakers.

② 36.00-inch (914.4 mm) minimum box width required.

③ 44.00-inch (1117.6 mm) box width required.

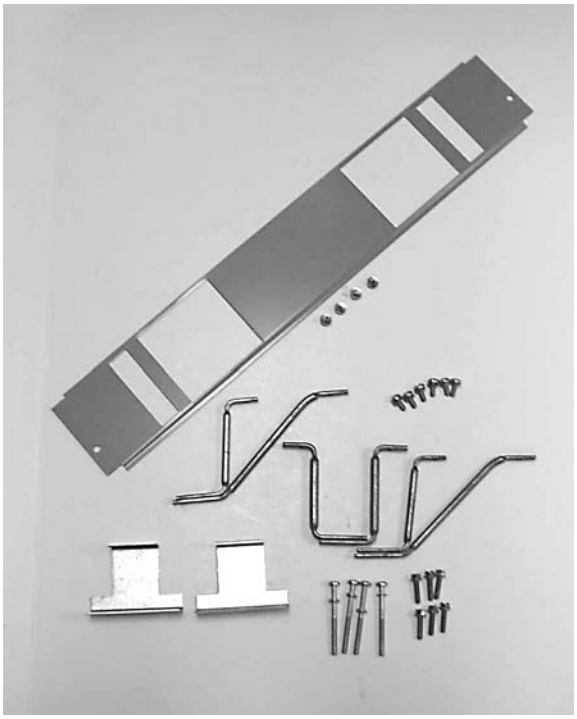

Connector kit