Renewal Parts **RP01400001E**

Effective May 2022
Supersedes April 2021

Pow-R-Line Xpert and legacy panelboards


PRL1X


PRL2X


PRL3X


PRL4X


PRL1X/2X-LX


PRL4F


Pow-R-Command

Contents

Description	Page
Procedure for identifying panelboard type	2
Procedure for identifying renewal parts	2
Distributor ordering instructions	2
Eaton satellite plants	3
PRL1X, PRL2X, PRL1a, PRL2a parts	
Connector kits, vertical breakers	4
Connector kits, lug assemblies	5
Connector kits, horizontally mounted, PRL1X, PRL1a	8
Neutral assemblies	11
Ground assemblies	15
Service entrance bonding jumper kits	15
Service entrance main breaker kits	16
Deadfront covers	17
Special trim locks	20
EZ Trim locks	21
Fastrim clamps and hardware kits	21
PRL3X, PRL3a parts	
Connector kits assemblies	22
Ground assemblies	24
Service entrance bonding jumper kits	24
Service entrance main breaker kits	25
Deadfront covers	25

Description	Page
PRL4X, PRL4 parts	
Vented cover assemblies and side gutter covers	31
Blank covers	32
Breaker connector kits	32
Fusible connector kits	34
Breaker retrofit kits	34
Fusible retrofit kits	34
Accessories	
PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a EZ Trim and enclosures	36
PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a special trims and enclosures	37
PRL4 special trims and enclosures	38
Type 12/3R enclosures	38
Ordering procedure	38
PRL1X-LX, PRL2X-LX, PRL1a-LX, PRL2a-LX column panelboards	39
Pow-R-Command	39
Additional services	39

Powering Business Worldwide

Table 1. Product history time line

Product	1985	1990	1995	2019	Present
PRL1X, 2X, 3X, 4X					May 2020 →
PRL1a, 2a			← Oct. 1996 →		
PRL3a		← Mar. 1994 →			
PRL4B/F	← Oct. 1987 →				
PRL1a, 2a-LX			← Dec. 1997 →		
Pow-R-Command™			← Mar. 1996 →		

Procedure for identifying panelboard type

The current line of Pow-R-Line C™ panelboards was introduced in 1993. The current line of Pow-R-Line Xpert™ panelboards was introduced in 2020.

A panelboard is identified by data found on the nameplate. Pow-R-Line C and Pow-R-Line Xpert panelboard nameplates are different in appearance, but all have the same critical information:

- Ampere rating of the main
- Ampere rating of the neutral
- Type of service (phase/wire)
- Manufacturing location
- Type of panel
- General order number

In the event the nameplate is missing, it may still be possible to identify the panel type by location of the neutral bar. **Figure 1** shows the position of the neutral in the panelboard.

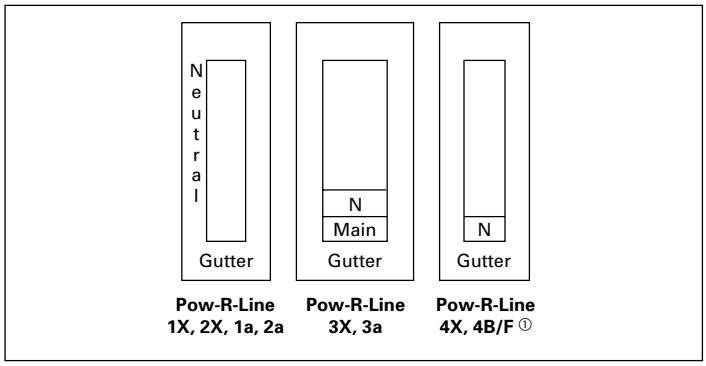


Figure 1. Position of the neutral in the panelboard

① PRL4F panels with vertical-mounted main switch will have the neutral mounted at the opposite end the main.

Box width may also help identify the panelboard type. Standard width for PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, and PRL3a is 20.00 inches (508.0 mm). PRL4X and PRL4 standard widths are 24.00, 36.00, and 44.00 inches (609.6, 914.4, and 1117.6 mm).

⚠ WARNING

HAZARDOUS VOLTAGE WILL CAUSE SEVERE INJURY OR DEATH. TURN OFF POWER SUPPLY TO EQUIPMENT BEFORE WORKING ON IT.

Procedure for identifying renewal parts

1. Identify the type of panelboard, i.e., PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, and PRL4 by reading the nameplate. Follow the procedure listed to the left.
2. Refer to the listing below and turn to the proper section in this document to identify standard parts.

Description **Page**

PRL1X, PRL2X, PRL1a, and PRL2a 4
Trim locks 20
Trim clamps 21
PRL3X and PRL3a 21
PRL4X, PRL4 31
Special trims and enclosures 38
PRL1X-LX, PRL2X-LX, PRL1a-LX, and PRL2a-LX (column width) 39
Pow-R-Command 39

3. This book identifies those replacement parts most frequently ordered and which are readily available from stock. These parts can be ordered by style or catalog number to speed up processing and delivery.

Distributor ordering instructions

1. Specify part by style/part number.
2. Turn to **page 3** to locate nearest satellite plant.
3. Enter the order via email to the nearest satellite plant.
4. Selling policy 25-000 applies.

Eaton satellite plants

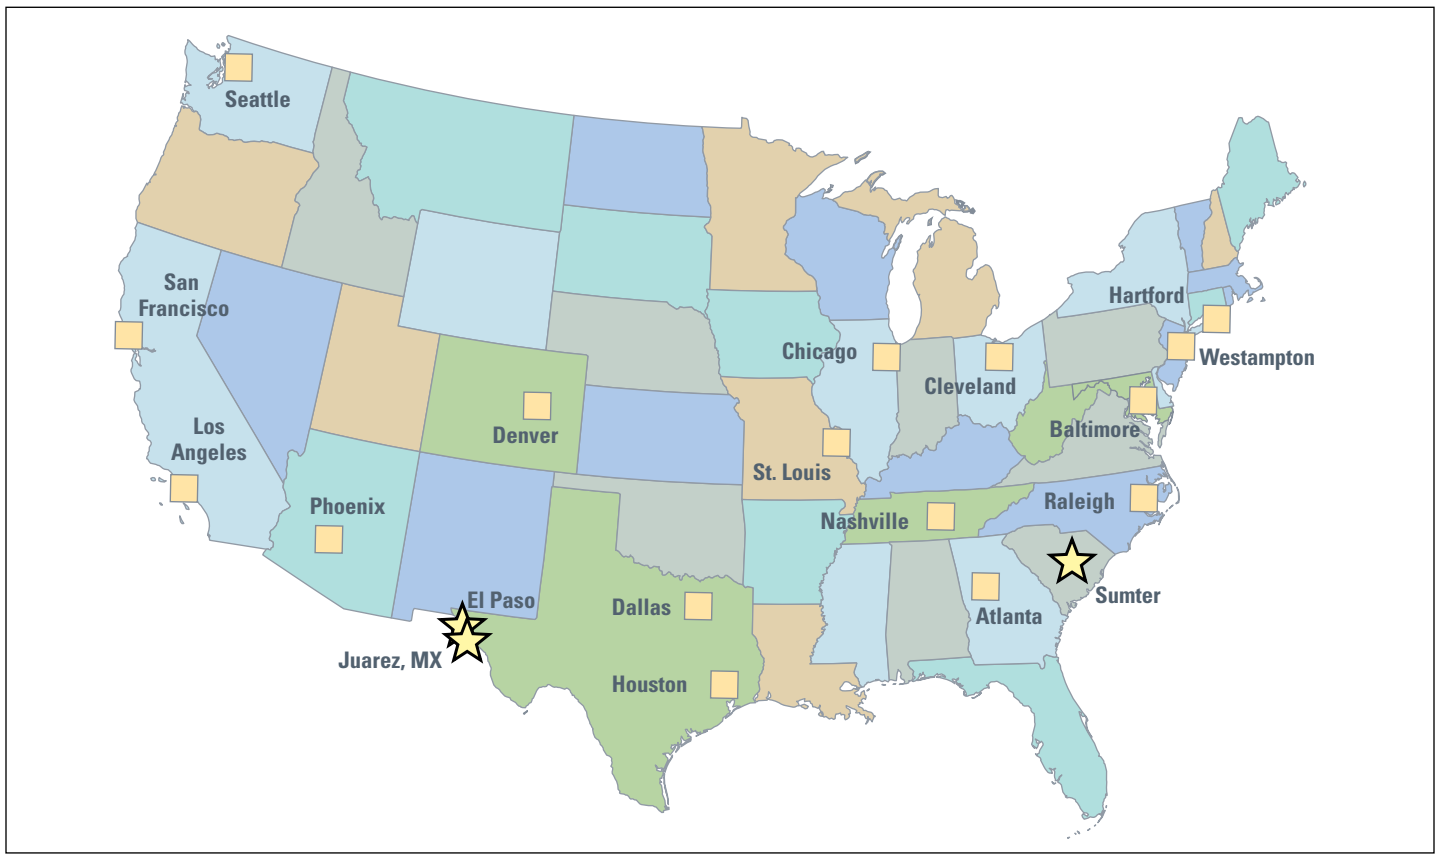


Figure 2. Satellite plants

For an unparalleled commitment to your specific needs, please visit your local Satellite facility.

Eaton Pow-R-Line Xpert panelboards and switchboards are built to your requirements at our world-class manufacturing plants in Sumter, SC, El Paso, TX, and Juarez, MX. In addition, Eaton has 16 regional Satellite facilities located across the country to meet your panelboard and switchboard service needs.

Atlanta
7000 Highlands Parkway SE
Suite 102
Smryna, GA 30082
678.309.4260

Baltimore
7451 Coca Cola Drive
Suite C
Hanover, MD 21076
410.796.7777

Chicago
230 Windy Point Drive
Glendale Heights, IL 60139
630.260.6303

Cleveland
12875 Corporate Drive
Unit E
Parma, OH 44130
216.265.3284

Dallas
631 Westport Parkway
Suite 100
Grapevine, TX 76051
817.251.6733

Denver
2450 Airport Road
Suite C
Aurora, CO 80011
303.366.2080

El Paso
45 Butterfield Circle
Suite C
El Paso, TX 79906
915.881.0259

Hartford
40A International Drive
Windsor, CT 06095
860.298.1305

Houston
14825 Northwest Freeway
Suite 100
Houston, TX 77040
713.744.7530

Juarez
Prolongacion Hermanos Escobar
#7014, Parque Industrial Omega
Adicion Oriental Cd.
Juarez, Chihuahua Mexico 32648

Los Angeles–P&S
13201 Dahlia Street
Suite 300
Fontana, CA 92337
919.428.8903

Nashville
1421 Gould Boulevard
Suite C
La Vergne, TN 37086
615.287.3200

Phoenix
560 N 54th Street
Suite 1
Chandler, AZ 85226
480.449.4222

Raleigh
9400 Globe Center Drive
Suite 121
Morrisville, NC 27560
919.544.7074

St. Louis
56 Soccer Park Road
Fenton, MO 63026
636.717.3500

Sumter
Main Manufacturing Plant
845 Corporate Circle
Sumter, SC 29154
803.481.3131

San Francisco
20923 Cabot Boulevard
Hayward, CA 94545
510.784.8981

Seattle
1604 15th Street SW
Suite 114
Auburn, WA 98001
253.833.5021

Westampton
96 Stemmers Lane
Westampton, NJ 08060
609.835.4230

PRL1X, PRL2X, PRL1a, PRL2a parts section

Description	Page
Connector kits, vertical breakers	4
Connector kits, lug assemblies	5–7
Connector kits, horizontally mounted	8–10
Neutral assemblies	11–14
Ground assemblies	15
Service entrance bonding jumper kits	15
Service entrance main breaker kits	16
Deadfront covers	17–19
Panelboard special trim locks	20
Panelboard EZ Trim locks	21
Panelboard Fastrim clamps and screw-on hardware kits	21

PRL1X, PRL2X, PRL1a, PRL2a connector kits


Table 2. PRL1X, PRL2X vertical breaker assemblies

		Three-phase		Single-phase	
		Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Device Type ①	Device mounting	Catalog number			
PD2 (100 A maximum)	Top fed	**KB13A2T**	**KB13S2T**	**KB11A2T**	**KB11S2T**
	Bottom fed	**KB13A2B**	**KB13S2B**	**KB11A2B**	**KB11S2B**
PD2 (225 A maximum)	Top fed	**KB23A2T**	**KB23S2T**	**KB21A2T**	**KB21S2T**
	Bottom fed	**KB23A2B**	**KB23S2B**	**KB21A2B**	**KB21S2B**
PD3A (400 A)	Top fed	**KB43A34T**	**KB43S34T**	**KB41A14T**	**KB41S14T**
	Bottom fed	**KB43A34B**	**KB43S34B**	**KB41A14B**	**KB41S14B**
PD3B (600 A)	Top fed	N/A	**KB63S36T**	N/A	**KB61S16T**
	Bottom fed	N/A	**KB63S36B**	N/A	**KB61S16B**


① Order main or sub-feed breaker separately when ordering above connector kits.

PD3A = Adjustable

PD3B = ETU (Electronic trip unit)

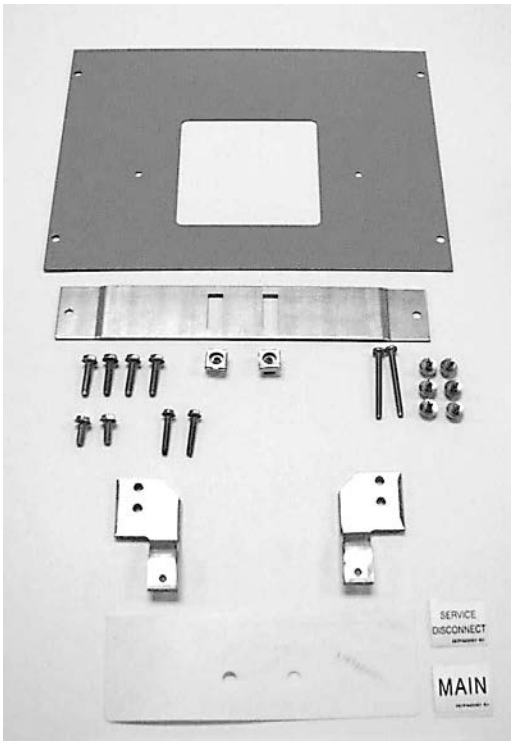

KB11AFT

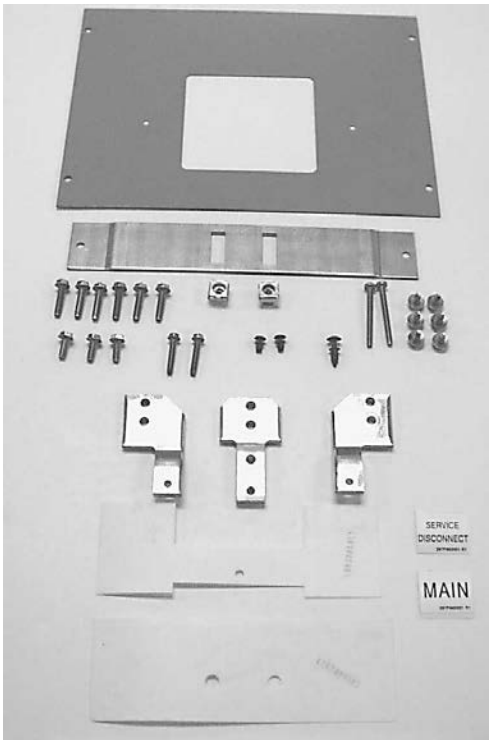

KB13AFT

Table 3. PRL1a, PRL2a vertical breaker assemblies

		Three-phase		Single-phase	
		Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Device type ①	Device mounting	Catalog number			
F-Frame ② (100 A maximum)	Top fed	**KB13AFT**	**KB13SFT**	**KB11AFT**	**KB11SFT**
	Bottom fed	**KB13AFB**	**KB13SFB**	**KB11AFB**	**KB11SFB**
F-Frame ③ (225 A maximum)	Top fed	**KB23AFT**	**KB23SFT**	**KB21AFT**	**KB21SFT**
	Bottom fed	**KB23AFB**	**KB23SFB**	**KB21AFB**	**KB21SFB**
J-Frame	Top fed	**KB43AJT**	**KB43SJT**	**KB41AJT**	**KB41SJT**
	Bottom fed	**KB43AJB**	**KB43SJB**	**KB41AJB**	**KB41SJB**
K-Frame	Top fed	**KB43AKT**	**KB43SKT**	**KB41AKT**	**KB41SKT**
	Bottom fed	**KB43AKB**	**KB43SKB**	**KB41AKB**	**KB41SKB**

① Order main or sub-feed breaker separately when ordering above connector kits.

② EHD, FD, HFD, FDC.

③ FD, HFD, FDC, ED, EDH, EDC.

Table 4. 100 A lug assemblies

				Three-phase		Single-phase	
				Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Lug type	Panel lug options ①	Wire size range	Quantity per phase	Catalog number			
Aluminum/copper mechanical	STD	#14–1/0	1	**KL13AMS**	**KL13SMS**	**KL11AMS**	**KL11SMS**
	SFL	#14–1/0	2	**KL13AMF**	**KL13SMF**	**KL11AMF**	**KL11SMF**
	OVS	#6–300 kcmil	1	**KL13AMO**	**KL13SMO**	**KL11AMO**	**KL11SMO**
Crimp	STD	#1–1/0	1	**KL13AVS**	**KL13SVS**	**KL11AVS**	**KL11SVS**
	SFL	#1–1/0	2	**KL13AVF**	**KL13SVF**	**KL11AVF**	**KL11SVF**
	OVS	2/0–300 kcmil	1	**KL13AVO**	**KL13SVO**	**KL11AVO**	**KL11SVO**
Copper mechanical	STD	#14–1/0	1	—	**KL13SCS**	—	**KL11SCS**
	SFL	#14–1/0	2	—	**KL13SCF**	—	**KL11SCF**
	OVS	#6–250 kcmil	1	—	**KL13SCO**	—	**KL11SCO**

① STD = Standard lugs. Use for main or through-feed.
SFL = Sub-feed lugs.
OVS = Oversize lugs. Use for main or through-feed.



KL13AMS



KL11AVS

Table 5. 225 A lug assemblies

				Three-phase		Single-phase	
				Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Lug type	**Panel lug options ①**	**Wire size range**	**Quantity per phase**	**Catalog number**			
Aluminum/copper mechanical	STD	#6–300 kcmil	1	**KL23AMS**	**KL23SMS**	**KL21AMS**	**KL21SMS**
	SFL	#6–300 kcmil	2	**KL23AMF**	**KL23SMF**	**KL21AMF**	**KL21SMF**
	OVS	4/0–500 kcmil	1	**KL23AMO**	**KL23SMO**	**KL21AMO**	**KL21SMO**
Crimp	STD	2/0–300 kcmil	1	**KL23AVS**	**KL23SVS**	**KL21AVS**	**KL21SVS**
	SFL	2/0–300 kcmil	2	**KL23AVF**	**KL23SVF**	**KL21AVF**	**KL21SVF**
	OVS	4/0–500 kcmil	1	**KL23AVO**	**KL23SVO**	**KL21AVO**	**KL21SVO**
Copper mechanical	STD	#6–250 kcmil	1	—	**KL23SCS**	—	**KL21SCS**
	SFL	#6–250 kcmil	2	—	**KL23SCF**	—	**KL21SCF**
	OVS	1/0–600 kcmil	1	—	**KL23SCO**	—	**KL21SCO**

① STD = Standard lugs. Use for main or through-feed.
SFL = Sub-feed lugs.
OVS = Oversize lugs. Use for main or through-feed.



KL23AMS




KL21AVS


Table 6. 400 A lug assemblies

Lug type	Panel lug options ①	Wire size range	Quantity per phase	Three-phase		Single-phase	
				Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
				Catalog number			
Aluminum/copper mechanical	STD	4/0–500 kcmil	2	**KL43AMS**	**KL43SMS**	**KL41AMS**	**KL41SMS**
	SFL	—	—	—	—	—	—
	OVS	3/0–750 kcmil	2	**KL43AMO**	**KL43SMO**	**KL41AMO**	**KL41SMO**
Crimp	STD	4/0–500 kcmil	2	**KL43AVS**	**KL43SVS**	**KL41AVS**	**KL41SVS**
	SFL	—	—	—	—	—	—
	OVS	500–750 kcmil	2	**KL43AVO**	**KL43SVO**	**KL41AVO**	**KL41SVO**
Copper mechanical	STD	1/0–600 kcmil	1	—	—	—	—
	SFL	—	—	—	—	—	—
	OVS	1/0–600 kcmil	1	—	**KL43SCO**	—	**KL41SCO**

① STD = Standard lugs. Use for main or through-feed.
SFL = Sub-feed lugs.
OVS = Oversize lugs. Use for main or through-feed.

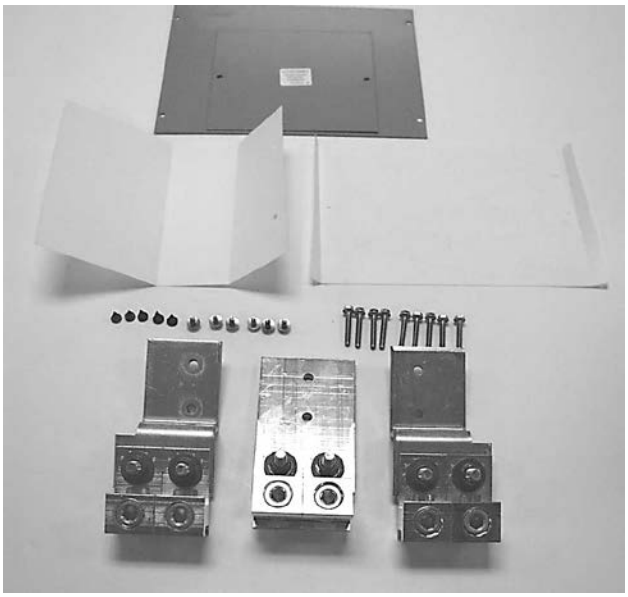

KL43AMS

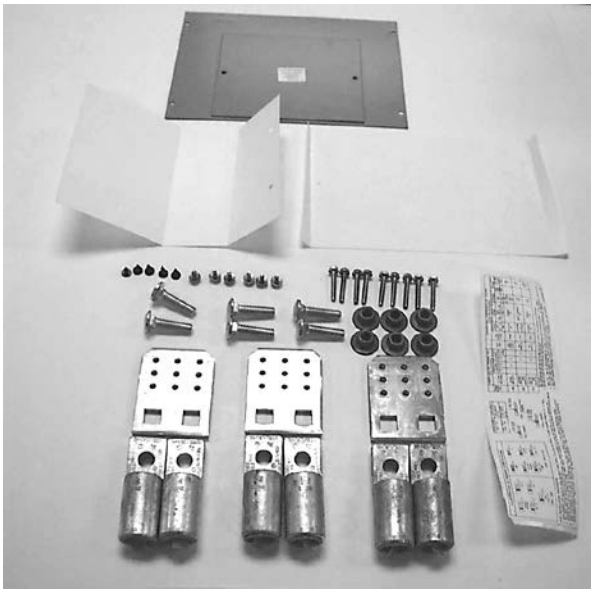

KL43AVS

Table 7. 600 A lug assemblies

Lug type	Panel lug options ①	Wire size range	Quantity per phase	Three-phase connectors				Single-phase connectors			
				Tin-plated aluminum	Bare copper	Silver-plated copper	Tin-plated copper	Tin-plated aluminum	Bare copper	Silver-plated copper	Tin-plated copper
				Catalog number							
Aluminum/copper mechanical	STD	4/0–500 kcmil	2	—	**KL63CMS**	**KL63SMS**	**KL63TMS**	—	**KL61CMS**	**KL61SMS**	**KL61TMS**
	SFL	—	—	—	—	—	—	—	—	—	—
	OVS	3/0–750 kcmil	2	—	**KL63CMO**	**KL63SMO**	**KL63TMO**	—	**KL61CMO**	**KL61SMO**	**KL61TMO**
Crimp	STD	4/0–500 kcmil	2	—	**KL63CVS**	**KL63SVS**	**KL63TVS**	—	**KL61CVS**	**KL61SVS**	**KL61TVS**
	SFL	—	—	—	—	—	—	—	—	—	—
	OVS	500–750 kcmil	2	—	**KL63CVO**	**KL63SVO**	**KL63TVO**	—	**KL61CVO**	**KL61SVO**	**KL61TVO**
Copper mechanical	STD	1/0–600 kcmil	1	—	—	—	—	—	—	—	—
	SFL	—	—	—	—	—	—	—	—	—	—
	OVS	1/0–600 kcmil	1	—	—	—	—	—	—	—	—

① STD = Standard lugs. Use for main or through-feed.
SFL = Sub-feed lugs.
OVS = Oversize lugs. Use for main or through-feed.


PRL1X, PRL1a horizontally mounted connector kit assemblies

Table 8. Bolt-on QUICKLAG® breaker assemblies


			Three-phase		Single-phase	
			Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Breaker frame	Drawing number ①	Branch circuit quantity	Item number			
BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP	1C96608	12	G01	G03	G05	G07
		18	G09	G11	G13	G15
		30	G17	G19	G21	G23
		42	G25	G27	G29	G31
		48	G33	G35	G37	G39
		54	G41	G43	G45	G47
		72	G49	G51	G53	G55
		96	G57	G59	G61	G63

① Order the basic drawing number, along with the equivalent G–number that's needed.

Note: When determining branch circuit quantity, remember:
1. QUICKLAG breakers with shunt trips require one additional circuit.
2. UL® listed lighting and appliance (CTL) panelboards **cannot** exceed 42 electrically connected circuits in a single enclosure.
3. When bare copper is specified, use the silver-plated groups.
4. **Order breakers separately with connector kit.**

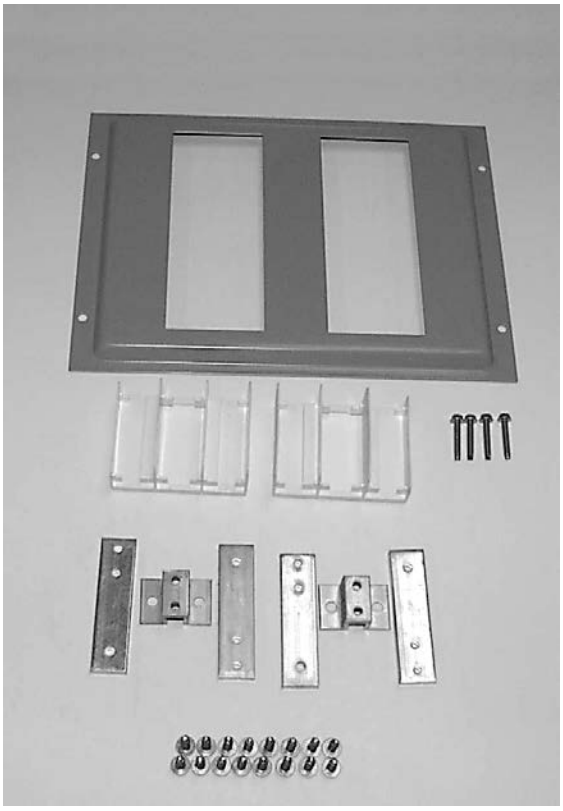

1C96608G01

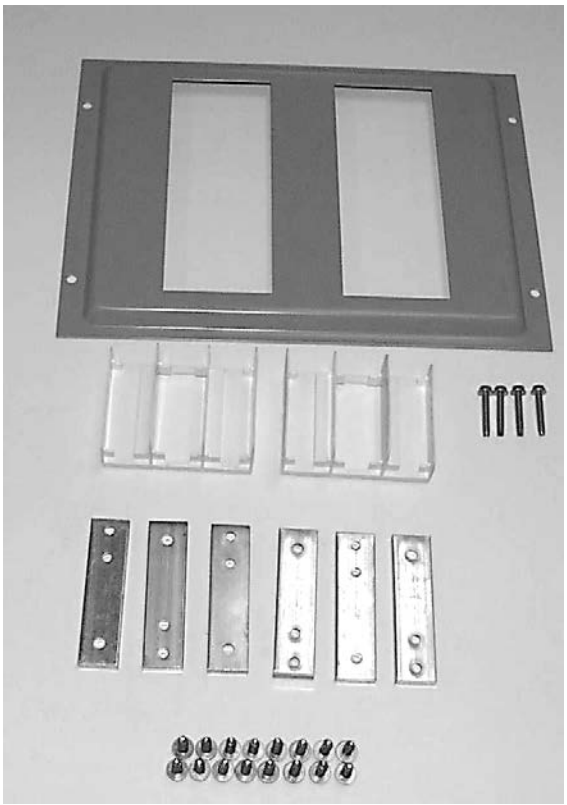


1C96608G05

Table 9. Plug-in QUICKLAG breaker assemblies


			Three-phase		Single-phase	
			Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Breaker frame	Drawing number ①	Branch circuit quantity	Item number			
HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP	2C11642	12	—	G03	—	G07
		18	—	G11	—	G15
		30	—	G19	—	G23
		42	—	G27	—	G31
		48	—	G35	—	G39
		54	—	G43	—	G47
		72	—	G51	—	G55
		96	—	G59	—	G63

① Order the basic drawing number, along with the equivalent G–number that's needed.

Note: When determining branch circuit quantity, remember:
1. QUICKLAG breakers with shunt trips require one additional circuit.
2. UL listed lighting and appliance (CTL) panelboards **cannot** exceed 42 electrically connected circuits in a single enclosure.
3. When aluminum is specified, use the silver-plated groups.
4. The sum of the horizontally twin-mounted breakers **shall not exceed 140 A**.
5. **Order breakers separately with connector kit.**

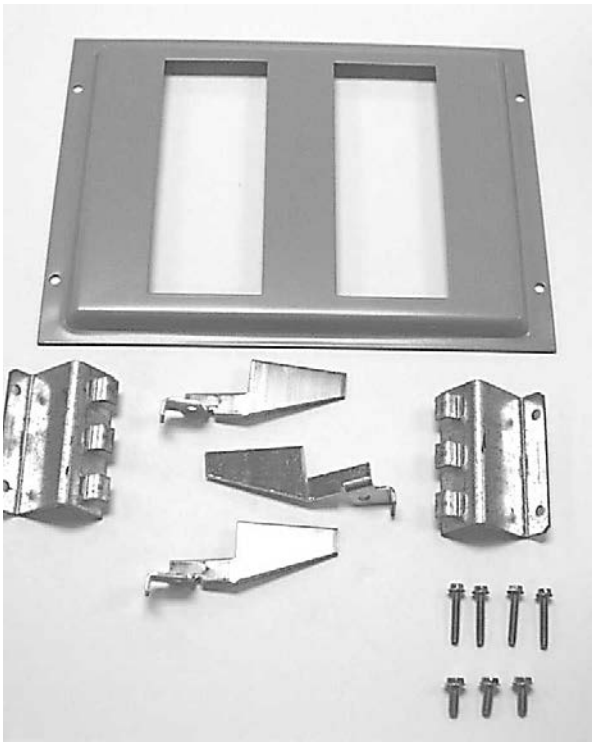

2C11642G03

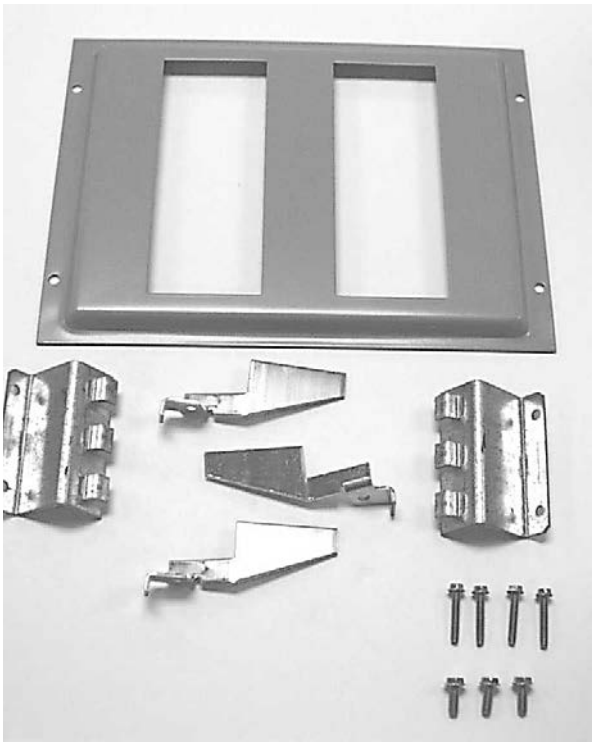


2C11642G07

Table 10. GB, GHB, GHQ, GHBS breaker assemblies

			Three-phase		Single-phase	
			Tin-plated aluminum connector	Silver-plated copper connector	Tin-plated aluminum connector	Silver-plated copper connector
Breaker frame	Drawing number ①	Branch circuit quantity	Item number			
GB, GHB, GHQ, GHBS	1C96609	12	G01	G03	G05	G07
		18	G09	G11	G13	G15
		30	G17	G19	G21	G23
		42	G25	G27	G29	G31
		48	G33	G35	G37	G39
		54	G41	G43	G45	G47
		72	G49	G51	G53	G55
		96	G57	G59	G61	G63

① Order the basic drawing number, along with the equivalent G–number that's needed.

Note: When determining branch circuit quantity, remember:
1. QUICKLAG breakers with shunt trips require one additional circuit.
2. UL listed lighting and appliance (CTL) panelboards **cannot** exceed 42 electrically connected circuits in a single enclosure.
3. When bare copper is specified, use the silver-plated groups.
4. **Order breakers separately with connector kit.**

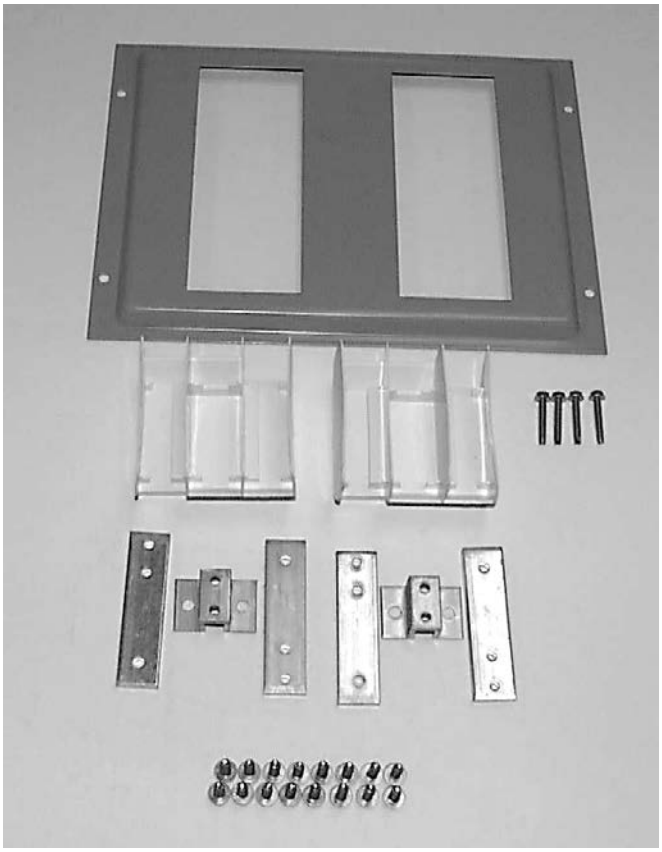

1C96609G01

PRL1X, PRL2X, PRL1a, PRL2a neutral assemblies

Table 11. 100 A neutral assemblies ①

Panel main bus ampere rating	Neutral rating	Lug type	Drawing number ②	Panel lug options ③	Wire size range	Quantity	Tin-plated aluminum connector Item number	Silver-plated copper connector
100	100%	Mechanical	1C96646	STD	#14–1/0	1	G02	G03
				SFL/TFL	#14–1/0	2	G05	G07
				OVS	#6–300 kcmil	1	G09	G11
		Crimp	42C4050	STD	#1–1/0	1	G01	G03
				SFL/TFL	#1–1/0	2	G05	G07
				OVS	2/0–300 kcmil	1	G09	G11
		Copper	1C96648	STD	#14–1/0	1	—	G03
				SFL/TFL	#14–1/0	2	—	G07
				OVS	#6–250 kcmil	1	—	G11
	200%	Mechanical	1C96649	STD	#6–300 kcmil	1	G02	G03
				SFL/TFL	#6–300 kcmil	2	G06	G07
				OVS	4/0–500 kcmil	1	G09	G11
		Crimp	42C4051	STD	2/0–300 kcmil	1	G01	G03
				SFL/TFL	2/0–300 kcmil	2	G05	G07
				OVS	4/0–500 kcmil	1	G09	G11
		Copper	1C96651	STD	#6–250 kcmil	1	—	G03
				SFL/TFL	#6–250 kcmil	2	—	G07
				OVS	1/0–600 kcmil	1	—	G11

① The assemblies shown on this page are for panelboards that mount in 30.00–90.00-inch (762.0–2286.0 mm) high enclosures only. Reference **page 14** for assemblies for panelboards that mount in 21.00–27.00-inch (533.4–685.8 mm) high enclosures.

② Order the basic drawing number, along with the equivalent G–number that's needed.

③ STD = Standard lugs.
SFL/TFL = Sub-feed and through-feed lugs.
OVS = Oversize lugs.



1C96646G01

Table 12. 225 A neutral assemblies ①

Panel main bus ampere rating	Neutral rating	Lug type	Drawing number ②	Panel lug options ③	Wire size range	Quantity	Tin-plated aluminum connector	Silver-plated copper connector
							Item number	
225	100%	Mechanical	1C96649	STD	#6–300 kcmil	1	G02	G03
				SFL/TFL	#6–300 kcmil	2	G06	G07
				OVS	4/0–500 kcmil	1	G09	G11
		Crimp	42C4051	STD	2/0–300 kcmil	1	G01	G03
				SFL/TFL	2/0–300 kcmil	2	G05	G07
				OVS	4/0–500 kcmil	1	G09	G11
		Copper	1C96651	STD	#6–250 kcmil	1	—	G03
				SFL/TFL	#6–250 kcmil	2	—	G07
				OVS	1/0–600 kcmil	1	—	G11
	200%	Mechanical	1C96652	STD	4/0–500 kcmil	2	G01	G03
				SFL/TFL	—	—	G05	G07
				OVS	3/0–750 kcmil	2	G09	G11
		Crimp	42C4052	STD	4/0–500 kcmil	2	G01	G03
				SFL/TFL	—	—	G05	G07
				OVS	500–750 kcmil	2	G09	G11
		Copper	1C96654	STD	1/0–600 kcmil	1	—	G03
				SFL/TFL	—	—	—	G07
				OVS	1/0–600 kcmil	1	—	G11

① The assemblies shown on this page are for panelboards that mount in 30.00–90.00-inch (762.0–2286.0 mm) high enclosures.

② Order the basic drawing number, along with the equivalent G–number that's needed.

③ STD = Standard lugs.
SFL/TFL = Sub-feed and through-feed lugs.
OVS = Oversize lugs.



1C96649G01


Table 13. 400 A neutral assemblies ①

Panel main bus ampere rating	Neutral rating	Lug type	Drawing number ②	Panel lug options ③	Wire size range	Quantity	Tin-plated aluminum connector Item number	Silver-plated copper connector
400	100%	Mechanical	1C96652	STD	4/0–500 kcmil	2	G01	G03
				SFL/TFL	—	—	G05	G07
				OVS	3/0–750 kcmil	2	G09	G11
		Crimp	42C4052	STD	4/0–500 kcmil	2	G01	G03
				SFL/TFL	—	—	G05	G07
				OVS	500–750 kcmil	2	G09	G11
		Copper	1C96654	STD	1/0–600 kcmil	1	—	G03
				SFL/TFL	—	—	—	G07
				OVS	1/0–600 kcmil	1	—	G11

① The assemblies shown on this page are for panelboards that mount in 30.00–90.00-inch (762.0–2286.0 mm) high enclosures.

② Order the basic drawing number, along with the equivalent G–number that's needed.

③ STD = Standard lugs.
SFL/TFL = Sub-feed and through-feed lugs.
OVS = Oversize lugs.

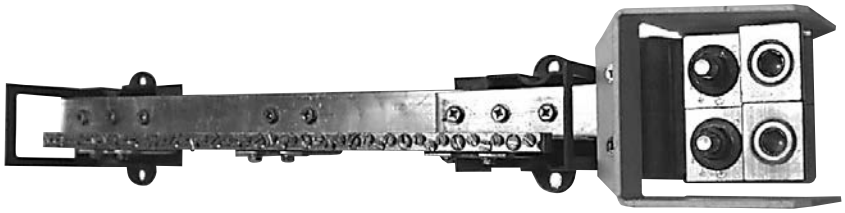

1C96652G01

Table 14. 600 A neutral assemblies ①

Panel main bus ampere rating	Neutral rating	Lug type	Drawing number ②	Circuit quantity	Panel lug options ③	Tin-plated aluminum connector Item number	Bare copper	Silver-plated copper connector	Tin-plated copper connector
600	100%	Mechanical	1C96652	42 or less	STD	—	G02	G03	G04
					TFL	—	G06	G07	G08
					OVS	—	G10	G11	G12
					OVS W/ TFL	—	G26	G27	G28
		Anderson	—	42 or less	STD	—	—	—	—
					TFL	—	—	—	—
					OVS	—	—	—	—
		Burndy	42C4052	42 or less	STD	—	G02	G03	G04
					TFL	—	G06	G07	G08
					OVS	—	G10	G11	G12
		Copper	—	42 or less	STD	—	—	—	—
					TFL	—	—	—	—
					OVS	—	—	—	—
				Greater than 42	STD	—	—	—	—
					TFL	—	—	—	—
					OVS	—	—	—	—

① The assemblies shown on this page are for panelboards that mount in 30.00–90.00-inch (762.0–2286.0 mm) high enclosures.

② Order the basic drawing number, along with the equivalent G–number that's needed.

③ STD = Standard lugs.
SFL/TFL = Sub-feed and through-feed lugs.
OVS = Oversize lugs.


Table 15. 100 A neutral assemblies for 21.00–27.00-inch (533.4–685.8 mm) high enclosures only ①

Panel main bus ampere rating	Neutral rating	Lug type	Drawing number ②	Panel lug options ③	Wire size range	Quantity	Tin-plated aluminum connector Item number	Silver-plated copper connector
100	100%	Mechanical	1C96645	STD	#14–1/0	1	G01	G03
				SFL/TFL	#14–1/0	2	G05	G07
				OVS	—	—	—	—
		Crimp	—	STD	—	—	—	—
				SFL/TFL	—	—	—	—
				OVS	—	—	—	—
		Copper	—	STD	—	—	—	—
				SFL/TFL	—	—	—	—
				OVS	—	—	—	—
	200%	Mechanical	1C97022	STD	#6–300 kcmil	1	G01	G03
				SFL/TFL	#6–300 kcmil	2	G05	G07
				OVS	—	—	—	—
		Crimp	—	STD	—	—	—	—
				SFL/TFL	—	—	—	—
				OVS	—	—	—	—
		Copper	—	STD	—	—	—	—
				SFL/TFL	—	—	—	—
				OVS	—	—	—	—

① The assemblies shown on this page are for panelboards that mount in 21.00–27.00-inch (533.4–685.8 mm) high enclosures only. Reference **page 11** for assemblies for panels that mount in 36.00, 48.00, 60.00, 72.00, and 90.00-inch (914.4, 1219.2, 1524.0, 1828.8, and 2286.0 mm) high enclosures.

② Order the basic drawing number, along with the equivalent G–number that's needed.

③ STD = Standard lugs.
SFL/TFL = Sub-feed and through-feed lugs.
OVS = Oversize lugs.

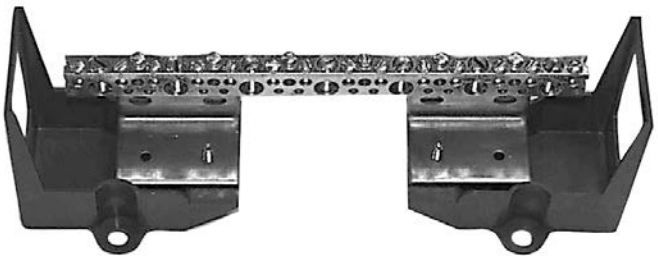

1C96645G01

PRL1X, PRL2X, PRL1a, PRL2a ground assemblies

Table 16. Standard ground

Drawing number ①	Enclosure height in inches (mm)	Bar material	Item number
5158C05	24.00 (609.6)	Aluminum/copper	G01
		Copper	G03
	36.00 (914.4), 48.00 (1219.2), 60.00 (1524.0), 72.00 (1828.8), 90.00 (2286.0)	Aluminum/copper	G02
		Copper	G04

① Order the basic drawing number, along with the equivalent G–number that's needed (example: 5158C05G01).



5158C05G01



5158C05G02

Table 17. Isolated ground

Drawing number ①	Enclosure height in inches (mm)	Bar material	Item number
2C11296	24.00 (609.6)	Aluminum/copper	G01
		Copper	G02
	36.00 (914.4), 48.00 (1219.2), 60.00 (1524.0), 72.00 (1828.8), 90.00 (2286.0)	Aluminum/copper	G03
		Copper	G04

① Order the basic drawing number, along with the equivalent G–number that's needed (example: 5158C05G01).

PRL1X, PRL2X, PRL1a, PRL2a service entrance bonding jumper kits

Table 18. PRL1X, PRL2X, PRL1a, PRL2a service entrance bonding jumper kits

Drawing number ①	Panel ampere rating	Tin-plated aluminum	Bare copper	Silver-plated copper	Tin-plated copper
		Item number			
Mechanical main lugs or main breakers					
4180B62	100–225	G01	G02	G03	G04
4180B62	400–600	G05	G06	G07	G08
Compression (crimp) main lugs					
4180B62	100–225	G09	G10	G11	G12
4180B62	400–600	G13	G14	G15	G16
Copper main lugs					
4180B62	100–225	—	G18	G19	G20
4180B62	400–600	—	G22	G23	G24

① Order the basic drawing number, along with the equivalent G–number that's needed (example: 5158C05G01).



4180B62G01

PRL1X, PRL2X, PRL1a, PRL2a service entrance main breaker kits

Table 19. PRL1X, PRL2X service entrance main breaker kits

Description	Circuit breaker frame	Catalog number
Service entrance barrier for PD3	PD3	**PRLSEBLGKD**
Service entrance barrier for PD2	PD2	**PRLSEBFD**
Service entrance barrier for GHB	GHB	**PRLSEBGHB**

Table 20. PRL1a, PRL2a service entrance main breaker kits

Description	Circuit breaker frame	Catalog number
Service entrance barrier for LG and KD	LG/KD	**PRLSEBLGKD**
Service entrance barrier for JD	JD	**PRLSEBJD**
Service entrance barrier for FD	FD	**PRLSEBFD**
Service entrance barrier for GHB	GHB	**PRLSEBGHB**



SE barrier kit FD_016

PRL1X, PRL2X, PRL1a, PRL2a deadfront covers

Note: Does not apply to PRL4 sub-chassis.

Table 21. Assembly

Assembly drawing number ①	Standard enclosure height in inches (mm)						
	24.00 (609.6)	36.00 (914.4)	42.00 (1066.8)	48.00 (1219.2)	60.00 (1524.0)	72.00 (1828.8)	90.00 (2286.0)
1C96638	G01	G02	G07	G03	G04	G05	G06

① Order the basic drawing number, along with the equivalent G–number that's needed (example: 1C96638G01).

Table 22. PRL1X, PRL2X, PRL1a, PRL2a vertically mounted devices

Mounting arrangement	Device/frame	Drawing number ①	Mounting position	Item number
Vertical	100 A MLO, SFL, TFL or PD2 (100 A maximum)	42C8072	Top	H01
			Bottom	H02
	225 A MLO, SFL, TFL or PD2 (225 A maximum)	42C8073	Top	H01
			Bottom	H04
	400 A MLO, TFL or PD3	42C7982	Top	H01
			Bottom	H02
Blank covers in inches (mm)	1.00 (25.4)	4180B08	—	H01
	2.00 (50.8)		—	H02
	3.00 (76.2)		—	H03
	4.00 (101.6)		—	H04
	5.00 (127.0)		—	H05
	6.00 (152.4)		—	H06
	7.00 (177.8)		—	H07
	8.00 (203.2)		—	H08
	9.00 (228.6)		—	H09
	10.00 (254.0)		—	H10
	11.00 (279.4)		—	H11
	12.00 (304.8)		—	H12
	13.00 (330.2)		—	H13
	14.00 (355.6)		—	H14
	15.00 (381.0)		—	H15
	16.00 (406.4)		—	H16


① Order the basic drawing number, along with the equivalent H–number that's needed (example: 4180B03H01).



1C96638G01



4180B08H03

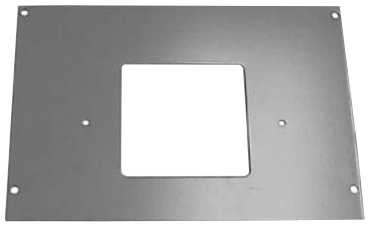

4180B03H01

Table 23. PRL1a, PRL2a vertically mounted devices


Mounting arrangement	Device/frame	Drawing number ①	Mounting position	Item number
Vertical	100 A MLO, SFL, TFL or F-Frame (100 A maximum)	42C8072	Top	H01
			Bottom	H02
	225 A MLO, SFL, TFL or F-Frame (225 A maximum)	42C8073	Top	H01
			Bottom	H04
	400 A MLO, SFL, TFL or J-Frame	4180B04	Top	H01
			Bottom	H02
	400 A MLO, TFL or K-Frame	4180B05	Top	H01
			Bottom	H02
Blank covers in inches (mm)	1.00 (25.4)	4180B08	—	H01
	2.00 (50.8)		—	H02
	3.00 (76.2)		—	H03
	4.00 (101.6)		—	H04
	5.00 (127.0)		—	H05
	6.00 (152.4)		—	H06
	7.00 (177.8)		—	H07
	8.00 (203.2)		—	H08
	9.00 (228.6)		—	H09
	10.00 (254.0)		—	H10
	11.00 (279.4)		—	H11
	12.00 (304.8)		—	H12
	13.00 (330.2)		—	H13
	14.00 (355.6)		—	H14
	15.00 (381.0)		—	H15
	16.00 (406.4)		—	H16

① Order the basic drawing number, along with the equivalent H–number that's needed (example: 4180B03H01).


Table 24. Horizontally mounted devices

Mounting arrangement	Device/frame	Drawing number ①	Branch circuit quantity	Item number	Quantity required
Horizontal	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP	1C96619	12	H01	1
			18	H02	1
			30	H04	1
			42	H06	1
			48	H03	2
			54	H03 and H04	1 each
			72	H05	2
			96	H07	2
	GB, GHB, GHQ, GHBS	1C96620	12	H01	1
			18	H02	1
			30	H04	1
			42	H06	1
			48	H03	2
			54	H03 and H04	1 each
			72	H05	2
			96	H07	2

① Order the basic drawing number, along with the equivalent H–number that's needed (example: 1C96619H01).

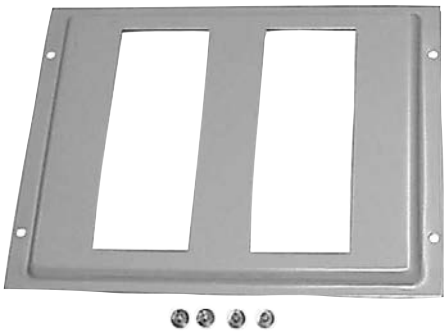

1C96619H01

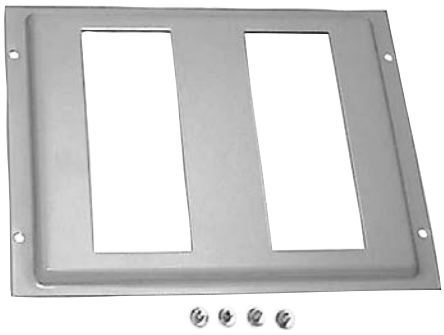

1C96620H01

Table 25. Filler covers


Device/frame	Drawing number	Item number
F, J, K ①	4180B52	H01
QUICKLAG, GB, GHB ②	5155C62	H01

① Filler covers are required in addition to deadfront cover whenever MLO, SFL or TFL are specified.

② Filler covers are required in addition to deadfront cover whenever a branch provision is specified.



5155C62H01

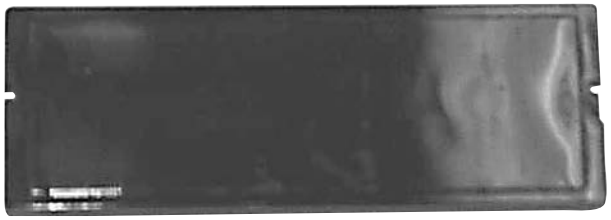


4180B52H01


Panelboard special trim locks


Panelboard trims use different trim locks. See pictures below for styles and part numbers. Contact your nearest satellite for availability on the styles listed below. See **page 3** for satellite listings.

Table 26. Panelboard special trim locks


Description	Catalog number
For use on left-handed door (hinged on left side)	**K80522**
For use on right-handed door (hinged on right side)	**K80133**
T–Handle lock, at one time used on all trims over 48.00 inches (1219.2 mm) in height, also used on outdoor NEMA® 12/3R trims	**K80429**
Used on PRL4X and PRL4 lighting and power panels as standard	**1A32258H03**
Used on PRL1X, 2X, 3X, PRL1, 2, 3 and PRL1a, 2a, 3a lighting panels as standard; WEM 2 key	**5155C81G01**


K80522


K80133

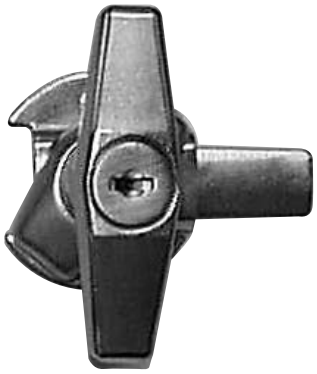
K80429


5155C81G01

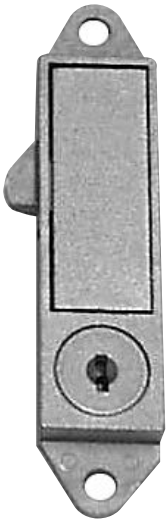
1A32258H03

Panelboard EZ Trim locks

Panelboard EZ Trim™ uses different trim locks. See **Table 27** and pictures below for styles and part numbers. Contact your nearest satellite for availability. See **page 3** for satellite listings.

Table 27. Panelboard EZ Trim locks

Description	Size	Catalog number
Lock	24–48 inches	**5155C81G03**
Lock and latch	54–60 inches	**5155C81G03/5155C81G05**
Lock and latch	72–90 inches	**5155C81G04/5155C81G06**



EZ Trim lock with key




EZ Trim latch without key

Panelboard Fastrim clamps and screw-on hardware kits


For panelboard trim clamps, contact your nearest satellite for availability on the styles listed below. See **page 3** for satellite listings.

Table 28. Panelboard Fastrim clamps and screw-on hardware kits


Description	Style number
Trim clamps—used on PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a Fastrims (6 per bag)	**2C11641G02**
Trim screws—used on PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a, PRL4B standard trim (10 per bag)	**5157C83G06**
Chassis mounting hardware bag—PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a panels	**7499A48G04**

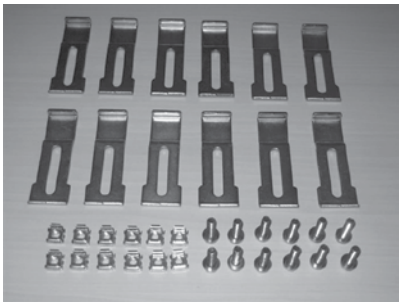

2C11641G02

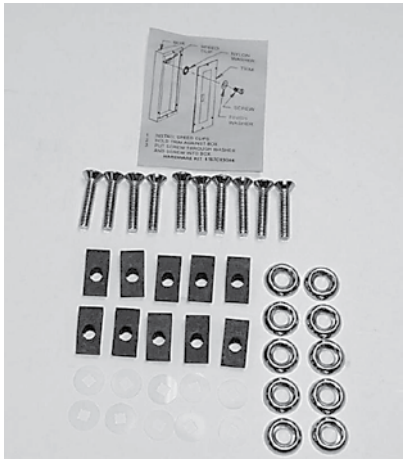

5157C83G06

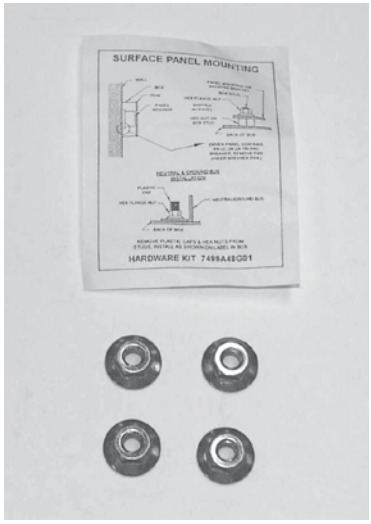

7499A48G04

PRL3X, PRL3a parts section

Description **Page**

Connector kit assemblies 22
Ground assemblies 24
Service entrance kits 24
Deadfront covers 25–29

PRL3X, PRL3a horizontally mounted connector kit assemblies


Three-phase kits contain A, B, and C phase connectors. Single-phase kits contain A and C phase connectors, deadfront cover, hardware and instructions to twin-mount breakers across from each other. **Maximum amperes connected to any one connector cannot exceed 200 A.**

Table 29. PRL3X horizontally mounted connector kit assemblies


Devices	Circuits or poles	Three-phase		Single-phase		Notes
		Catalog number	Phase	Catalog number	Phase	
BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP	6	**KPRL3XBA06**	A/B/C	**KPRL3XBA06-1**	A/C	(2) 100 A devices maximum
	12	**KPRL3XBA12**	A/B/C	**KPRL3XBA12-1**	A/C	
	18	**KPRL3XBA18**	A/B/C	**KPRL3XBA18-1**	A/C	
	24	**KPRL3XBA24**	A/B/C	**KPRL3XBA24-1**	A/C	
GB, GHB, GHQ, GHBS	6	**KPRL3XGB06**	A/B/C	**KPRL3XGB06-1**	A/C	
	12	**KPRL3XGB12**	A/B/C	**KPRL3XGB12-1**	A/C	
	18	**KPRL3XGB18**	A/B/C	**KPRL3XGB18-1**	A/C	
	24	**KPRL3XGB24**	A/B/C	**KPRL3XGB24-1**	A/C	

Table 30. PRL3a horizontally mounted connector kit assemblies

Devices	Circuits or poles	Three-phase		Single-phase		Notes
		Catalog number	Phase	Catalog number	Phase	
BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP	6	**KPRL3ABA06**	A/B/C	**KPRL3ABA06-1**	A/C	(2) 100 A devices maximum
	12	**KPRL3ABA12**	A/B/C	**KPRL3ABA12-1**	A/C	
	18	**KPRL3ABA18**	A/B/C	**KPRL3ABA18-1**	A/C	
	24	**KPRL3ABA24**	A/B/C	**KPRL3ABA24-1**	A/C	
GB, GHB, GHQ, GHBS	6	**KPRL3AGB06**	A/B/C	**KPRL3AGB06-1**	A/C	
	12	**KPRL3AGB12**	A/B/C	**KPRL3AGB12-1**	A/C	
	18	**KPRL3AGB18**	A/B/C	**KPRL3AGB18-1**	A/C	
	24	**KPRL3AGB24**	A/B/C	**KPRL3XGB24-1**	A/C	

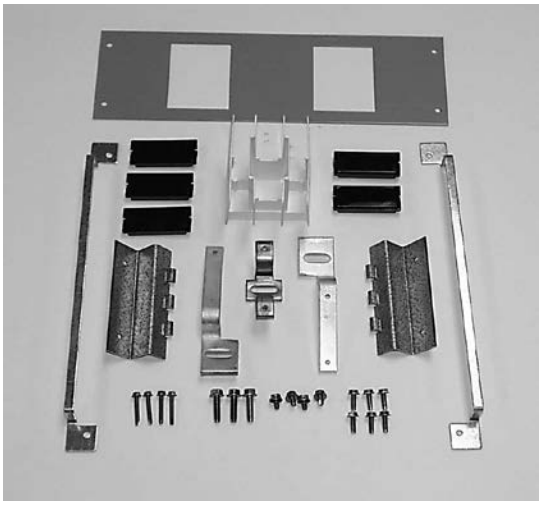

KPRL3ABA06

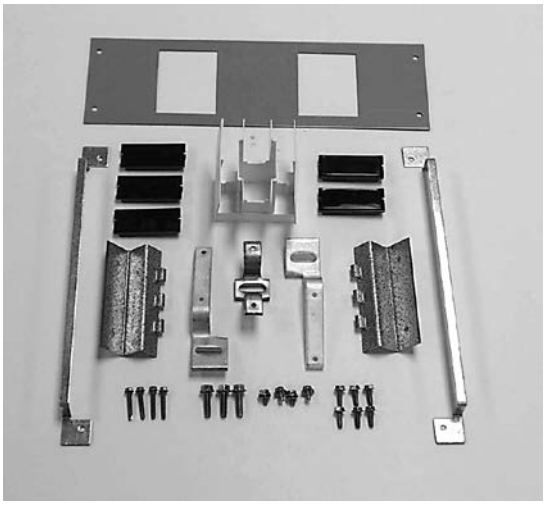

KPRL3AGB06

PRL3X, PRL3a, PD2, F-Frame horizontally mounted connector kit assemblies

Connector kits contain phase connectors, deadfront cover, hardware, and instructions to mount breakers. Order breakers separately when ordering connector kit.

Table 31. PRL3X, PD2 Frame horizontally mounted connector kit assemblies


Devices	Circuits or poles	Three-phase		Single-phase		Notes
		Catalog number	Phase	Catalog number	Phase	
PD2 (175–225 A single mount) ①	Three-pole breaker	**KPRL3X23**	A/B/C	—	—	(1) 225 A maximum single mounted
	Two-pole breaker	**KPRL3X22**	A/C	**KPRL3X22**	A/C	
PD2 (150 A maximum twin mount)	Three-pole breaker	**KPRL3X23T**	A/B/C	—	—	(2) 150 A devices maximum
	Two-pole breaker	**KPRL3X22T**	A/C	**KPRL3X22T**	A/C	
	Single-pole breaker	**KPRL3X21T**	A/C	**KPRL3X21T**	A/C	

① PD2 Frame devices rated above 150 A must be single mounted. No twin mounting acceptable.

Table 32. PRL3a F-Frame horizontally mounted connector kit assemblies

Devices	Circuits or poles	Three-phase		Single-phase		Notes
		Catalog number	Phase	Catalog number	Phase	
EHD, FD, FDB, HFD, FDC (150 A maximum twin mount)	Three-pole breaker	**KPRL3AFD3**	A/B/C	—	—	(2) 150 A devices maximum
	Two-pole breaker	**KPRL3AFD2**	A/C	**KPRL3AFD2**	A/C	
	Single-pole breaker	**KPRL3AFD1**	A/C	**KPRL3AFD1**	A/C	
FD, HFD, FDC, ED, EDH, EDC (175–225 A single mount) ①	Three-pole breaker	**KPRL3AED3**	A/B/C	—	—	(1) 225 A maximum single mounted
	Two-pole breaker	**KPRL3AED2**	A/C	**KPRL3AED2**	A/C	

① PD2 Frame devices rated above 150 A must be single mounted. No twin mounting acceptable.

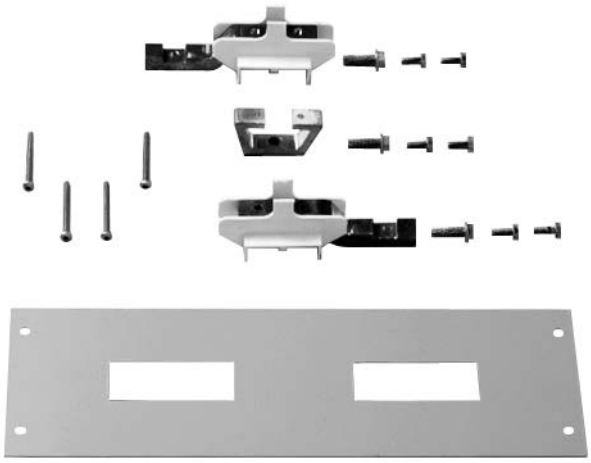

KPRL3AFD3

PRL3X, PRL3a ground assemblies

Table 33. PRL3X, PRL3a ground assemblies

	Standard	Isolated
Material	**Catalog number**	
Aluminum/copper	**5158C05G02**	**2C11296G02**
Copper only	**5158C05G04**	**2C11296G04**



5158C05G02

PRL3X, PRL3a service entrance bonding jumper kits

Table 34. PRL3X, PRL3a service entrance bonding jumper kits

		Tin-plated aluminum	Bare copper	Silver-plated copper	Tin-plated copper
Style number ①	**Panel ampere rating**	**Item number**			
Mechanical main lugs or main breakers					
5078A98	100	G01	G02	G03	G04
	250–600	G13	G14	G15	G16
Crimp main lugs					
5078A98	100	G05	G06	G07	G08
	250–600	G17	G18	G19	G20
Copper main lugs					
5078A98	100	G09	G10	G11	G12
	250–600	G21	G22	G23	G24

① When ordering, use complete style number (example: 100 A tin-plated aluminum 5078A98G01).



5078A98G01

PRL3X, PRL3a service entrance main breaker kits

Table 35. PRL3X service entrance main breaker kits

Description	Circuit breaker frame	Catalog number
Service entrance barrier for PD3	PD3	**PRLSEBPD3**
Service entrance barrier for PD2	PD2	**PRLSEBPD2**
Service entrance barrier for GHB	GHB	**PRLSEBGHB**

Table 36. PRL3a service entrance main breaker kits

Description	Circuit breaker frame	Catalog number
Service entrance barrier for LG and KD	LG/KD	**PRLSEBLGKD**
Service entrance barrier for JD	JD	**PRLSEBJD**
Service entrance barrier for FD	FD	**PRLSEBFD**
Service entrance barrier for GHB	GHB	**PRLSEBGHB**



SE Barrier Kit FD_016

PRL3X, PRL3a deadfront covers

Table 37. Assembly ①

	Chassis height/item number				
Style number ②	**14X**	**23X**	**31X**	**40X**	**53X**
6559C59	G01	G02	G03	G04	G05

① Assembly groups include the frame only (two rails and two end covers). Reference **page 29** for specific device covers. All connector kits ship with a deadfront cover for that device.

② When ordering, use complete style number (example: 14X high assembly 6559C59G01).



6559C59G01

PRL3X, PRL3a vertical devices deadfront covers


Table 38. PRL3X vertical devices deadfront covers

				Item number	
Device/frame	**Trip unit type**	**Style number ①**	**"X" space required**	**Without lock-offs ①**	**With lock-offs ①**
PD2 (top) ②	—	**42C8076**	7X	H01	H01
PD2 (bottom) ②	—	**42C8076**	7X	H02	H02
PD2 (top) ③	—	**42C8077**	10X	H01	H01
PD2 (bottom) ③	—	**42C8077**	10X	H02	H02
PD3 400 A (top)	Thermal-magnetic	**42C7980**	15X	H01	H01
PD3 400 A (bottom)	PXR	**42C7980**	15X	H02	H02
PD3 600 A (top)	Thermal-magnetic	**42C8055**	18X	H01	N/A
PD3 600 A (bottom)	PXR	**42C8055**	18X	H02	N/A
Neutral/blank cover	—	**4176B72**	1X	H01	—
			2X	H02	—
			3X	H03	—
			4X	H04	—
			5X	H05	—
			6X	H06	—
			7X	H07	—
			8X	H08	—
			9X	H09	—
			10X	H10	—
			11X	H11	—
			12X	H12	—

① When ordering covers, order complete style and item numbers (example: 4176B68H01).

② 4/0 maximum acceptable terminal size.

③ 300 kcmil maximum acceptable terminal size.

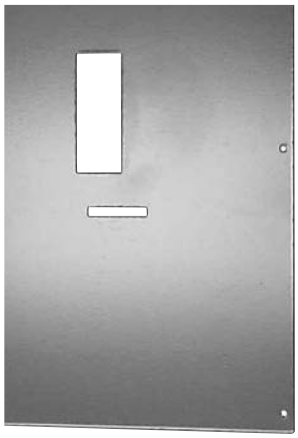

J main 4176B60H04



Neutral blank cover 4176B72H04

Table 39. PRL3a vertical devices deadfront covers

Device/frame	Trip unit type	Style number ①	"X" space required	Item number	
				Without lock-offs ①	With lock-offs ①
EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (top) ②	—	**42C8076**	7X	H01	H01
EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (bottom) ②	—	**42C8076**	7X	H02	H02
FD, HFD, FDC, ED, EDH (top) ③	—	**42C8077**	10X	H01	H01
FD, HFD, FDC, ED, EDH (bottom) ③	—	**42C8077**	10X	H02	H02
J-Frame (bottom)	—	**4176B60**	14X	H01	H02
J-Frame (top)	—	**4176B60**	14X	H03	H04
K-Frame (bottom)	Thermal-magnetic	**4176B61**	15X	H01	H02
K-Frame (bottom)	Electronic	**4176B61**	15X	H03	H04
K-Frame (top)	Thermal-magnetic	**4176B61**	15X	H05	H06
K-Frame (top)	Electronic	**4176B61**	15X	H07	H08
L-Frame (bottom)	Thermal-magnetic	**4176B51**	17X	H01	H02
L-Frame (bottom)	Electronic	**4176B51**	17X	H03	H04
L-Frame (top)	Thermal-magnetic	**4176B51**	17X	H05	H06
L-Frame (top)	Electronic	**4176B51**	17X	H07	H08
FB-P (top only)	—	**4176B70**	9X	H02	H02
LA-P (top only)	—	**4176B57**	21X	H01	H01
FCL	—	**4176B70**	9X	H01	H01
LCL (top)	—	**4176B56**	21X	H01	H02
LCL (bottom)	—	**4176B56**	21X	H03	H04
Neutral/blank cover	—	**4176B72**	1X	H01	—
	—	**4176B72**	2X	H02	—
	—	**4176B72**	3X	H03	—
	—	**4176B72**	4X	H04	—
	—	**4176B72**	5X	H05	—
	—	**4176B72**	6X	H06	—
	—	**4176B72**	7X	H07	—
	—	**4176B72**	8X	H08	—
	—	**4176B72**	9X	H09	—
	—	**4176B72**	10X	H10	—
	—	**4176B72**	11X	H11	—
	—	**4176B72**	12X	H12	—
J-Frame sub-feed twin bottom	—	**4176B79**	20X	H01	H02 (2 L/O)
	—	**4176B79**	20X	H01	H03 (1 L/O RT)
	—	**4176B79**	20X	H01	H04 (1 L/O LT)
J-Frame sub-feed twin top	—	**4176B79**	20X	H05	H05 (2 L/O)
	—	**4176B79**	20X	H05	H07 (1 L/O RT)
	—	**4176B79**	20X	H05	H08 (1 L/O LT)
Bolt switch					
PT363 (switch, pullout, 100 A maximum) (top)	—	**4180B79**	7X	H01	—
PT363 (switch, pullout, 100 A maximum) (bottom)	—	**4180B79**	7X	H02	—
PT364 (switch, pullout, 200 A maximum) (top)	—	**4180B79**	9X	H03	—
PT364 (switch, pullout, 200 A maximum) (bottom)	—	**4180B79**	9X	H04	—

① When ordering covers, order complete style and item numbers (example: 4176B68H01).

② 4/0 maximum acceptable terminal size.

③ 300 kcmil maximum acceptable terminal size.

PRL3X, PRL3a horizontal devices deadfront covers

Table 40. PRL3X horizontal mounting position

Device/frame	Device poles	Style number ①	Total circuit quantity	"X" space required	Item number
PD2 (twin mounted)	1, 2 or 3	**42C8078**	6	3X	H01
			12	6X	H02
			18	9X	H03
			24	12X	H04
			30	15X	H05
			36	18X	H06
			42	21X	H07
			48	24X	H08
PD2 (twin mounted)	1 or 2	**42C8079**	4	2X	H01
			8	4X	H02
			12	6X	H03
			16	8X	H04
			20	10X	H05
			24	12X	H06
			28	14X	H07
			32	16X	H08
PD2 (twin mounted)	1	**42C8080**	2	1X	H01
PD2 (single mounted)	2	**42C8081**	2	2X	H01
PD2 (single mounted)	3	**42C8082**	3	3X	H01
BA, BAB, BABRP, BABRSP, QBH, QBGF, QBGFEP, QBHGFEP	1, 2 or 3	**4176B67**	6	3X	H01
			12	5x	H02
			18	8x	H03
			24	10x	H04
GB, GHB, GHBS, GHBGFEP, HGHB, GHQ	1, 2 or 3	**4176B69**	6	3X	H01
			12	5x	H02
			18	8X	H03
			24	10X	H04
Pow-R-Command Controller	—	**4180B91**	—	5X	H01
Pow-R-Command Expansion	—	**4180B91**	—	7X	H02
			—	16X	H03

① When ordering covers, order complete style and item number (example: 4178B08H01).

Table 41. PRL3a horizontal mounting position

Device/frame	Device poles	Style number ①	Total circuit quantity	"X" space required	Item number
EHD, FD, FDB, HFD, FDC (twin mounted)	1, 2 or 3	**42C8078**	6	3X	H01
			12	6X	H02
			18	9X	H03
			24	12X	H04
			30	15X	H05
			36	18X	H06
			42	21X	H07
			48	24X	H08
EHD, FD, FDB, HFD, FDC (twin mounted)	1 or 2	**42C8079**	4	2X	H01
			8	4X	H02
			12	6X	H03
			16	8X	H04
			20	10X	H05
			24	12X	H06
			28	14X	H07
			32	16X	H08
EHD, FD, FDB, HFD, FDC (twin mounted)	1	**42C8080**	2	1X	H01
FD, HFD, FDC, ED, EDH, EDC (single mounted)	2	**42C8081**	2	2X	H01
FD, HFD, FDC, ED, EDH, EDC (single mounted)	3	**42C8082**	3	3X	H01
CA, CAH, HCA	3	**4176B66**	3	3X	H01
CA, CAH, HCA	2	**4176B80**	2	2X	H01
BA, BAB, BABRP, BABRSP, QBH, QBGF, QBGFEP, QBHGFEP	1, 2 or 3	**4176B67**	6	3X	H01
			12	5X	H02
			18	8X	H03
			24	10X	H04
GB, GHB, GHBS, GHBGFEP, HGHB, GHQ	1, 2 or 3	**4176B69**	6	3X	H01
			12	5X	H02
			18	8X	H03
			24	10X	H04
Pow-R-Command Controller	—	**4180B91**	—	5X	H01
Pow-R-Command Expansion	—	**4180B91**	—	7X	H02
				16X	H03

① When ordering covers, order complete style and item number (example: 4178B08H01).


PRL3X, PRL3a deadfront cover blank fillers

Table 42. PRL3X deadfront cover blank fillers

Device/frame	Poles	Style number
PD2	1, 2 or 3	**42C8083H01**
QUICKLAG, GB, GHB, GHBS	1, 2 or 3	**5155C62H01**

Table 43. PRL3a deadfront cover blank fillers

Device/frame	Poles	Style number
F-Frame	1, 2 or 3	**42C8083H01**
C-Frame	2	**6555C40H01**
C-Frame	3	**6555C41H01**
QUICKLAG, GB, GHB, GHBS	1, 2 or 3	**5155C62H01**

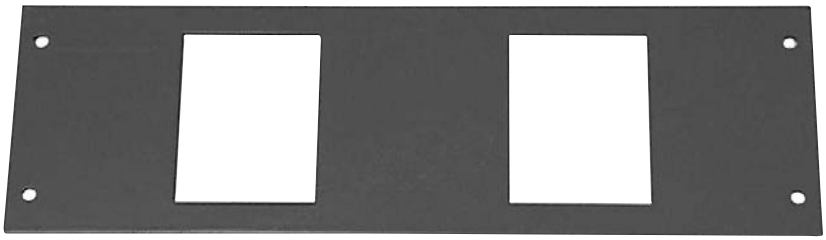


BAB Cover 4176B67H01

PRL4X, PRL4 parts section

Description	Page
Vented cover assemblies	31
Blank covers	32
Breaker connector kits	32
Fusible connector kits	34
Breaker and fusible switch retrofit kits	34–35
PRL4 special trims and enclosures	38

PRL4 vented cover assemblies

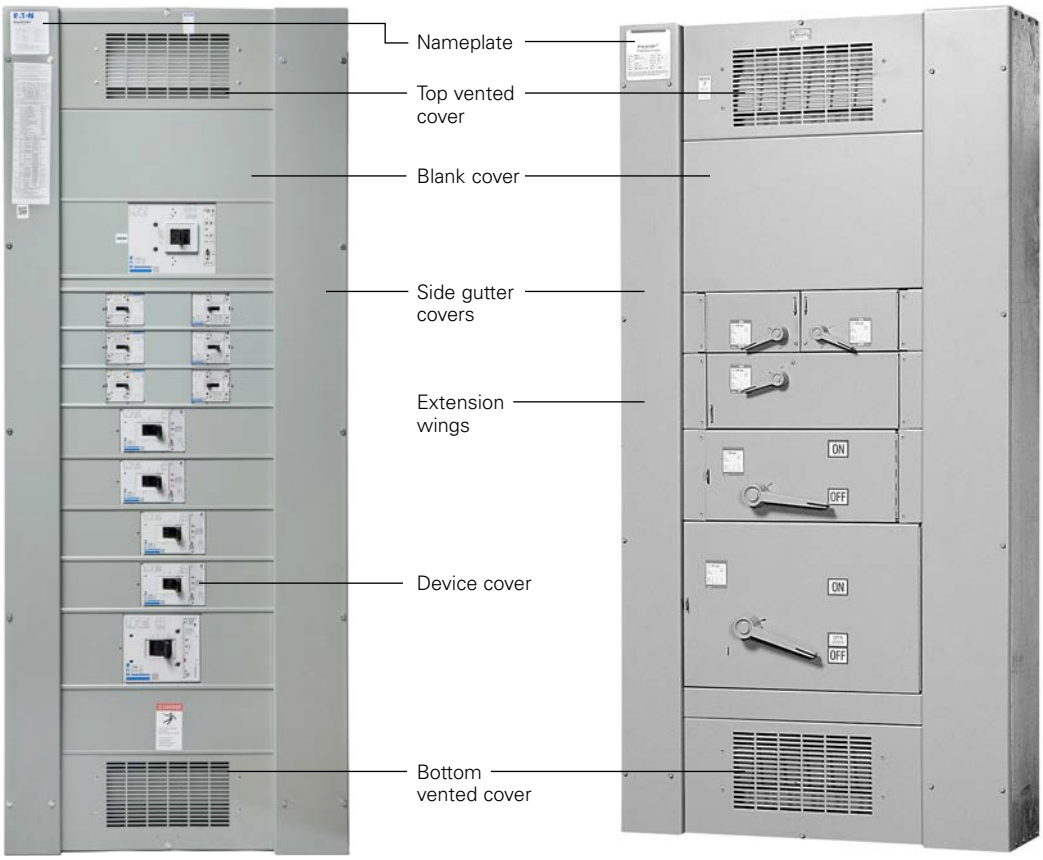

PRL4X PRL4F

Table 44. Vented cover assemblies and side gutter covers—dimensions in inches (mm)

NEMA 1 box					Side gutter covers			
					Left		Right	
Height	Width	Depth ①	Catalog number	Vented cover assembly ② style number	Size	Style number	Size	Style number
57.00 (1447.8)	24.00 (609.6)	10.40 (264.2)	**BX2457**	**6574C74G02**	5.00 (127.0) x 57.00 (1447.8)	**6555C20H01**	5.00 (127.0) x 57.00 (1447.8)	**6555C20H01**
73.00 (1854.2)	24.00 (609.6)		**BX2473**	**6574C74G03**	5.00 (127.0) x 73.00 (1854.2)	**6555C21H01**	5.00 (127.0) x 73.00 (1854.2)	**6555C21H01**
90.00 (2286.0)	24.00 (609.6)		**BX2490**	**6574C74G04**	5.00 (127.0) x 90.00 (2286.0)	**6555C25H01**	5.00 (127.0) x 90.00 (2286.0)	**6555C25H01**
73.00 (1854.2)	36.00 (914.4)		**BX3673**	**6574C74G05**	6.00 (152.4) x 73.00 (1854.2)	**6555C22H01**	8.00 (203.2) x 73.00 (1854.2)	**6555C23H01**
90.00 (2286.0)	36.00 (914.4)		**BX3690**	**6574C74G06**	6.00 (152.4) x 90.00 (2286.0)	**6555C26H01**	8.00 (203.2) x 90.00 (2286.0)	**6555C27H01**
73.00 (1854.2)	44.00 (1117.6)		**BX4473**	**6574C74G05**	8.00 (203.2) x 73.00 (1854.2)	**6555C23H01**	14.00 (355.6) x 73.00 (1854.2)	**6555C24H01**
90.00 (2286.0)	44.00 (1117.6)		**BX4490**	**6574C74G06**	8.00 (203.2) x 90.00 (2286.0)	**6555C27H01**	14.00 (355.6) x 90.00 (2286.0)	**6555C28H01**

① Covers add 0.90 inches (22.9 mm) to box depth for overall enclosure depth of 11.30 inches (287.0 mm).


② Cover assembly consists of two side rails, top and bottom vented covers. **Important:** Order individual device covers and blanks separately.

PRL4 blank covers

Used to cover blank space on chassis. All PRL4X and PRL4 cover heights are measured in "X" units. 1X equals 1.38 inches (35.1 mm).

Table 45. PRL4 blank covers

Cover size	Style number 24.00-inch (609.6 mm) width box	Style number 36.00, 44.00-inch (914.4, 1117.6 mm) width box
1X	**6554C01H01**	**6554C02H01**
2X	**6554C01H02**	**6554C02H02**
3X	**6554C01H03**	**6554C02H03**
4X	**6554C01H13**	**6554C02H13**
5X	**6554C01H14**	**6554C02H14**
6X	**6554C01H04**	**6554C02H04**
7X	**6554C01H05**	**6554C02H05**
9X	**6554C01H06**	**6554C02H06**
10X	**6554C01H07**	**6554C02H07**
11X	**6554C01H08**	**6554C02H08**
12X	**6554C01H09**	**6554C02H09**
13X	**6554C01H10**	**6554C02H10**
15X	**6554C01H11**	**6554C02H11**
20X	**6554C01H12**	**6554C02H12**

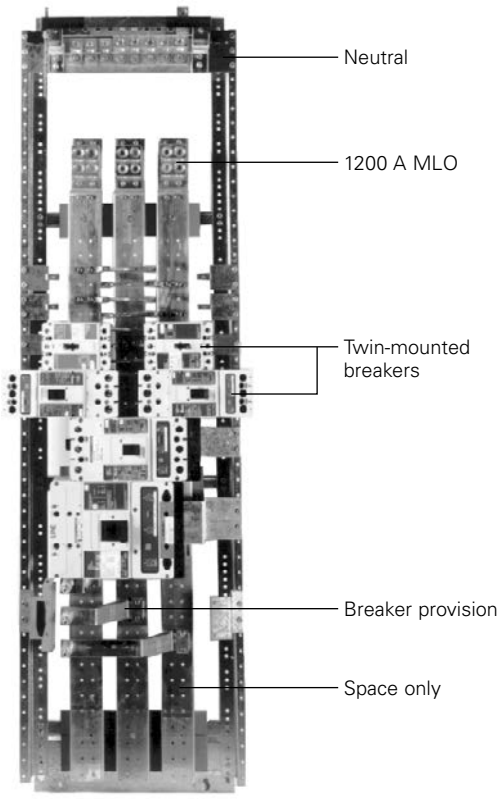

PRL4B Interior

PRL4 breaker connector kits

Breaker connector kits

Each kit includes copper connectors, mounting brackets, covers, hardware, and instructions for mounting breaker(s) in a PRL4X and PRL4. **Breakers are not included.** Contact your local satellite plant for availability and application information (see **page 3**).

Connector kit

Each kit includes copper connectors mounting brackets, cover, hardware, and instructions.


Table 46. PRL4 breaker connector kits

Breaker frame	Space required Inches (mm)	Space required "X"	Number of poles	Mounting type	Connector kit catalog number
PD2	2.75 (69.9)	2X	1 ①	Twin	**KPRL4X12**
			2	Twin	**KPRL4X22**
PD2	4.13 (104.9)	3X	3	Twin	**KPRL4X32**
PD3 (400 A Frame)	5.50 (139.7)	4X	3	Single	**KPRL4X334S** ②
PD3 (400 A Frame)	5.50 (139.7)	4X	3	Twin	**KPRL4X334T** ③
PD3 (600 A Frame)	5.50 (139.7)	4X	3	Single	**KPRL4X336** ②
PD4	8.25 (209.6)	6X	3	Single	**KPRL4X34** ②
PD5	8.25 (209.6)	6X	3	Single	**KPRL4X35** ②

① Two sets of twin-mounted single-pole breakers.

② 36.00-inch (914.4 mm) minimum box width required.

③ 44.00-inch (1117.6 mm) box width required.

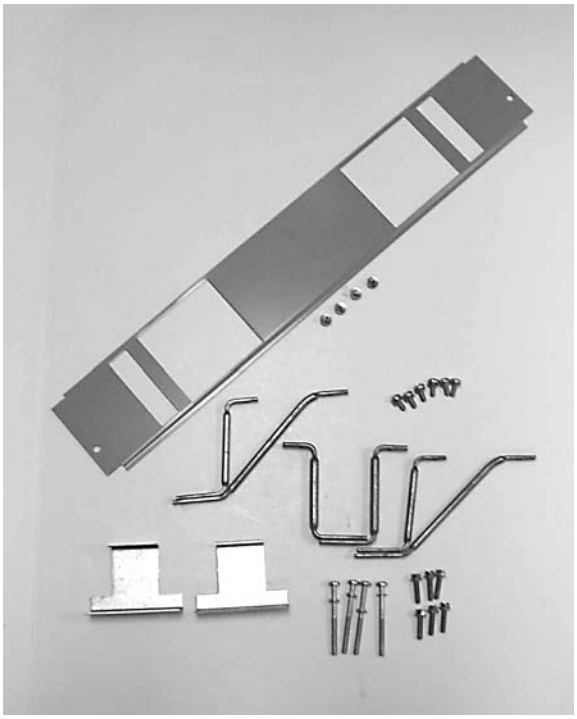

Connector kit

Table 47. PRL4 breaker connector kits

Breaker frame	Space required		Number of poles	Mounting type	Connector kit catalog number
	Inches (mm)	"X"			
EHD/FDB/FD/HFD/FDC	2.75 (69.9)	2X	1 ①	Twin	**KPRL4X12**
EHD/FDB/FD/HFD/FDC/ED/EDH/EDC/EHD/FDB/FD/HFD/FDC/FDB	2.75 (69.9)	2X	2	Twin	**KPRL4X22**
ED/EDH/EDC /FDE/HFDE/FDCE	4.13 (104.9)	3X	3	Twin	**KPRL4X32**
ED/EDH/EDC/EDB/EDS	4.13 (104.9)	3X	3	Twin	**KPRL4X32**
FD current limiter (available in single mounting only)	4.13 (104.9)	3X	3	Single	**KPRL4FDCL**
CA/CAH/HCA	2.75 (69.9)	2X	2	Twin	**KPRL4CA** ②
CA/CAH/HCA	4.13 (104.9)	3X	3	Twin	**KPRL4CA**
JD, JDB, HJD, JDC	4.13 (104.9)	3X	2, 3	Single	**KPRL4JDS**
JD, JDB, HJD, JDC	4.13 (104.9)	3X	2, 3	Twin	**KPRL4JDT** ②
FCL, FB-P, FD/LFD	4.13 (104.9)	3X	3	Twin	**KPRL4FBP**
DK, KD, KDB, HKD, KDC	5.50 (139.7)	4X	2, 3	Single	**KPRL4KDS** ②
DK, KD, KDB, HKD, KDC	5.50 (139.7)	4X	2, 3	Twin	**KPRL4KDT** ③
LC/LCY/HLC/LD/HLD/LDC/LDB [LA]	8.25 (209.6)	6X	3	Single	**KPRL4LC** ②
LGE/LGS/LGHLGC/LGU	8.25 (209.6)	6X	3	Single	**KPRL4X336** ②
LHH	5.50 (139.7)	4X	3	Single	**KPRL4LG** ②
MDS/MC/MCY/HMC [MA/HMA]	8.25 (209.6)	6X	3	Single	**KPRL4MC** ②
MDL/HMDL	8.25 (209.6)	6X	3	Single	**KPRL4X34** ②
LA-P	8.25 (209.6)	6X	3	Single	**KPRL4LAP** ②
LCL	8.25 (209.6)	6X	3	Single	**KPRL4LCL** ②
NB-P	8.25 (209.6)	6X	3	Single	**KPRL4NBP** ②
NC/NCY/HNC [NB/HNB]	8.25 (209.6)	6X	3	Single	**KPRL4NC** ②
ND/HND/NDC/NGS/NGH/NGC	8.25 (209.6)	6X	3	Single	**KPRL4X35** ②
NHH	8.25 (209.6)	6X	3	Single	**KPRL4ND** ②
100% rated breakers					
CKD/CHKD/CKDC	5.50 (139.7)	4X	3	Single	**KPRL4CKD** ③④
CLD/CHLD/CLDC	8.25 (209.6)	6X	3	Single	**KPRL4LC** ③④
LCC/HLCC	8.25 (209.6)	6X	3	Single	**KPRL4LC** ③④
MCC/HMCC	8.25 (209.6)	6X	3	Single	**KPRL4MC** ③④
MDSC	8.25 (209.6)	6X	3	Single	**KPRL4MC** ③④
CMDL/CHMDL	8.25 (209.6)	6X	3	Single	**KPRL4MD** ③④
CND/CHND/CNDC/NGS-C/NGH-C/NGC-C	8.25 (209.6)	6X	3	Single	**KPRL4CND** ③④

① Two sets of twin-mounted single-pole breakers.


② 36.00-inch (914.4 mm) minimum box width required.

③ 44.00-inch (1117.6 mm) box width required.

④ Requires density rated bus in existing panel chassis.

Hardware kit


Each kit includes mounting bracket(s) and mounting hardware only. Use the appropriate connector kit catalog number and add an "H" to designate hardware only (example: KPRL4X32-H).

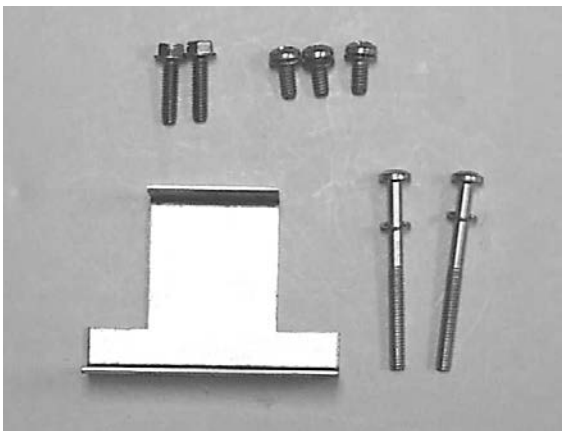

Hardware kit

Standard ground bus

Copper bus with (3) 6–300 kcmil lugs plus a 24-circuit terminal bar with #14–1/0 wire range.

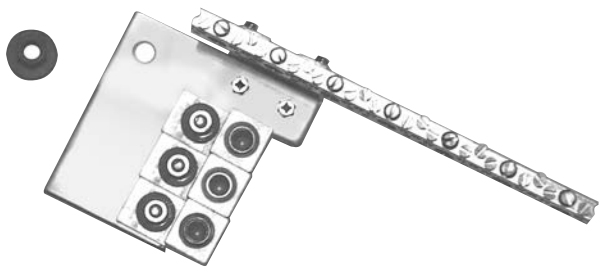

6572C746G01

PRL4 fusible connector kits

Fusible switch connector kits

Each kit includes copper connectors, extension wings (when required), hardware, and instructions to mount a fusible switch. Switches are not included. Contact your local satellite plant for availability and application information (see **page 3**).

Table 48. Fusible switch connector kits

Switch height			Three-pole switch		
			240 V	600 V	
Inches (mm)	"X" space required	Switch ampere rating	Catalog number		Connector kit
5.50 (139.7)	4X	30–30	**FDPWT3211R**	**FDPWT3611R**	—
		60–60	**FDPWT3222R**	**FDPWT3622R**	**KPRL44X** ①
		100–100	**FDPWT3233R**	—	—
6.88 (174.8)	5X	100–100	—	**FDPWT3633R**	**KPRL45X1**
8.25 (209.6)	6X	200	**FDPBS324R**	**FDPBS364R**	**KPRL4B6XS**
		200–200	**FDPBT3244R**	**FDPBT3644R**	**KPRL4B6XT** ②
12.38 (314.5)	9X	400	**FDPW325R**	**FDPW365R**	**KPRL4W9X**
15.13 (384.3)	11X	600	**FDPW326R**	**FDPW366R**	**KPRL4W11X**
		800	**FDPW327**	**FDPW367**	**KPRL4W11X** ②
20.63 (524.0)	15X	1200	**FDPW328**	**FDPW368**	**KPRL4W15X** ②

① These connector kits will fit the FDP and FDPW switches.

② 44.00-inch (1117.6 mm) box width required for both R and J fuse applications.

PRL4 breaker and fusible switch retrofit kits

Breaker retrofit kits

Each kit includes one breaker, copper connectors, covers, hardware, and instructions to mount in a PRL4X and PRL4.

Table 49. PRL4X breaker retrofit kits

Breaker frame	Frame ampere rating	Trip range	Mounting type
PD2	100	15–100	Twin
PD2	150	110–150	Twin
PD2	225	110–225	Twin
PD3	400	100–400	Twin/single
PD3	600	300–600	Single
PD4	800	300–800	Single
PD5	1200	600–1200	Single

Table 50. PRL4 breaker retrofit kits

Breaker frame	Frame ampere rating	Trip range	Mounting type
EHD	100	15–100	Twin
FDB		15–100	Twin
FD		15–100	Twin
HFD		15–100	Twin
FDC		15–100	Twin
FCL		15–100	Twin
FB-P		15–100	Twin
FDB	150	110–150	Twin
FD	225	110–225	Twin
HFD		110–225	Twin
FDC		110–225	Twin
ED		100–225	Twin
EDH		100–225	Twin
EDC		100–225	Twin
JD	250	70–250	Twin/single
HJD		70–250	Twin/single
JDC		70–250	Twin/single
DK	400	100–400	Twin/single
KD		100–400	Twin/single
HKD		100–400	Twin/single
KDC		100–400	Twin/single
CKD		100–400	Single
LCL		125–400	Single
LA-P		70–400	Single
LD	600	300–600	Single
CLD		300–600	Single
HLD		300–600	Single
CHLD		300–600	Single
LDC		300–600	Single
CLDC		300–600	Single
MDL	800	300–800	Single
CMDL		300–800	Single
HMDL		300–800	Single
CHMDL		300–800	Single
ND	1200	600–1200	Single
CND		600–1200	Single
HND		600–1200	Single
CHND		600–1200	Single
NDC		600–1200	Single
CNDC		600–1200	Single

How to order a breaker retrofit kit by catalog number

Use "KPRL4" prefix and add catalog number of breaker as shown below. Use suffix "T" or "S" to denote twin or single mounting. Twin-mounting indicates that one set of connectors is required to mount two breakers (of similar frames) opposite one another. Retrofit kit includes one breaker only, for either single or twin-mounted applications.

Table 51. Catalog numbering system—breaker retrofit kit



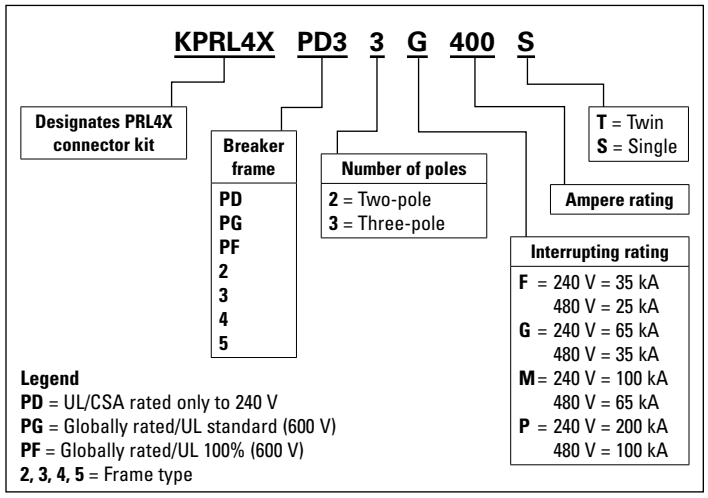


Table 52. Catalog numbering system—legacy breaker retrofit kit

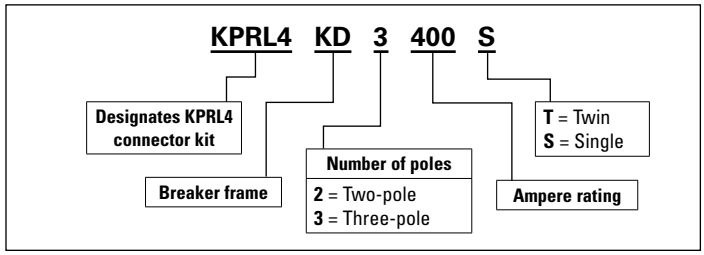

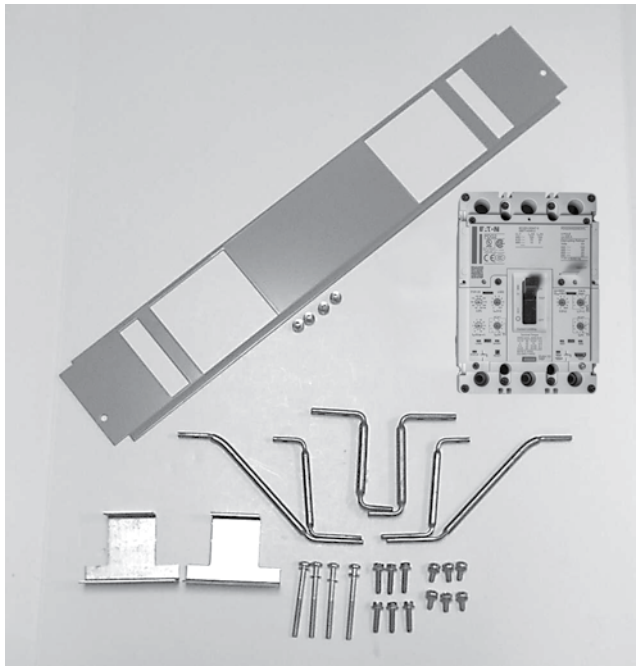

PRL4 breaker retrofit kits

Fusible retrofit kits

Each kit includes a three-pole switch, copper connectors, extension wings (if required), hardware, and instructions to horizontally mount in a PRL4.

Table 53. Fusible retrofit kits


Switch ampere rating	Switch type	Mounting type
30–30	FDPW	Twin
60–60	FDPW	Twin
100–100	FDPW	Twin
100	FDPW	Single
200	FDPB	Single
200–200	FDPB	Twin
400	FDPW	Single
600	FDPW	Single
800	FDPW	Single
1200	FDPW	Single

How to order a fusible retrofit kit by catalog number

Use "KPRL4" prefix and add catalog number of appropriate switch (refer to **page 34** for three-pole switch catalog number).

Example: The retrofit kit catalog number for a 600 V, 100 A twin FDPW switch is:

Table 54. Catalog numbering system—fusible retrofit kit

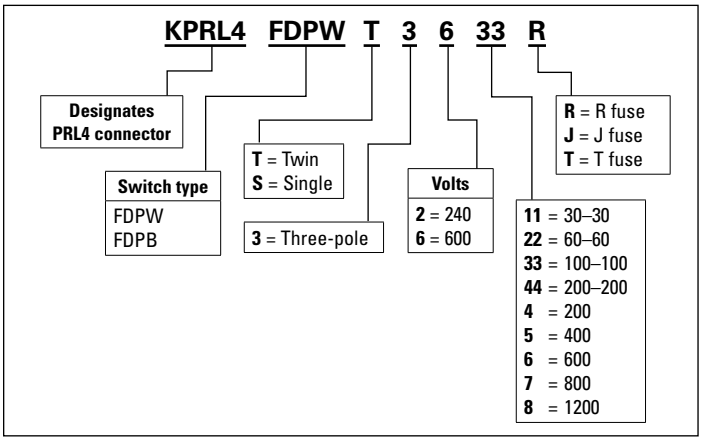

Accessories

PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a EZ Trim and enclosures

EZ Trim

PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, and PRL3a EZ Trim and EZ Box™ meet code requirements for both Type 1 standards. Features include a door-in-door standard with no exposed hardware and laser-cut trim with rounded corners. For EZ Box and EZ Trim, refer to **page 37.**

Example: EZT2048 and **EZB2048**.



EZ Trim

Table 55. EZ Trim

	Box				Trim							
	Unpainted		Painted		Unvented surface mounted		Unvented flush mounted		Vented surface mounted		Vented flush mounted	
Encl. height	Catalog number	Style number	Catalog number	Style number	Catalog number	Style number	Catalog number	Style number	Catalog number	Style number	Catalog number	Style number
24	**EZB2024R**	42C1999G01	**EZBP2024R**	42C1999G13	**EZT2024S**	42C4255G01	**EZT2024F**	42C4258G01	**EZTV2024S**	42C4261G01	**EZTV2024F**	42C4264G01
30	**EZB2030R**	42C1999G02	**EZBP2030R**	42C1999G14	**EZT2030S**	42C4255G02	**EZT2030F**	42C4258G02	**EZTV2030S**	42C4261G02	**EZTV2030F**	42C4264G02
36	**EZB2036R**	42C1999G03	**EZBP2036R**	42C1999G15	**EZT2036S**	42C4255G03	**EZT2036F**	42C4258G03	**EZTV2036S**	42C4261G03	**EZTV2036F**	42C4264G03
42	**EZB2042R**	42C1999G04	**EZBP2042R**	42C1999G16	**EZT2042S**	42C4255G04	**EZT2042F**	42C4258G04	**EZTV2042S**	42C4261G04	**EZTV2042F**	42C4264G04
48	**EZB2048R**	42C1999G05	**EZBP2048R**	42C1999G17	**EZT2048S**	42C4255G05	**EZT2048F**	42C4258G05	**EZTV2048S**	42C4261G05	**EZTV2048F**	42C4264G05
54	**EZB2054R**	42C1999G06	**EZBP2054R**	42C1999G18	**EZT2054S**	42C4255G06	**EZT2054F**	42C4258G06	**EZTV2054S**	42C4261G06	**EZTV2054F**	42C4264G06
60	**EZB2060R**	42C1999G07	**EZBP2060R**	42C1999G19	**EZT2060S**	42C4255G07	**EZT2060F**	42C4258G07	**EZTV2060S**	42C4261G07	**EZTV2060F**	42C4264G07
72	**EZB2072R**	42C1999G09	**EZBP2072R**	42C1999G21	**EZT2072S**	42C4255G09	**EZT2072F**	42C4258G09	**EZTV2072S**	42C4261G09	**EZTV2072F**	42C4264G09
90	**EZB2090R**	42C1999G12	**EZBP2090R**	42C1999G24	**EZT2090S**	42C4255G12	**EZT2090F**	42C4258G12	**EZTV2090S**	42C4261G12	**EZTV2090F**	42C4264G12

PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a special trims and enclosures

Fastrim

Used when concealed trim-mounting hardware is required for PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, and PRL3a. Trim clamps are included and shipped with the trim. Order by adding the letter "F" to the standard trim catalog number. Add 20% to standard trim list price.

Example: LT2072S becomes **LTF2072S**.

For trim clamps only, refer to **page 21**.



Fastrim

Door-in-door

Piano hinge on the right side of the trim provides access to the wiring gutters without requiring removal of the trim. Order by adding the letters "DD" to the standard trim catalog number. Add 20% to standard trim list price.

Example: LT2072S becomes **LTDD2072S**.



Door-in-door

Ventilated trim

Required on 600 A and above panels only. Order by adding the letter "V" to the standard trim catalog number. Add 10% to standard trim list price.

Example: LT2072S becomes **LTV2072S**.



Ventilated trim

Type 12/3R enclosures

The complete enclosure consists of a box and trim. The enclosure meets code requirements for both Type 12 (dust-tight) and Type 3R (rainproof) standards. Features include a laser-cut trim with rounded corners, concealed hinges, and a T-handle lock. Gasketing is provided around the trim door.

The box is gasketed and made from code gauge steel with dripshield and is painted ANSI-61.

Table 56. Type 12/3R enclosures for PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a

Box dimensions in inches (mm)			Catalog number	
Height	Width	Depth	Box	Trim
24.00 (609.6)	20.00 (508.0)	6.00 (152.4)	**VWPB2024**	**LWPT2024**
36.00 (914.4)	20.00 (508.0)	6.00 (152.4)	**VWPB2036**	**LWPT2036**
48.00 (1219.2)	20.00 (508.0)	6.00 (152.4)	**VWPB2048**	**LWPT2048**
60.00 (1524.0)	20.00 (508.0)	6.00 (152.4)	**VWPB2060**	**LWPT2060**
72.00 (1828.8)	20.00 (508.0)	6.00 (152.4)	**VWPB2072**	**LWPT2072**
90.00 (2286.0)	20.00 (508.0)	6.00 (152.4)	**VWPB2090**	**LWPT2090**



Type 12/3R enclosures

PRL4 special trims and enclosures

Door-in-door trim



Door-in-door trim

A piano hinge on the right side of the trim provides access to the wiring gutter without requiring the removal of the trim. When used with a standard PRL4 box, a special mounting channel must be used to add extra depth to the enclosure.

An extra depth box, not requiring a mounting channel, is another available option. Contact your local satellite for ordering information.

Table 57. Special trims and enclosures

Standard box catalog number	Mounting channel style number	Door-in-door trim catalog number	
		Surface	Flush
BX2457	**8708C82G02**	**LDD2457STW**	**LDD2457FTW**
BX2473	**8708C82G03**	**LDD2473STW**	**LDD2473FTW**
BX2490	**8708C82G04**	**LDD2490STW**	**LDD2490FTW**
BX3673	**8708C82G05**	**LDD3673STW**	**LDD3673FTW**
BX3690	**8708C82G06**	**LDD3690STW**	**LDD3690FTW**
BX4473	**8708C82G07**	**LDD4473STW**	**LDD4473FTW**
BX4490	**8708C82G08**	**LDD4490STW**	**LDD4490FTW**

Type 12/3R enclosures



Type 12, 24.00 inches (609.6 mm) wide



Type 3R, 36.00 inches (914.4 mm) wide

PRL4 enclosures are available in both Type 12 (dust-tight) and Type 3R (rainproof) designs. The 24.00-inch (609.6 mm) wide enclosure includes a single hinged door while the 36.00-inch (914.4 mm) wide is provided with double hinged doors.

The side gutter covers are an integral part of the box in all styles. Sizes and catalog numbers are shown in **Table 58**.

Table 58. Type 12/3R enclosures

Enclosure dimensions in inches (mm)			Catalog number	
Height	Width	Depth	Type 3R	Type 12
57.00 (1447.8)	24.00 (609.6)	13.90 (353.1)	**RPCB2457**	**DPC2457**
73.00 (1854.2)	24.00 (609.6)	13.90 (353.1)	**RPCB2473**	**DPC2473**
90.00 (2286.0)	24.00 (609.6)	13.90 (353.1)	**RPCB2490**	**DPC2490**
73.00 (1854.2)	36.00 (914.4)	13.90 (353.1)	**RPCB3673**	**DPC3673**
90.00 (2286.0)	36.00 (914.4)	13.90 (353.1)	**RPCB3690**	**DPC3690**

Ordering procedure

Select the correct part or branch device. When selecting, you need to know the following:

- Panelboard type
- Amperage
- System voltage
- Available short-circuit rating
- Number of poles available
- Size and number of wires per phase
- "X" space required

PRL1X-LX, PRL2X-LX, PRL1a-LX, PRL2a-LX column panelboards



Table 59. Type 1 box and trims

	Catalog number		
Box height in inches (mm)	**Box**	**Surface trim standard**	**Surface trim door-in-door**
Incoming location top fed			
69.00 (1752.6)	**YSC969**	**LTC969S**	**LTCD969S**
78.00 (1981.2)	**YSC978**	**LTC978S**	**LTCD978S**
81.00 (2057.4)	**YSC981**	**LTC981S**	**LTCD981S**
90.00 (2286.0)	**YSC990**	**LTC990S**	**LTCD990S**
Incoming location bottom fed			
69.00 (1752.6)	**YSC969**	**LTC969SB**	**LTCD969SB**
78.00 (1981.2)	**YSC978**	**LTC978SB**	**LTCD978SB**
81.00 (2057.4)	**YSC981**	**LTC981SB**	**LTCD981SB**
90.00 (2286.0)	**YSC990**	**LTC990SB**	**LTCD990SB**

Pow-R-Command

For replacement parts, see PRL3X, PRL3a section, **page 21**. The following parts are available:

- Connector kits
- Ground assemblies
- Service entrance kits
- Deadfront covers
- Trim locks



Pow-R-Command

Additional services

Because virtually all panelboards are supplied to meet specific customer requirements, other parts not listed in this publication might occasionally be needed. Price and availability for parts not shown here may be obtained by contacting your local satellite plant and providing a complete description of the part along with the data on the panelboard nameplate.

Should you experience difficulty in determining what replacement parts are needed, contact your local satellite plant manager who can provide help to:

- Identify and recommend replacement parts
- Remove damaged parts and instruct you in how to install replacement parts
- Verify the correct connector kits that should be ordered for each circuit breaker or fusible switch
- Retrofit existing panelboard boxes with new Pow-R-Line interiors
- Provide a recommended spare parts list



Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2022 Eaton
All Rights Reserved
Printed in USA
Publication No. RP01400001E / Z26214
May 2022

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.