KI-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard


Instalación de un interruptor automático principal marco KI (de 225 A como máximo) y accesorio de adaptador en un tablero de alumbrado NQ

Installation d'un disjoncteur à châssis KI (225 A maximum) et d'un kit adaptateur dans un panneau de distribution NQ

Instruction Bulletin
Boletín de instrucciones
Directives d'utilisation

80043-726-01

Retain for Future Use.
Conservar para uso futuro.
À conserver pour usage ultérieur.

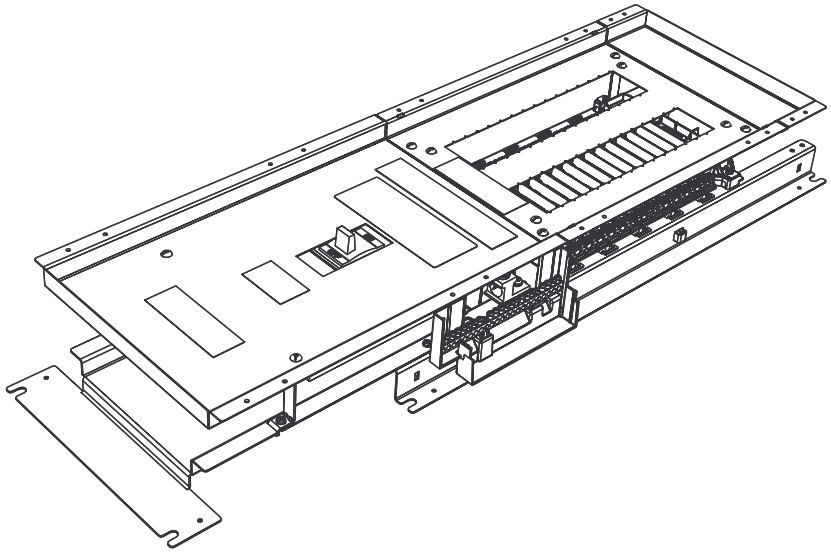

a brand of Schneider Electric

SQUARE D

80043-726-01
01/2008
Peru, IN, USA

Instruction Bulletin

KI-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard

Class 1640

Retain for future use.

ENGLISH

Introduction

This bulletin contains instructions for installing Square D® brand KI-frame main circuit breaker (225 A maximum) and adapter kit onto a Square D brand NQ panelboard manufactured by Schneider Electric.

Safety Precautions

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Turn off all power supplying this equipment before working on or inside equipment.
- Always use a properly rated voltage sensing device to confirm power is off.
- Replace all devices, doors and covers before turning on power to this equipment.


Failure to follow these instructions will result in death or serious injury.

Kit Contents

NQMB2KI

A. Main circuit breaker deadfront cover (1)
B. Main circuit breaker mounting pan (1)
C. Deadfront support brackets (2)
D. “MAIN” circuit breaker label (1)
E. 10-32 x 7/16-inch tapping screws (2)
F. 10-32 x 5/16-inch tapping screws (6)
G. 10-32 x 3 1/4-inch tapping screws (4)
H. Main lug wires (3)

NOTE: Screws enlarged to show detail.

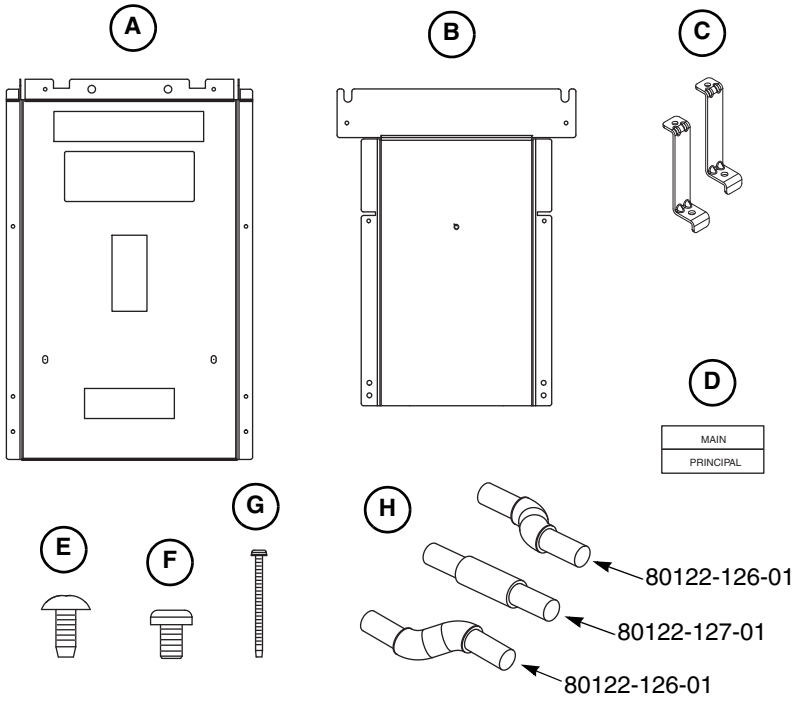

Tools Needed




- #2 Square-head Robertson driver
- Torque wrench with 3/8-inch Allen driver

ENGLISH


Installing a Main Circuit Breaker and Adapter Kit

Turn off all power supplying this equipment before working inside the panelboard; follow all lockout/tagout procedures.

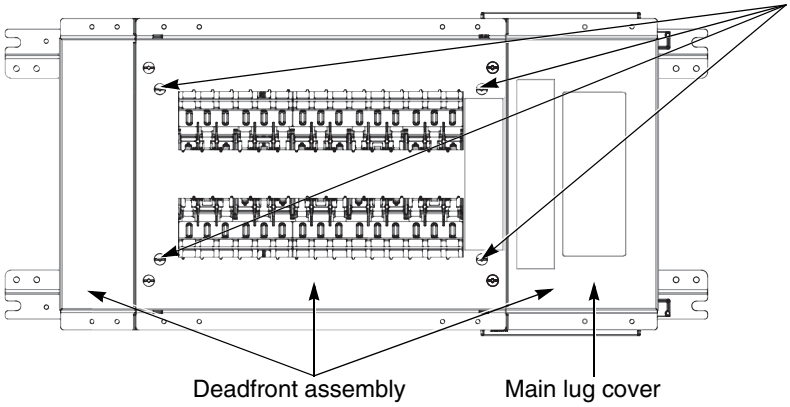

1 Remove the deadfront assembly and retain. Retain the four screws for reuse.

2 Attach the main circuit breaker mounting pan to the main lug end of the panelboard using four 10-32 x 5/16-inch tapping screws included in the kit.

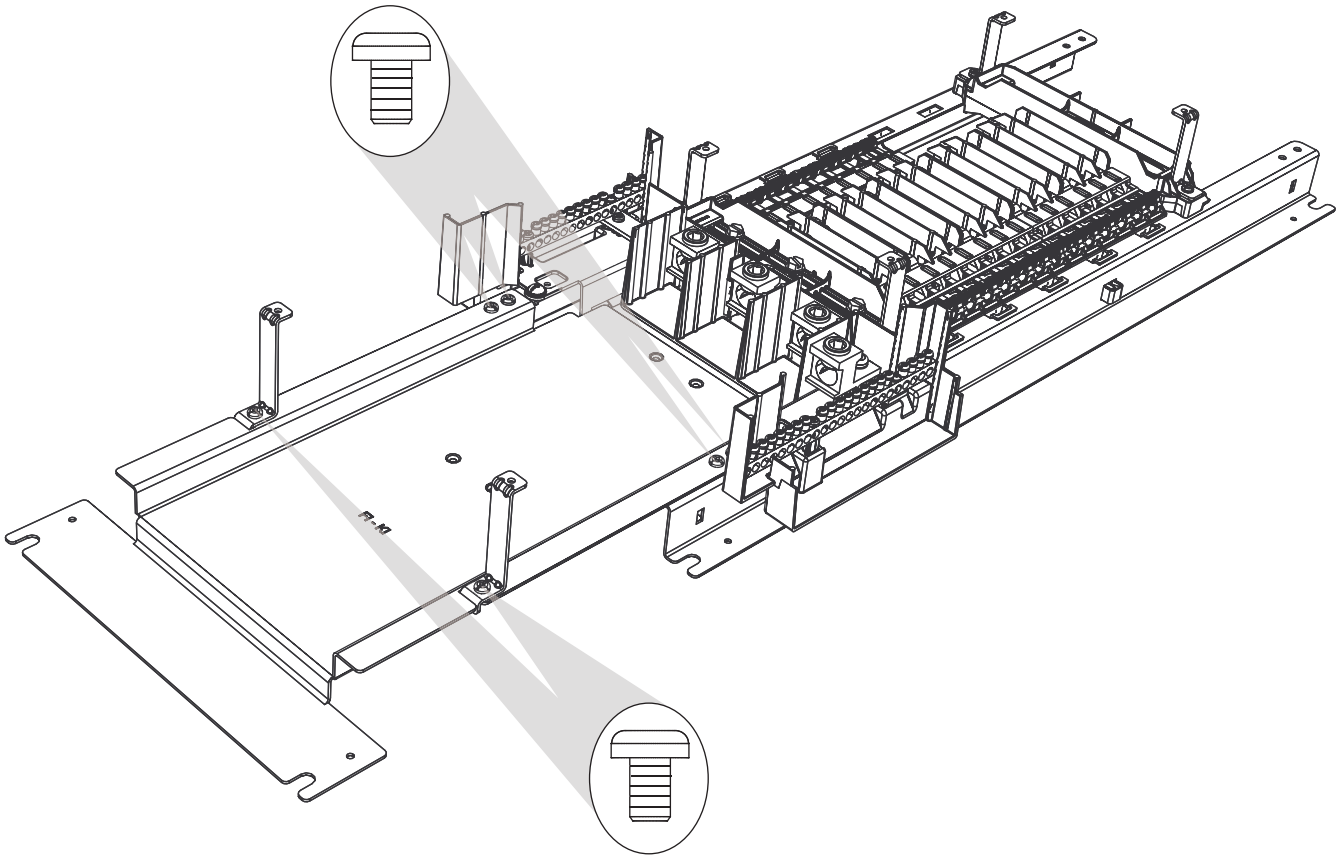


3 Attach the two deadfront support brackets to the alignment slots on the main circuit breaker mounting pan (with the top of the brackets pointing to the panelboard) using the remaining two 10-32 x 5/16-inch tapping screws included in the kit.

© 2008 Schneider Electric All Rights Reserved

ENGLISH

4 Insert the wires loosely into the circuit breaker lugs.

NOTE: The circuit breakers are shown in the “OFF” position.

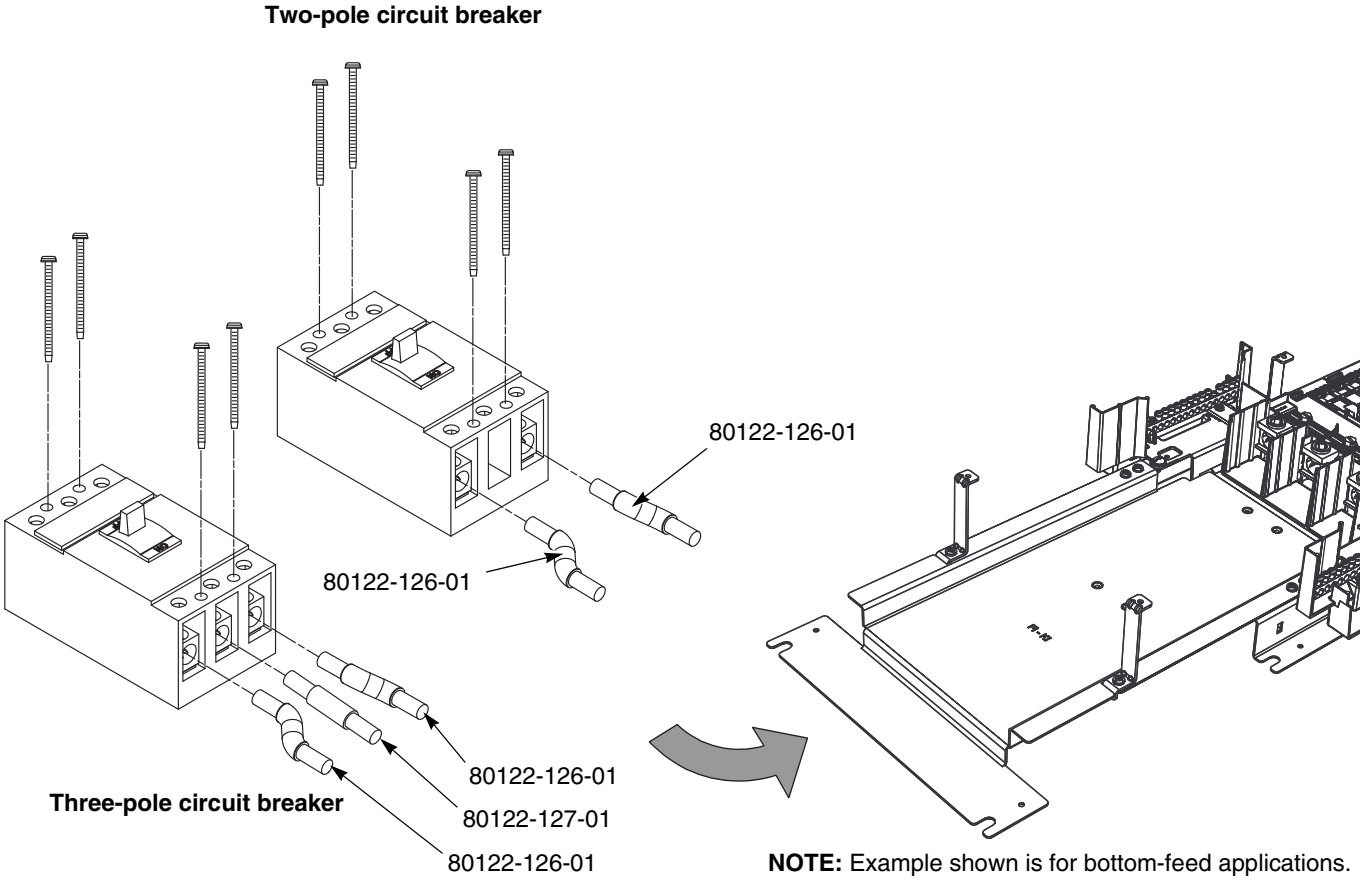

NOTE: Example shown is for bottom-feed applications.


5 **NOTE:** Discard the screws supplied with the breaker.

Install the main circuit breaker on the mounting pan using the 10-32 x 3 1/4-inch tapping screws included in the kit.

© 2008 Schneider Electric All Rights Reserved

ENGLISH

6 Verify that the wire connectors are properly inserted into the lugs on the panelboard and the circuit breaker lugs.

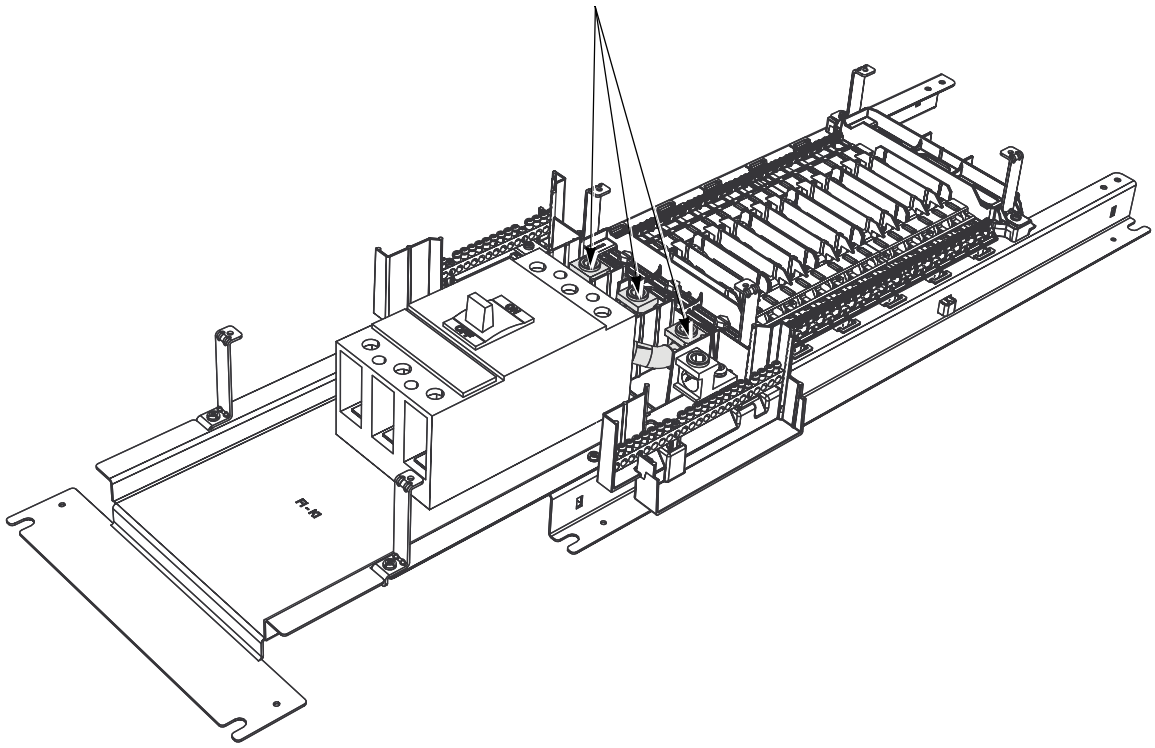


7 Tighten the panel main lug wire binding screws to 275 lb-in (31 N•m).

NOTE: Example shown is for three-phase applications.


8 Refer to the circuit breaker label for the appropriate lug torque value.

9 Remove the existing main lug cover (see step 1) and discard, but retain the two screws. Mount the main circuit breaker deadfront cover included in the kit using the same screws.

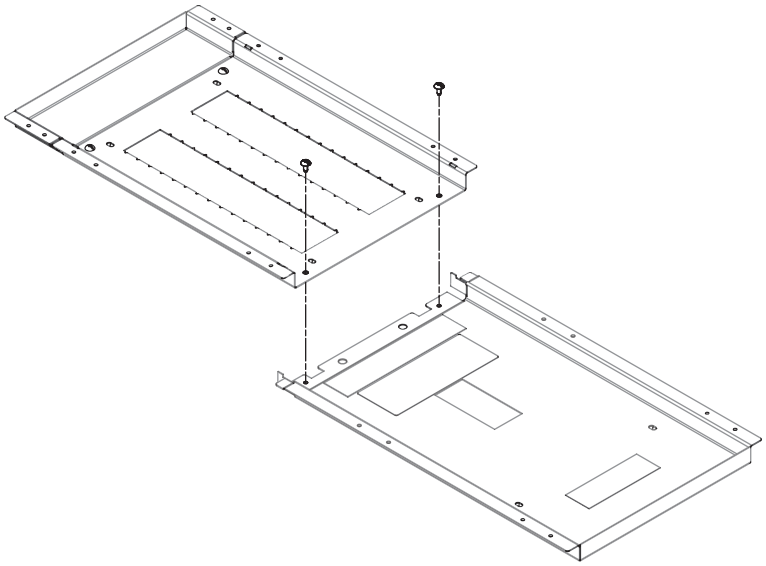

© 2008 Schneider Electric All Rights Reserved

10 Remount the deadfront assembly using the four screws retained from step 1 and the two 10-32 x 7/16-inch tapping screws provided in the kit.

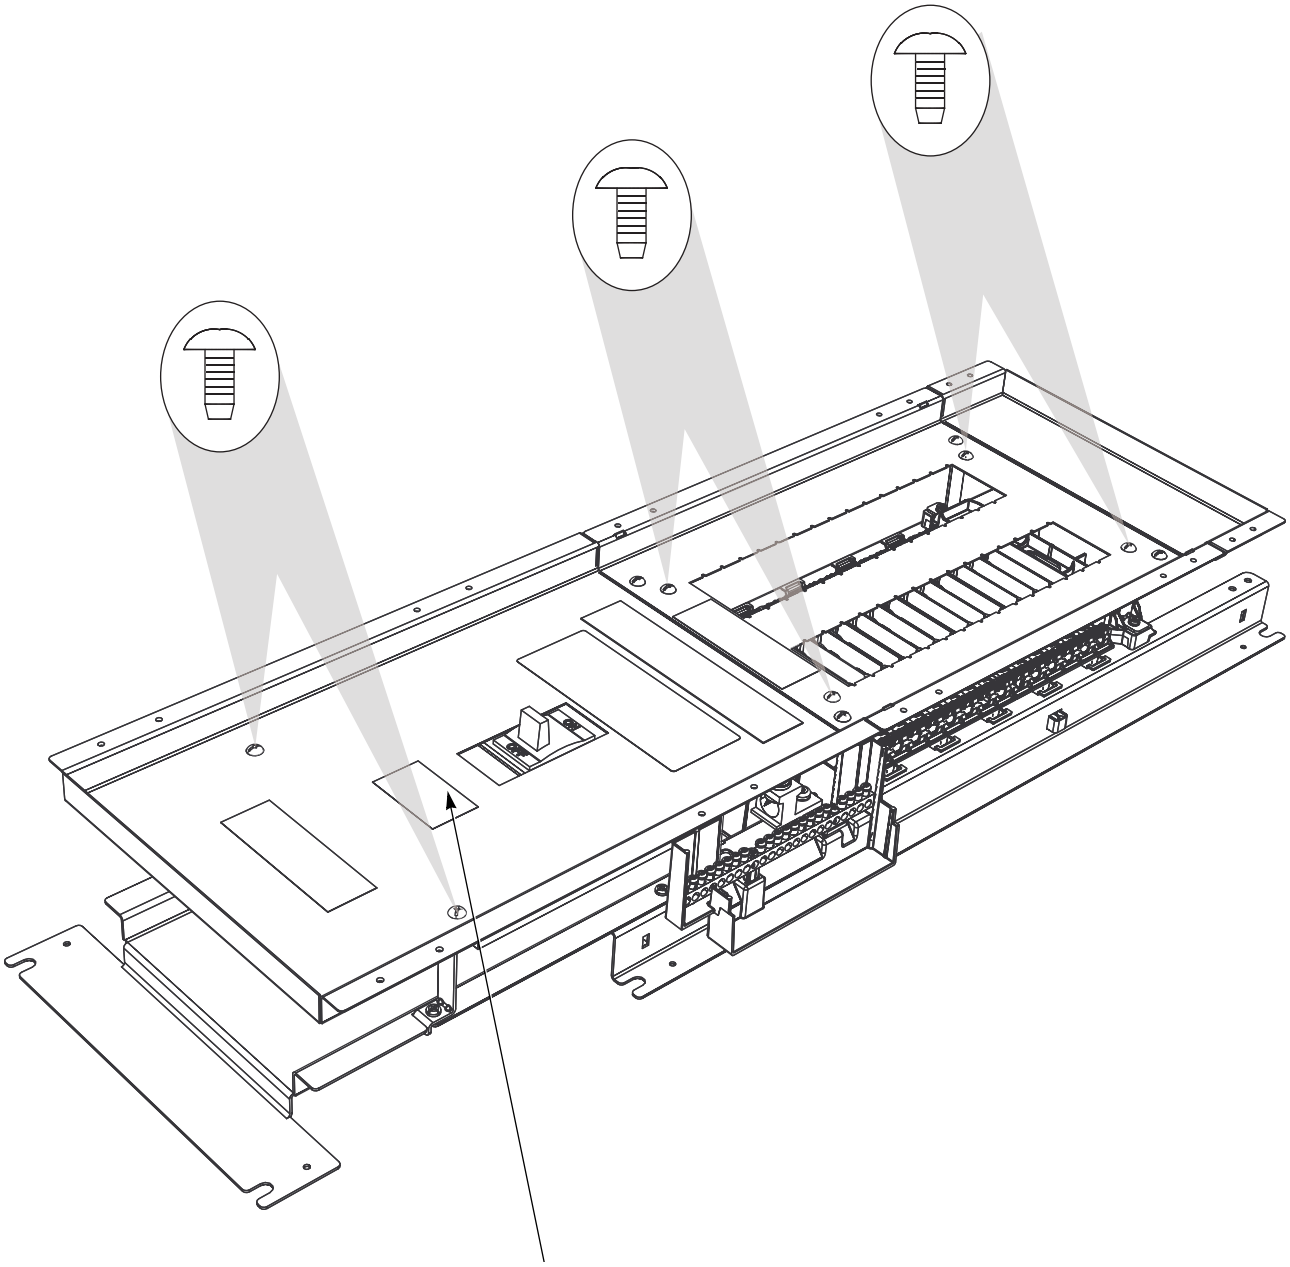

11 Peel off the backing of the “MAIN” circuit breaker label. Apply it to the cover near the circuit breaker handle.

© 2008 Schneider Electric All Rights Reserved

ENGLISH

Schneider Electric USA
252 North Tippecanoe
Peru, IN 46970 USA
1-888-SquareD (1-888-778-2733)
www.us.SquareD.com

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

© 2008 Schneider Electric All Rights Reserved



80043-842-01
08/2018

California Proposition 65 Warning—Nickel Compounds and Bisphenol A (BPA)

Advertencia de la Proposición 65 de California—compuestos de níquel y Bisfenol A (BPA)

Avertissement concernant la Proposition 65 de Californie—composés de nickel et Bisphénol A (BPA)

⚠ **WARNING:** This product can expose you to chemicals including Nickel compounds, which are known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

⚠ **ADVERTENCIA:** Este producto puede exponerle a químicos incluyendo compuestos de níquel, que son conocidos por el Estado de California como causantes de cáncer, y Bisfenol A (BPA), que es conocido por el Estado de California como causante de defectos de nacimiento u otros daños reproductivos. Para mayor información, visite www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT**: Ce produit peut vous exposer à des agents chimiques, y compris composés de nickel, identifiés par l'État de Californie comme pouvant causer le cancer, et Bisphénol A (BPA) reconnus par l'État de Californie comme pouvant causer des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca

© 2018 Schneider Electric All Rights Reserved / Reservados todos los derechos / Tous droits réservés