80043-778-01
01/2009
Peru, IN, USA

Instruction Bulletin

ENGLISH

Condo Riser Neutral Assembly Kit
Installation onto an NQ Condo Riser Panelboard
Class 1640

Retain for future use.

Introduction

This bulletin contains instructions for installing a Square D® brand condo riser neutral assembly kit onto a Square D brand NQ condo riser panelboard manufactured by Schneider Electric.

Safety Precautions

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Turn off all power supplying this equipment before working on or inside equipment.
- Always use a properly rated voltage sensing device to confirm power is off.
- Replace all devices, doors, and covers before turning on power to this equipment.


Failure to follow these instructions will result in death or serious injury.

Kit Contents

NQN6CR and NQNL6CR

A. **NQN6CR kit only–**Neutral sub-assembly (1)
B. **NQN6CR kit only–**Neutral sub-assembly (1)
C. **NQNL6CR kit only–**Neutral sub-assembly (1)
D. **NQNL6CR kit only–**Neutral sub-assembly (1)
E. Neutral jumper bar (1)
F. 10-32 x 7/8-inch tapping screws (8)
G. 1/4-20 x 11/16-inch tapping screws (4)

NOTE: Kit contents not shown to scale.

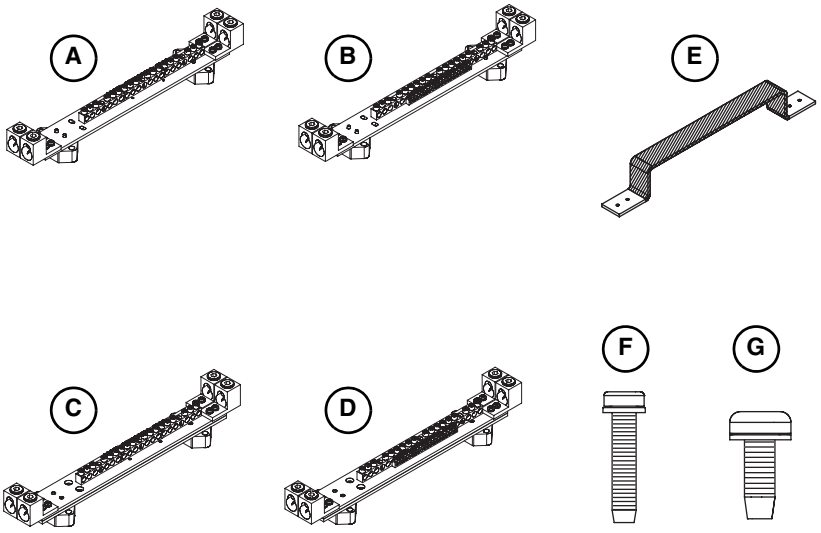

Tools Needed



- Torque wrench with slotted-head driver
- Torque wrench with 5/32-inch Allen driver
- Torque wrench with 3/8-inch Allen driver
- #2 Square-head Robertson driver

© 2009 Schneider Electric All Rights Reserved


SQUARE D
by Schneider Electric


ENGLISH

Installing the Kit

Turn off all power supplying this equipment before working inside the panelboard; follow all lockout/tagout procedures.

1 Remove the deadfront assembly. Retain the six screws for reuse.

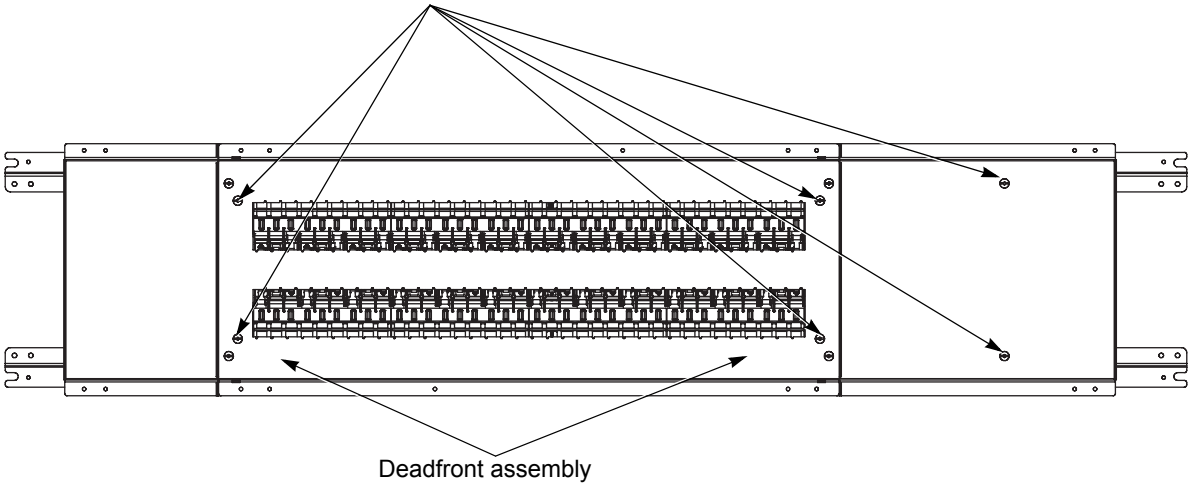

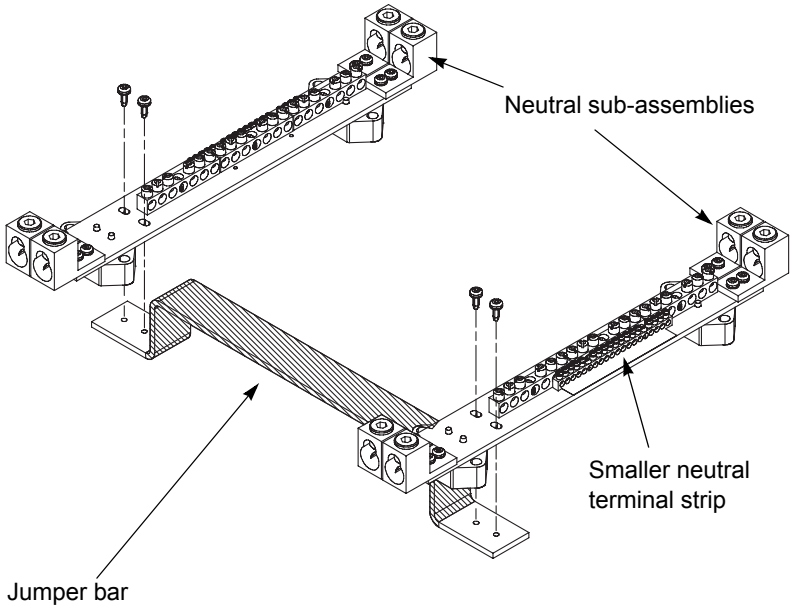

Neutral Assembly

2 Attach the neutral sub-assemblies to the neutral jumper bar, as shown, using four 1/4-20 x 11/16-inch tapping screws from the kit. Tighten to 60–65 lb-in (6.8–7.3 N•m).

When fully assembled, this unit comprises the neutral assembly.


NOTE: Ensure the smaller neutral terminal strips face out (toward the enclosure sidewalls when installed).

© 2009 Schneider Electric All Rights Reserved

ENGLISH

3 Mount the completed neutral assembly to the enclosure by aligning the holes in the neutral assembly support blocks with the corresponding holes on the back wall of the enclosure, as shown below. Secure the neutral assembly with eight 10-32 x 7/8-inch tapping screws from the kit.


NOTE: Ensure the neutral jumper bar is positioned at the line side end of the panelboard.

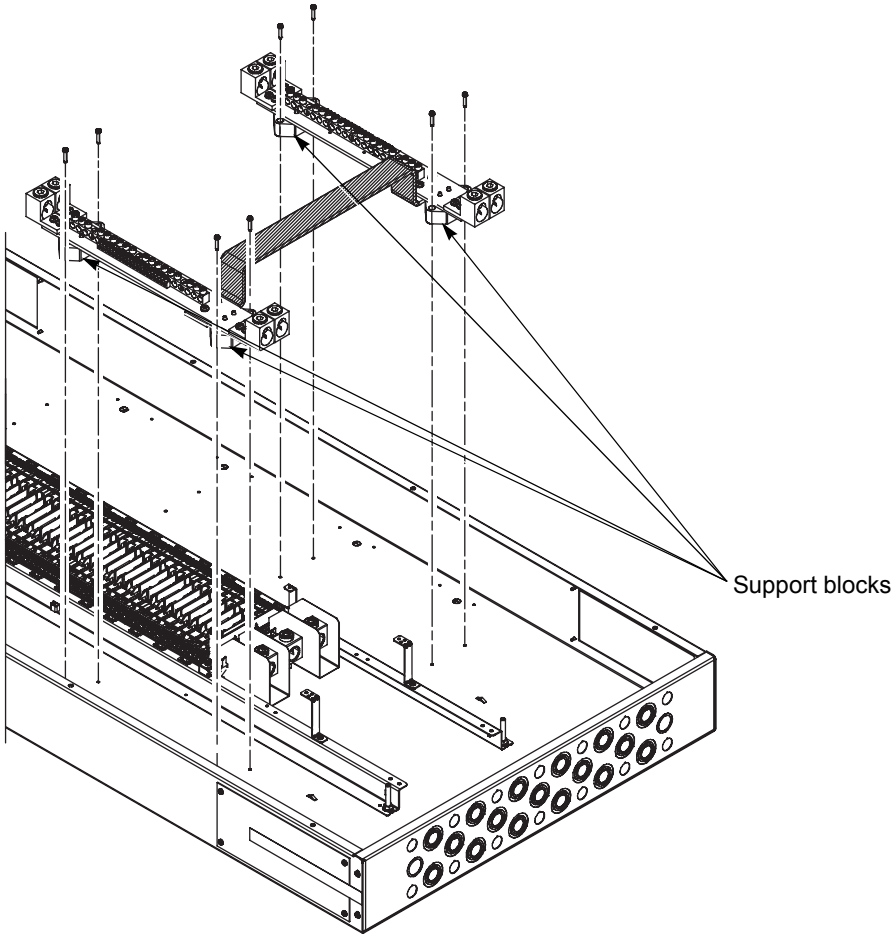

© 2009 Schneider Electric All Rights Reserved

ENGLISH

4 Remount the deadfront assembly using the screws retained from step 1.

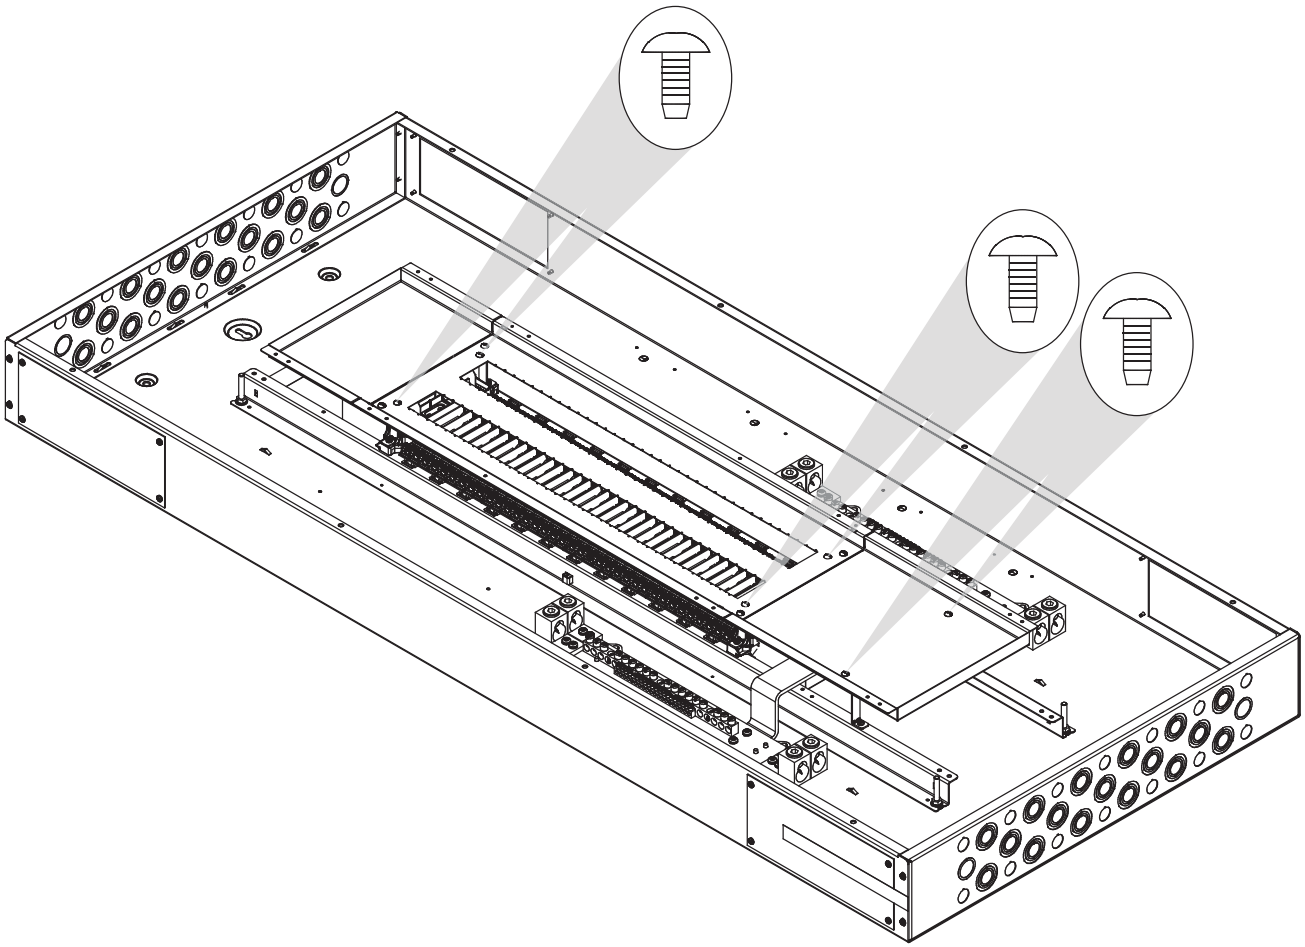

For technical support on the installation of this kit, contact the Square D/Schneider Electric Customer Information Center at 1-888-SquareD (1-888-778-2733).

Schneider Electric USA
252 North Tippecanoe
Peru, IN 46970 USA
1-888-SquareD (1-888-778-2733)
www.us.SquareD.com

Square D® is a trademark or registered trademark of Schneider Electric. Other trademarks used herein are the property of their respective owners.

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

© 2009 Schneider Electric All Rights Reserved



80043-842-01
08/2018

California Proposition 65 Warning—Nickel Compounds and Bisphenol A (BPA)

Advertencia de la Proposición 65 de California—compuestos de níquel y Bisfenol A (BPA)

Avertissement concernant la Proposition 65 de Californie—composés de nickel et Bisphénol A (BPA)

⚠ **WARNING:** This product can expose you to chemicals including Nickel compounds, which are known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

⚠ **ADVERTENCIA:** Este producto puede exponerle a químicos incluyendo compuestos de níquel, que son conocidos por el Estado de California como causantes de cáncer, y Bisfenol A (BPA), que es conocido por el Estado de California como causante de defectos de nacimiento u otros daños reproductivos. Para mayor información, visite www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT**: Ce produit peut vous exposer à des agents chimiques, y compris composés de nickel, identifiés par l'État de Californie comme pouvant causer le cancer, et Bisphénol A (BPA) reconnus par l'État de Californie comme pouvant causer des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca

© 2018 Schneider Electric All Rights Reserved / Reservados todos los derechos / Tous droits réservés