
STEPPING MOTORS

PH264M, PH265M, PH266M, PH268M type

Step Angle 0.9°





Features


— Installing Base Size 2.22″ sq.
— High Resolution

Specifications


Motor		Voltage	Current per Phase	Holding Torque		Resistance per Phase (windings)	Inductance per Phase (Winding)	Rotor Inertia		Number of Leads
Single Shaft	Double Shaft	V. DC	A/Phase	OZ-in	N-cm	ohm/Phase (windings)	mH/Phase (Winding)	OZ-in²	g-cm²	
PH264M-31	**PH264M-31B**	4	1.1	25.0	17.6	3.6	4.1	0.31	57	6
PH264M-32	**PH264M-32B**	12	0.4	27.8	19.6	30	28	0.31	57	6
PH265M-31	**PH265M-31B**	6	0.85	52.8	37.2	7.1	9	0.60	110	6
PH265M-32	**PH265M-32B**	12	0.42	52.8	37.2	29	35	0.60	110	6
PH265M-33	**PH265M-33B**	24	0.21	52.8	37.2	114	171	0.60	110	6
PH266M-E1.2	**PH266M-E1.2B**	6	1.2	80	56.8	(5)	(8.8)	0.74	135	8
PH266M-E06	**PH266M-E06B**	12	0.6	80	56.8	(20)	(35)	0.74	135	8
PH268M-E1.5	**PH268M-E1.5B**	5.4	1.5	118	83.2	(3.6)	(6.5)	1.09	200	8
PH268M-E068	**PH268M-E068B**	12	0.68	118	83.2	(17.7)	(30)	1.09	200	8

Dimensions scale 1:4, unit = inch

Single Shaft

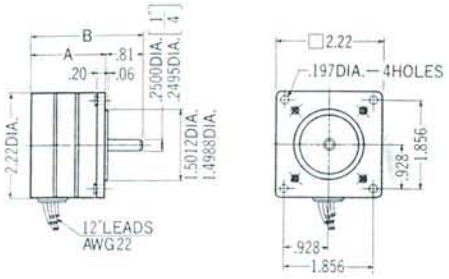


Double Shaft

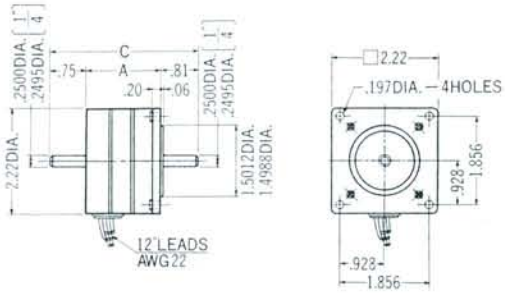


Model	Dimension (unit = inch)			Weight	
	A	B	C	lbs.	kg
PH264M	1.54	2.35	3.09	0.88	0.40
PH265M	2.01	2.82	3.57	1.20	0.54
PH266M	2.13	2.94	3.69	1.30	0.60
PH268M	2.99	3.80	4.55	2.10	0.95

Colors of Lead Wires

6-Lead Wires




8-Lead Wires




Speed vs. Torque Characteristics


● **PH264M-31B** * Measured by unipolar constant current chopper drive

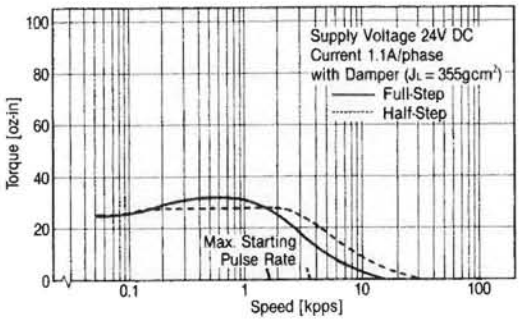


● **PH265M-31B** * Measured by unipolar constant current chopper drive

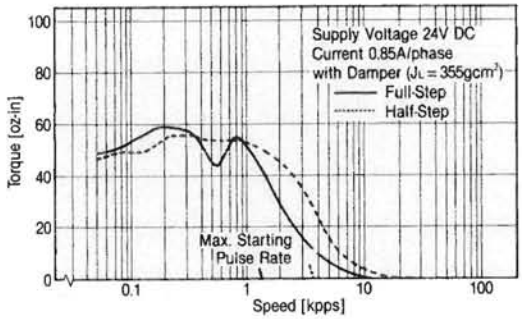

● **PH266M-E1.2B** * Measured by bipolar (parallel) constant current chopper drive

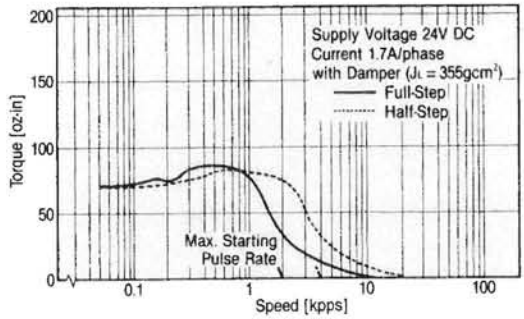


● **PH268M-E1.5B** * Measured by bipolar (parallel) constant current chopper drive

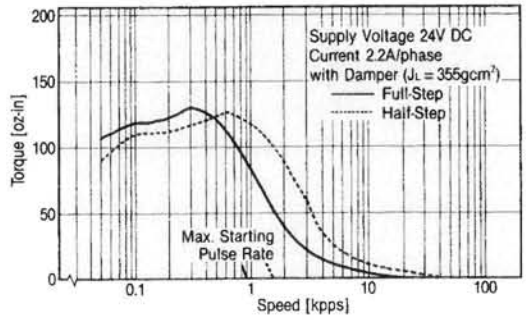


Inertia vs. Starting Pulse Rate Characteristics


● **PH264M-31B** * Measured by unipolar constant current chopper drive

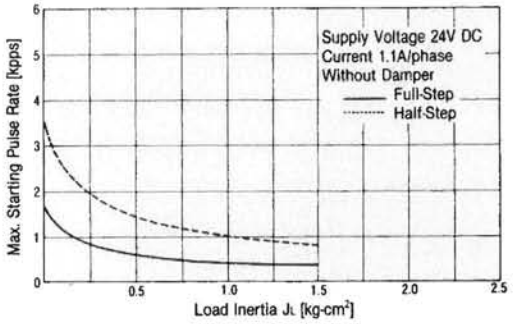

● **PH265M-31B** * Measured by unipolar constant current chopper drive

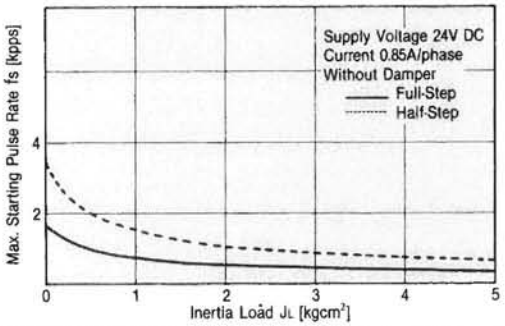

● **PH266M-E1.2B** * Measured by bipolar (parallel) constant current chopper drive

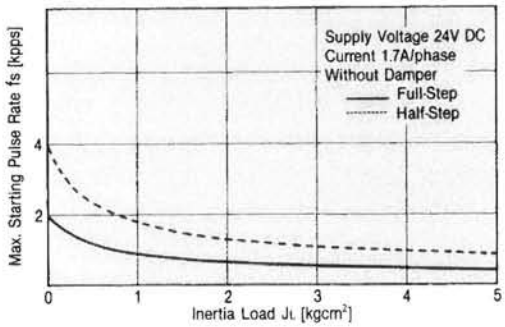

● **PH268M-E1.5B** * Measured by bipolar (parallel) constant current chopper drive

