ARC-164 Main Board: panel controls and backlight LEDs

J10 control cable mates pin-for-pin to driver J10. Pins 2–5 and 33–40 reserved NC. Inputs use Teensy 3.3V pull-ups.


J21: 1 regulated LED 5V; 2 MOSFET-switched LED return; 3 common ground. Never connect return pin 2 directly to GND.


19 green backlight LEDs are panel-facing on Main Board. Each has an individual 330 ohm series resistor: test physical fit and brightness.

19 provisional green backlight LEDs, each with 330 ohm series resistor. Driver PCB supplies DCS-BIOS PWM dimming.

BACKLIGHT: 19 provisional green LED branches. Position under lettering; count may change.

Each branch: LED_5V -> 330 ohm resistor -> LED anode; cathode -> BACKLIGHT_RETURN (PWM switched, not GND).

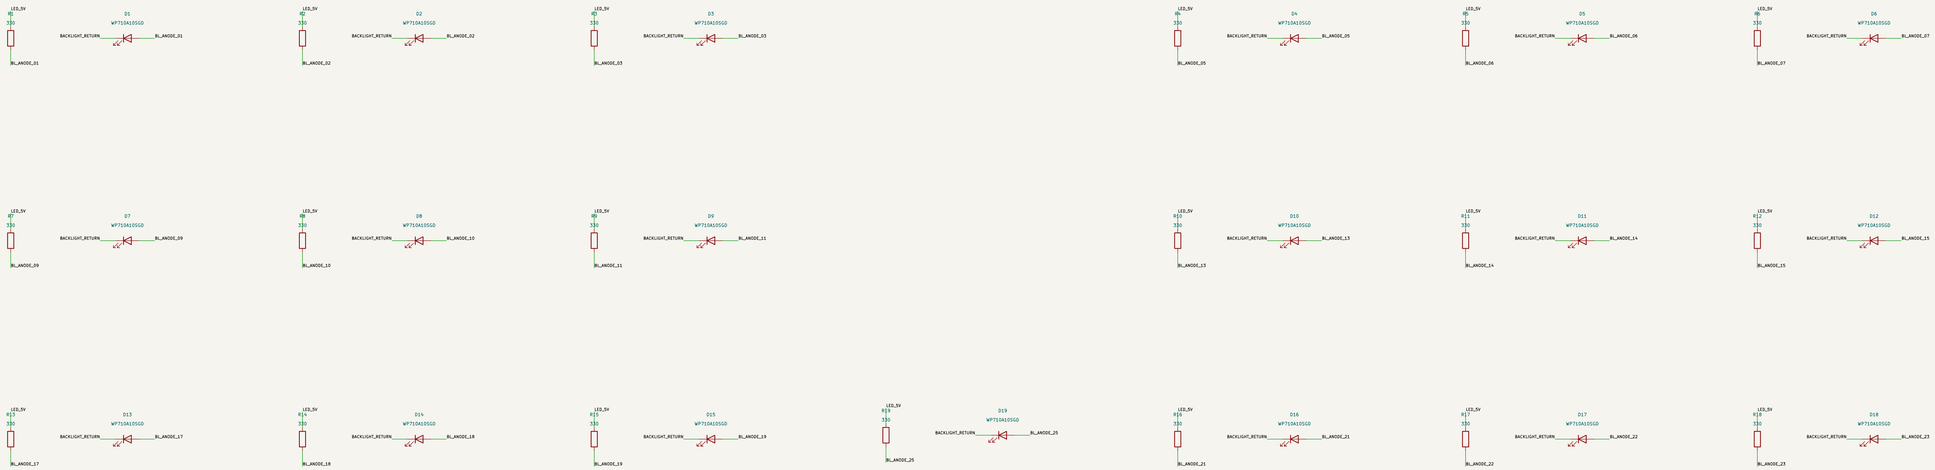

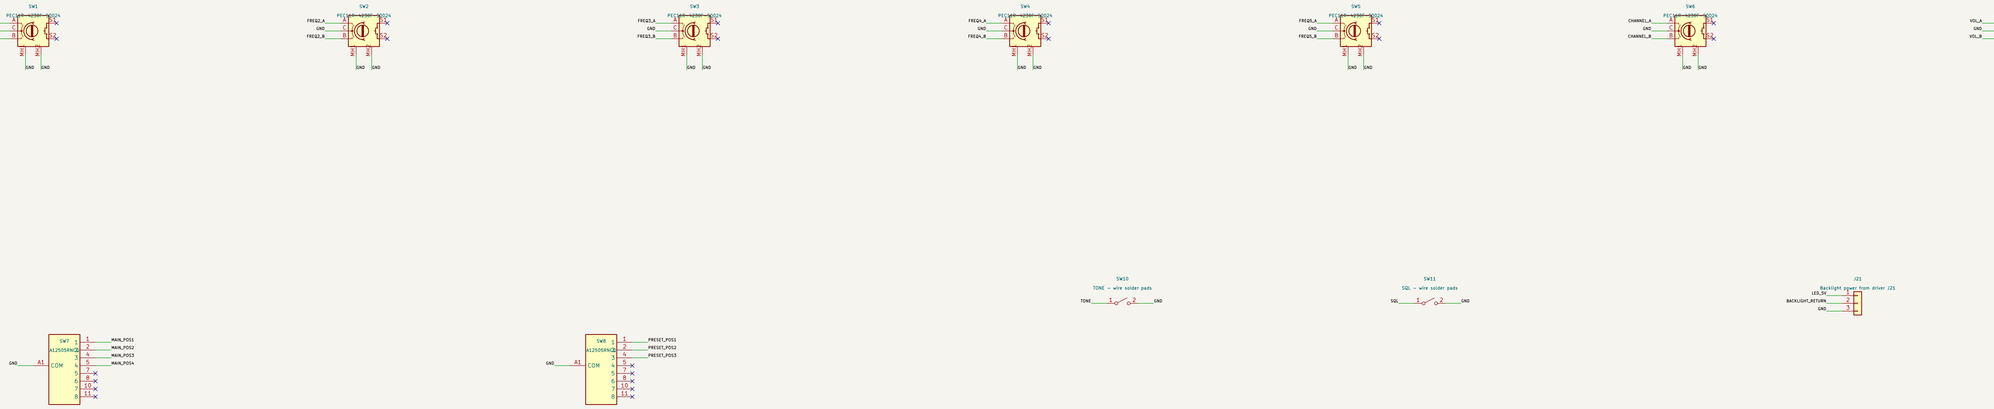

Sheet: /	
File: Main Board.kicad_sch	
Title: ARC-164 Main Board — UNTESTED PROTOTYPE	
Size: A1 Date:	**Rev: 1.1**
KiCad E.D.A. 10.0.7	Id: 1/1