



PART #


JOB NAME / TYPE



The LBI MAX is a linkable, linear fixture or retrofit kit available in 2 FT & 4 FT configurations. Equipped w/ SuperFLEX adjustability to select the ideal wattage and color temperature to address every application. The LBI MAX is the perfect luminaire for commercial, retail, manufacturing, warehouse, and display applications.

- Link up to (20) units together @ 120VAC, or up to (40) units @ 277VAC
- Works w/ all LBI wiring accessories
- Seamless connectors allow multiple units to run on a single power source
- Surface mount (wall or ceiling) or suspend w/ included V-hooks. Additional mounting accessories available - pendant, aircraft, or in-line
- **SIMPLE & NETWORK LIGHTING CONTROLS**

SUPERFLEX SWITCH BETWEEN
4 WATTAGES & 4 CCTS

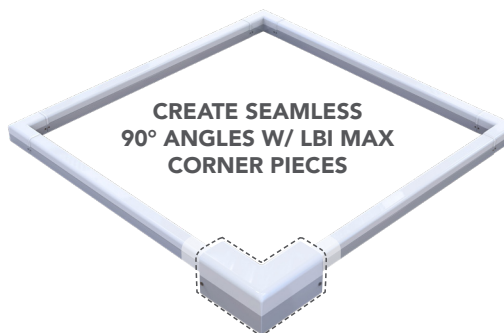

SENSOR READY



AUX OUTPUT



OPTIONAL EMG
BATTERY BACKUP



EFFICACY
(LIGHT ENGINE)



CRI



BEAM ANGLE



OPERATING TEMP



>100,000hrs RATED
LIFE (CALCULATED)



51,000hrs
RATED LIFE


PART #	DESCRIPTION	VOLTAGE	LUMENS	WATTAGE	CCT	
RP-LBIMAX-2F-25W-40K-WC	2 FT LINKABLE LINEAR STRIP	120-277V	1950-3900	FLEXWATT 15W/20W/ 25W /30W	FLEXCOLOR 3000K/3500K/ 4000K /5000K	
RP-LBIMAX-4F-48W-40K-WC	4 FT LINKABLE LINEAR STRIP		3997-6365	FLEXWATT 30W/35W/40W/ 48W		
RP-LBIMAX-LR-16W-40K-WC	RIGHT-TURN 90° CORNER		910-2080	FLEXWATT 7W/10W/ 13W /16W		
RP-LBIMAX-LL-16W-40K-WC	LEFT-TURN 90° CORNER					

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD





DIMENSIONS

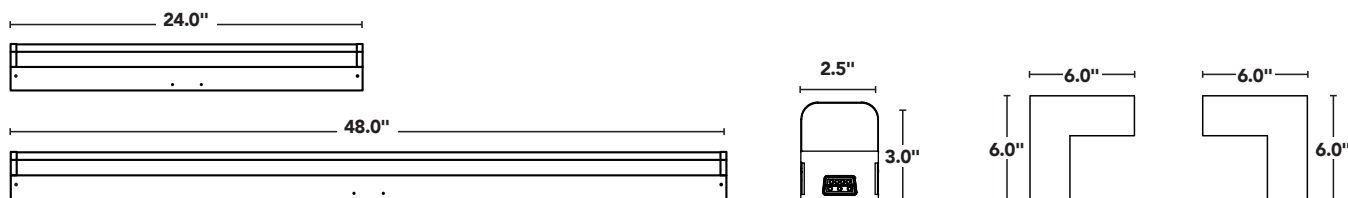

PART NUMBER BUILDER

MFR	PRODUCT	LENGTH	WATTAGE	CCT	FUNCTION	SENSOR	EMG
RP	LBIMAX			40K	WC		
		2F -----	25W	40K = 4000K	WC = FLEXWATT + FLEXCOLOR	-OC -OCBT -BT	EM1 = EMERGENCY BATTERY BACKUP
		4F -----	48W				

EXAMPLE PART NUMBER RP-LBIMAX-4F-48W-40K-WC-OC-EM1

FACTORY SHIPS 2 FT AT 25W/4000K, AND 4 FT AT 48W/4000K

CONTROL OPTIONS

SIMPLE LIGHTING CONTROLS



-OCC

MICROWAVE OCCUPANCY AND
DAYLIGHT HOLD-OFF SENSOR
IR23 REMOTE




NETWORK LIGHTING CONTROLS



-OCBT


SILVAIR™ BLUETOOTH
MICROWAVE MOTION AND
DAYLIGHT HARVESTING SENSOR
IR23 REMOTE & SILVAIR APP



IR REMOTE SETS SENSOR RANGE

-BT

SILVAIR™ BLUETOOTH
NODE W/ EXTERNAL ANTENNA
SILVAIR APP




Light Efficient Design/RemPhos has partnered with Sil vair to offer fixtures and retrofits w/ a wireless Bluetooth-mesh eco-system. Sil vair is listed on the DLC NLC QPL certified to Technical Requirements Version 5.1. Our Sil vair controls meet all eligibility criteria of integral, fixture-mounted, addressable sensors with motion and photocell/ambient light-sensing capabilities, along with embedded programming that can be configured and networked. System can control motion response, illumination levels, and scheduling.

LINKING QUANTITY

	120V	208V	240V	277V
4 FT	20 UNITS	30 UNITS	35 UNITS	40 UNITS
2 FT	28 UNITS	40 UNITS	40 UNITS	40 UNITS

LINKING POSSIBILITIES

- Linking cables will lower connectable quantities.
- The linking numbers are based on using the LBI Junction box and connected end to end.
- If linking cables are used when powered on 120VAC, linking number is reduced to 12pcs.
- Linking does not include 0-10V linked control. This will depend on the controlling device.

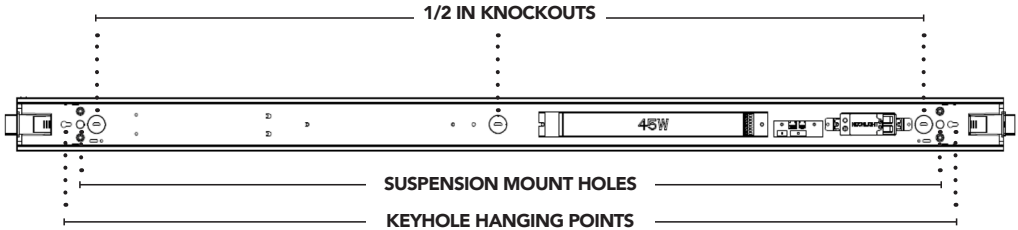

INCLUDED HARDWARE

V-HOOKS	BOLT CAPS	JUNCTION BOX COVER	DEAD END CAPS

OPTIONAL HARDWARE

PART #	DESCRIPTION	
RP-LBIMAX-SM-LINK	SURFACE MOUNT LINKING BRACKET (DIMMABLE SEAMLESS CONNECTOR INCLUDED)	
RP-LBIMAX-SPND	SUSPENSION MOUNT LINKING BRACKET (DIMMABLE SEAMLESS CONNECTOR INCLUDED)	
RP-LBIMAX-SPND-KIT	SUSPENSION MOUNT LINKING BRACKET KIT THE COMPLETE KIT INCLUDES: ONE AIRCRAFT CABLE (9.8FT), ONE ADJUSTABLE CABLE GRIPPER, ONE SUSPENSION MOUNT LINKING BRACKET AND ONE CEILING ANCHOR.	
RP-LBIMAX-SIL-KIT-2P	SUSPENSION KIT THE COMPLETE KIT INCLUDES: TWO AIRCRAFT CABLES (9.8FT), TWO ADJUSTABLE CABLE GRIPPERS, AND TWO CEILING ANCHORS.	
RP-LBIMAX-PM-KIT	PENDANT MOUNT KIT	
RP-LBI-SSC-DIM-10P RP-LBI-SSC-NODIM-10P	SEAMLESS CONNECTOR AVAILABLE FOR DIMMING AND NON-DIMMING APPLICATIONS.	



CABLES + CONNECTORS

PART #				DESCRIPTION
6IN	12IN	18IN	24IN	LINKING CABLES
RP-LBI-LC-6IN-DIM-10P RP-LBI-LC-6IN-NODIM-10P	RP-LBI-LC-12IN-DIM-10P RP-LBI-LC-12IN-NODIM-10P	RP-LBI-LC-18IN-DIM-10P RP-LBI-LC-18IN-NODIM-10P	RP-LBI-LC-24IN-DIM-10P RP-LBI-LC-24IN-NODIM-10P	
36IN	48IN	60IN	72IN	
RP-LBI-LC-36IN-DIM-10P RP-LBI-LC-36IN-NODIM-10P	RP-LBI-LC-48IN-DIM-10P RP-LBI-LC-48IN-NODIM-10P	RP-LBI-LC-60IN-DIM-10P RP-LBI-LC-60IN-NODIM-10P	RP-LBI-LC-72IN-DIM-10P RP-LBI-LC-72IN-NODIM-10P	

PART #	DESCRIPTION	
RP-LBI-G1-IP-3F-DIM	3 FT INCOMING POWER KIT INCOMING POWER CABLE / PIGTAIL + SERVICE DISCONNECT W/ ABRASION PROTECTION GROMMET USED TO HARDWIRE THE INCOMING POWER CABLE INTO FIXTURE OR JUNCTION BOX	
RP-LBI-G1-IP-2F-120V-SW RP-LBI-G1-IP-7F-120V-SW	INCOMING POWER CABLE W/ SWITCH 2 FT AND 7 FT LENGTHS AVAILABLE PLUG IN THE INCOMING POWER CABLE INTO FIXTURE OR JUNCTION BOX	
RP-LBI-G1-IP-90DEG-12F-DIM	12 FT 90° DEGREE INCOMING POWER CABLE	
RP-LBIMAX-LR-16W-40K-WC	RIGHT-TURN 90° DEGREE CORNER CORNERS ARE FLEXCOLOR, DEFAULT 4000K	
RP-LBIMAX-LL-16W-40K-WC	LEFT-TURN 90° DEGREE CORNER CORNERS ARE FLEXCOLOR, DEFAULT 4000K	

Turns on when power goes off





41°F to 122°F
OPERATING TEMP



OPTIONAL EMG
BATTERY BACKUP

RC-LBIMAX-4W-EMGKIT (HELPOWER PART# EMS-04050-YY)

EMG WIRING DIAGRAM

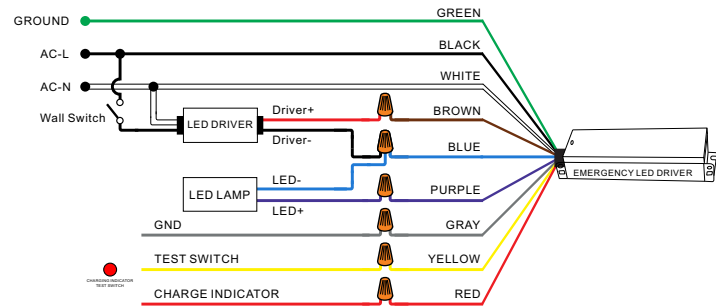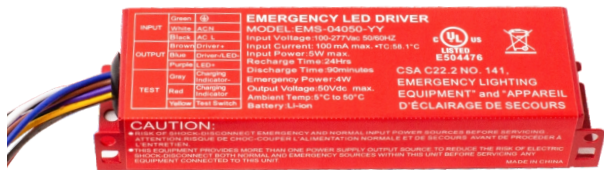

TEST BUTTON
LOCATED ON SIDE
OF FIXTURE



PRODUCT SPEC	INFORMATION
Input Voltage / Frequency	120~277VAC , 50/60Hz
Input Current	100mA Max
Recharge Power	5W Max
Output Voltage Range	15~50Vdc
Output Power	4W
Battery Recharge Time	24 Hours
Battery Discharge Time	Minimum 90 Minutes
Warranty	5 Years
Battery Type	Li-ion
Ambient Operating Temperature Range	5°C To 50°C (41°F To 122°F)
Surge Protection	Live-Neutral 3KV
UL	Listed to UL924 and tested to CSAC22.2 No.141 Field or factory installation
Low Energy Consumption	CEC Title20 compliance
Emergency Mode Protections	Battery Over Charge Protection Battery Over Discharge Protection Battery Short Circuit Protection
Wiring	to LED driver's DC output



MID OUTPUT

PART #	DLC CODE	DLC	PRIMARY USE	CCT	WATTAGE	LUMENS
RP-LBIMAX-4F-30W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-H2PYAV	●	STAIRWELL AND PASSAGEWAY LUMINAIRES	30/35/40/50K	30	4000
RP-LBIMAX-4F-35W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-SB6KLF			30/35/40/50K	35	4800
RP-LBIMAX-4F-40W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-PI9VU7			30/35/40/50K	40	5400
RP-LBIMAX-4F-48W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-UO654R			30/35/40/50K	48	6400

LOW-BAY

PART #	DLC CODE	DLC	PRIMARY USE	CCT	WATTAGE	LUMENS
RP-LBIMAX-4F-30W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-CMDIGX	●	RETROFIT KITS FOR LOW BAY LUMINAIRES COMMERCIAL & INDUSTRIAL BUILDINGS	30/35/40/50K	30	4000
RP-LBIMAX-4F-30W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-VOUDIQ	●	LOW BAY LUMINAIRES COMMERCIAL & INDUSTRIAL BUILDINGS	30/35/40/50K		4000
RP-LBIMAX-4F-35W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-GK6YX9			30/35/40/50K	35	4800
RP-LBIMAX-4F-35W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-HE9JRZ	●	RETROFIT KITS FOR LOW BAY LUMINAIRES COMMERCIAL & INDUSTRIAL BUILDINGS	30/35/40/50K		4700
RP-LBIMAX-4F-40W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-J68VOC			30/35/40/50K	40	5300
RP-LBIMAX-4F-40W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-TJ7YID	●	LOW BAY LUMINAIRES COMMERCIAL & INDUSTRIAL BUILDINGS	30/35/40/50K		5400
RP-LBIMAX-4F-48W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-C8SPZD			30/35/40/50K	48	6400
RP-LBIMAX-4F-48W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-JH1RFV	●	RETROFIT KITS FOR LOW BAY LUMINAIRES COMMERCIAL & INDUSTRIAL BUILDINGS	30/35/40/50K		6300

LINEAR AMBIENT

PART #	DLC CODE	DLC	PRIMARY USE	CCT	WATTAGE	LUMENS
RP-LBIMAX-4F-30W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-AI6R08	●	DIRECT LINEAR AMBIENT LUMINAIRES	30/35/40/50K	30	4000
RP-LBIMAX-4F-30W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-FX9I5H		RETROFIT KITS DIRECT LINEAR AMBIENT LUMINAIRES	30/35/40/50K		4100
RP-LBIMAX-4F-35W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-1ZLOW4		DIRECT LINEAR AMBIENT LUMINAIRES	30/35/40/50K	35	4800
RP-LBIMAX-4F-35W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-HQ4P61		RETROFIT KITS DIRECT LINEAR AMBIENT LUMINAIRES	30/35/40/50K		4900
RP-LBIMAX-4F-40W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-EV92RZ		DIRECT LINEAR AMBIENT LUMINAIRES	30/35/40/50K	40	5400
RP-LBIMAX-4F-40W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-FR2I3Q			30/35/40/50K		5400
RP-LBIMAX-4F-48W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-I58RO3		RETROFIT KITS DIRECT LINEAR AMBIENT LUMINAIRES	30/35/40/50K	48	6400
RP-LBIMAX-4F-48W-XXK-[WC,C]-[HV,Blank]-[OC,OCRF,BT,Blank]-[EM1,Blank]-[BAA,AA,Blank]	S-MD2R0U			30/35/40/50K		6400

● STANDARD ● PREMIUM

MICROWAVE OCCUPANCY AND DAYLIGHT HOLD-OFF SENSOR

ADDING -OC TO THE LBI MAX PART NUMBER UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **SIMPLE CONTROL** UTILIZING A MICROWAVE MOTION SENSOR. IT ALSO COMES EQUIPPED W/ A DAYLIGHT HARVESTING SENSOR TO DIM AND/OR TURN OFF THE LBI MAX WHEN THE SPACE IS UNOCCUPIED OR SURROUNDING NATURAL LIGHT LEVELS ARE HIGH.




ATTRIBUTES

DETECTION TECHNOLOGY	MICROWAVE
DETECTION TYPE	OCCUPANCY
SENSOR POWER	12VDC
GROUPABLE	NO
NETWORK LIGHTING CONTROL	NO
COMISSIONING METHOD	IR REMOTE
REMOTE	IR23*
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	NO
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	NONE
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES
CONTROL CAPACITY	10 FIXTURES

* SENSOR ALSO COMPATIBLE W/ IR12 REMOTE

IR23 REMOTE




-  **PERMANENT ON/OFF FUNCTION**
-  **SENSOR MODE**
-  **RESET FUNCTION**
-  **AMBIENT LEARN**
-  **TEST MODE**
-  **DIM +/-**

FOR MORE INFORMATION ON THE IR23 REMOTE SCAN BELOW




DETECTION PATTERN / -OC

CEILING MOUNTING

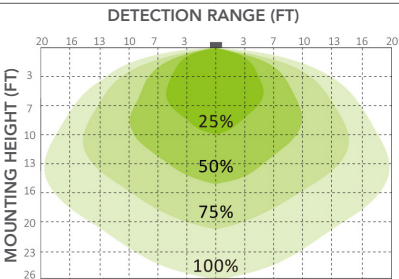


WALL MOUNTING

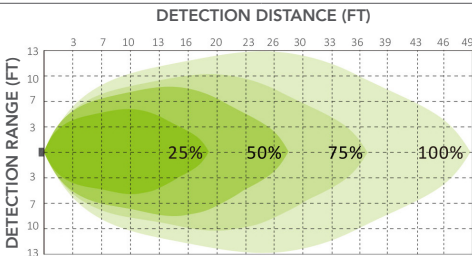

DAYLIGHT HARVESTING / -OC

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even w/o movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light meets target level).

NOTE LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPOPERATE WITHOUT MOTION WHEN STANDBY IS SET TO + ∞.

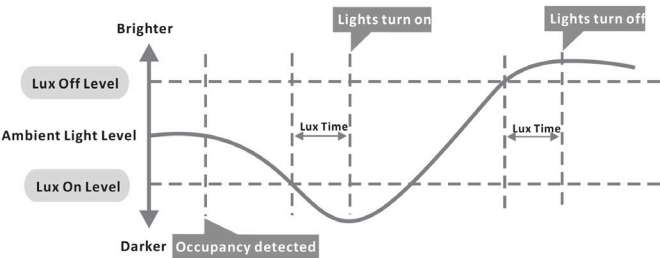


ATTRIBUTES




DETECTION TECHNOLOGY	MICROWAVE
DETECTION TYPE	OCCUPANCY / VACANCY
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMMISSIONING METHOD	SILVAIR APP + IR REMOTE FOR RANGE SETTING
REMOTE	IR23*
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	SILVAIR BLUETOOTH MESH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC
CONTROL CAPACITY	10 FIXTURES

* SENSOR ALSO COMPATIBLE W/ IR12 REMOTE


DETECTION RANGE

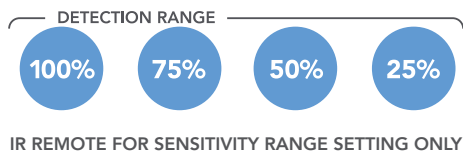

FOR MORE INFORMATION SCAN ABOVE



SILVAIR IS A SOFTWARE AND COMMISSIONING APP
THAT CONNECTS AND CONTROLS LIGHTING
FIXTURES USING BLUETOOTH MESH TECHNOLOGY.




FOR MORE INFO SCAN ABOVE

DETECTION PATTERN / -OCBT


CEILING MOUNTING

DETECTION RANGE (FT)

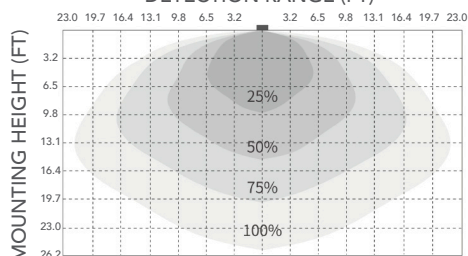


WALL MOUNTING


DETECTION DISTANCE (FT)

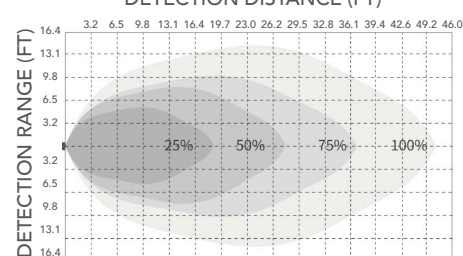

DIMENSIONS / -OCBT

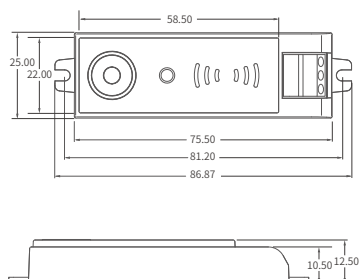

WIRING DIAGRAM / -OCBT

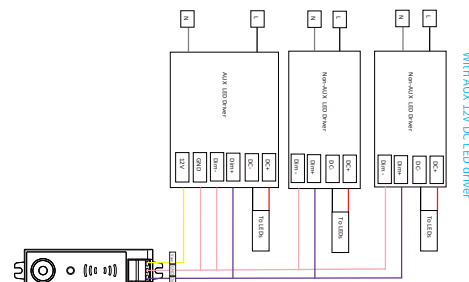

SILVAIR™ BLUETOOTH NODE W/ EXTERNAL ANTENNA


ADDING **-BT** TO THE LBI MAX PART NUMBER UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **NETWORK LIGHTING CONTROL**. CONNECT THROUGH THE SILVAIR APP ON ROBUST BLUETOOTH MESH. CAN BE PAIRED WITH A SWITCH FOR WIRELESS DIMMING CONTROL OR CONNECT TO OTHER FIXTURES WITH SENSORS TO MAXIMIZE COST SAVINGS.




ATTRIBUTES

DETECTION TECHNOLOGY	NONE
DETECTION TYPE	NONE
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMISSIONING METHOD	NONE
REMOTE	SILVAIR APP
DAYLIGHT HARVESTING	NO
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	NO
NETWORK TECHNOLOGY	BLUETOOTH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC


SILVAIR APP




SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.



FOR MORE INFORMATION ON THE SILVAIR APP SCAN BELOW



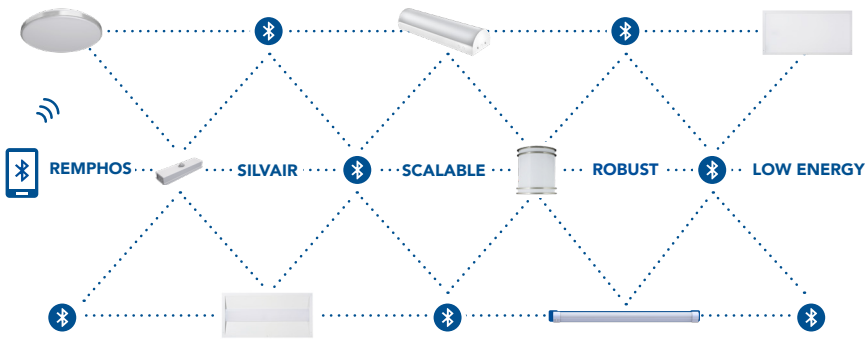

WHAT IS SILVAIR?

Silvaair is a software and commissioning app that connects and controls lighting fixtures using Bluetooth mesh technology.

HOW DOES IT CONNECT?

Silvaair can be set up in advance through the cloud and the Silvaair portal. It can also be commissioned in the field with the IOS app.

DOWNLOAD SILVAIR APPS



MOBILE APP Apple App Store
or
WEB APP platform.silvaair.com

