




PART #

JOB NAME

TYPE

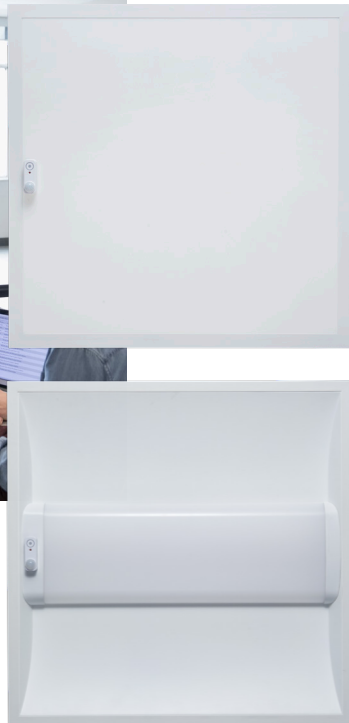

Sleek design and easy installation, this fixture is packed with features to suit almost any space. Available in three standard sizes, it offers versatility without compromising on performance.

- Slim design makes it easier to replace a wide range of existing fixtures
- Constant current driver is flicker free in accordance with IEEE-PAR1789, conforms to GSA P100
- Emergency battery backup option available
- Choose from a volumetric or a flat panel design
- Field installable **SIMPLE** & **NETWORK LIGHTING CONTROLS** options

..... **SIMPLY REMOVE THE CAP AND PLUG IN THE SENSOR**

SUPERFLEX
SWITCH BETWEEN
3 WATTAGES & 3 CCTS

TAA



PART #	UPC	DESCRIPTION	LUMENS	WATTAGE	CCT	DLC CODE
RP-TV-G1-1X4-35W-40K-WC-TAA	197810035671	1X4 VOLUMETRIC FIXTURE	2200/3300/4400	FLEXWATT 18W/26W/35W	FLEXCOLOR 3500K/4000K/5000K	S-1M5XK9
RP-TV-G1-2X2-35W-40K-WC-TAA	197810035701	2X2 VOLUMETRIC FIXTURE				S-VGPK1B
RP-TV-G1-2X4-44W-40K-WC-TAA	197810016304	2X4 VOLUMETRIC FIXTURE	3300/4400/5500	FLEXWATT 26W/35W/44W		S-Q67KQX
RP-TF-G1-1X4-40W-40K-WC-TAA	844006009847	1X4 FLAT PANEL FIXTURE	2600/3900/5200	FLEXWATT 20W/30W/40W		S-WQ239X
RP-TF-G1-2X2-40W-40K-WC-TAA	844006009793	2X2 FLAT PANEL FIXTURE				S-G5ZQY8
RP-TF-G1-2X4-50W-40K-WC-TAA	844006009786	2X4 FLAT PANEL FIXTURE	3900/5200/6500	FLEXWATT 30W/40W/50W		S-N155V0

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD





TV PART NUMBER BUILDER

MFR	PRODUCT	GEN	SIZE (FT)	DEFAULT WATTAGE	CCT	FUNCTION	OPTIONS	LISTING	EMG
RP	TV	G1				WC			EMG1
			1X4	40W	40K	WC = WATTAGE + COLOR SELECTABLE	OCC = PIR OCCUPANCY SENSOR	TAA = TRADE ACT AGREEMENT COMPLIANT	EMG1 = 4W, 500 LUMENS, 90 MIN EMERGENCY BATTERY BACKUP
			2X2				OCCBT = LOW ENERGY NETWORK (PIR OCCUPANCY SENSOR) ⓘ		
			2X4	44W					

EXAMPLE PART NUMBER RP-TV-G1-1X4-35W-40K-WC-OCC-TAA-EMG1

TF PART NUMBER BUILDER

MFR	PRODUCT	GEN	SIZE (FT)	DEFAULT WATTAGE	CCT	FUNCTION	OPTIONS	LISTING	EMG
RP	TF	G1				WC			EMG1
			1X4	40W	40K	WC = WATTAGE + COLOR SELECTABLE	OCC = PIR OCCUPANCY SENSOR	TAA = TRADE ACT AGREEMENT COMPLIANT	EMG1 = 4W, 500 LUMENS, 90 MIN EMERGENCY BATTERY BACKUP
			2X2				OCCBT = LOW ENERGY NETWORK (PIR OCCUPANCY SENSOR) ⓘ		
			2X4	50W					

EXAMPLE PART NUMBER RP-TF-G1-1X4-40W-40K-WC-OCC-TAA-EMG1

CONTROL OPTIONS

SIMPLE LIGHTING CONTROL



-OCC

PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HOLD-OFF SENSOR
IR23 REMOTE



NETWORK LIGHTING CONTROL




-OCCBT

SILVAIR™ PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR
SILVAIR APP




BLUETOOTH CONTROL


USE BLUETOOTH CONTROLS TO CONNECT TROFFERS TO YOUR PHONE AND/OR WALL SWITCH

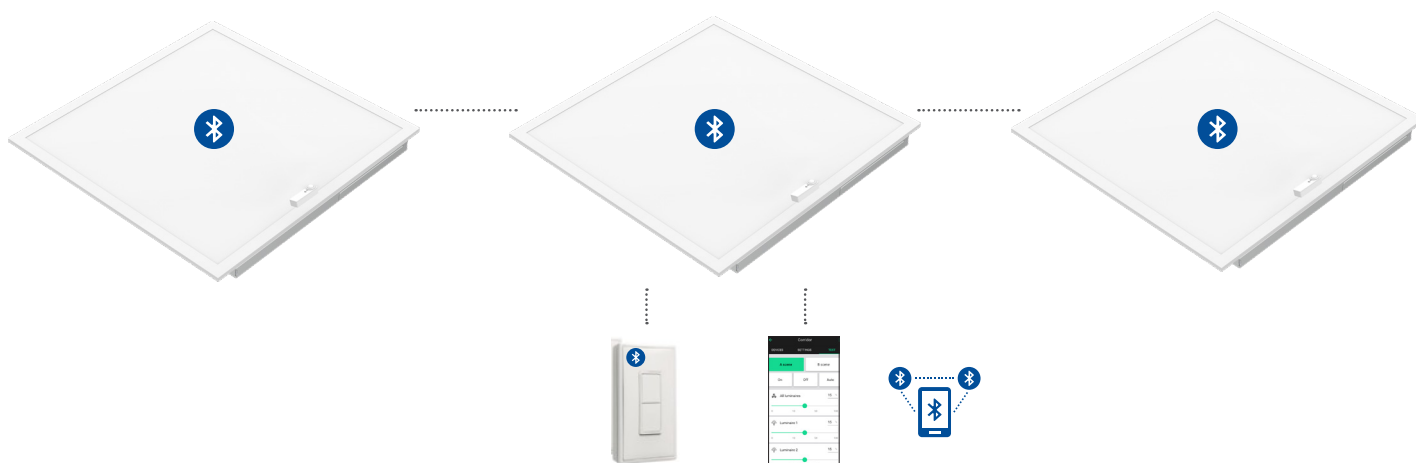


TV 1X4

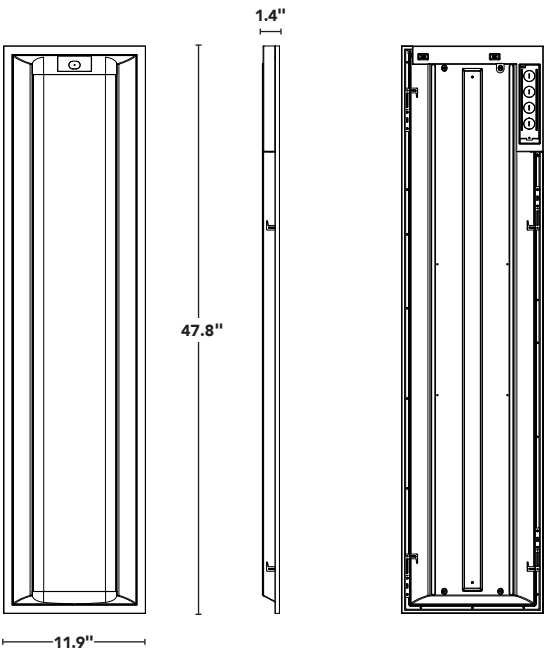

TV 2X4

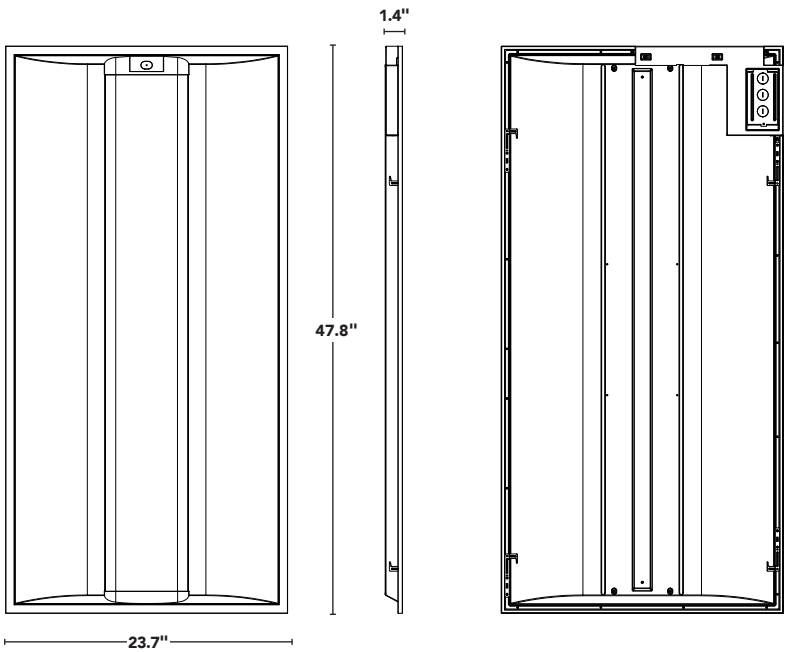


TV 2X2

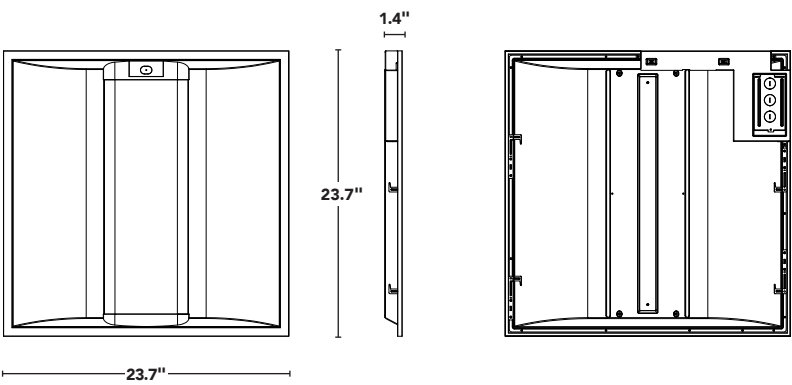





TF 1X4

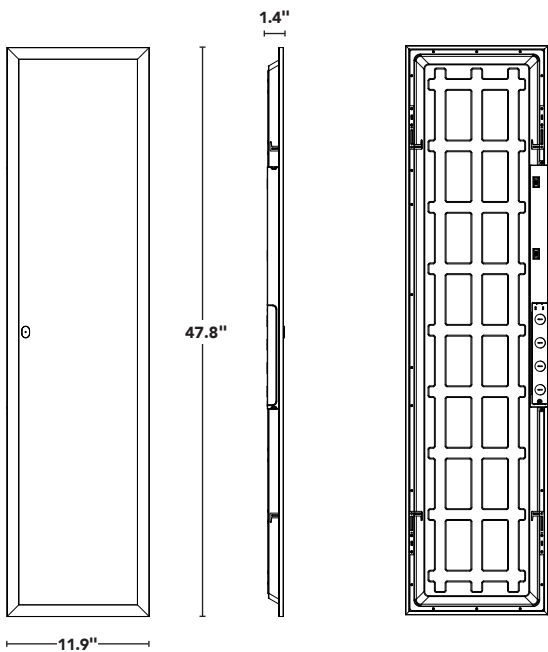

TF 2X4

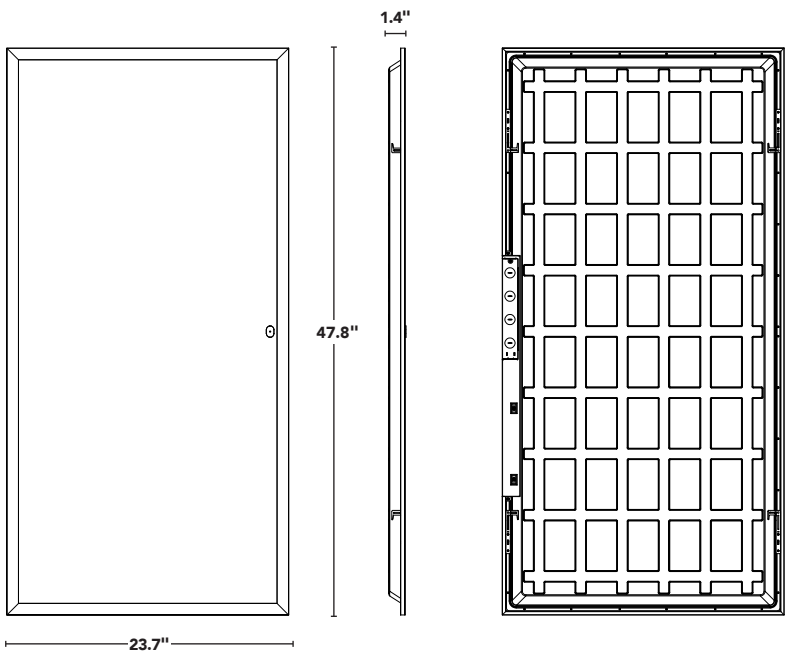

TF 2X2

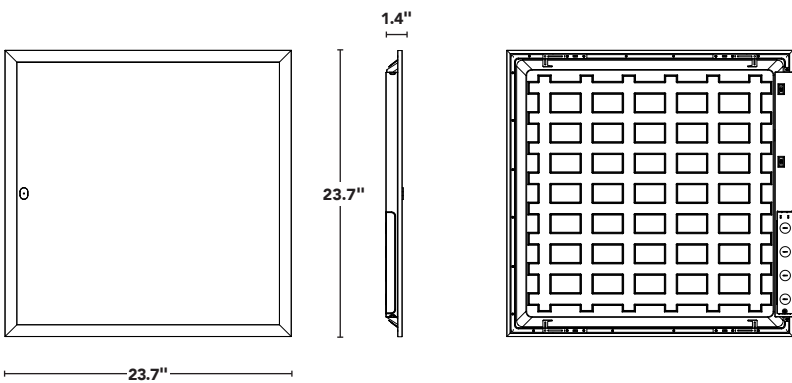



SURFACE MOUNT KIT		FLANGE KIT	
PART#	DESCRIPTION	PART#	DESCRIPTION
RPT-LEDPANEL-SMK-2X2	2X2 SURFACE MOUNT KIT	RPT-LEDPANEL-FMK-2X2-A	2X2 FLANGE KIT
RPT-LEDPANEL-SMK-1X4	1X4 SURFACE MOUNT KIT	RPT-LEDPANEL-FMK-1X4-A	1X4 FLANGE KIT
RPT-LEDPANEL-SMK-2X4	2X4 SURFACE MOUNT KIT	RPT-LEDPANEL-FMK-2X4-A	2X4 FLANGE KIT

SMK DOES NOT WORK WITH EMG KITS. CONTACT US FOR OTHER OPTIONS.

FLEXWATT™ TECHNOLOGY (SWITCH POSITION)



TV	1	2	3
1X4	18W (2200LM)	26W (3300LM)	35W (4400LM)
2X2	18W (2200LM)	26W (3300LM)	35W (4400LM)
2X4	26W (3300LM)	35W (4400LM)	44W (5500LM)

TF	1	2	3
1X4	20W (2600LM)	30W (3900LM)	40W (5200LM)
2X2	20W (2600LM)	30W (3900LM)	40W (5200LM)
2X4	30W (3900LM)	40W (5200LM)	50W (6500LM)

FLEXCOLOR™ TECHNOLOGY (SWITCH POSITION)



3500K	3500°K NEUTRAL / POSITION 1
4000K	4000°K NEUTRAL / POSITION 2
5000K	5000°K COOL / POSITION 3

SIMPLY REMOVE THE CAP
AND PLUG IN THE SENSOR







LIGHTING CONTROL SCENARIOS

Multiple lighting control scenarios are available once the Bluetooth mesh sensor is provisioned. Within scenario, duration, fade time and target brightness can be configured at any time with the iOS app.

EXAMPLE OCCUPANCY SCENARIO

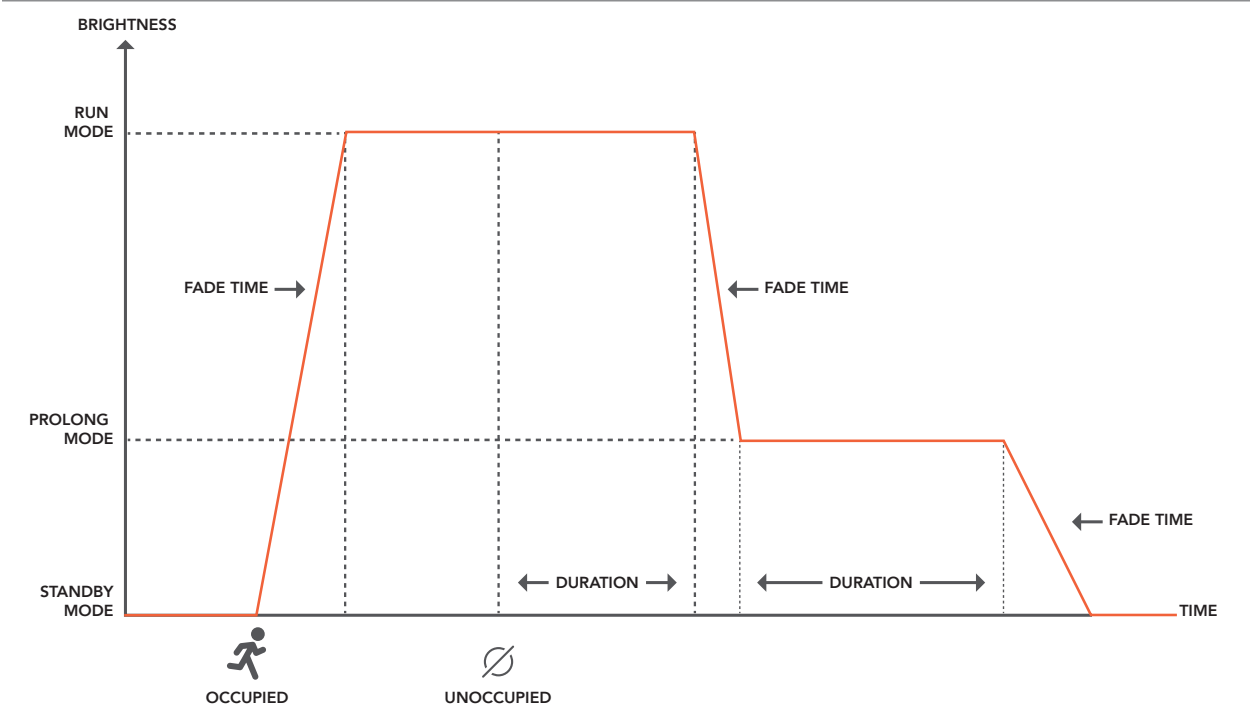


EXAMPLE OCCUPANCY SCENARIO W/ MANUAL OVERRIDE

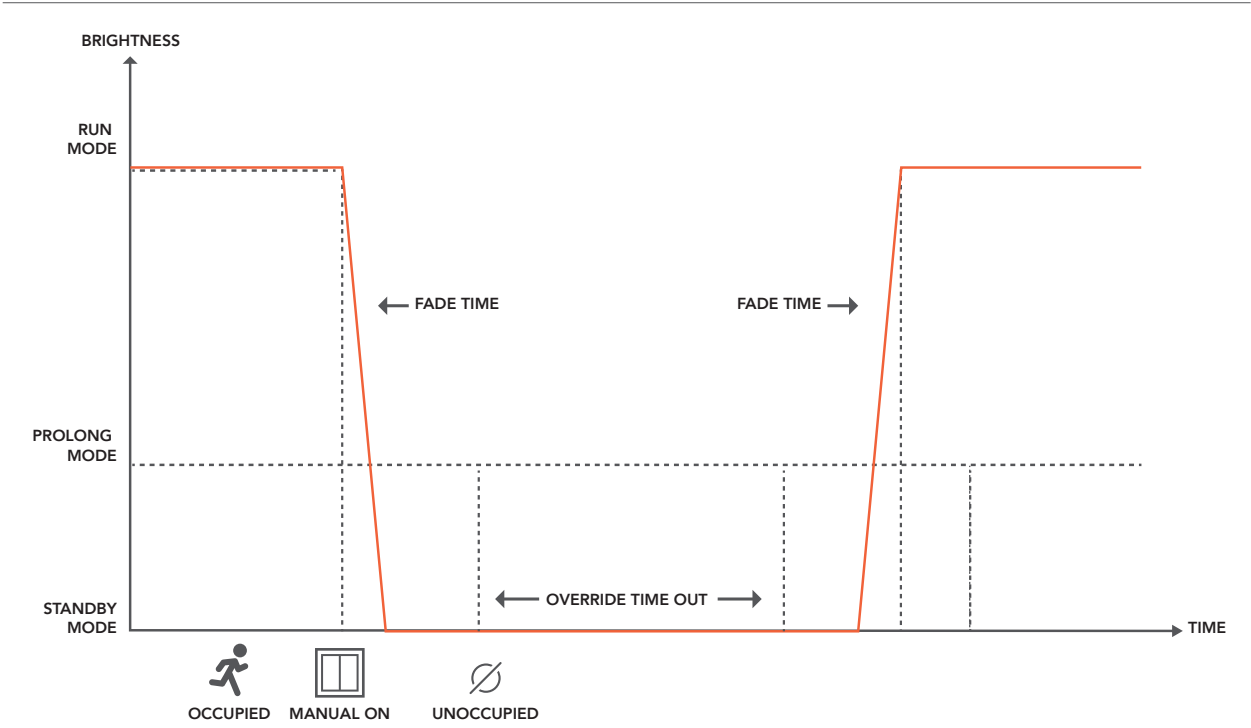




EXAMPLE OCCUPANCY SCENARIO W/ DAYLIGHT HARVESTING

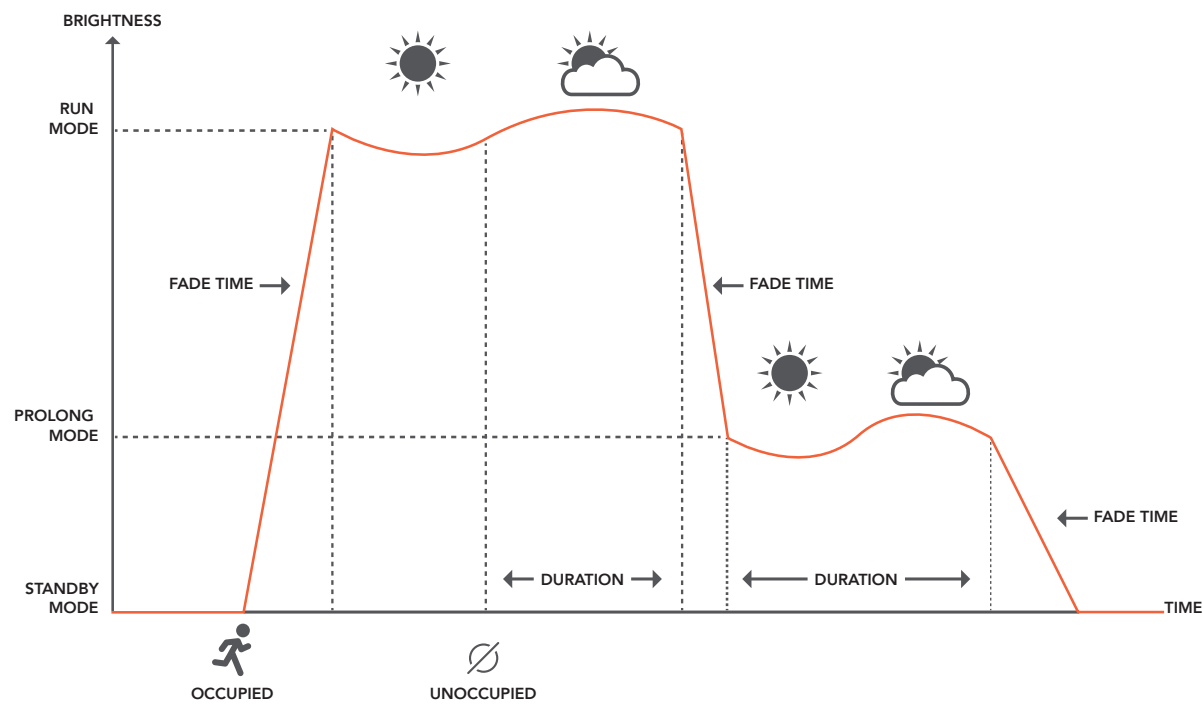

EXAMPLE VACANCY SCENARIO

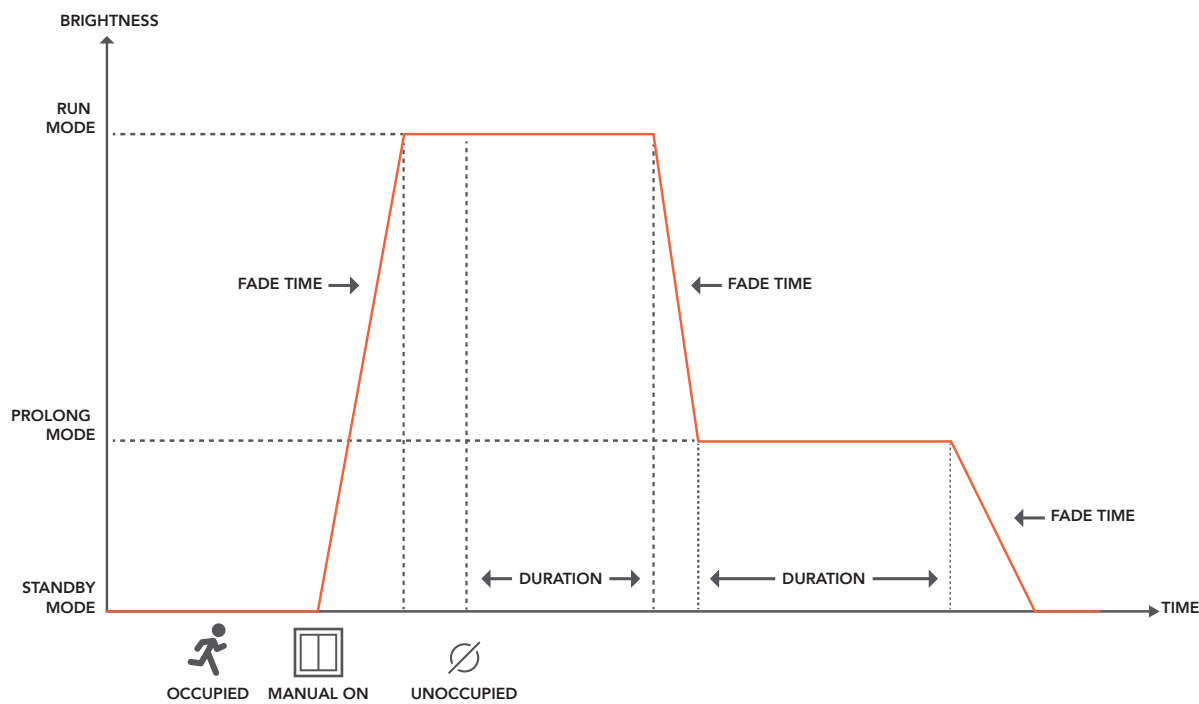

PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HOLD-OFF SENSOR

ADDING **-OCC** TO THE TROFFER FIXTURE PART NUMBER UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **SIMPLE CONTROL** UTILIZING A PASSIVE INFRARED SENSOR. IT ALSO COMES EQUIPPED W/ A DAYLIGHT HARVESTING SENSOR TO DIM AND/OR TURN OFF THE FLAT PANEL WHEN THE SPACE IS UNOCCUPIED OR SURROUNDING NATURAL LIGHT LEVELS ARE HIGH.




ATTRIBUTES

DETECTION TECHNOLOGY	PASSIVE INFRARED (PIR)
DETECTION TYPE	OCCUPANCY
SENSOR POWER	12VDC
GROUPABLE	NO
NETWORK LIGHTING CONTROL	NO
COMISSIONING METHOD	IR REMOTE
REMOTE	IR23*
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	NO
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	NONE
INSTALLATION TYPE	AUDIO JACK (EXTERNAL)
FLC LISTED	YES

* SENSOR ALSO COMPATIBLE W/ IR12 REMOTE

IR23 REMOTE




- PERMANENT ON/OFF FUNCTION**
- SENSOR MODE**
- RESET FUNCTION**
- AMBIENT LEARN**
- TEST MODE**
- DIM +/-**

FOR MORE INFORMATION ON THE IR23 REMOTE SCAN BELOW




DETECTION PATTERN / -OCC

CEILING MOUNTING

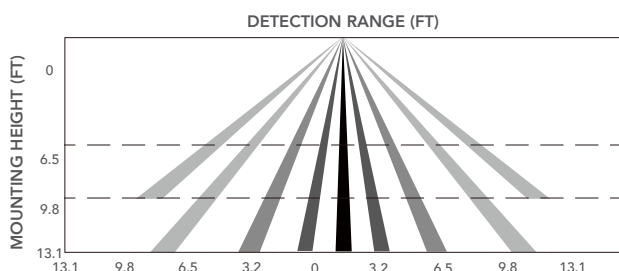


WALL MOUNTING

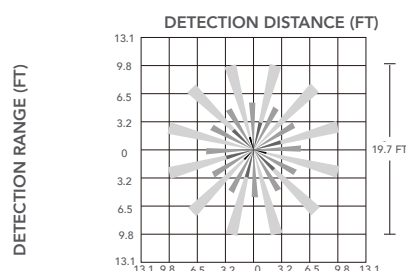

DAYLIGHT HARVESTING / -OCC

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even w/o movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light meets target level).

NOTE LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPERATE WITHOUT MOTION WHEN STANDBY IS SET TO + ∞.

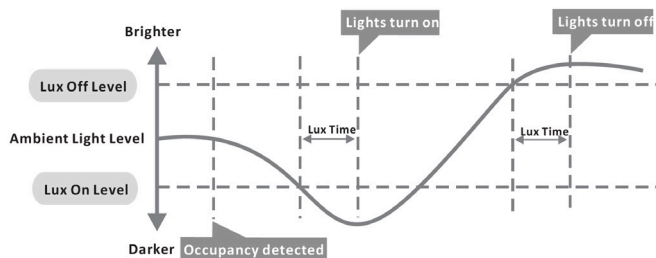

SILVAIR™ PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR


ADDING -OCCBT TO THE TROFFER RETROFIT KIT PART NUMBER UPGRADES THE FIXTURE W/ A FACTORY INSTALLED NETWORK LIGHTING CONTROL. ONCE CONNECTED THROUGH THE SILVAIR APP, THE BLUETOOTH PASSIVE INFRARED SENSOR AND DAYLIGHT HARVESTING TECHNOLOGY CAN MAXIMIZE ENERGY SAVINGS.



ATTRIBUTES	
DETECTION TECHNOLOGY	PASSIVE INFRARED (PIR)
DETECTION TYPE	OCCUPANCY / VACANCY
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMISSIONING METHOD	SILVAIR APP + IR REMOTE FOR RANGE SETTING
REMOTE	IR23*
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	BLUETOOTH
INSTALLATION TYPE	AUDIO JACK (EXTERNAL)
DLC LISTED	YES + DLC NLC

* SENSOR ALSO COMPATIBLE W/ IR12 REMOTE

IR23 REMOTE



DETECTION RANGE


100%75%50%25%

IR REMOTE FOR SENSITIVITY RANGE SETTING ONLY




FOR MORE INFORMATION SCAN ABOVE

SILVAIR APP



SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.







FOR MORE INFO SCAN ABOVE

DETECTION PATTERN / -OCCBT

CEILING MOUNTING

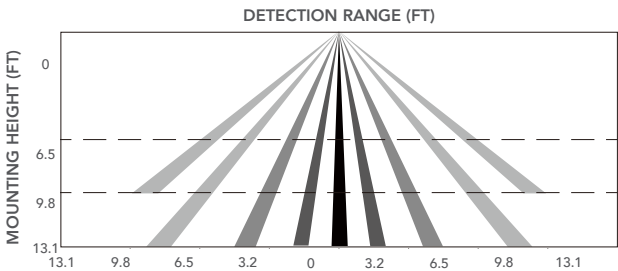


WALL MOUNTING

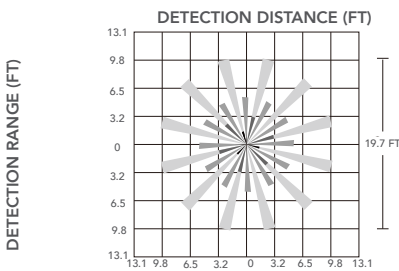


DAYLIGHT HARVESTING / -OCCBT

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even w/o movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light meets target level).

NOTE LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPERATE WITHOUT MOTION WHEN STANDBY IS SET TO + ∞.

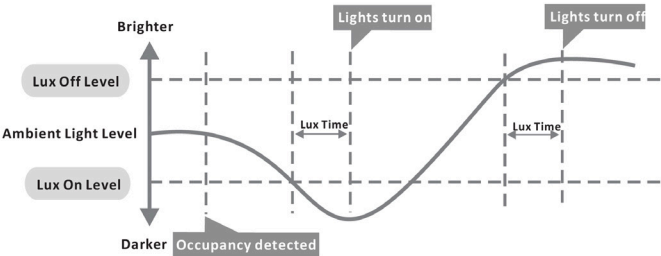

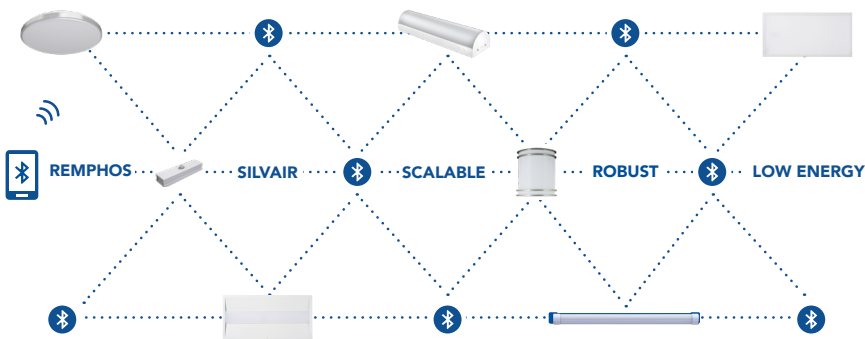

WHAT IS SILVAIR?

Silvoir is a software and commissioning app that connects and controls lighting fixtures using Bluetooth mesh technology.

HOW DOES IT CONNECT?

Silvoir can be set up in advance through the cloud and the Silvoir portal. It can also be commissioned in the field with the IOS app.

DOWNLOAD SILVAIR APPS



MOBILE APP Apple App Store
or
WEB APP platform.silvoir.com

