

Name: Dhinakaran. S

Register Number: 192412353

Course Code: ECA0901

Course Name: DIGITAL SIGNAL PROCESSING

2. Chebyshev IIR Filters

2.1 Design and performance Evaluation of a Chebyshev Type I IIR Low Pass Filter using MATLAB

CODE:


```
clc;
clear;
Wp=0.4; Ws=0.55; Rp=1; As=40;
[N,Wn]=cheb1ord(Wp,Ws,Rp,As);
[b,a]=cheby1(N,Rp,Wn);
fprintf('Filter Order = %d\n',N);
fprintf('Cutoff Frequency = %.2f * pi rad/sample\n',Wn);
if all(abs(roots(a))<1)
disp('System is STABLE');
else
disp('System is UNSTABLE');
end
% ----- GRAPHS -----
figure; freqz(b,a); % Magnitude + Phase
figure; impz(b,a); % Impulse Response
figure; grpdelay(b,a); % Group Delay
figure; zplane(b,a); % Pole-Zero
```

OUTPUTS:


Objective 1:

```
Filter Order = 6  
Cutoff Frequency = 0.40 * pi rad/sample  
System is STABLE
```


Objective 2:

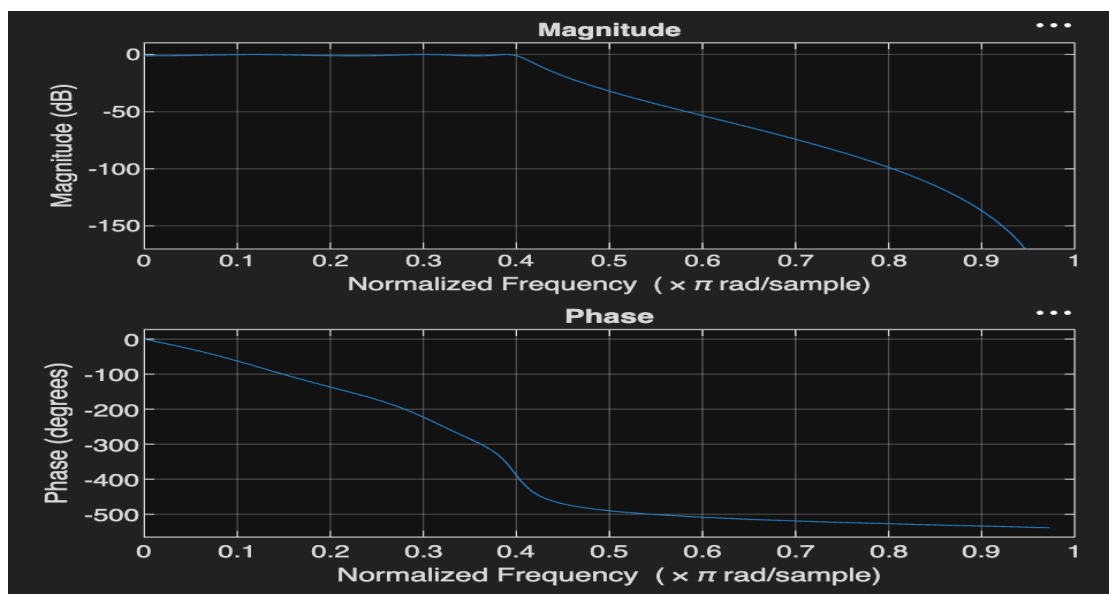

Objective 3:

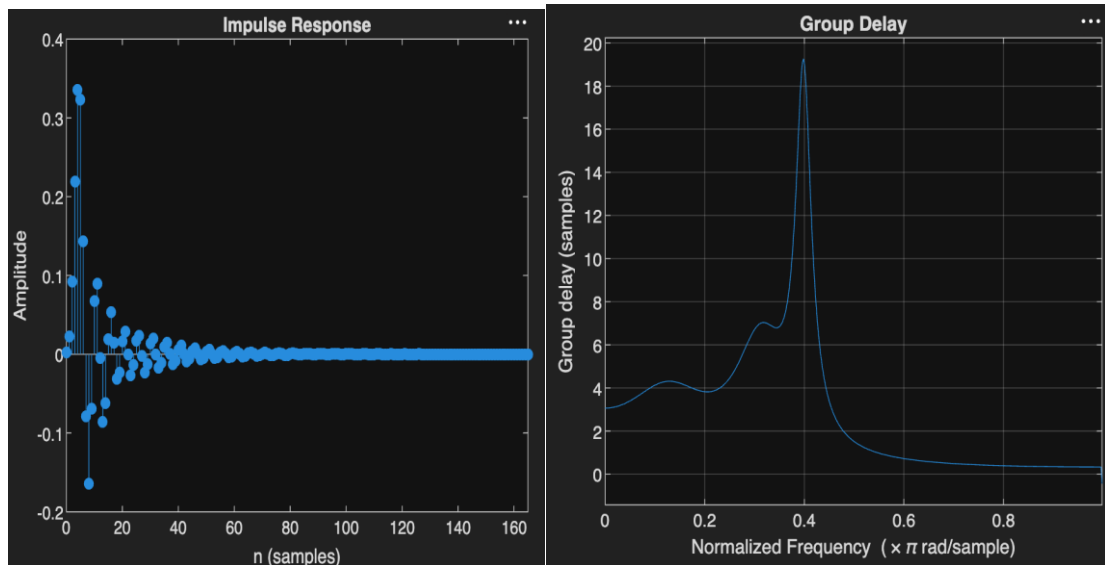

Objective 4:

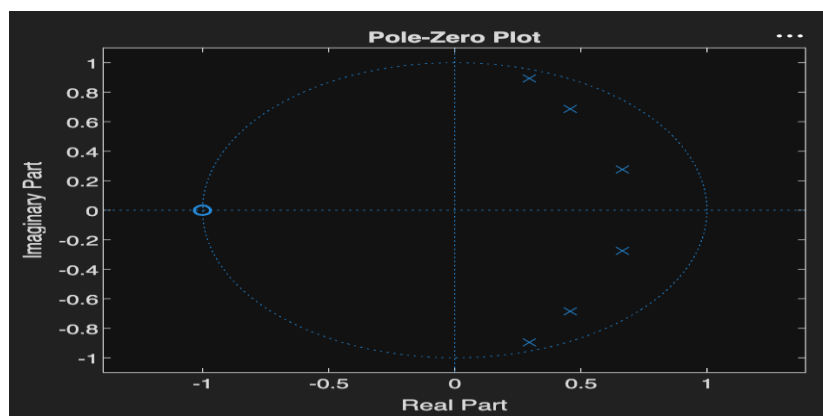

2.2. Design and Performance Evaluation of a Chebyshev Type-I IIR High-Pass Filter

CODE:

```
clc;
clear;
close all;
% Specifications
Rp = 1; % Passband Ripple (dB)
Rs = 40; % Stopband Attenuation (dB)
Wp = 0.5; % Passband Edge
Ws = 0.35; % Stopband Edge
% Find Filter Order
[n,Wn] = cheblord(Wp,Ws,Rp,Rs);
% Design High-Pass Filter
[b,a] = cheby1(n,Rp,Wn,'high');
% Frequency Response
```

```

figure;
freqz(b,a);
title('Frequency Response');
% Impulse Response
figure;
impz(b,a);
title('Impulse Response');
% Group Delay
figure;
grpdelay(b,a);
title('Group Delay');
% Pole-Zero Plot
figure;
zplane(b,a);
title('Pole-Zero Plot');
fprintf('Filter Order = %d\n',n);
fprintf('Cutoff Frequency = %.4f\n',Wn);

```

OUTPUTS:


Objective 1:

```


Filter Order = 6
Cutoff Frequency = 0.5000

```

Objective 2:

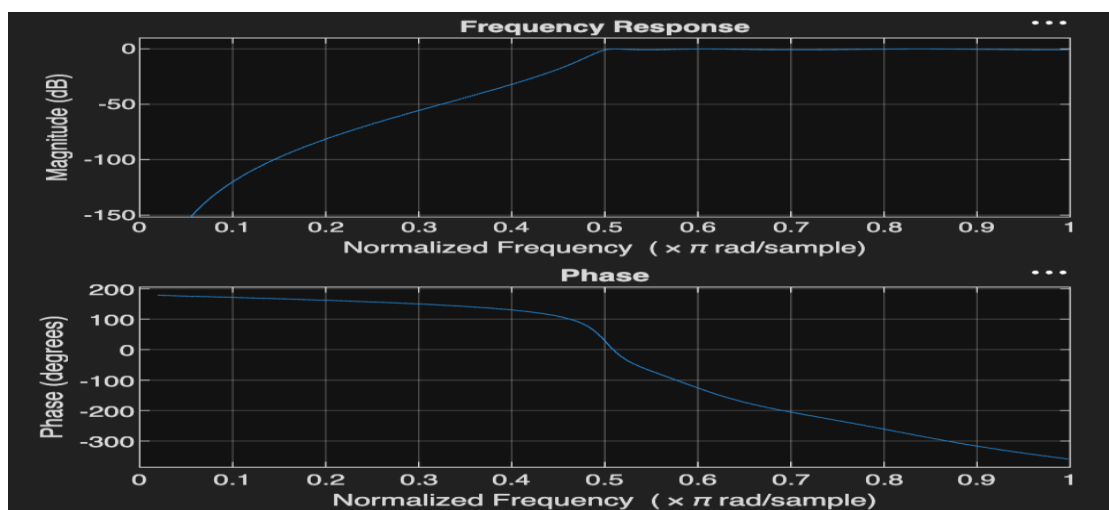

Objective 3:

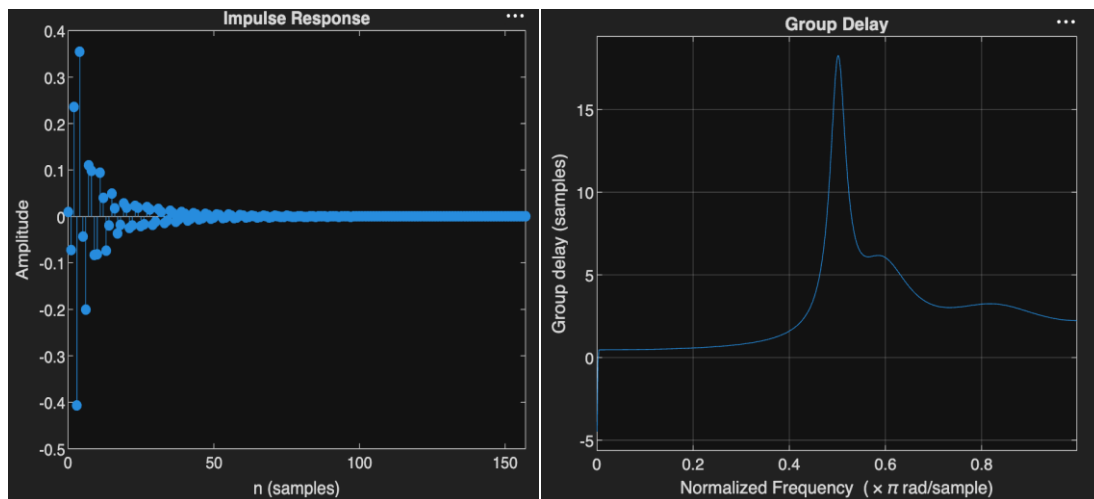

Objective 4:

