




Operación de micros e interfases

Conalep San José Iturbide


PIC16F877A

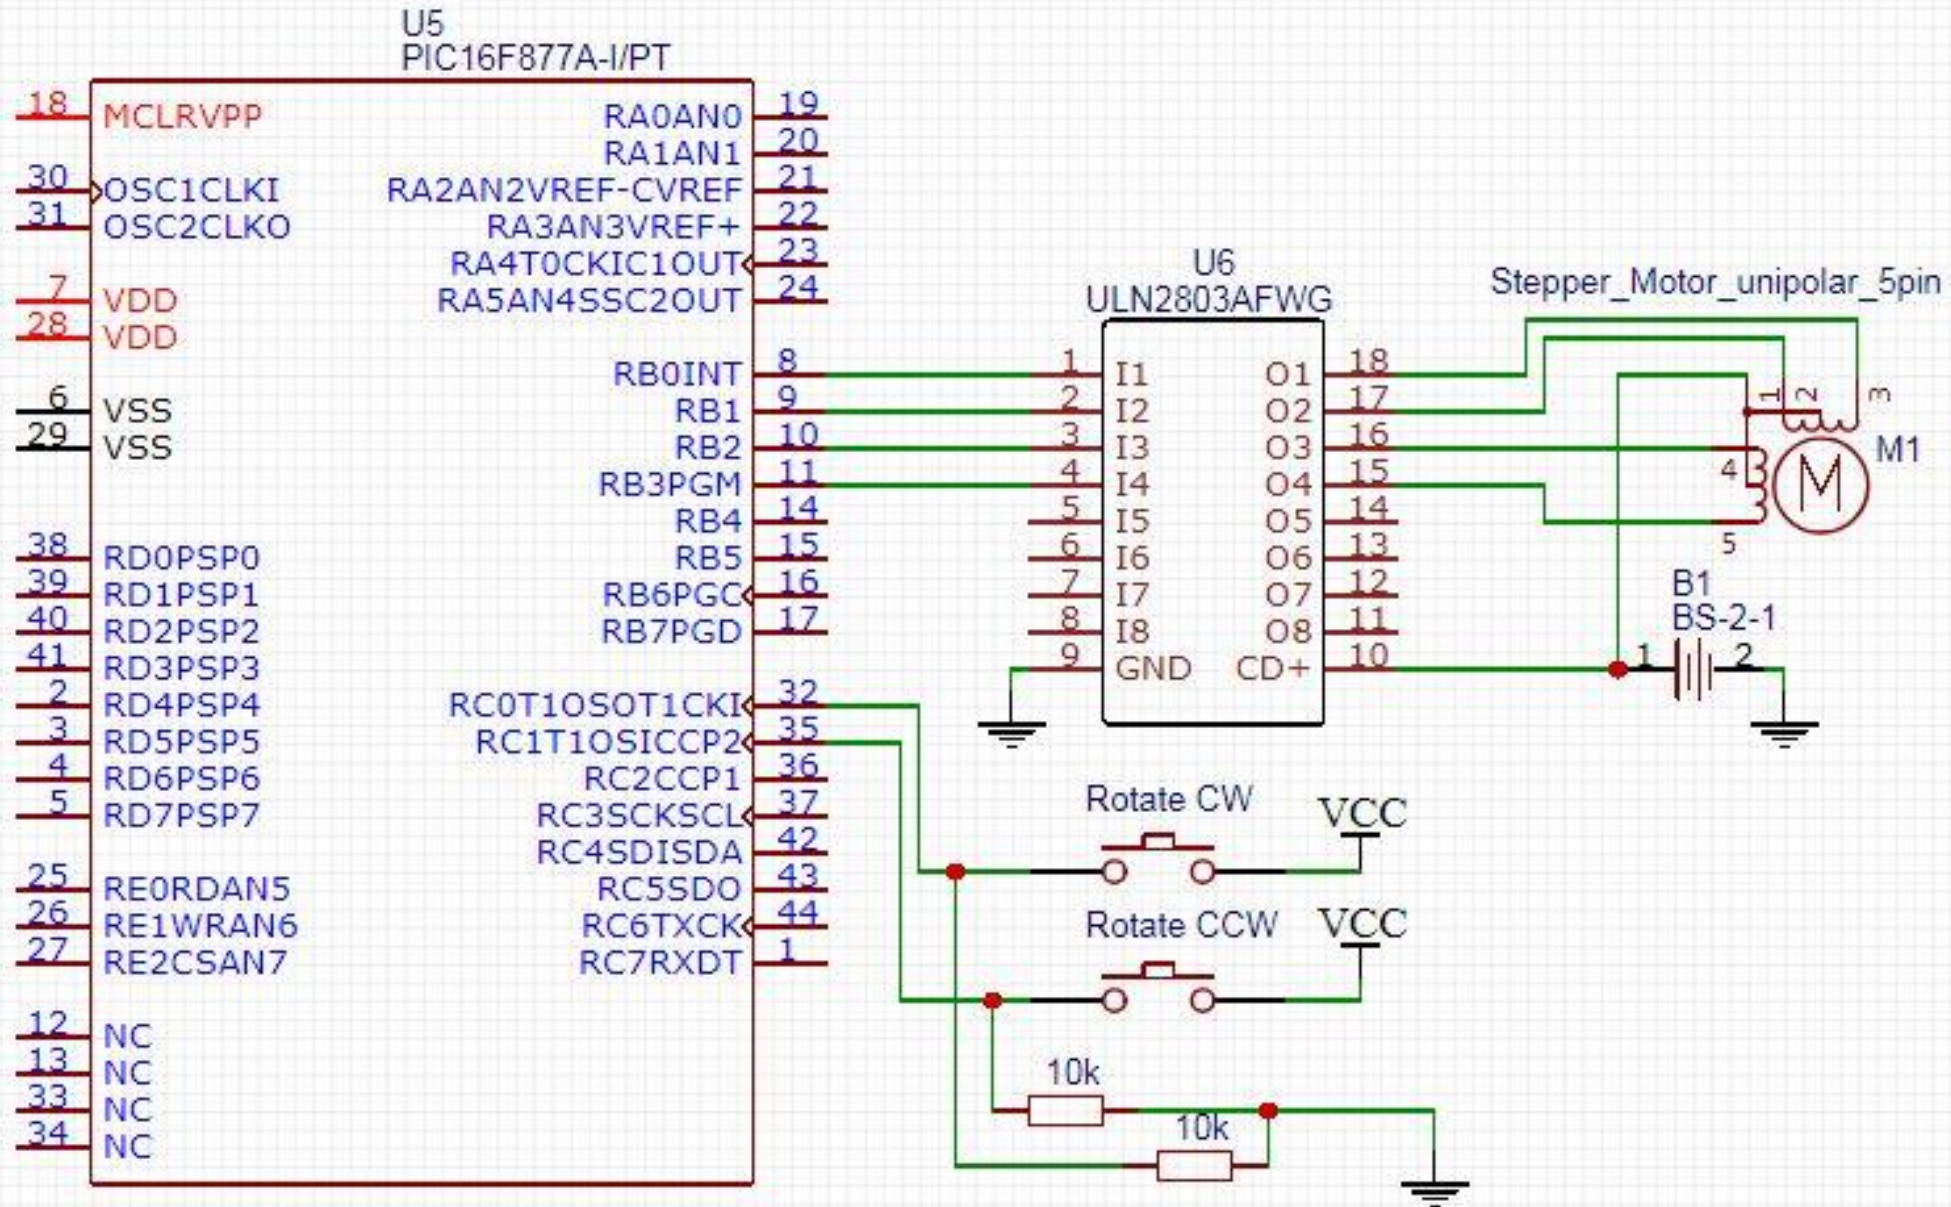

```
void main(void)
{
    // Create Bit-Shifting Variable
    unsigned char i=0;
    // Set PORTB 8-Pins To Be Output Pins
    TRISB = 0x00;
    // Set All PORTB Pins To Be OFF (Initially) !
    PORTB = 0x00;
    // Set RC0, RC1 Pins To Be Input Pins
    TRISC0 = 1;
    TRISC1 = 1;
    // Create The System's Main Routine !
    while(1)
    {
        // While Button1 is pressed, Rotate CW
        while(RC0)
        {
```

```
            PORTB = (1<<i);
            i++;
            __delay_ms(100);
            if (i==4)
                i=0;
        }
        // While Button2 is pressed, Rotate CCW
        while(RC1)
        {
            PORTB = (8>>i);
            i++;
            __delay_ms(100);
            if (i==4)
                i=0;
        }
    }
    return;
}
```

PIC16F886

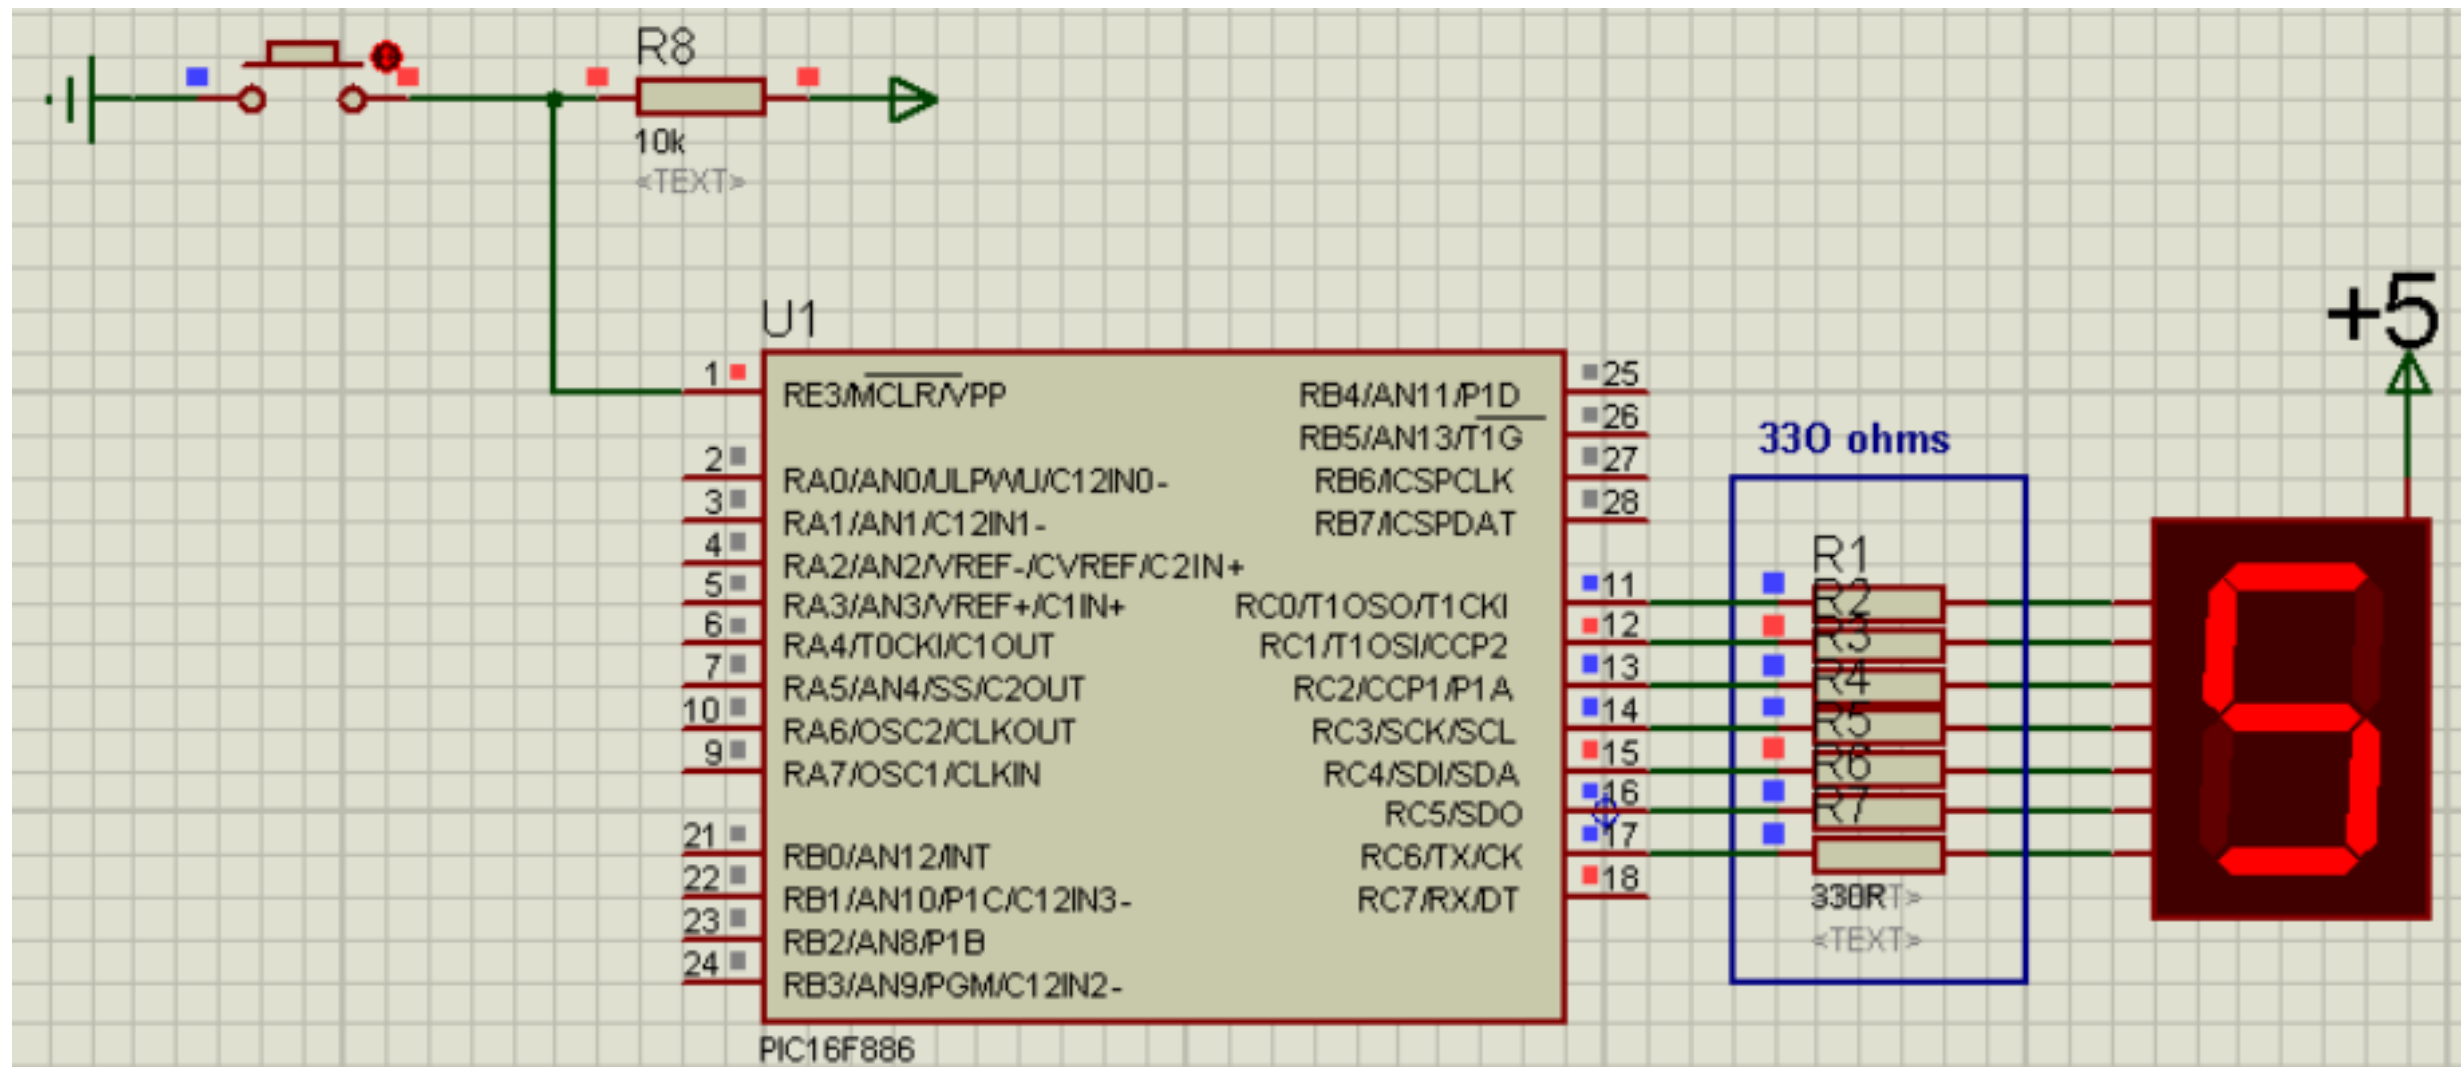

```
// CONFIGURACION
#pragma config FOSC = INTRC_NOCLKOUT
#pragma config WDTE = OFF
#pragma config PWRTE = OFF
#pragma config MCLRE = ON
#pragma config CP = OFF
#pragma config CPD = OFF
#pragma config BOREN = OFF
#pragma config IESO = OFF
#pragma config FCMEN = OFF
#pragma config LVP = OFF

#define _XTAL_FREQ 4000000
```


```
void main(void)
{
    // DISPLAY 7 SEGMENTOS CATODO COMUN
    unsigned char mostrar[] = {
        0b11000000, //0
        0b11111001, //1
        0b10100100, //2
        0b10110000, //3
        0b10011001, //4
        0b10010010, //5
        0b10000010, //6
        0b11111000, //7
        0b10000000, //8
        0b10010000 //9
    };
}
```

```
unsigned char contador;

// CONFIGURAR PUERTO C COMO SALIDA
TRISC = 0x00;
PORTC = 0x00;

while(1)
{
    for(contador = 0; contador <= 9; contador++)
    {
        PORTC = mostrar[contador];
        __delay_ms(1000);
    }
}
```



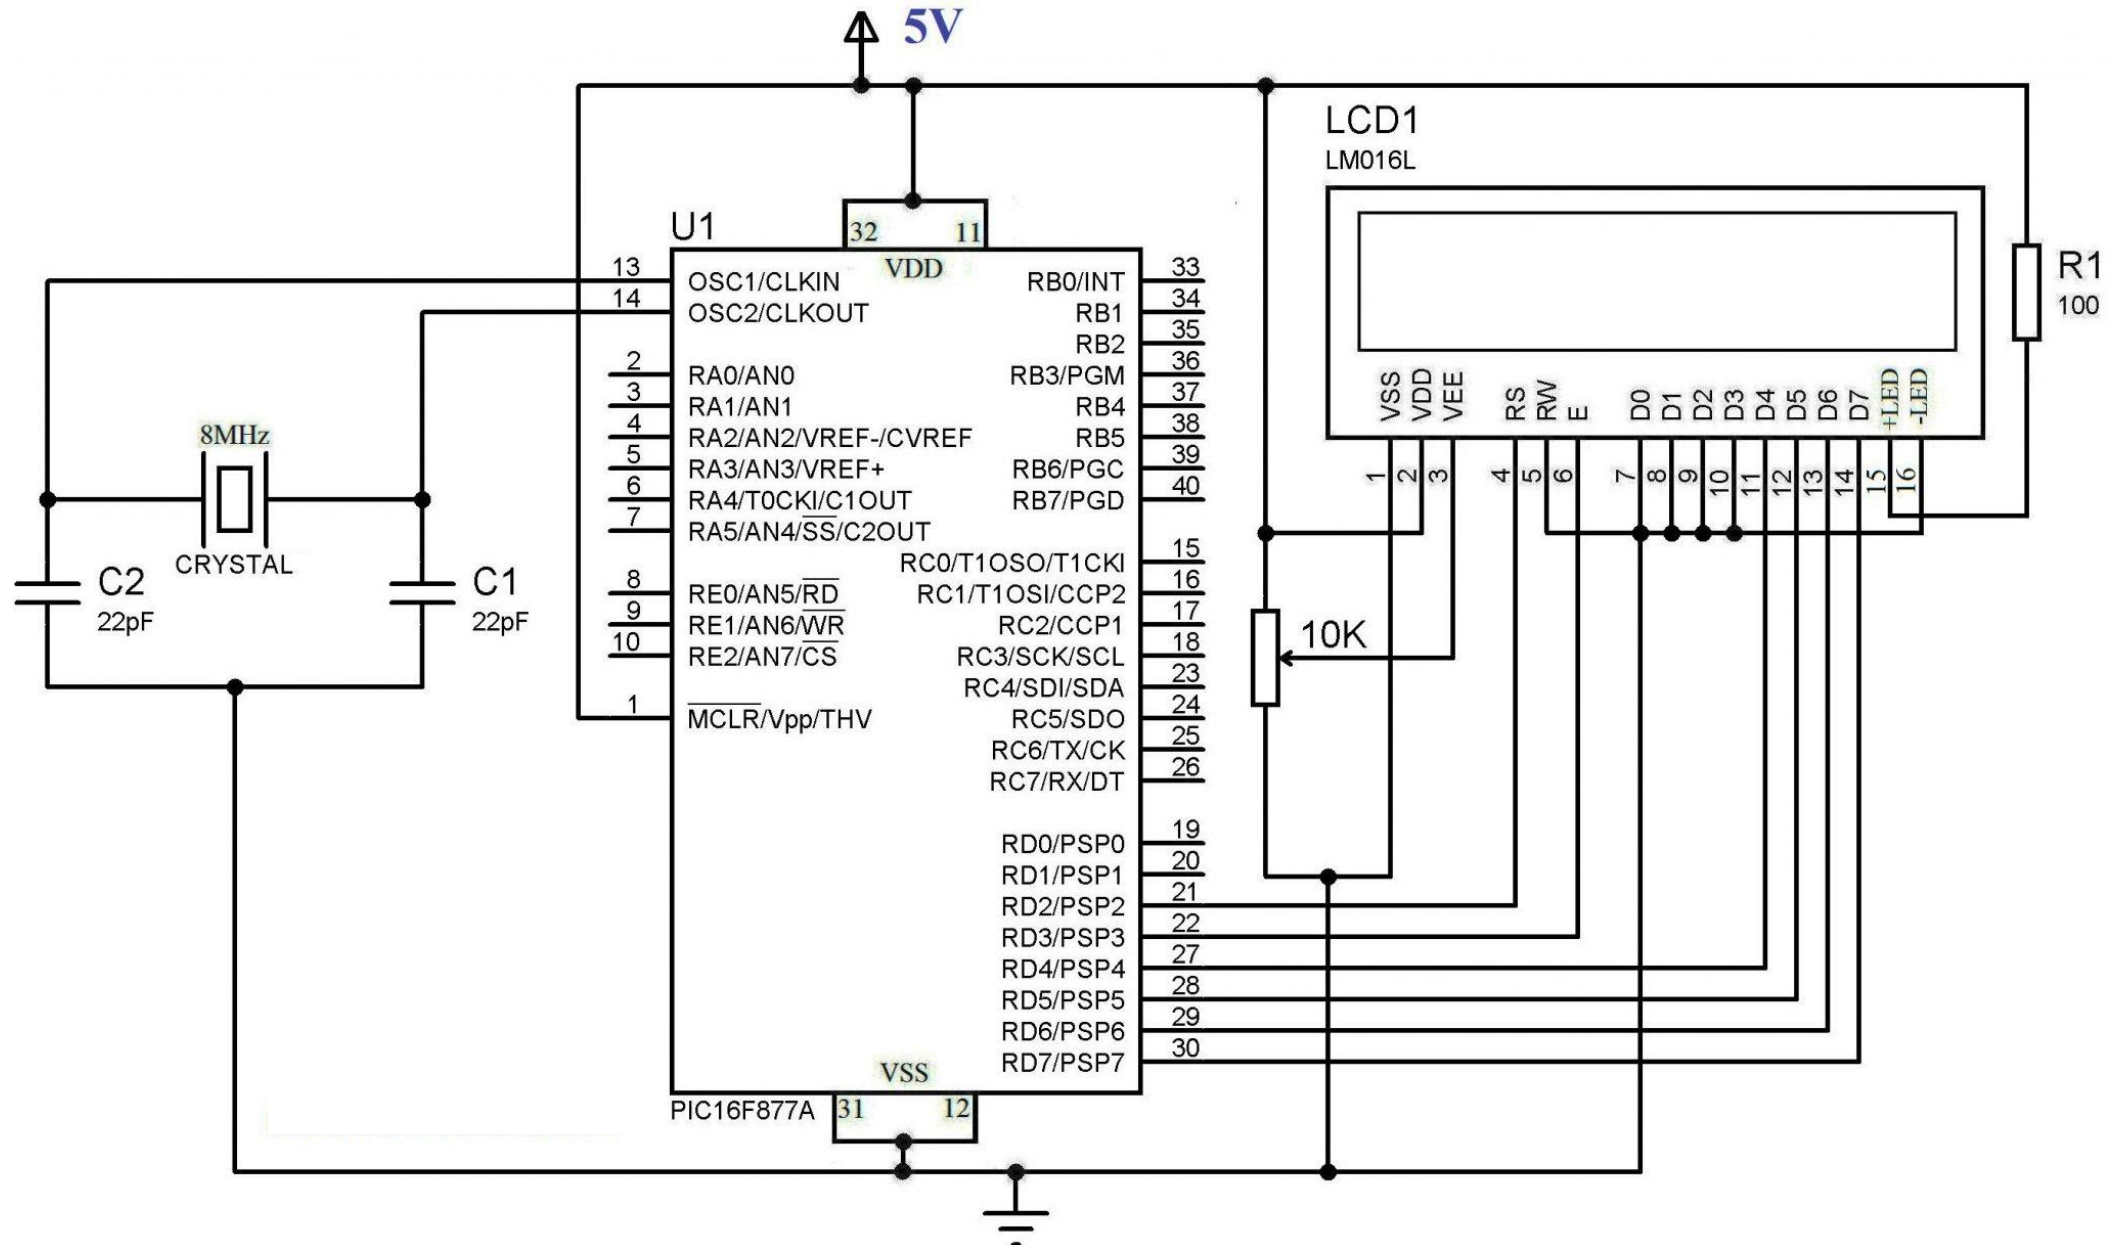

```
int main()
{
    unsigned int a;
    TRISD = 0x00;
    Lcd_Init();
    while(1)
    {
        Lcd_Clear();
        Lcd_Set_Cursor(1,1);
        Lcd_Write_String("LCD Library for");
        Lcd_Set_Cursor(2,1);
        Lcd_Write_String("MPLAB XC8");
        __delay_ms(2000);
        Lcd_Clear();
        Lcd_Set_Cursor(1,1);
        Lcd_Write_String("Developed By");
        Lcd_Set_Cursor(2,1);
        Lcd_Write_String("electroSome");
        __delay_ms(2000);
        Lcd_Clear();
        Lcd_Set_Cursor(1,1);
        Lcd_Write_String("www.electroSome.com");
```

```
        for(a=0;a<15;a++)
        {
            __delay_ms(300);
            Lcd_Shift_Left();
        }

        for(a=0;a<15;a++)
        {
            __delay_ms(300);
            Lcd_Shift_Right();
        }

        Lcd_Clear();
        Lcd_Set_Cursor(2,1);
        Lcd_Write_Char('e');
        Lcd_Write_Char('S');
        __delay_ms(2000);
    }
    return 0;
```

