





Operación de Micros e Interfaces

Conalep San José Iturbide

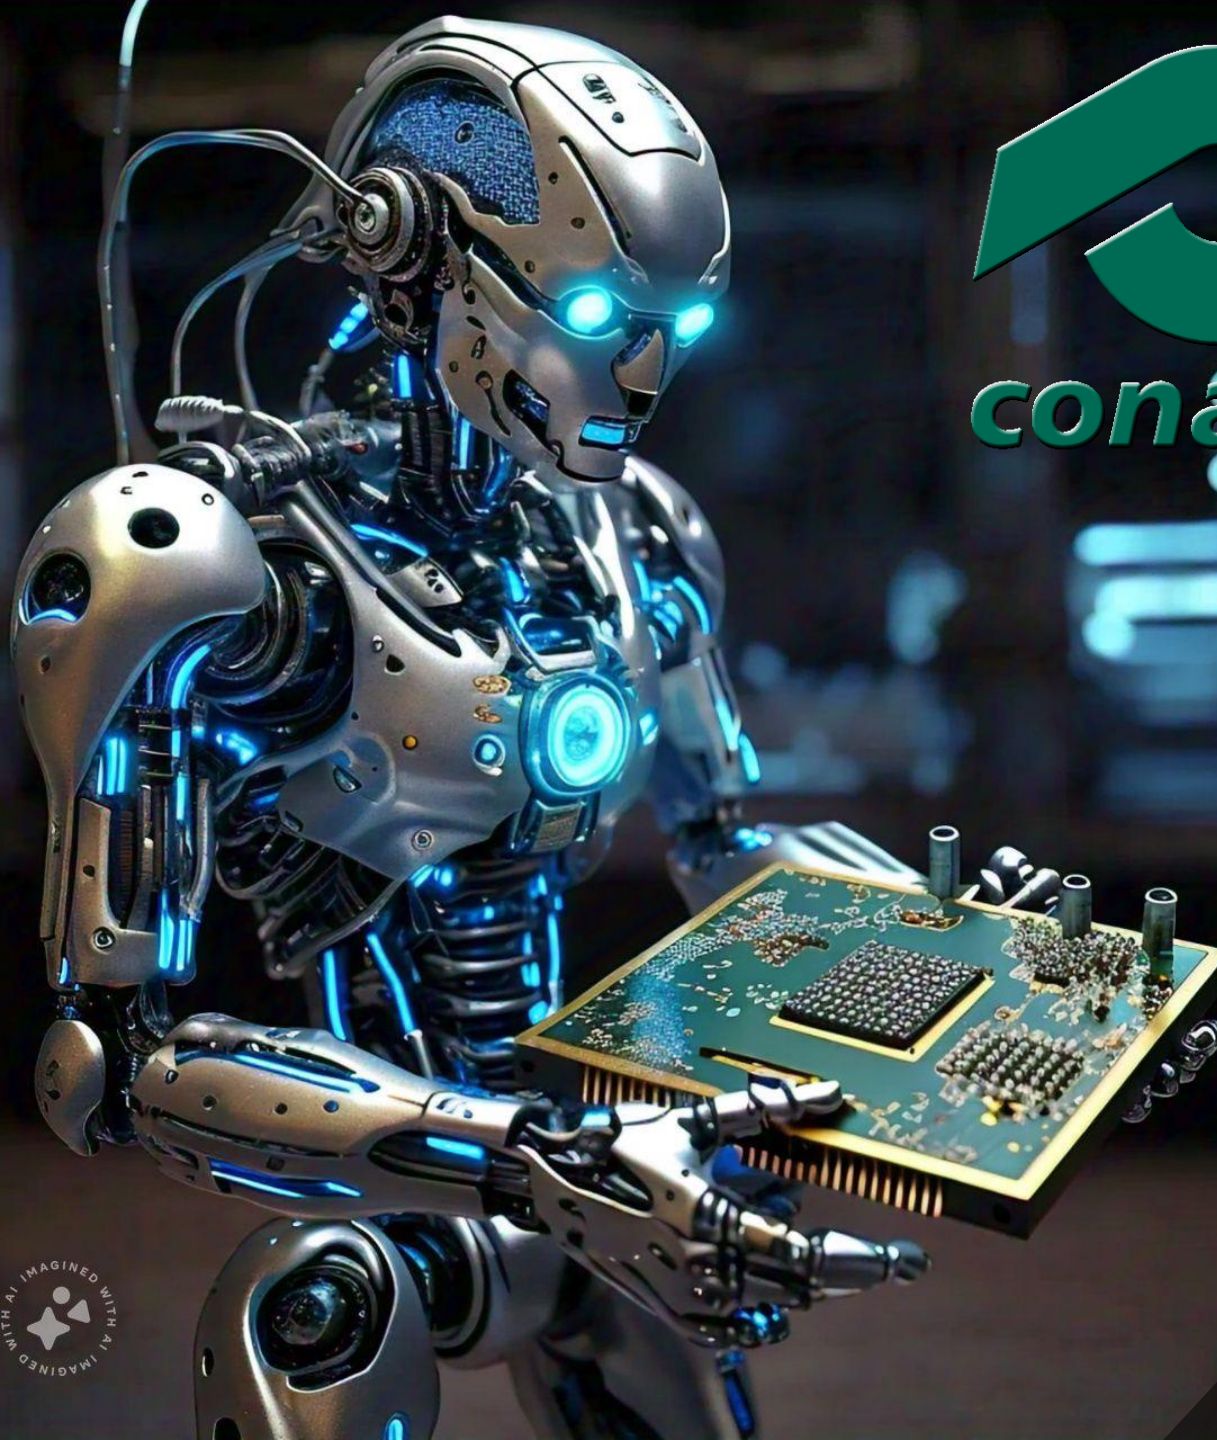

PIC16F877A

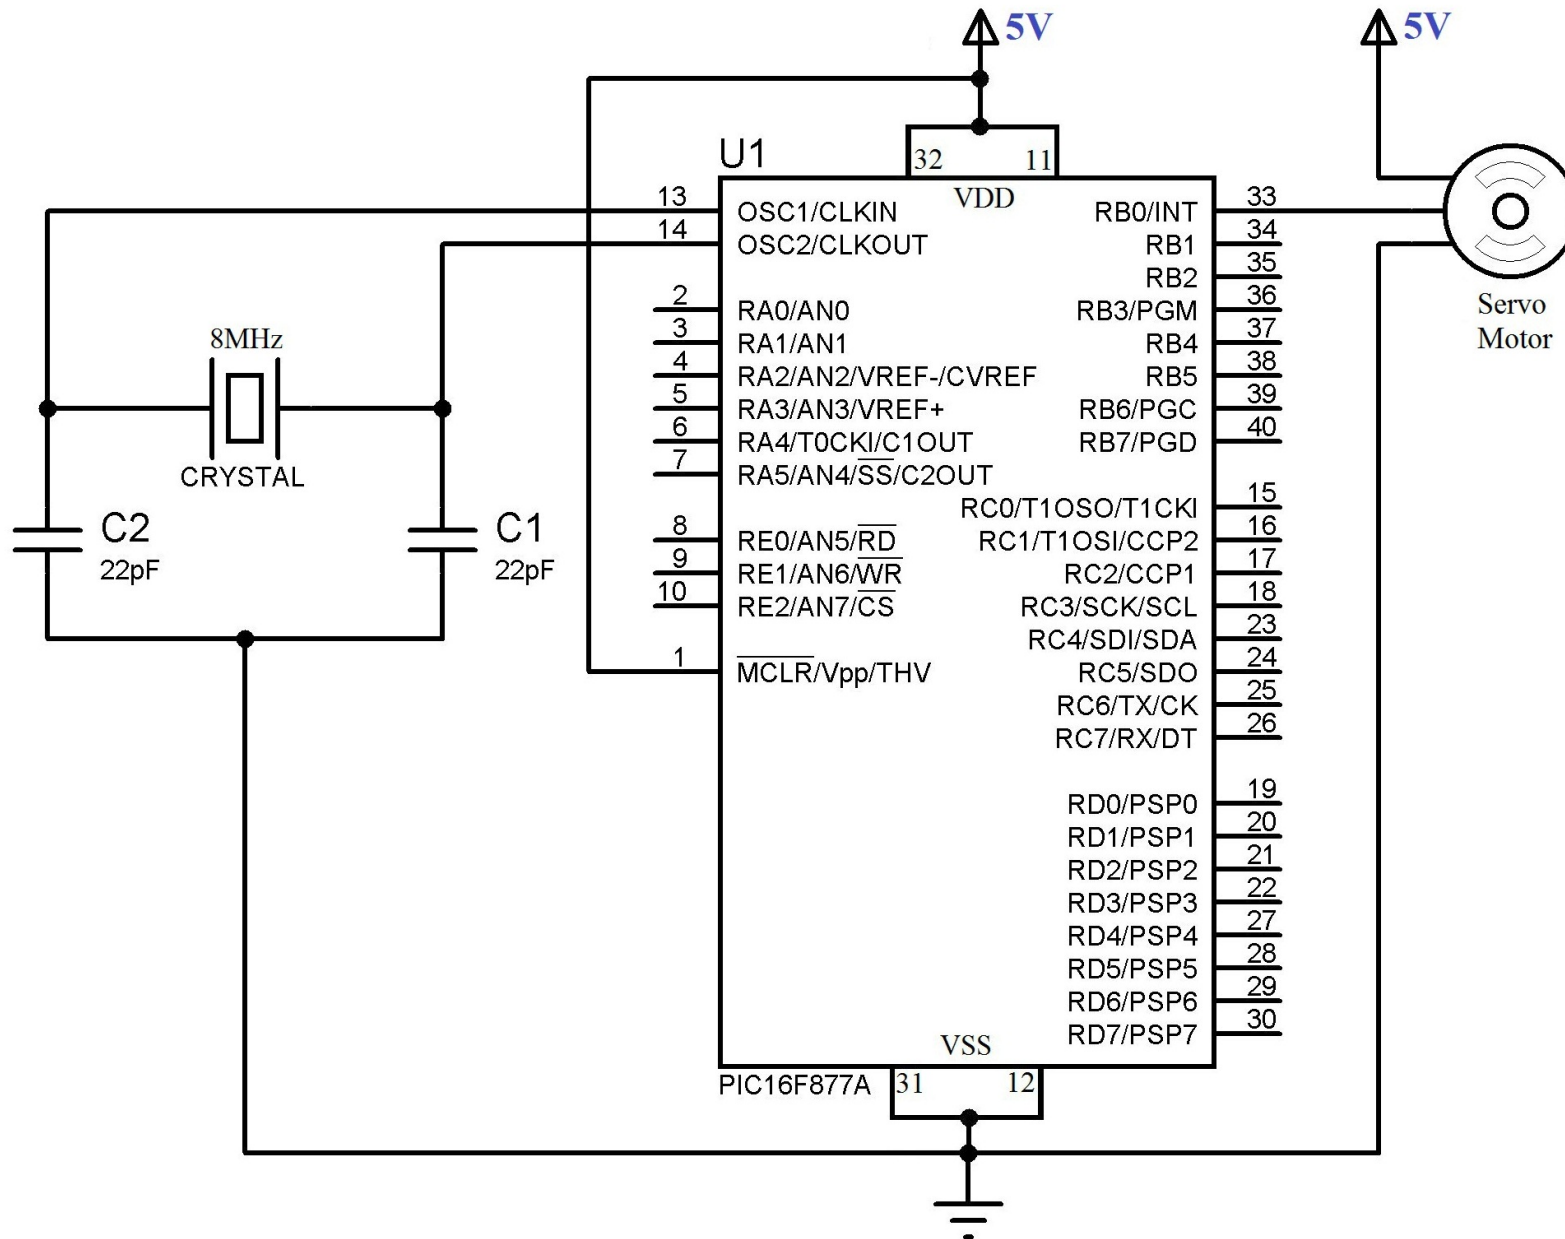


```
void servoRotate0() //0 Degree
{
    unsigned int i;
    for(i=0;i<50;i++)
    {
        RB0 = 1;
        __delay_us(800);
        RB0 = 0;
        __delay_us(19200);
    }
}
```

```
void servoRotate90() //90 Degree
{
    unsigned int i;
    for(i=0;i<50;i++)
    {
        RB0 = 1;
        __delay_us(1500);
        RB0 = 0;
        __delay_us(18500);
    }
}
```

```
void servoRotate180() //180 Degree
{
    unsigned int i;
    for(i=0;i<50;i++)
    {
        RB0 = 1;
        __delay_us(2200);
        RB0 = 0;
        __delay_us(17800);
    }
}
```

```
void main()
{
    TRISB = 0; // PORTB as Output Port
    do
    {
        servoRotate0(); //0 Degree
        __delay_ms(2000);
        servoRotate90(); //90 Degree
        __delay_ms(2000);
        servoRotate180(); //180 Degree
    }while(1);
}
```

PIC16F887

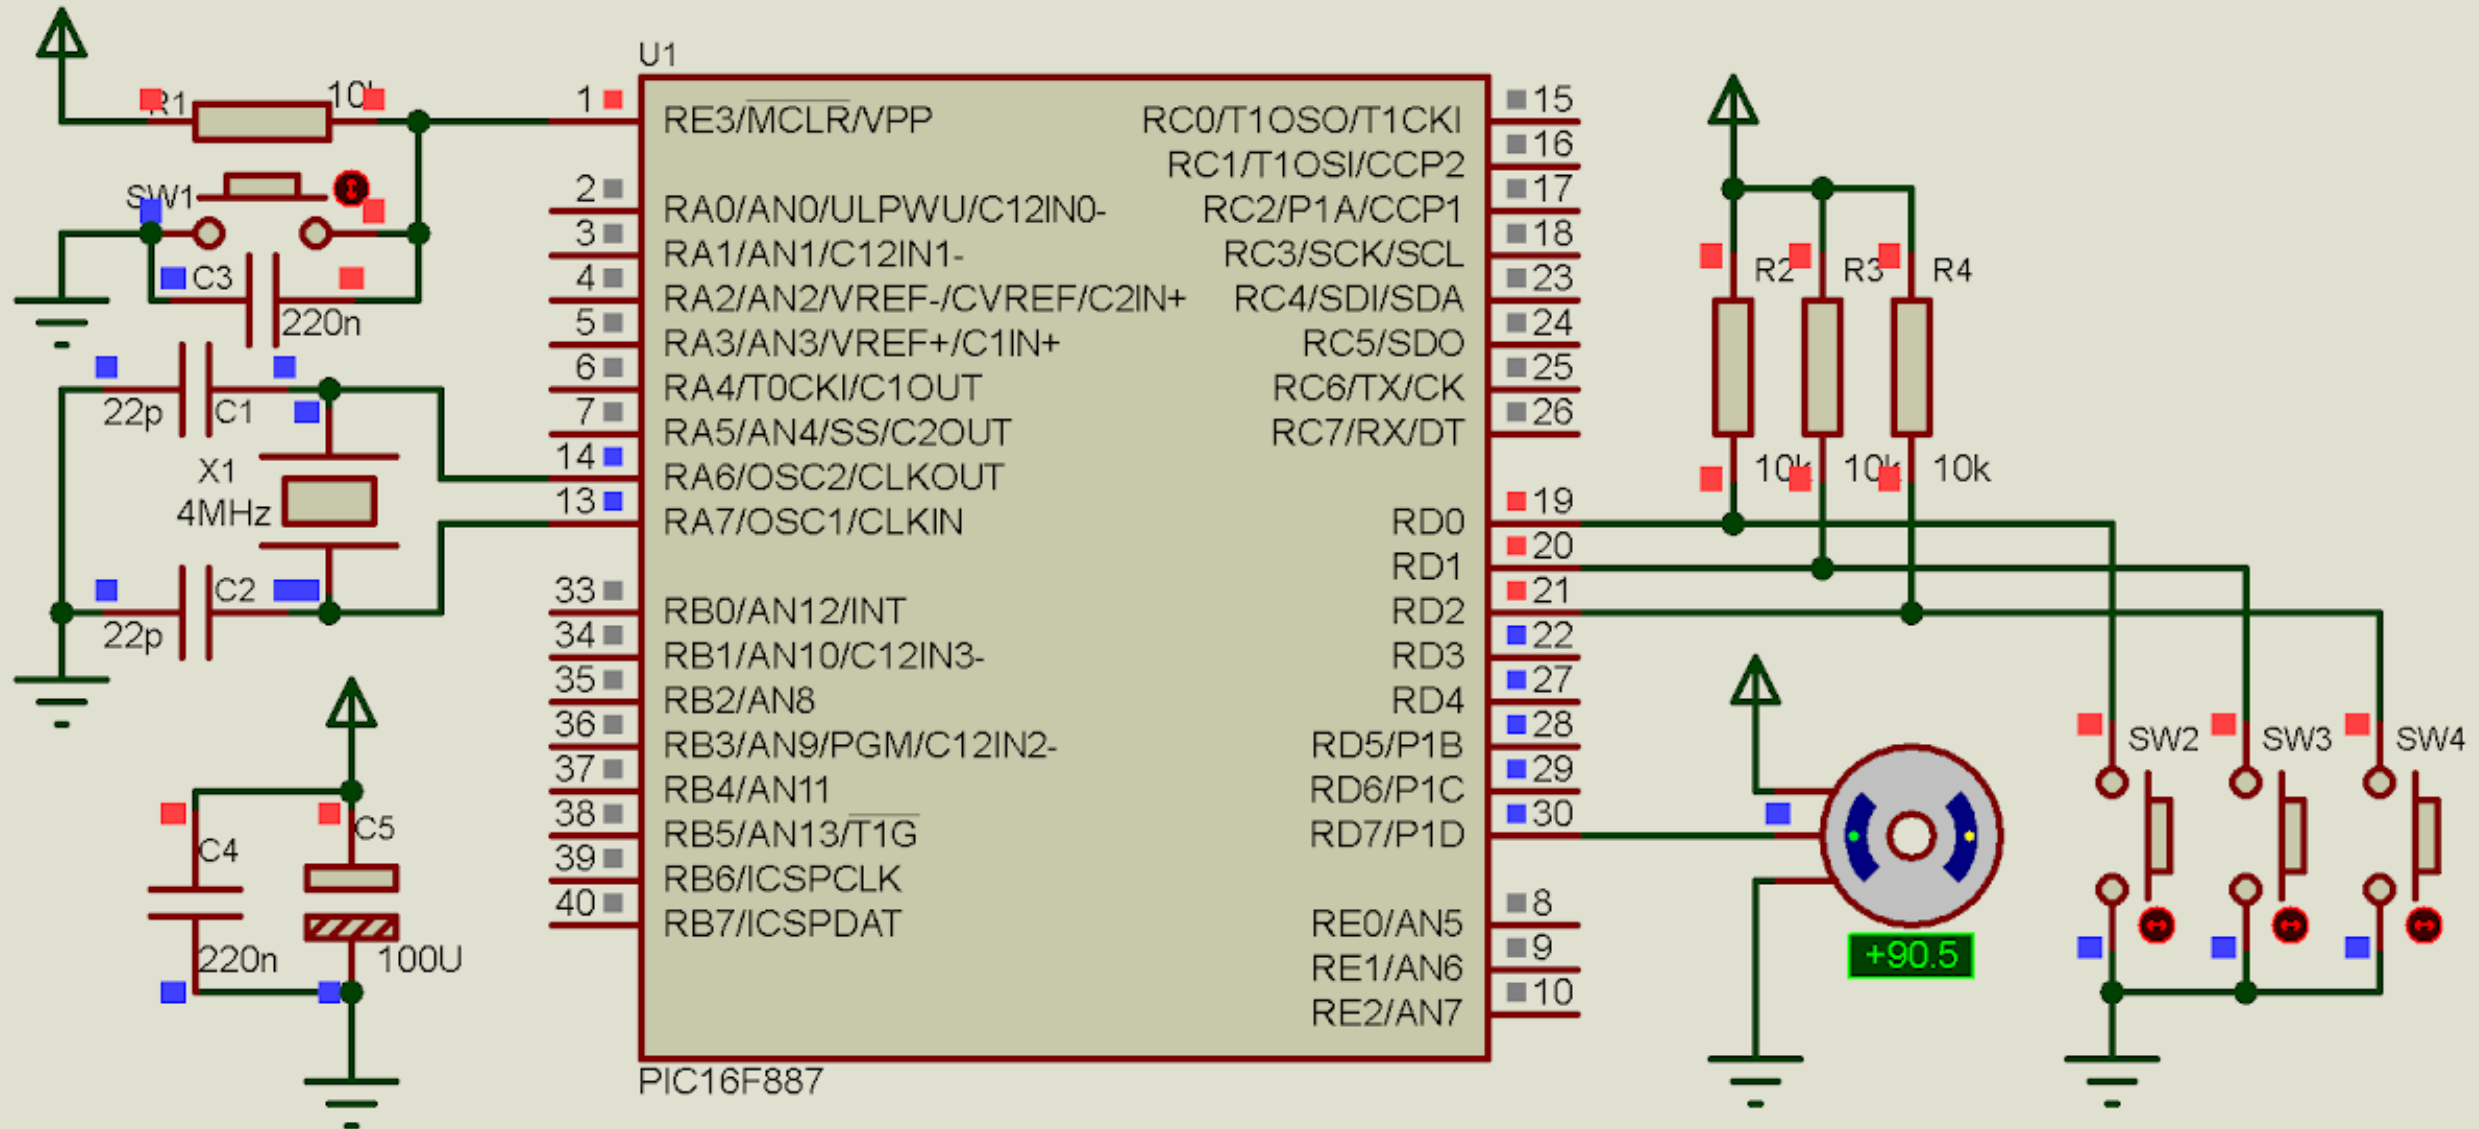

PIC16F887

```
#define _XTAL_FREQ 4000000
#define sw0 RD0
#define sw90 RD1
#define sw180 RD2
void rotate0(void){
    RD7=1;
    __delay_us(1000);
    RD7=0;
    __delay_us(19000);
}
void rotate90(void){
    RD7=1;
    __delay_us(1500);
    RD7=0;
    __delay_us(18500);
}
```

```
void rotate180(void){
    RD7=1;
    __delay_us(2000);
    RD7=0;
    __delay_us(18000);
}
void main(void){
    PORTD=0x00;
    TRISD=0x07;

    while(1){
        if(sw0==0){
            __delay_ms(100);
            rotate0();
        }
        if(sw90==0){
            __delay_ms(100);
            rotate90();
        }
        if(sw180==0){
            __delay_ms(100);
            rotate180();
        }
    }
}
```