

DYLAN HUSTON  
ISAI MORENO

ECE 3793 – PROJECT 2

November 18, 2025

## Introduction

In this project, our team will be deriving and applying Fourier constants across a simple step function. During this process several MATLAB calculations will be performed, as well as deriving the Fourier constant integral to be used in recreating a signal. These signals and constants will then be plotted. The code that is used to derive the Fourier constants will then be used to derive the constants of different instruments playing the C3 note.

## Part I: Derivation for the Transmitter

Given a signal with a frequency of 500 Hz,

$$x(t) = \cos(2\pi \times 500t) \quad (1)$$

and an arbitrary carrier frequency ( $F_c$ ), to which the carrier signal is

$$x_c(t) = \cos(2\pi F_c t) \quad (2)$$

### Calculation 1: $x_{TX}(t)$ as a sum of cosines

$$x_{TX}(t) = x(t)x_c(t) \quad (3)$$

Using the known signals,  $x(t)$  and  $x_c(t)$ , we can substitute these functions into  $x_{TX}(t)$ .

$$x_{TX}(t) = (\cos(2\pi \times 500t))(\cos(2\pi F_c t))$$

Using the trigonometric identity

$$\cos(u)\cos(v) = \frac{1}{2}[\cos(u+v) + \cos(u-v)] \quad (4)$$

Substituting in equation 1 for the  $\cos(u)$  term, and equation 2 for the  $\cos(v)$  term,

$$\cos(2\pi \times 500t)\cos(2\pi F_c t) = \frac{1}{2}[\cos(2\pi \times 500t + 2\pi F_c t) + \cos(2\pi \times 500t - 2\pi F_c t)]$$

Resulting in the equation

$$x_{TX}(t) = \frac{1}{2}[\cos(2\pi \times 500t + 2\pi F_c t) + \cos(2\pi \times 500t - 2\pi F_c t)] \quad (5)$$

Then distributing the  $1/2$  to each cosine

$$x_{TX}(t) = \frac{1}{2}\cos(2\pi \times 500t + 2\pi F_c t) + \frac{1}{2}\cos(2\pi \times 500t - 2\pi F_c t)$$

and factoring out  $2\pi$  from each cosine term

$$x_{TX}(t) = \frac{1}{2}\cos(2\pi(500t + F_c t)) + \frac{1}{2}\cos(2\pi(500t - F_c t))$$

And finally, factoring out  $t$  from each term.

$$x_{TX}(t) = \frac{1}{2}\cos(2\pi t(500 + F_c)) + \frac{1}{2}\cos(2\pi t(500 - F_c))$$

**Calculation 1 Results:**

As shown through using trigonometric identities, and basic algebraic techniques,  $x_{TX}(t)$  can be expressed as a sum of cosines as follows.

$$x_{TX}(t) = \frac{1}{2}\cos(2\pi t(500 + F_c)) + \frac{1}{2}\cos(2\pi t(500 - F_c)) \quad (6)$$

**Calculation 2: The Fourier Transform of  $x_{TX}(t)$** 

The Fourier Transform for a continuous signal is defined as

$$X(F) = \int_{-\infty}^{\infty} x(t)e^{-j2\pi Ft}dt \quad (7)$$

Thankfully, the function  $x_{TX}(t)$  has a known Fourier Transform pair. The known pairing is

$$x(t) = \cos(2\pi F_0 t) \xrightarrow{\mathcal{F}} X(F) = \frac{1}{2}[\delta(F - F_0) + \delta(F + F_0)] \quad (8)$$

Since a property of the Fourier Transform is linearity, this means that we can split the function into two parts and apply the transform to each part. The first cosine term is

$$\begin{aligned} \frac{1}{2}\cos(2\pi t(500 + F_c)) &\xrightarrow{\mathcal{F}} \frac{1}{2} \left[ \frac{1}{2}[\delta(F - 500 + F_c) + \delta(F + 500 + F_c)] \right] \\ &= \frac{1}{4} [\delta(F - 500 + F_c) + \delta(F + 500 + F_c)] \\ &= \frac{1}{4}\delta(F - 500 + F_c) + \frac{1}{4}\delta(F + 500 + F_c) \end{aligned} \quad (9)$$

Then the second cosine term,

$$\begin{aligned} \frac{1}{2}\cos(2\pi t(500 - F_c)) &\xrightarrow{\mathcal{F}} \frac{1}{2} \left[ \frac{1}{2}[\delta(F - 500 - F_c) + \delta(F + 500 - F_c)] \right] \\ &= \frac{1}{4} [\delta(F - 500 - F_c) + \delta(F + 500 - F_c)] \\ &= \frac{1}{4}\delta(F - 500 - F_c) + \frac{1}{4}\delta(F + 500 - F_c) \end{aligned} \quad (10)$$

Then, referencing back to the linearity property, we are able to add these two transformed terms back together to have the final Fourier Transform,  $X_{TX}(F)$ .

$$X_{TX}(F) = \frac{1}{4}\delta(F - 500 + F_c) + \frac{1}{4}\delta(F + 500 + F_c) + \frac{1}{4}\delta(F - 500 - F_c) + \frac{1}{4}\delta(F + 500 - F_c)$$

Finally, we can factor out the 1/4 term from each cosine, giving us our final answer.

$$X_{TX}(F) = \frac{1}{4} [\delta(F - 500 + F_c) + \delta(F + 500 + F_c) + \delta(F - 500 - F_c) + \delta(F + 500 - F_c)] \quad (11)$$

**Calculation 2 Results:**

Using the linearity property and a known pair, we were able to perform the Fourier Transform on a signal consisting of a sum of cosines. The resulting signal is a sum of  $\delta$  functions, with a magnitude of  $1/4$ .

$$x_{TX}(t) \xrightarrow{\mathcal{F}} X_{TX}(F) = \frac{1}{4} [\delta(F - 500 + F_c) + \delta(F + 500 + F_c) + \delta(F - 500 - F_c) + \delta(F + 500 - F_c)]$$

**Calculation 3:**

It is important to verify that the pairs and properties of the Fourier Transform were applied properly. In order to do this, the Fourier Transforms of both  $x(t)$  and  $x_c(t)$  will be performed. Beginning with  $x_t(t)$ , we can note that the signal can be used with the same pair used in finding the Fourier Transform of  $X_{TX}(F)$  being,

$$x(t) = \cos(2\pi F_0 t) \xrightarrow{\mathcal{F}} X(F) = \frac{1}{2} [\delta(F - F_0) + \delta(F + F_0)]$$

Substituting in our  $x(t)$  gives

$$x(t) = \cos(2\pi \times 500t) \xrightarrow{\mathcal{F}} X(F) = \frac{1}{2} [\delta(F - 500) + \delta(F + 500)]$$

$$x(t) = \cos(2\pi \times 500t) \xrightarrow{\mathcal{F}} X(F) = \frac{1}{2} \delta(F - 500) + \frac{1}{2} \delta(F + 500)$$

and doing the same for  $x_c(t)$

$$x_c(t) = \cos(2\pi F_c t) \xrightarrow{\mathcal{F}} X_c(F) = \frac{1}{2} [\delta(F - F_c) + \delta(F + F_c)]$$

$$x_c(t) = \cos(2\pi F_c t) \xrightarrow{\mathcal{F}} X_c(F) = \frac{1}{2} \delta(F - F_c) + \frac{1}{2} \delta(F + F_c)$$

This results in our final calculations for  $X(F)$  and  $X_c(F)$  to be

$$X(F) = \frac{1}{2} \delta(F - 500) + \frac{1}{2} \delta(F + 500)$$

$$X_c(F) = \frac{1}{2} \delta(F - F_c) + \frac{1}{2} \delta(F + F_c)$$

**Calculation 4:**

With these two Fourier Transforms, and the multiplication property,

$$x(t)y(t) \xrightarrow{\mathcal{F}} X(F) * Y(F)$$

we can define the Fourier Transform of  $x_{TX}(t)$  as

$$X_{TX}(F) = X(F) * X_C(F)$$

Substituting the values found above for  $X(F)$  and  $X_C(F)$ , we have the new function

$$X_{TX}(F) = \frac{1}{2}\delta(F - 500) + \frac{1}{2}\delta(F + 500) * \frac{1}{2}\delta(F - F_c) + \frac{1}{2}\delta(F + F_c)$$

To simplify the terms of this  $X_{TX}(F)$ , the function must be convolved. To do this, the shifting and linearity properties of convolution must be applied.

$$x(t) * \delta(t - t_0) = x(t - t_0)$$

For ease of viewing, each term in the convolution has been labeled as follows

$$X_{TX}(F) = \overset{\textcircled{1}}{\frac{1}{2}\delta(F - 500)} + \overset{\textcircled{2}}{\frac{1}{2}\delta(F + 500)} * \overset{\textcircled{3}}{\frac{1}{2}\delta(F - F_c)} + \overset{\textcircled{4}}{\frac{1}{2}\delta(F + F_c)} \quad (12)$$

each term on the right hand side,  $\textcircled{3}$  and  $\textcircled{4}$ , must be applied to each term on the left hand side,  $\textcircled{1}$  and  $\textcircled{2}$ .

$$\overset{\textcircled{1}}{\frac{1}{2}\delta(F - 500)} * \overset{\textcircled{3}}{\frac{1}{2}\delta(F - F_c)} = \frac{1}{4}\delta(F - 500 - F_c)$$

$$\overset{\textcircled{1}}{\frac{1}{2}\delta(F - 500)} * \overset{\textcircled{4}}{\frac{1}{2}\delta(F + F_c)} = \frac{1}{4}\delta(F - 500 + F_c)$$

$$\overset{\textcircled{2}}{\frac{1}{2}\delta(F + 500)} * \overset{\textcircled{3}}{\frac{1}{2}\delta(F - F_c)} = \frac{1}{4}\delta(F + 500 - F_c)$$

$$\overset{\textcircled{2}}{\frac{1}{2}\delta(F + 500)} * \overset{\textcircled{4}}{\frac{1}{2}\delta(F + F_c)} = \frac{1}{4}\delta(F + 500 + F_c)$$

Then, referencing back to the linearity property, we are able to add these terms back together to have the final Fourier Transform,  $X_{TX}(F)$ .

$$X_{TX}(F) = \frac{1}{4}\delta(F - 500 + F_c) + \frac{1}{4}\delta(F + 500 + F_c) + \frac{1}{4}\delta(F - 500 - F_c) + \frac{1}{4}\delta(F + 500 - F_c)$$


And we can factor out the  $1/4$  term from each cosine, giving us our final answer.

$$X_{TX}(F) = \frac{1}{4} [\delta(F - 500 + F_c) + \delta(F + 500 + F_c) + \delta(F - 500 - F_c) + \delta(F + 500 - F_c)] \quad (13)$$


Comparing this to the  $X_{TX}(F)$  found in **Calculation 2**, we can see that both of these ways result in the same answer, verifying the linearity and convolution properties of the Fourier Transform.

**Question 1: How is  $X_{TX}(F)$  related to  $X(F)$ ?**


Let's begin by looking at a graph of  $X(F)$ .

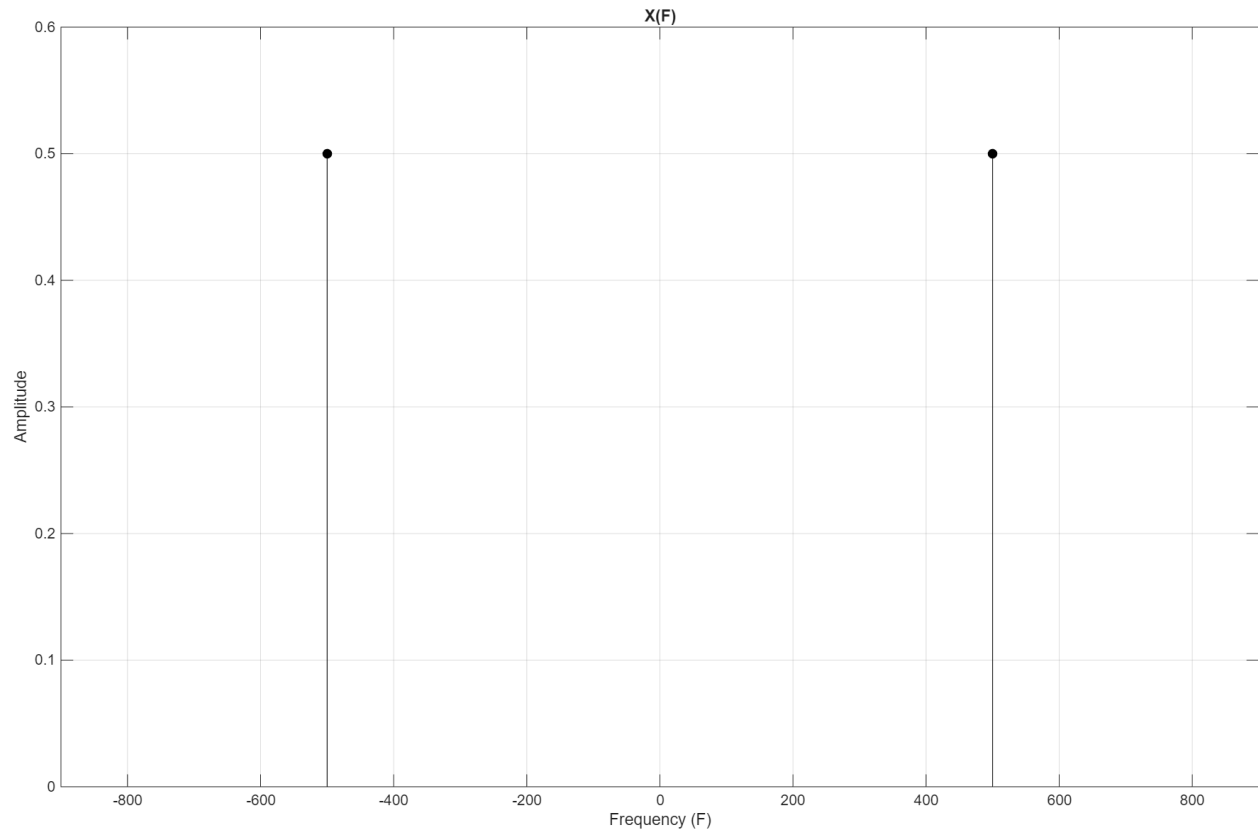

Above we can see two stems, located at -500 and +500, with a height of  $1/2$ . With the signal being centered around 0. Now let us look at a graph for  $X_{TX}(F)$ , with an  $F_c$  of 0.

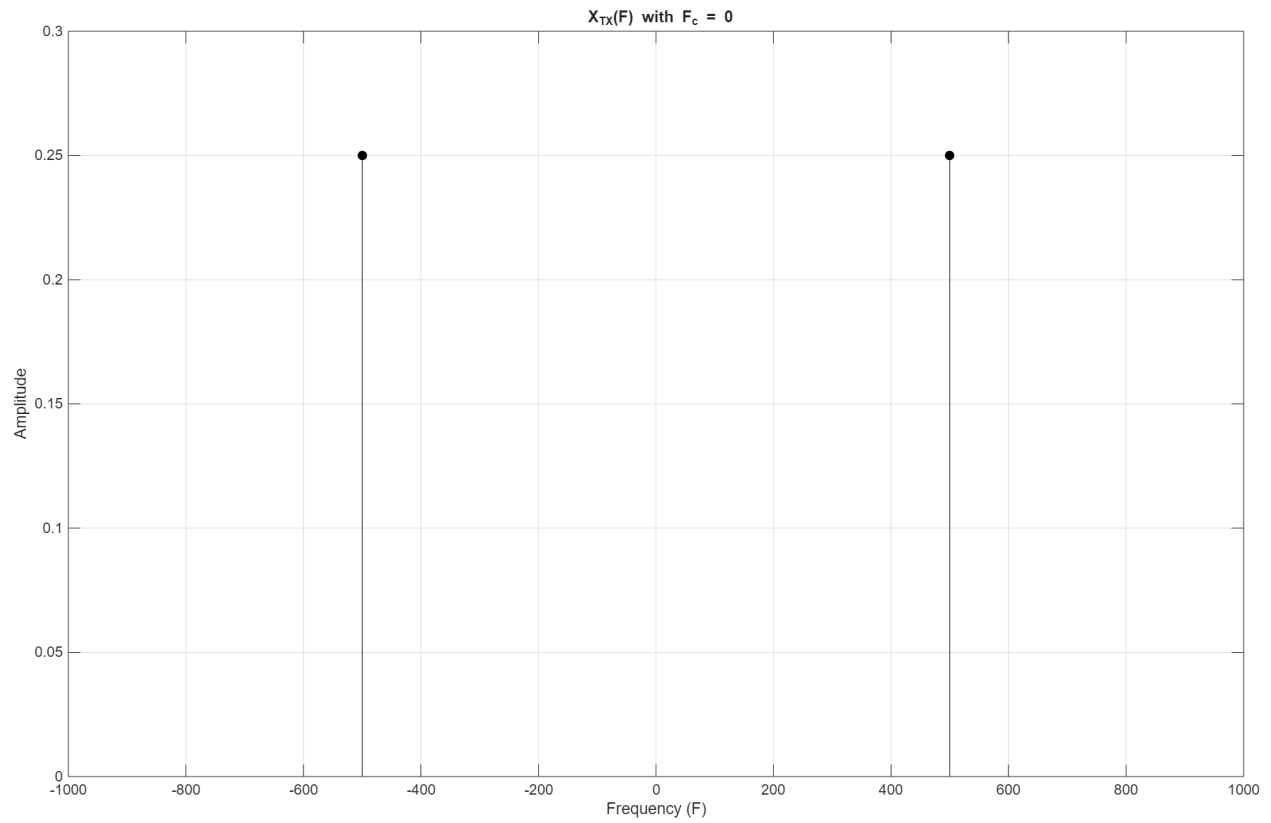

We can see that this is the same graph, only scaled down due to the additional  $1/2$  from  $X_c(F)$ . Looking at a graph where  $F_c = 5500$ , we can see a change in the graph.

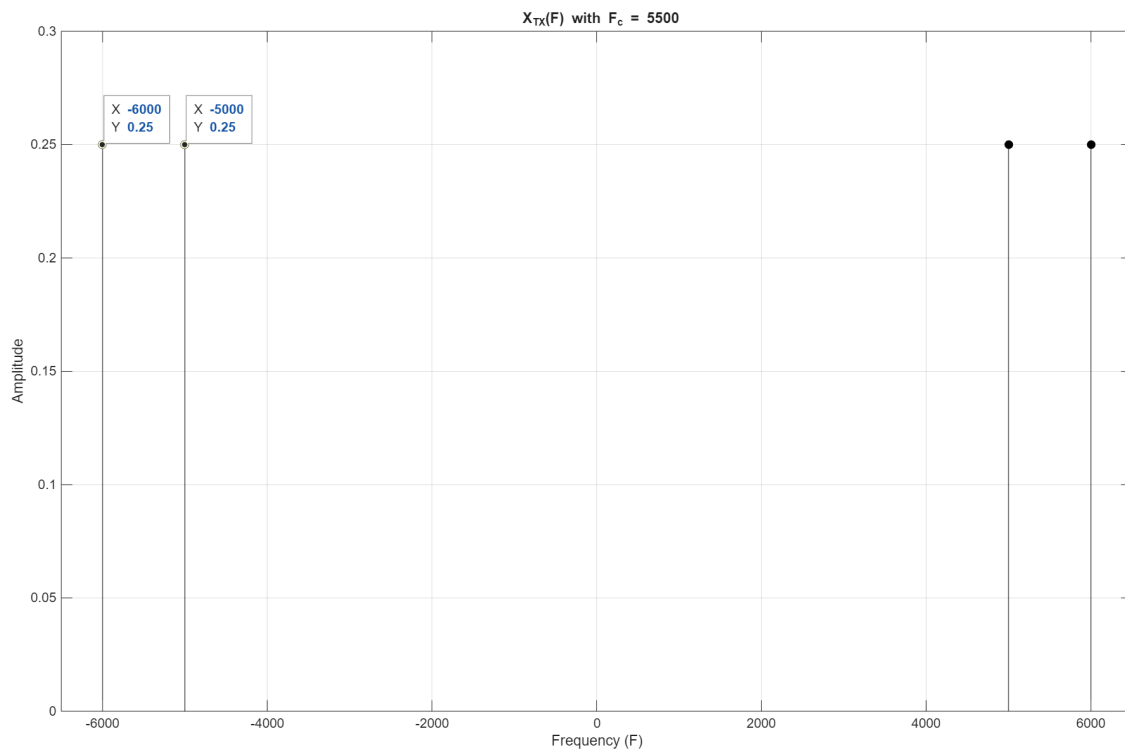



Looking at this graph, we can see that when the signal is shifted by  $F_c$ , it is bound by  $X(F)$ .

## WE AINT DONE COME BACK HERE

Now, should we be given an audio waveform  $x_a(t)$ , given only the knowledge that it has a Fourier transform  $X_a(F)$  which only has non-zero values for  $|F| < 22\text{kHz}$  and it is a real signal, meaning that it is conjugate symmetric.

We shall now redefine our transmit signal by

$$x_{TX}(t) = x_a(t)x_c(t)$$

### Calculation 5:

Despite not knowing the signal  $x_a(t)$ , we will still take the Fourier transform to find our new, transformed signal,  $X_{TX}(F)$ . For now, we will define the Fourier transform of  $x_a(t)$  as  $X_a(F)$ .

$$x_{TX}(t) = x_a(t)x_c(t) \xrightarrow{\mathcal{F}} X_{TX}(F) = X_a(F) * X_c(F)$$

Since we have previously defined  $X_c(F)$ , we can easily substitute it in.

$$X_{TX}(F) = X_a(F) * \frac{1}{2}\delta(F - F_c) + \frac{1}{2}\delta(F + F_c)$$

Now, using the shifting property of convolution,  $x(t) * \delta(t - t_0) = x(t - t_0)$ .

$$X_{TX}(F) = \frac{1}{2}X_a(F - F_c) + \frac{1}{2}X_a(F + F_c)$$

**Question 2: How is  $X_{TX}(F)$  related to  $X_a(F)$ ?**

## I AINT DONE WITH YOU BOY

**Question 3: What is the bandwidth of  $X_a(F)$  if we only consider the positive side of the F-Axis?**

With the hypothetical that the minimum frequency of  $X_a(F)$  is  $F = 0$  Hz, and the maximum frequency is  $F = 22\text{kHz}$ , the bandwidth is the difference between the largest and smallest frequency. The difference between the two frequencies, 0 Hz and 22k Hz, is 22k Hz. With that we can say that **the bandwidth of  $X_a(F)$  is 22kHz**

**Question 4: What is the bandwidth of  $X_{TX}(F)$  if we only consider the positive side of the F-Axis?**